

Levels Legend:	
+29.24	Existing Surveyed Ground Level
FFL 67.950	Proposed Finished Floor Level (FFL)
(Green line)	Minor Road Contours (20mm Vertical Spacing)
(Red line)	Major Road Contours (100mm Vertical Spacing)
(Red line)	Site Boundary




**CIVIL / STRUCTURAL DESIGN RISK MANAGEMENT**

Abnormal or unusual residual risks associated with the design outcomes shown on this drawing are:-

RSK LDE LTD has followed its Design Risk Management process for Hazard Elimination and Risk reduction in developing the design shown on this drawing. Abnormal or unusual residual risks may be shown above where it is considered that such risk may not normally be expected by competent persons engaged on work of this nature or type.

- Notes:**
- This drawing is to be read in conjunction with all relevant Architects and Engineers drawings and specifications.
  - All levels quoted are in metres A.O.D.
  - All Finished Floor Levels stated are indicative and will be subject to detailed review as part of the audit process for Building Regulation Part M compliance. In this respect the levels shown may deviate by +/- 20mm to ensure level entry requirements access for disabled can be maintained.
  - For the Site Drainage Layout refer to Drawing No 0022 - 0024
  - All road gullies shall be located away from proposed entrances to houses.
  - Kerb upstands to footway adjacent to road pavements to be typically 125mm except on raised tabled and shared access paved areas where it will be reduced to 25mm.

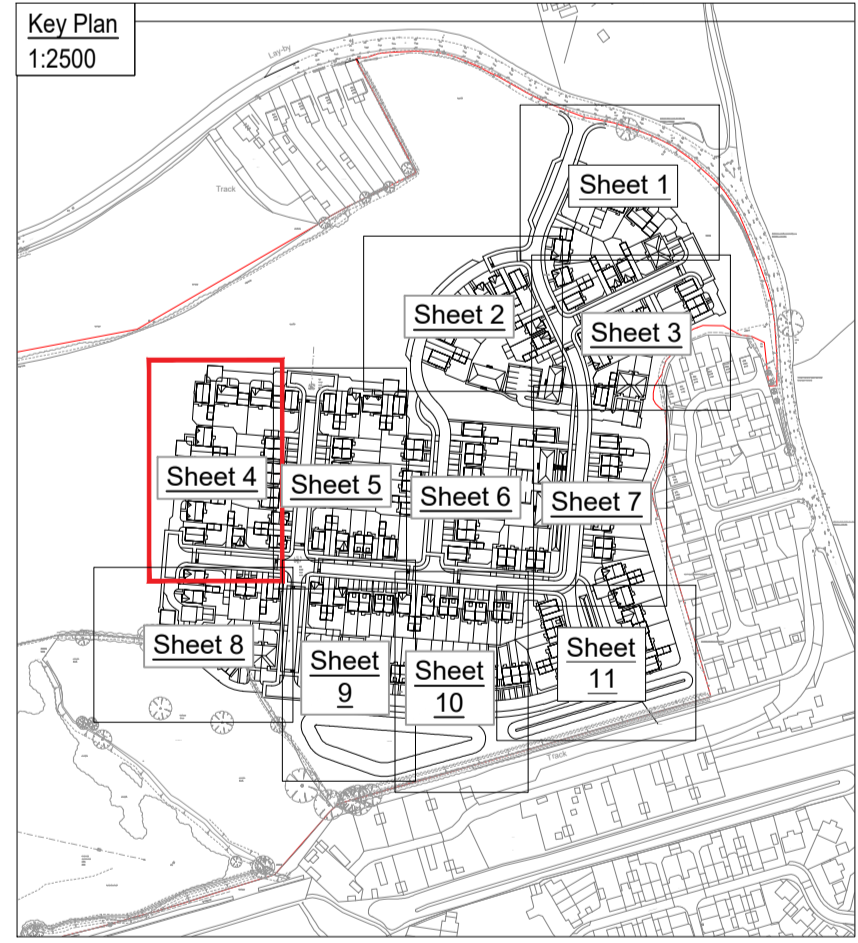

Rev.	Date	Amendment	Drawn	Chd.	Appd.
P03	07.08.2023	Amended to meet architects layout.	LN	GT	GT
P02	13.07.2023	Amended to meet architects layout.	LN	GT	GT
P01	05.07.2023	Final Issue	LN	AF	GT

**LDE**  
 CIVILS | STRUCTURES | HYDROLOGY  
 an rsk company  
 18 Progress Road, Hemel Hempstead, Hertfordshire, Herts, UK  
 Tel: +44 (0) 1442 437500, Fax: +44 (0) 1442 437500, Email: info@lde.co.uk

Client: **dandara**

Project Title: **MOOR FIELDS LITTLE DUNMOW**

Status: **PLANNING**

Drawing Title: **SITE LEVELS SHEET 4 OF 11**

Drawn	Date	Checked	Date	Approved	Date
LN	03.06.2023	AF	04.07.2023	GT	05.07.2023

Scale	Orig Size	Dimensions
1:100	A0	M

Project No.	Drawing File
134390	134390-RSK-ZZ-22-DR-C-0009-0011 Site Levels.dwg

Project	Org	Wk.Sys	Lev.Loc.	Type	Rev.	Chw. No.
134390	RSK	ZZ	ZZ	DR	C	0009 P03

