



Department for
Business, Energy
& Industrial Strategy

RENEWABLE ENERGY STATISTICS

Data Sources and Methodologies

February 2018

A decorative blue arc that starts on the left side of the page, curves upwards and then downwards, ending with a small blue dot on the right side.

Contents

Introduction	2
Scope	3
BEIS Energy Statistical Publications	4
Data Collection	6
Sources of data	6
Metrics	10
Electricity Capacity	10
Electricity Generation	11
Fuel Input	11
Load Factors	12
Categorisation of schemes by consuming sector	13
Technologies	14
Hydro	14
Solar photovoltaics (PV)	14
Sewage Sludge Digestion	15
Anaerobic Digestion (AD)	15
Wastes	15
Active Solar Heating	17
Plant Biomass	18
Heat Pumps	20
Liquid biofuels in transport	21
Quality Assurance	23
Data validation	23
Duplication of sources	23
Revisions	23
Appendix 1: Conversion Factors	25
Appendix 2: Calorific Values for biofuels	27
Appendix 3: Renewable Energy Directive	31

Introduction

This note documents the data sources and methodologies used in producing the Department for Business, Energy & Industrial Strategy BEIS's (and its predecessor's) renewable energy statistics, covering electricity and heat generation, and transport for the UK.

Since 1989, renewable energy data have been collated in **RESTATS**, the UK's Renewable Energy STATisticS database, and is the primary source of accurate, timely statistics for UK renewable energy sources. The data enable monitoring progress against national and international targets, such as the 2009 Renewable Energy Directive (15 per cent of energy from renewable sources by 2020 for the UK). In addition, certain metrics such as load factors enable the comparison of individual scheme performance against technology wide averages.

The UK data are published on, and available for download from, the GOV.UK web site, principally in the Digest of UK Energy Statistics (DUKES) and Energy Trends publications. They additionally contribute to statistics produced by the Statistical Office of the European Communities (Eurostat) and the International Energy Agency (IEA), in establishing the wider deployment of renewable technologies and enabling country comparisons.

Scope

RESTATS contains information, at installation level where available, specifically those technologies supported by various measures. Key data collected are shown in Table 1:

Table 1: Overview of data held in RESTATS database

Technology	Details
Wind (onshore and offshore)	Electricity
Solar photovoltaics	Electricity
Hydro (large- and small-scale)	Electricity
Marine (wave and tidal)	Electricity
Bio-energy ¹	Electricity, Heat
Heat pumps	Heat
Solar thermal	Heat
Deep geothermal	Heat
Liquid biofuels	Transport
Metrics	
Electrical capacity	kW / MW ²
Generation	kWh / MWh / ktoe (heat) ³
Consumption	kWh / MWh / ktoe
Fuel input	Litres / ktoe
Derived metrics	
Load factors	
Meta data	
Technology	
Location	If available
Commissioning date	If available
Support mechanism	RO / RHI / FiT ⁴ etc
Consuming sector	Domestic/Industry etc

¹ Landfill gas, sewage sludge digestion, animal biomass (poultry litter, meat and bone), anaerobic digestion (AD; farm and food wastes), municipal solid waste (MSW; biodegradable part), wood, waste wood, straw, paper and packaging.

² kW – kilowatt; MW – Megawatt

³ kWh – kilowatt hour; MWh – Megawatt hour; ktoe – thousand tonnes of oil equivalent

⁴ Renewables Obligation (RO), Renewable Heat Incentive (RHI), Feed in Tariff (FiT)

BEIS Energy Statistical Publications

Renewables statistics collected for the RESTATS project, along with associated analyses, are disseminated in various BEIS energy related publications, the key ones being DUKES (annual) and Energy Trends (quarterly). These publications are classed as National Statistics and are published to a previously announced timetable available via the following link;

<https://www.gov.uk/government/statistics/announcements?utf8=%E2%9C%93&organisations%5B%5D=department-for-business-energy-and-industrial-strategy>

Table 2 shows details of scheduled publications and when they are published;

Table 2: Publication timetable for renewables statistics

Publication	Product	Frequency	Date	Time lag
DUKES Chapter 6	Commentary	Annual	Final Thursday in July	7 months
	Tables 6.1-6.7, 6.1.1			
Energy Trends Section 6: quarterly / monthly updates	Commentary	Quarterly	Final Thursday in quarter,	1 quarter
	Tables 6.1-6.2			
	Table 6.3	Monthly	Second Thursday in month	3 months
Energy Trends articles	Renewable Energy in year - 1	Annual	Final Thursday in June	6 months
	Renewable Electricity in Scotland, Wales, Northern Ireland, and the regions of England	Annual	Final Thursday in September	9 months
Regional Renewable Electricity	Tables; key source for tables in annual Energy Trends Regional article	Annual	Final Thursday in September	9 months

Further information on the excel tables listed in Table 2 above is provided in table 3 below:

Table 3: DUKES renewable energy tables

	Table	Description	Dates covered
DUKES	6.1-6.3	Commodity balances for renewable <i>energy</i> sources, by technology and sector	1996+
	6.4	<i>Electricity</i> installed capacity and generation, by technology	1996+
	6.5	<i>Electricity</i> load factors, by technology ⁵	1996+
	6.6	Renewable fuel used for <i>Electricity, Heat and Transport</i> , by technology	1996+
	6.7	Progress under the 2009 EU RED (measured as specified in the directive) ⁶ , split by electricity, heat and transport	2008+
	6.1.1	Renewable fuel used for <i>Electricity, Heat and Transport</i> , Electricity generation and installed capacity	2002+
Energy Trends	ET6.1	Quarterly electricity generation, capacity and load factor (standard method), by technology and UK country	2010+
	ET6.2	Quarterly liquid biofuels used in transport	2010+
	ET6.3	Monthly electricity generation, capacity and load factor (standard method), by technology and UK country	2010+
Regional		Regional statistics generation	2003+
		Regional installed capacity	2003+
		Regional number of sites	2003+
		Regional standard load factors	2003+
		Regional unchanged configuration load factors	2003+
		Regional economic activity (Gross Value Added (GVA) measure)	2003+
		Renewable electricity by local authority; number of sites, electrical capacity, and generation	2014+

⁵ See section on Load Factors for descriptions of the various measures and details of calculations

⁶ See Appendix 3 for more information

⁷ For some sites, particularly small-scale Feed in Tariff installations or older wind turbine / Solar PV schemes, no location information is available. These are therefore placed in an “unallocated” line in the Regional and Local Authority tables. In Energy Trends 6.1, these are allocated across the four countries, to maintain consistency with the overall UK figures presented.

Data Collection

Sources of data

No one approach to data collection is completely effective in producing an up to date, accurate picture of renewable energy in the UK. There are therefore different data collection methodologies depending on the level of data readily available.

For generation supported by various measures, detailed site level data are available.

The key measures relating to renewables generation are;

- [Renewables Obligation \(RO\)](#); now closed to new schemes but will continue to provide support to existing schemes until 2037.
- [Feed in Tariffs \(FiT\); small scale schemes up to 5 MW](#)
- [Domestic Renewable Heat Incentive \(RHII\)](#)
- [Non-Domestic Renewable Heat Incentive \(RHI\)](#)
- [Renewable Heat Premium Payment](#); closed to new applications on 31st March 2014
- [Contracts for Difference \(CfD\)](#)
- [Electricity Market Reform \(EMR\)](#)
- [Combined Heat and Power Quality Assurance programme \(CHPQA\)](#)
- [Renewable Transport Fuel Obligation \(RTFO\)](#) (administered by Department for Transport (DfT))

For certain technologies either not supported by a measure, or where coverage is limited, a “**gap analysis**” is undertaken. This includes the annual **municipal solid waste survey**. Planning work begins late November to update the (e-) mailing lists with a full survey commencing in mid-January. A Waste-to-Energy Questionnaire tailored for EfW is used that addresses issues relating to use of waste as a renewable fuel. Survey return forms are collected and collated from January through to March. Gap analysis surveys also include ad hoc surveys such as the 2014 domestic wood consumption survey used to update the baseline.

For other technologies where surveys are not feasible, top down estimates are based on market data combined with informed assumptions (such as heat pump characteristics and annual updates for domestic wood).

As part of this methodology note, a summary table of data sources by technology in excel format has been published and additional information is included in technology sections at: <https://www.gov.uk/government/publications/renewable-energy-statistics-data-sources-and-methodologies>

Table 4 below shows additional information by data source and how they are accessed;

Table 4 summary of data sources and access

Data Source	Owner	Frequency of data	Description	Years covered
Administrative data				
ROCs Register	Ofgem	Monthly	Name, Country, Technology, Installed Capacity, ROCs per MWh, Month of output, ROCs issued	2002+
Feed-in Tariff (FiT) Register	Ofgem (BEIS summary)	Monthly	Installation level register of all schemes on FITs	2010+
Renewables Heat Incentive (RHI) Register	Ofgem		Contribution from these schemes are increasing and are now being used to measure growth rates against an agreed baseline figure (e.g., Plant Biomass)	2010+
Contract for Difference (CfD)	LCCC	Live database	Sites registered for support under CfDs	2016+
CHPSTATS, the Combined Heat and Power STATisticS database	Ricardo on behalf of BEIS and Defra ⁸		Data on schemes accredited under CHP quality assurance scheme (CHPQA)	1992+
RTFO data	DfT	Annually	Type and quantity of biofuels used for transport	2008+
Hydrocarbon oils bulletin data (National statistics)	HM Revenue & Customs	Quarterly	Hydrocarbon oils bulletin data (National statistics).	2002+
Wood chip/pellet trade data	HM Revenue & Customs	Monthly	Volumes of exports and imports of wood pellets and chips, by commodity code and nation	2009+
Surveys (BEIS / Ricardo)				
Major Power Producers (MPP) Survey	BEIS	Monthly	MPPs currently defined as those organisations whose portfolio of projects have a total installed capacity of $\geq 50\text{MW}$	2005+
Biofuels production survey	Ricardo / BEIS	Annual gap analysis survey	Further info below in Section 10.9	2002+
Energy from Waste survey (EfW)	Ricardo / BEIS	Annual gap analysis	Further info below in Section 10.5	1989+

⁸ Department for the Environment, Food, and Rural Affairs

		survey		
Domestic Wood Use Survey	Ricardo/BEIS	Gap analysis ad hoc survey (2014)	Baseline data from survey with an uplift based on industry sales figures from HETAS, a weather correction methodology, together with a replacement rate for existing installation of 2 %. Back corrected to 2010	2014
Surveys (Other)				
Cereal and Oilseed Production survey	Defra	2014	Information on straw consumption. Back corrected to 2010	2014
Databases				
Renewable Energy Planning Database (REPD)	BEIS	Monthly	Renewable electricity schemes undergoing the planning process Currently limited to projects \geq 1MW	2006+
ROCs Database of Accredited Generating Stations	Ofgem	Live database	Fields used; Name, Country, Technology, Declared Net Capacity, Commissioning Date, Registered address	2002+
ROO-FIT	Ofgem	Monthly	Preliminary accreditation under Feed in Tariff	Most recent year
Microgeneration Certification Scheme (MCS)	Gemserv	Monthly		2010+
British Hydropower Association Database	British Hydropower Association		New site data and information for cross checking	
Solar Thermal Markets in Europe	European Solar Thermal Industry Federation (ESTIF)		Summary of EU sales data	2004+
Plus archived material				
UK Solar Thermal Statistics	Solar Trade Association (STA)	Monthly	Summary of UK sales data; does not cover all sales so some estimation made	1990+
Clinical Waste; database of all UK clinical waste incinerators	Environment Agency (EA)		Starting point for the Gap Analysis Survey.	2010+

Non Fossil Fuel Obligation (NFFO) Database; includes Scottish Renewables Obligation (SRO) and the Northern Ireland NFFO (NI-NFFO)	Non-Fossil Purchasing Agency (NFPA) for England, Wales and Scotland	Monthly		1991+
Landfill Gas Sites list	Environment Agency (EA)	Annual gap analysis	These data are used as a starting point for the Gap Analysis Survey.	
Renewable UK Wind Database	Renewable UK (formerly, the British Wind Energy Association)		Cross checking of addresses and Installed Capacities; data on small-scale wind	
BEIS commissioned data				
Heat pump sales data	Building Services Research and Information Association (BSRIA)		Annual Information on number of new ASHP and GSHP installations	2008+
Cement industry production report.	British Cement Association (via BEIS)	Annual	Type and quantity of renewable fuels (including tyres) used for cement production.	2000+
National Non Food Crops Centre (NNFCC) list of operational Anaerobic Digestion sites	Defra/BEIS	Annual	Used in Farm AD; interactive map available.	2013+ (back corrected to 2010)
WRAP list of operational anaerobic digestion sites	Waste & Resources Action Programme (WRAP)	Annual	Map of operational AD sites	2014+
Stove sales data	HETAS	Annual	Growth estimates from HETAS.	2005+

Metrics

Electricity Capacity

Capacity is taken as that operational at the end of the reference period (i.e. year or quarter). For larger sites that are under construction, this may be only a portion of the final capacity. This particularly applies to wind farms (especially offshore), where turbines are installed and commissioned incrementally. For co-firing sites where capacity data are not available, it is calculated by dividing generation by the number of hours in the reference period.

Installed Capacity (“Nameplate Capacity”)

Installed Capacity, is the capacity the manufacturer claims the plant can produce. Total Installed Capacity is used where possible; where this is not available (for example, non-MPP sites that are RO accredited, but not yet in receipt of ROCs), **Declared Net Capacity (DNC)** is used.

Declared Net Capacity (DNC)

DNC is defined as the maximum continuous rating of the generating sets in the stations that can be exported to the grid, i.e. less the power consumed by the plant itself and any grid constraints.

To take into account the intermittent nature of some of the renewable energy sources, a factor (B) is applied. Although this is not used directly in current DUKES tables, it is a requirement of International Energy Agency (IEA) reporting.

DNC represents the nominal maximum capability of a generating set to supply electricity to consumers; it is calculated from the following equations:

$$DNC = (installed\ capacity \times B) - 'in-house' \ load$$

B has the following values for the different renewable sources.

B	Resource
0.43	Wind
0.17	Solar
0.33	Tidal/Wave
0.55	Small-scale hydro
1.00	All Others

Electricity Generation

Actual Generation

When available, actual generation data are utilised. This is available from the following sources:

- MPP Survey
- ROCs issued data
- Annual Energy from Waste (EfW) survey
- CHP Stats

For ROCs, for each entry, generation-equivalent figures (MWh) are calculated as:

ROC issued/ROCs per MWh.

Estimated Generation

Actual generation data may not always be available either entirely, because the site is not covered by the data source, or partially due to time lags.

Where generation data are not directly available, an estimate is derived using the capacity and applying typical monthly load factors (by region if possible) from similar installations.

This particularly applies to ROCs issued data, where the final month of the quarter are not available in time for compiling the quarterly Energy Trends tables.

For FiTS schemes, few are covered by the MPP survey. Therefore, this is carried out at a detailed level, considering commissioning date, summarised in the following methodology:

www.gov.uk/government/statistics/energy-trends-december-2013-special-feature-article-estimating-generation-from-feed-in-tariff-installations

Where actual generation is available for some FiT-supported schemes, these values are deducted from the above estimates.

Fuel Input

Actual Fuel Use

The following sources provide actual fuel inputs;

- MPP Survey
- Annual EfW survey
- CHP Stats

Estimated Fuel Use

For installations without fuel use data, this is estimated by applying **typical thermal efficiencies** to generation data. As for load factors, these are derived from sites where both generation and fuel use data are available.

For CHP schemes, the amount of fuel used is allocated between electricity and heat, according to the CHP methodology. Further information is available via the following link;

<https://www.gov.uk/government/statistics/combined-heat-and-power-chapter-7-digest-of-united-kingdom-energy-statistics-dukes>

Load Factors

Load factors measure of the ratio of actual electricity generated to the amount that could potentially be generated if the installed capacity were operating continuously throughout the year. There are different ways of estimating the load factor.

Load Factor based on average capacity

The installed capacity is calculated as the average of the capacity at the beginning and end of the year, expressed as;

$\frac{E}{(C_b + C_e) \times h}$	E	Electricity generated during the year (kWh)
	C _b	Installed capacity at the beginning of the year (kW)
	C _e	Installed capacity at the end of the year (kW)
	h	Hours in year

Changes in capacity during the year can also affect load factors calculated using this methodology; for example, removing Ironbridge from the plant biomass load factor calculation in 2015 resulted in a 1.8 percentage point reduction in the load factor. This is because Ironbridge ceased operating in the latter part of the year, resulting in a larger impact to the numerator compared to the denominator which is averaged.

Load Factors on an “unchanged configuration” basis

To compensate for changes in capacity throughout the year, a second capacity measure is calculated on an **“unchanged configuration” basis**, and is included in Table 6.5. This calculation is restricted to those schemes that have operated continuously throughout the year without a change in capacity. One of the inputs to the unchanged configuration calculation is data on issued ROCs, and a site is included in the calculation only if it has been issued ROCs for each month during the calendar year. The formula for calculating the unchanged configuration load factors is:

$\frac{E}{C_u \cdot h}$	E	Electricity generated during the year (kWh)
	C_u	Installed capacity operating throughout the year with unchanged configuration (kW)
	h	Hours in year

A full account of the exercise to derive these factors for wind can be found in *Energy Trends*, March 2006 pages 28 to 32⁹.

Categorisation of schemes by consuming sector

For the purposes of informing policy, it is sometimes instructive to associate electricity generation figures from each scheme and the consumption of renewable heat with an economic sector in which most the energy is consumed. Schemes are therefore classified, where possible, in the RESTATS database according to the “Economic Sectors” in which they operate. These sectors include:

- Grid
- Own Use/Site
- Commercial
- Agricultural
- Industrial
- Domestic
- Public
- Utilities
- Other

⁹http://webarchive.nationalarchives.gov.uk/20101209103442/http://www.decc.gov.uk/media/viewfile.ashx?file_path=statistics/publications/trends/articles_issue/file43950.pdf&filetype=4&minwidth=true

Technologies

Hydro

Large and small

Data are split by large and small schemes, using the following definitions:

Small	Up to (and including) 5 MW
Large	Greater than 5 MW

Hydro generation is largely supported by administrative data; large scale via the MPP survey and ROCs data and small scale from FiTs data.

Historical Note

Prior to 2004 MPP was submitted in aggregate form and not broken down by site or size. This meant that some small-scale schemes were hidden within the generation data for the large-scale schemes.

Pumped Storage and Mixed

Generation for pumped storage is not included in renewables generation; however, the UK does have one plant, Foyers, which is primarily a pumped storage site but also receives natural flow supplies of water. In this case, a portion of generation is allocated to Natural Flow Hydro. This is calculated by the data provider (SSE):

Natural flow generation = Total generation – (Pumped storage electricity input*efficiency).

Solar photovoltaics (PV)

Pre FiT estimates

Until 2009, Solar PV capacity was estimated from both aggregate estimates plus small individual site data under the RO. Some of this estimated capacity (14.6 MW) has been carried forward into future years, though sites subsequently accredited under the FiT and RO schemes, capacity and generation figures are deducted to avoid double counting. From 2010, it is assumed all new solar installations area captured in the current (listed) data sources.

Sewage Sludge Digestion

The majority of sites are covered by CHP Quality Assurance (CHPQA) Programme.

For plants outside the CHPQA generation is sourced from ROCs data and estimates of electrical efficiencies and heat to power ratios typical of the technology and capacity are used to determine fuel inputs and heat outputs.

Anaerobic Digestion (AD)

Information on operational AD sites in the UK was obtained from several sources including; the CHPSTATS database, the AD portal run by the National Non-Food Crops Centre (NNFCC), the Renewable Energy Planning Database, Waste & Resources Action Programme (WRAP), ROC, FiT and RHI returns and Ricardo internal information.

Electricity and heat production was estimated using CHPSTATS survey information, where available, or information from ROC, FiT and RHI if no survey information existed. Where none of these sources was available, the energy production was calculated from the capacity using an estimated load factor. The load factor was based on ROC data from operating schemes for electricity schemes, and on historic load factors for heat only schemes.

Biogas grid injection

Some AD is injected into the main GB gas network. In the renewables energy balance, this is considered a statistical transfer of biogas from renewables to natural gas. This is sourced from RHI data.

Wastes

Wastes include: Municipal Solid Waste (MSW), General Industrial Waste (GIW), hospital waste and waste tyres. The European Union's Renewables Directive (RD) of October 2001 redefined what were to be regarded as eligible renewables¹⁰. This included only the non-biodegradable component of wastes (the same as the international definition used). Generation from these sources would be split between biodegradable sources and non-biodegradable sources using information on calorific values of the constituent parts.

Municipal solid waste (MSW) combustion

Information on the direct combustion of unprocessed MSW and the combustion of refuse derived fuels (RDF) was obtained via the RESTATS waste to energy survey

¹⁰ <http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX%3A32001L0077>

Only the biodegradable component of MSW is counted as renewable. For several years, research estimated that UK domestic waste had a biodegradable content of 67.5 per cent \pm 1 per cent and this accounted for about 62.5 per cent of the energy generated from its combustion. Further research in 2009 resulted in an upward revision to 63.5 per cent.

The success of recycling initiatives has gradually changed the composition of waste available for combustion and the biodegradable content, reducing the share over the years. Additional research and evidence gathering indicated that the renewable content had fallen to 50 per cent in 2014.

As no time series data are available between 2009 and 2014, a linear change in composition over this period was assumed, see Table 5 below;

Table 5 biodegradable share of EfW

Years	Value	Source
Pre-2009	62.5%	Defra study
2009	63.5%	Defra study
2010	60.8%	Estimated (linear change between 2009 and 2014)
2011	58.1%	
2012	55.4%	
2013	52.7%	
2014+	50.0%	Various studies

Hospital waste

At present, all hospital waste is also considered non-biodegradable.

Information is based on a RESTATS survey undertaken in 2007, repeated in 2010 and reviewed again in 2013. Additional information on sites that reclaim energy is obtained from the Environment Agency’s clinical waste incineration database.

Tyres

At present, all waste tyres are considered non-biodegradable. Although part of waste tyre combustion is of biodegradable matter, because there is no agreed method of calculating the small biodegradable content, under the Renewable Energy Directive, it was decided all

the generation from waste tyres would continue to be included under non-biodegradable wastes¹¹.

Active Solar Heating

Active Solar heating includes solar collectors used for domestic hot water (DHW) systems and swimming pools. For both components, consumption is estimated. Due to refinements to the methods (and limited revisions windows), there are breaks in the series at 2008 and 2010.

Estimates of annual installations

First, the number of annual installations is estimated, consisting of two inputs:

- DHW: Using UK STA sales data, with scaling factor¹² of 1.2 applied, to take into account that the whole market is not covered by the UK STA.
- Swimming pools (not covered by the STA).

Pre-2010, the growth rate in swimming pool installations is higher.

Quantity of energy supplied

Second, the quantity of the energy supplied is estimated, based on the quantity of fossil fuel that is displaced by its use. The split between gas, electricity and oil (that would otherwise be used to provide the heating demands) are based on a model using a conversion methodology recommended by the IEA Solar Heat and Cooling Programme and ESTIF:

[http://www.estif.org/no_cache/st_energy/area_to_energy_conversion_method/?sword_list\[\]=method](http://www.estif.org/no_cache/st_energy/area_to_energy_conversion_method/?sword_list[]=method)

In the case of domestic hot water, the estimated split between gas and electricity displaced by this technology is 80% and 20%, respectively. In the case of swimming pools, the estimated split between gas, oil and electricity savings is 45%, 45% and 20% respectively, an estimate informed by the Solar Thermal Alliance (STA).

Equipment replacement

From 2010, the model incorporates **equipment replacement** after 20 years of operation and for a small reduction in efficiency with age of the system.

¹¹ <https://ec.europa.eu/energy/en/topics/renewable-energy/renewable-energy-directive>

¹² From discussions between BEIS, the STA and ESTIF

Plant Biomass

Domestic wood

Several methods have been used to estimate domestic wood consumption, with corresponding breaks in the time-series at 2000 and 2008.

Pre-2003:

The annual consumption estimate was based on a survey carried out in 1989¹³.

2003-2007:

In 2003, the method was re-examined. From this, domestic wood use figures were based on a 50 per cent growth rate in sales/installations of wood-burning stoves for each 2/3-year period since 2000, supported with anecdotal information from the sources listed below:

- HETAS, the official body recognised by Government to approve solid fuel domestic heating appliances, fuels and services;
- the National Association of Chimney Sweeps; and
- Discussions with a risk assessor acting on behalf of insurance companies.

Estimates from 2003 to 2013 were based on 2002 baseline data that were then extrapolated forward using information from annual discussions with representatives of the associations listed above. The estimates were then peer reviewed by the Forestry Commission prior to publication

Degree-day corrections were added, based on those used for seasonally adjusted and temperature corrected final energy consumption figures for gas, to model increased fuel use during colder weather¹⁴. These degree-day normalisation factors are based on monthly correction data and are weighted differently to those calculated using annual degree days.

2008-present

In 2014 BEIS commissioned a one-off, large scale, **user survey of domestic wood fuel consumption** in the UK to provide a new baseline. The survey was part of a weekly face to face omnibus survey and was conducted in England, Wales and Scotland. A separate dedicated survey was commissioned in Northern Ireland. A total of 16,046 households were surveyed, with 1,206 (7.5 per cent) confirmed as wood fuel users. Information was collected on number, type and frequency of use of domestic wood fuel appliances and on types and quantities of wood fuels purchased over the previous year.

¹³ ENERGY FROM BIOMASS Volume 3: Converting Wood Fuel to Energy ETSU BM/04/00056/REP/1

¹⁴ www.gov.uk/government/uploads/system/uploads/attachment_data/file/295406/et1_3.xls

Wood fuel use was estimated from **appliance use data**, rather than quantity estimates in accordance with expert advice that this would produce the most robust estimate. Data were used to estimate total hours of operation in the year and wood fuel use was then calculated using standard data for appliance wood fuel use per hour. The appliance method is indirect in that respondents had to estimate how many hours per week they operated their appliances in winter and summer, and a standard factor for wood use per hour for each appliance type was required.

Further information may be found in the BEIS publication on the summary of results of the domestic wood use survey¹⁵.

The revised 2014 baseline was back corrected to 2010 using appliance sales figures provided by HETAS, and applying a weather correction factor. This methodology was also applied to the 2015 estimate. For 2016, an additional assumption was applied based on new evidence that, given the maturity of the market, some installations would now be replacements rather than new. Accordingly a 2 per cent replacement rate was applied based on the views of the Renewable Energy Association and Delta Energy and Environment.

Calorific values of wood fuel depend on the types and composition of the wood mix being burnt. Historically, these were reported on an 'as received' basis for freshly harvested fuels but was not considered typical of that used as fuel which would require seasoning before use. These have now been revised upwards following research into current typical values Gross Calorific Values (GCV) and Net Calorific Values (NCV) are now calculated on an 'as received' basis, based on a GCV for oven dry wood of 20.3 GJ/t (6% H content) and 20% moisture content. These are in line with those reported by the Forestry Commission's Biomass Energy Centre (BEC) based on more detailed studies of typical wood feedstock compositions. Further information on calorific values is included in Appendix 2.

Straw

Pre 2014

The estimates for straw used for heat were based on a combination of 1990 information and a survey of straw-fired boilers carried out in 1993-94.

2014 onwards

The end-use of straw was added to the DEFRA Cereal and Oilseed Production survey in 2014¹⁶. Straw used for heat is calculated by deducting from this straw used for electricity generation, in the form of co-firing and in dedicated straw power stations

¹⁵ <https://www.gov.uk/government/publications/summary-results-of-the-domestic-wood-use-survey>

As no time series data are available to amend historic time series data or estimate growth rates, a linear growth rate has been assumed to back-correct to 2008. The same value for 2014 has been maintained.

Heat Pumps

Included technologies

Estimates are made of the renewable heat from:

- Air to water heat pumps (ASHP),
- Ground source heat pumps (GSHP); and
- Exhaust air heat pumps.

The estimate currently does not include the contribution from reversible air to air heat pumps; however, the results of a recent study may facilitate the inclusion of Reversible Air to Air Heat pumps in DUKES 2018 statistics.

Methodology

The renewable heat contribution is calculated per the methodology prescribed in the Renewable Energy Directive 2009/28/EC on the promotion of the use of energy from renewable sources. Appendix VII Accounting of energy from heat pumps¹⁷. There is a break in the methodology at 2015, described below.

Qualification

Prior to 2015 all heat pumps installed after 2008 were assumed to meet the minimum SPF of 2.5 prescribed in the Renewable Energy Directive, and annual hours of operation and Seasonal Performance Factor (SPF) were based on default values proposed by the European Commission in Commission Decision C (2013) 1082 final¹⁸.

In line with advice from EUROSTAT¹⁹, renewable heat from all domestic heat pumps, including those with SPF less than 2.5, should be included in the DUKES/ET statistics.

Heat Generation

Estimates of renewable heat generated are based on sales information from BSRIA on number of heat pumps installed annually since 2008. Sales data are split between small

¹⁶ www.gov.uk/government/uploads/system/uploads/attachment_data/file/483812/nonfood-statsnotice2014-10dec15.pdf

¹⁷ <http://eur-lex.europa.eu/legal-content/EN/ALL/?uri=celex%3A32009L0028>

¹⁸ <http://ec.europa.eu/transparency/regdoc/?fuseaction=list&coteld=3&year=2013&number=1082&language=en>

¹⁹ Personal communication with Eurostat, April 2016

domestic, large domestic and commercial/ industrial ASHP and GSHP. Five per cent of GSHP installations in the commercial/ industrial category are assumed to be industrial.

The average capacity of heat pumps in each category is estimated by BEIS from data on heat pumps installed under the RHPP and RHI. The allocation of heat pumps to climatic zones is based on the regional data available for schemes installed under the UK RHPP and RHI schemes, and the climate classification in the UK set out by EUROSTAT.²⁰

The calculation for heat generated is;

$$C \times \text{No.} \times \text{hhp} \times \text{proportion } \geq 2.5 \text{ SPF} \times (1 - 1/\text{SPF})$$

Where;

C	Average capacity
No.	Number of heat pumps installed
hhp	hours of operation
SPF	Seasonal Performance Factor

For DUKES, the proportion of heat pumps meeting the minimum SPF is 100 per cent. For reporting progress against the Renewable Energy Directive it is based on research results (if available), or the 100 per cent default assumption as specified.

2015-2016

Updated information on actual hours of operation and SPF of domestic heat pumps installed in the UK under the Renewable Heat Premium Payments (RHPP) scheme was used to estimate the renewable heat contribution for domestic heat pumps. This is in line with advice from the European Commission in Commission Decision C (2013) 1082 final²¹ to utilise country specific information where available and to opt for conservative estimates.

Liquid biofuels in transport

Consumption

The primary source of data used are the detailed Department for Transport Biofuels statistics (used for the RTFO), which disaggregate by the various sub-categories of biofuels, which is necessary for the sustainability requirements and adjustments made

²⁰ Shares tool manual 2014.

<http://ec.europa.eu/eurostat/documents/38154/4956088/SHARES2014manual.pdf/1749ab76-3685-48bb-9c37-9dea3ca51244>

²¹

<http://ec.europa.eu/transparency/regdoc/?fuseaction=list&coteld=3&year=2013&number=1082&language=en>

under the RED (and in DUKES table 6.7). Year 2016 are based on information available from RTFO statistics²² reports, specifically Y8 report 6 and Y9 report 3.

Due to lags in the above source, as an interim measure, and in table ET 6.2, timelier, but less detailed, data from the HMRC hydrocarbon oils bulletin are used²³. For the final month in the latest quarter, data from this are not available and so are estimated according to patterns of overall petrol/diesel consumption.

Production and exports

Information on UK biofuels production is collected by means of an annual survey of large scale biofuels producers, together with an estimate of small scale production. The sampling frame for the survey comprises companies on the RTFO account holders list that produce more than 450,000 litres per annum biofuel.

Small scale production is based on a 2012 estimate which used information from HMRC and industry associations.

The survey asks about actual production and production capacity in the calendar year. It also asks about the end market for the biofuel and the feedstocks used in its production. Information is collated in a summary excel workbook and the results are summarised for biodiesel, bioethanol and biogas. Feedstock information is shared with Defra statisticians who use it to help estimate land and crop use for biofuels in the UK. The information on end markets is used to estimate the quantity of biofuels exported.

Small scale production is based on a 2012 estimate which used information from HMRC and industry associations.

Imports

Imports of biofuels are calculated by residual:

Imports = Consumption – (biofuels production – exports).

²² www.gov.uk/government/collections/biofuels-statistics

²³ <https://www.uktradeinfo.com/Statistics/Pages/TaxAndDutybulletins.aspx>

Quality Assurance

Data validation

Before data are imported into the RESTATS database, several checks are made, including:

- Data cleansing (removing any duplicate or closed sites), utilising GIS
- Cross-checking with other data sources for completeness
- ‘Sanity’ checks: a) are the load factors in the range expected for type of technology and the current years’ seasonal variations for those technologies affected by this; b) are the time-series capacity data meaningful and change in an understandable way.

Duplication of sources

For many technologies, especially electricity, no single data source can provide complete coverage, therefore, several data sources are used. However, between the data sources, there is duplication of data for some sites. Whilst this provides good validation of the primary data source, decisions are made around which data source to use. Generally, survey data is preferred, ahead of administrative data.

Example: MPP v ROCs v NFFO

Typically, due to lags in data, MPP data is expected to exceed ROCs data, which in turn should be higher than NFFO data.

NFFO data therefore provide a good crosscheck with ROCs as these schemes are recorded in both databases. When ROCs first began, there were a few discrepancies primarily related to combustion schemes as the latter required proof of the nature and calorific value of the fuels and would result in a delay in the issuing of certificates. At present, there is usually a good correlation in >99% of the schemes.

Revisions

Where lags in administrative data collection occur and estimates are made, revisions will be made to subsequent publications to reflect that actual data have now replaced the estimates. Additionally, should evidence come to light suggesting previous estimates were incorrect, such as the 2014 domestic wood survey, previous year’s data will be revised using back correcting methodologies. This eliminates any possible breaks in the time series.

For DUKES, a decision is made each year as to how many years will be revised; this is a chapter wide discussion and each chapter lead will contribute to the decision. However, as a general rule, every second year will be open for revisions for just two years.

Where data in the tables have been revised, an “r” will appear next to that number to indicate a revised value. Any explanation of the revisions will also be discussed in the actual chapter along with the magnitude.

Appendix 1: Conversion Factors

Conversion factors are used to express energy figures in different units. Energy units used are therms, tonnes of oil equivalent (toe – the energy content of one tonne of oil), Megawatt hours (MWh) and Giga-Joules (GJ). The conversion factors used are not the same for each of the combustion technologies and do not convert all the energy released from the fuel into electricity, therefore the conversion factor needs to consider the energy lost during electricity generation.

These data are analysed to **standardised statistical methodologies** and conversion factors in line with International Energy Agency (IEA) and Statistical Office of European Commission (SOEC) definitions.

The conversion factors used are summarised in Table 6 below:

Table 6: conversion factors

Conversion Factors	Technology	Adopted IEA/SOEC Definitions
therms/toe	Standard conversion factors	396.83
toe/MWh		0.08598
MWh/toe		11.63
MWh _e /toe	Wind	11.63
MWh _e /toe	Hydro (small-scale <5MW)	11.63
MWh _e /toe	Hydro (large-scale ≥5MW)	11.63
MWh _e /toe	Wave Energy	11.63
MWh _e /toe	Tidal Currents	11.63
MWh _e /toe	Biomass electricity conversions, including Others Category, landfill gas + sewage.	3.05 ²⁴
GJ/toe	All Heat Conversions	41.868

²⁴ This is a two stage process; x 11.63 to convert from MWh to toe thermal; x 0.262, the fractional electrical conversion efficiency to convert from thermal to electrical toe.

There are two points to note:

- One tonne of oil equivalent is defined as 396.83 therms.
- Primary electricity contributions from wave, tidal, hydro and wind are expressed in terms of an 'energy-supplied' model.

Further information on conversion factors are available from Annex A in DUKES (this includes a section on calorific values, discussed in Appendix 2);

[Digest of UK Energy Statistics \(DUKES\) 2017: main report - GOV.UK](#)

Figures on fuel use for electricity generation can be compared in two ways. The fuel input basis (after conversion to an oil equivalent unit) is the most appropriate to use for analysis of the quantities of fuels used in electricity generation but it takes no account of how efficiently that fuel is converted into electricity. The output (energy-supplied) basis uses the amount of electricity generated and supplied by each fuel.

While biomass appears to dominate the picture when fuel inputs are being measured, hydroelectricity and wind power together provide a larger contribution when the output of electricity is being measured. This is because, on an energy supplied basis, the inputs are deemed to be equal to the electricity produced for hydro, wind, wave and solar. However, for landfill gas, sewage sludge, municipal solid waste and other renewables, a substantial proportion of the energy content of the input is lost in the process of conversion to electricity.

Appendix 2: Calorific Values for biofuels

Table 6 shows the estimated average Gross Calorific Values (GCV) and Net Calorific Values (NCV) for bioenergy that are used to convert the data from tonnes of fuel processed by the plant to its energy content.

Table 6: Calorific values of biofuels – 2016

Renewable Energy Source	Source	NCV (GJ/te)	GCV (GJ/te)	Moisture Content
<u>Wood fuels</u> ²⁵				
Domestic Wood	²⁶	14.7	16.3	20%
Industrial Wood	²⁷	19.0	20.3	0%
Wood pellets	²⁸	16.9	18.3	10%
Short Rotation Coppice	²⁹	12.6	14.2	30%
<u>Other plant biomass</u>				
Straw	³⁰	13.4	15.7	15%
<u>Animal biomass</u>				

²⁵ Calculated on an 'as received' basis, based on a GCV for oven dry wood of 20.3 GJ/t (6% H content). These are now in line with those reported by the Forestry Commission's Biomass Energy Centre which was based on data gathered by the team.

²⁶ NCV and GCV calculated on an 'as received' basis, based on GCV for oven dry wood of 20.3 GJ/t (6% H content) and 20% moisture content. These are now in line with those reported by the Forestry Commission's Biomass Energy Centre which was based on data they gathered.

²⁷ Based a GCV for oven dry wood of 20.3 GJ/t (6% H content) and 0% moisture content. These are now in line with those reported by the Forestry Commission's Biomass Energy Centre which was based on data they gathered.

²⁸ Based a GCV for oven dry wood of 20.3 GJ/t (6% H content) and 10% moisture content. These are now in line with those reported by the Forestry Commission's Biomass Energy Centre which was based on data they gathered.

²⁹ Based a GCV for oven dry wood of 20.3 GJ/t (6% H content) and 30% moisture content. These are now in line with those reported by the Forestry Commission's Biomass Energy Centre which was based on data they gathered.

³⁰ Straw, Poultry Litter and Energy Crops as Energy Sources ENERGY FROM BIOMASS Volume 5: ETSU BM/04/00056/REP/3

Poultry Litter	See below	7.6	9.5	20%
Meat and Bone	BEIS MPP survey	16.8	19.0	11%
<u>Wastes</u>				
General Industrial Waste	EfW survey	15.2	16.0	5%
Hospital Waste	³¹	13.3	14.0	5%
Municipal Solid Waste	EfW survey	6.8	9.8	30%
Refuse Derived Fuel	³²	13.0	18.5	30%
Tyres	³³	30.4	32.0	5%
<u>Transport biofuels</u>				
Biodiesel	³⁴	37.2	38.7	4%
Bioethanol	³⁵	26.8	29.7	10%
<u>Biogases</u>		NCV (MJ/m³)	GCV (MJ/m³)	
Landfill Gas	³⁶	19-23	21-25	
Sewage Gas	“ “	19-23	21-25	
Biogas (Anaerobic Digestion - farm/food)	“ “	19-24	21-26	

Additionally, a time series for calorific values are published as an Excel spreadsheet and can be accessed via the following link;

[Digest of UK Energy Statistics \(DUKES\): calorific values - GOV.UK](#)

Fuel Calorific Value and Moisture Content:

The calorific value (CV) of a fuel is the heat available from that fuel when it is completely burned, expressed as heat units per unit of fuel weight or volume.

³¹ Current Practice in Hospital Waste Disposal, Scott P.J., J. Institute of Hospital Engineering, 1989 43 (2). Discussed every 3-4 years against data held by the Environment Agency but considered essentially unchanged

³² Mitsui Babcock Energy Ltd, Studies on the Thermal Processing of Biomass and Waste Materials. Report No: ETSU B/T1/00358/REP (1997)

³³ The Use of Waste Tyres as a fuel at a Tyre Remoulding Factory. Prepared by NIFES for ETSU acting on behalf of the Energy Efficiency Office ED/194/143 (1988)

³⁴ Based on data published in BIOGRACE (the EC GHG emissions calculation tool)

³⁵ Based on data published in BIOGRACE (the EC GHG emissions calculation tool)

³⁶ Calorific value varies depending on the methane content of the gas

The gross, or higher, value (GCV) is determined in the laboratory using a calorimeter. It can be defined as the total heat liberated by the complete combustion of the fuel. It is determined by measuring the heat removed when cooling the products of combustion to a standard reference temperature, and it includes latent heat recovered from condensation of the water vapour component. This water vapour forms either as a by-product of combustion from hydrogen contained within the fuel, or from the vaporisation of any moisture present.

The net, or lower, value (NCV) is determined by calculation³⁷ and equals the gross calorific value minus the latent heat of the water vapour either formed as a by-product of combustion or present as moisture present in the fuel.

The net value is more representative of the heat available in practice when fuels are burned in equipment such as furnaces and boilers. The latent heat of the water vapour contained in exhaust gases is not normally recoverable, except where low-temperature heat recovery involving condensation is used.

Calorific values for the biomass fuels above are usually quoted on an “**as received**” basis which includes the effect of the moisture in the fuel. Other bases are used such as dry, air-dried, oven-dried etc., for particular purposes³⁸.

The Biomass Calorific Value Calculator (advanced) developed by the New Zealand Forest Research Institute Limited is very useful for use with wood and it is recommended that such tools are used to gain a more meaningful insight³⁹

The calorific value of **used poultry litter**, and the effects of moisture content, was investigated as part of the independent monitoring of the Energy Power Resources (formerly Fibropower) Eye power litter-fired power station commissioned by the former DTI⁴⁰.

On an as received basis, the moisture content typically ranges from 25 - 50% throughout the season. The Net Calorific Value (NCV) is variable but typically in the range 10-12 GJ/te. Its variation with moisture content is shown in Figure 1.


³⁷ <http://www.biodat.eu/pages/FuelSpecificationCalculation.pdf>

³⁸ http://p29596.typo3server.info/fileadmin/Files/Documents/05_Workshops_Training_Events/Taining_materials/english/D19_6_EN_Solidbiofuels_properties.pdf

³⁹ <http://www.eecabusiness.govt.nz/wood-energy-resources/biomass-calorific>

⁴⁰ Use of Poultry Litter for Power Generation - Monitoring of 'Eye' Power station. FEC Ltd. ETSU B/FW/00235/REP Crown Copyright (1995)
Available via the British Lending Library

Figure 1: Net calorific value and moisture content of poultry litter

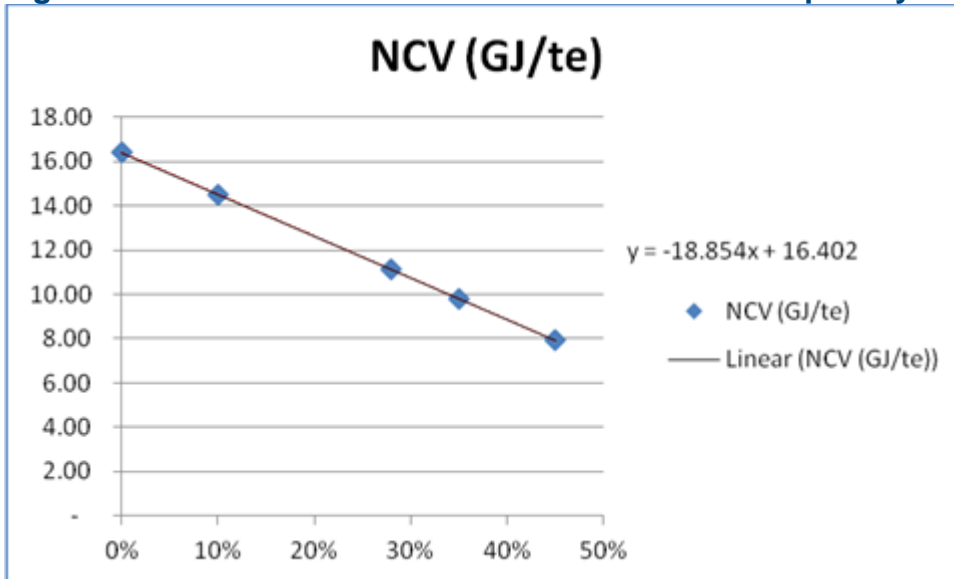

Appendix 3: Renewable Energy Directive

The Renewable Energy Directive (RED), which came into EU law in April 2009, is designed to help Member States progress towards meeting the EU 2020 target of 20% energy derived from renewable sources. The target for the UK is 15% of **final energy consumption** calculated on a net calorific basis⁴¹. Reporting for RED has a major impact on the contribution from biomass which historically has been calculated based on the energy content of the fuel. In addition, 10% of energy used in transport must be renewable. This has resulted in changes to the methodology required to provide data to monitor progress to this target. Data are reported annually to Eurostat, with comparative statistics on progress for all member states⁴².

The RED uses different measures of both renewables and overall energy from those elsewhere in the Digest. The renewable numerator in the calculation uses 'normalised' wind and hydro generated electricity – combined with other actual electricity generated from other sources, energy for heating and cooling by final consumers, as well as the use of energy for transport purposes. Gross final energy consumption (which is calculated on a net calorific value basis) also includes consumption of electricity by electricity generators, consumption of heat by heat generators, transmission and distribution losses for electricity, and transmission and distribution losses for distributed heat. Normalised generation is calculated by applying an average load factor to current capacity. For wind, the load factor is calculated as the average of the past five years (including the present one), with current capacity taken as an average of the start and end of year capacity. For hydro, the load factor is the average of the past 15 years, applied to capacity at the end of the current year. The generation figures obtained from this procedure replace the actual generation figures for wind and hydro in the Directive calculation. The energy generated by heat pumps is also calculated differently; only heat pumps which meet a minimum Seasonal Performance Factor (SPF) of 2.5 are included as prescribed by the Commission's guidance for calculating renewable energy from heat pumps⁴³.

Additionally, the Directive includes a cap on the proportion that air transport can contribute to the total; this cap is currently 6.18 per cent; certain fuels also receive a higher weighting in the calculation, with full details being set out in the Directive⁴⁴.

⁴¹ Renewable Energy Directive <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:140:0016:0062:EN:PDF>

⁴² http://epp.eurostat.ec.europa.eu/portal/page/portal/energy/other_documents

⁴³ <http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX%3A32013D0114>

⁴⁴ <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:140:0016:0062:EN:PDF>

In the UK, energy balances are usually published on a gross calorific value basis to facilitate comparisons with EU statistics. However, the balances are also available on a net calorific basis in table I1⁴⁵.

When measuring the contribution of transport biofuels for the Renewable Energy Directive, only those meeting sustainability criteria count. The data referred to above do not contain sustainability information, including those which carry a higher weighting (mostly sourced from waste), and the table which does, is not yet a complete data set for 2016. This is due to the RTFO allowing suppliers to make claims for RTFCs up to August after the obligation period (to allow suppliers to optimise their supply chain verification processes), as well as, allowing sufficient time for DfT to make necessary compliance checks before applications are processed. An estimate of the proportion of compliant bio liquids and the proportion meeting the double credited criteria (mostly those from waste sources) is also reported.

⁴⁵ www.gov.uk/government/statistics/energy-chapter-1-digest-of-united-kingdom-energy-statistics-dukes