



Department for Transport

Travel time measures for the Strategic Road Network and local 'A' roads, England: October 2016 to September 2017

Between October 2016 and September 2017, average delay on the Strategic Road Network decreased by 0.1 seconds per vehicle per mile (1.0%) and average delay on local 'A' roads increased by 0.8 seconds per vehicle per mile (1.7%).



Please note

The values for the Strategic Road Network and local 'A' roads are not directly comparable. See [p11](#) for further details.

About this release

This statistical release presents information about travel times on Strategic Road Network (roads managed by Highways England) and local highway authority managed 'A' roads in England. The measures in this release are estimated using in-vehicle Global Positioning Systems.

In this publication




- SRN figures [p4](#)
- Local 'A' road figures [p7](#)
- Background [p11](#)

Key Statistics

On the Strategic Road Network (SRN) for the year ending September 2017:

- ▶ The average delay is estimated to be **8.9 seconds per vehicle per mile compared to free flow**, a 1.0% decrease on the previous year.
- ▶ The average speed was **59.5 mph**, similar (up 0.3%) to the previous year.

Figure 1: Average delay, compared to free flow, on the Strategic Road Network (Table [CGN0402](#))

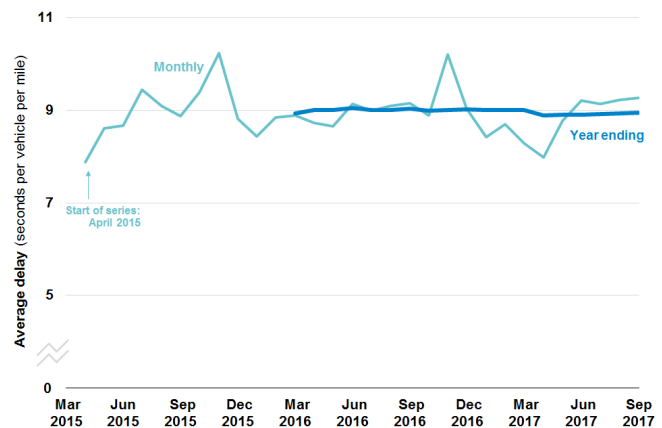


- ▶ The reliability of travel times is measured using the Planning Time Index. This presents **67.4% of additional time needed compared to free flow**, on average, on individual roads sections to ensure on time arrival. This is down 1.1 percentage points compared to the previous year.

On local 'A' roads for the year ending September 2017:

- ▶ The average delay is estimated to be **46.4 seconds per vehicle per mile compared to free flow**, a 1.7% increase on the previous year.
- ▶ The average speed was **25.3 mph**, the same as in the previous year.

Figure 2: Average delay, compared to free flow, on local 'A' roads (Table [CGN0502](#))

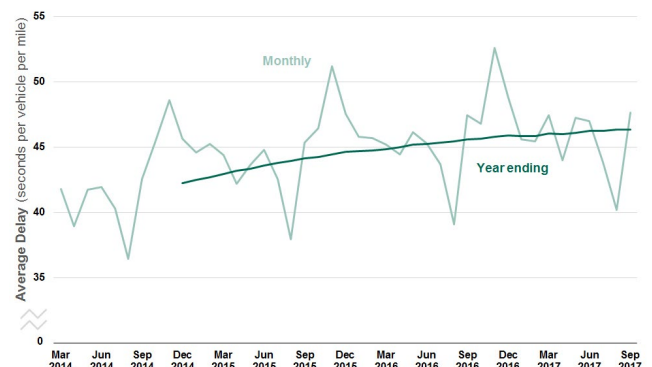

Definitions

Average speed is in miles per hour and is an estimate of the physical level of congestion.

Free flow speed is the estimated speed of the traffic if there was no congestion. This is calculated differently for SRN and local 'A' roads.


Average delay is the difference between free flow travel times and average journey times.

↔ represents negligible change (less than 0.5%)

LCV - Light Commercial Vehicles

Strategic Road Network, in the year ending September 2017

Average delay
seconds per vehicle per mile (spvpm)

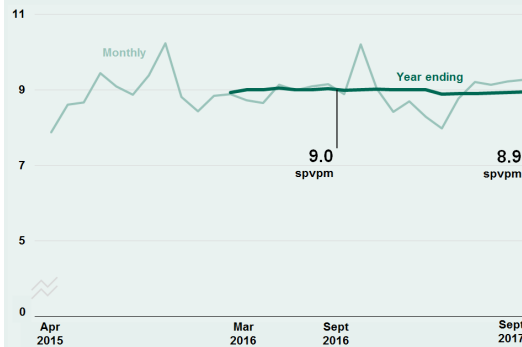

8.9
spvpm

↓ **-0.1** spvpm
1.0% decrease compared with the year ending September 2016

Sample

100 %
cars



Up to
50,000 cars

Average speed
miles per hour (mph)



59.5 mph

↔ **+0.2** mph

0.3% increase compared with the year ending September 2016

Reliability



67.4%
additional time is needed compared to free flow

Local 'A' Roads, in the year ending September 2017

Average delay
seconds per vehicle per mile (spvpm)



46.4
spvpm

↑ **+0.8** spvpm
1.7% increase compared with the year ending September 2016



Urban
76.5 spvpm



Rural
21.2 spvpm



Weekday morning
(7am - 10am)

53.9 spvpm



Weekday evening
(4pm - 7pm)

65.3 spvpm

Sample



63%

37%



Up to 140,000 cars and LCVs

Average speed



0.0 mph

25.3 mph

no change to year ending September 2016

Please note

The figures produced in this publication are average measures across the whole network, and these figures are likely to differ from the average value for specific sections of road, time periods and vehicle types.

Caution comparing between the SRN and local 'A' road figures

This release brings together figures from the SRN and local 'A' roads. It presents an overview of the national measures for congestion across the two road networks and helps highlight methodological differences. The statistical measures calculated for both networks are shown in the table below. There are figures for average speed and average delay across both networks, with an additional measure for the SRN and further breakdowns provided for local 'A' roads.

Figure 3: Travel time measures calculated for SRN and local 'A' roads

	SRN	Local 'A' roads
Measures		
Average delay	✓	✓
Average speed	✓	✓
Reliability	✓	-
Breakdowns		
Urban / rural	-	✓
AM / PM peak	-	✓
Region / Local Authority	-	Produced annually (Feb)
Road level	-	-

Where breakdowns are presented for both local 'A' roads and SRN, there are some methodological differences (see page 11) so **figures should not be directly compared for the two road networks.**

Introduction to average delay

Delay (or 'time lost') is calculated by subtracting derived 'free flow' travel times from observed travel times for individual road sections.

This measure is weighted by traffic flows, see [p11](#) for more details.

Note for average delay

Average delay is presented across all 24 hours of the day, on a seconds per vehicle per mile basis. Average delay is commonly used as a measure of relative congestion as it takes account of different free flow speeds (associated with different speed limits) allowing road sections to be compared more easily.

It is important to note that road users often do not expect to encounter free flow conditions (particularly during peak times) and consciously build in additional time for their journey based on their own experience. As a result, drivers may perceive delay relative to their expected (or average) journey time rather than free flow conditions.

Feedback request

We are interested in user feedback about which breakdowns are most useful, and those users would like to see in the future.

Also, we are considering moving to a schedule where we would update only the tables on a quarterly basis, and publish a written report annually. We would be interested in any user feedback.

Please direct all comments to Congestion.stats@dft.gsi.gov.uk

STRATEGIC ROAD NETWORK (SRN)

Geographical network for SRN

These travel time measures are based on data matched to Highways England's National Traffic Information Service (NTIS) network in England.

Introduction to average speed on SRN

This measure reflects the average speed of cars on the SRN across the entire day (24 hour period).

The measure weights speed observations from a sample of vehicles by associated traffic flows so that it is representative of traffic volumes on the roads in different locations and at different times of day (as for average delay).

SRN: Summary figures of average delay, speed and reliability

The summary table below (Figure 4) presents average speed and delay on the SRN, in the year ending September 2017, the value for the previous year and the percentage change.

Figure 4: Summary of recent changes in average speed, average delay compared to free flow and reliability on SRN in England

(Tables [CGN0401](#), [CGN0402](#) and [CGN0403](#))


	Latest Year ending Sept 2017	Last year Year ending Sept 2016	Change from Year ending Sept 2016
Average delay (seconds per vehicle per mile)	8.9	9.0	⬇️ -1.0%
Average speed (miles per hour)	59.5	59.3	↔️ 0.3%
Reliability (% additional time)	67.4%	68.6%	⬇️ -1.1 pp

pp = percentage point

SRN: Average speed

For the year ending September 2017, the average speed on the SRN was **59.5 mph**. This is **broadly similar (up 0.3% or 0.2 mph)** on the year ending September 2016, which means on average vehicles were moving at around the same speed.

Figure 5: Average speed on the Strategic Road Network (Table [CGN0401](#))

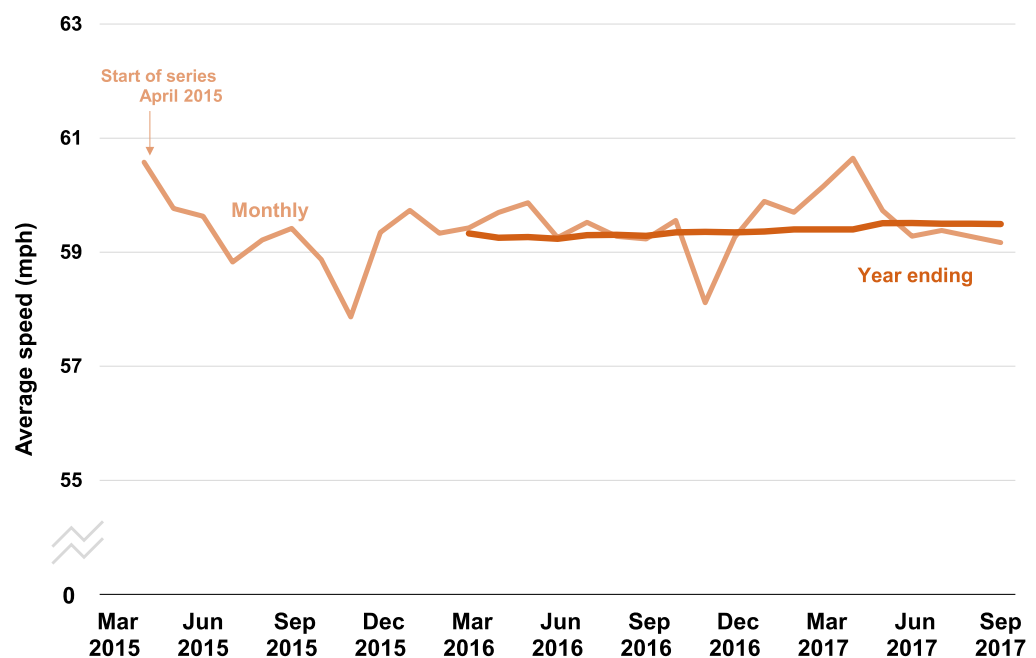

Free Flow on SRN




Free flow travel times, which apply to both the average delay and reliability measures, are currently set equivalent to the speed limit, for each individual road section.

SRN: Average delay

For the year ending September 2017, the average delay on the SRN is estimated to be **8.9 seconds per vehicle per mile (spvpm)** compared to free flow. This is **down 1.0% or 0.1 spvpm** on the year ending September 2016, which means on average there was less delay.

Figure 6: Average delay on the Strategic Road Network (Table [CGN0402](#))

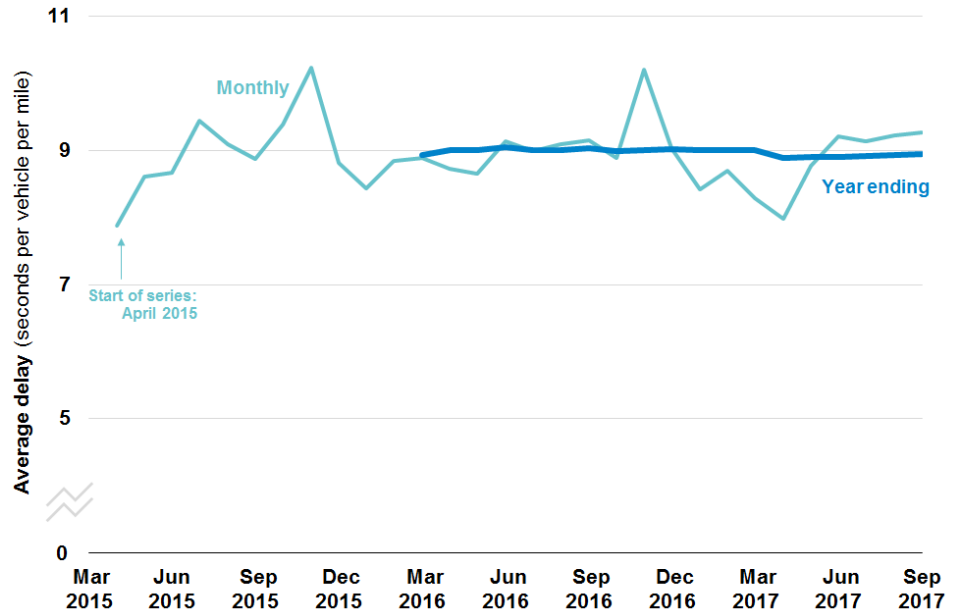


Technical note for reliability on SRN

Unlike the average delay and average speed figures (which are calculated across all 24 hours of the day), the reliability figures presented in this release are calculated across daytime hours (6am to 8pm) - where network demand is at its highest - and across the entire Strategic Road Network.

SRN: Reliability

For the year ending September 2017, on average, **67.4% of additional time was required compared to free flow**, to ensure on time arrival on individual road sections of the SRN. This is **down 1.1 percentage points** compared to the year ending September 2016, so on average, a **smaller proportion of additional time** is required to ensure on time arrival. This means on average the network is more reliable.

Figure 7: Additional time needed compared to free flow to ensure on time arrival on the Strategic Road Network (Table [CGN0403](#))

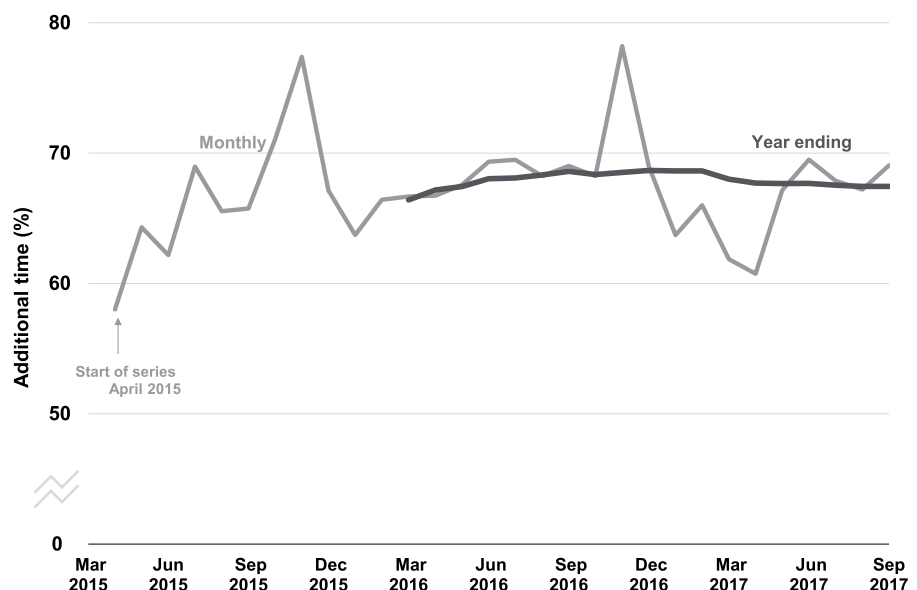

Further definitions for reliability on SRN

For reliability measure there are several further definitions. A 'journey' represents travel across one link on the network. An 'on time journey' is defined as one which is completed within a set reference time. Free flow reference times are based on actual speed limits.

The Planning Time Index (PTI or Reliability) monitors the amount of time that would need to be added to free flow travel times to have a 95% chance of a journey arriving at a destination on time. This is measured as a percentage.

Reliability on the SRN as a whole is calculated by averaging the Planning Time Index (PTI) across individual road sections, weighting by daytime (6am to 8pm) traffic flows for each section. The PTI does not represent the reliability of start to end journeys, across several road sections.

It should be emphasised that the PTI compares observed travel times with free flow times, rather than with expected travel times. Therefore, if a user rarely experiences free flowing conditions on an individual road section during the daytime, 60% additional time compared to free flow on that road section, for example, may reflect a typical travel time to them.

Reliability Example

As an illustrative case, consider an individual road section with a PTI of 60%, for a given year. If the travel time for this section in free flow conditions is 10 minutes, 95% of users leaving 16 minutes to traverse that road section would have arrived on time. Equivalently, users leaving 16 minutes to traverse the same road section would have been on time 19 times out of 20 in the year.

LOCAL 'A' ROADS

Local 'A' road fact

The local 'A' road network accounts for around 10% of all English roads by length, but carries around a third of all traffic.

Local 'A' roads: Summary figures of average speed and delay

The summary table below (Figure 8) presents average speed and delay on local 'A' roads in England, in the year ending September 2017. The value for the previous year (year ending September 2016), and the percentage change in average speeds and delays are also shown.

Figure 8: Summary of recent changes in average speed and average delay compared to free flow on local 'A' roads in England

(Tables [CGN0501a](#) and [CGN0502a](#))

	This year Year ending Sept 2017	Last year Year ending Sept 2016	Change from Year ending Sept 2016
Average speed (miles per hour)			
All day (24 hour period)	25.3	25.3	↔ 0.0%
Average delay (seconds per vehicle per mile)			
All day (24 hour period)	46.4	45.6	↻ 1.7%

Introduction to average speed on local 'A' roads

This measure reflects the average speed of vehicles on local 'A' roads across the entire day (24 hour period).


The measure weights speed observations from a sample of vehicles by associated traffic flows so that it is representative of traffic volumes on the roads in different locations and at different times of day (as for average delay). The weighting for local 'A' roads also weights by hour, day type, month, urban and rural classification and local authority.

Local 'A' roads: Average speed

National overview of average speed

The **average speed on local 'A' roads in England** across 24 hours in the **year ending September 2017** is estimated to be **25.3 mph**. There has been no change in average speed compared to the previous year (**around 0.01 mph**), which means on average vehicles were moving at a similar speed.

Figure 9: Average speed on local 'A' roads in England (Table [CGN0501a](#))

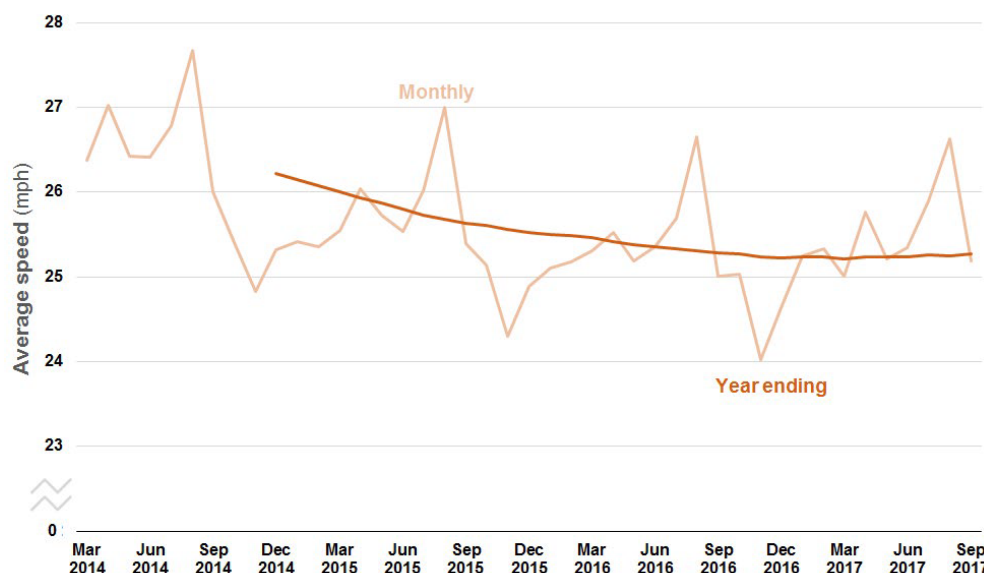

Between the year ending December 2014 and the year ending September 2017, average speeds (across the entire 24 hour period) have decreased by 0.9 mph (or 3.6%).

Definition

DfT defines 'urban' roads to be those within a settlement of 10,000 people or more. This is consistent with the [Rural and Urban Area Classification 2011](#). All other roads are defined as 'rural'.

Average speed at peak times and in urban and rural areas

Average speeds on local 'A' roads during the **weekday morning peak (7am to 10am)** and the **weekday evening peak (4pm to 7pm)** were **24.0 mph** and **22.3 mph, respectively**, in the year ending September 2017.

Since 2014, decreases in average speed have been observed during both the weekday morning peak (7am to 10am) and the weekday evening peak (4pm to 7pm). Over this time period, the decrease in average speed was greater for evening peak (4.4%) than for morning peak (2.7%).

On **urban classified local 'A' roads**, average speeds were **18.5 mph** in the year ending September 2017, compared to **36.3 mph on rural local 'A' roads**. Since 2014, there has been a similar reduction in average speed for both urban and rural local 'A' roads (0.8 and 0.9 mph respectively), although the percentage change is greater on urban roads (a decrease of 4.3%) compared to rural roads (a decrease of 2.3%).

Free flow on local 'A' roads

Free flow travel times (used to calculate the average delay measure) are currently calculated using the 85th percentile speed observation, for each individual road section. These are 'capped' at national speed limits.

Geographical network for local 'A' roads

These travel time measures are based on data matched to the Ordnance Survey ITN mastermap representation of the local 'A' road network in England.

Regionally and Local Highway Authority figures

The annual average delay for each region and local highway authority can be found in Table [CGN0502b](#). These figures are updated annually in the February release.

Local 'A' road fact

Almost one third of the English local 'A' road network is classified as urban with the remaining two-thirds classified as rural.


Local 'A' roads: Average delay

National overview of average delay

The **average delay on local 'A' roads in England** across all time periods in the **year ending September 2017** is estimated to be **46.4 seconds per vehicle per mile (spvpm)** compared to free flow. This is a 0.8 spvpm increase or **1.7% increase** compared with the year ending September 2016, which means that on average there was more delay.

Between the start of the series (year ending December 2014) and the year ending September 2017, average delay compared to free flow has increased by 4.1 spvpm (or 9.7%).

Figure 10: Average delay on Local 'A' roads (Table [CGN0502](#))

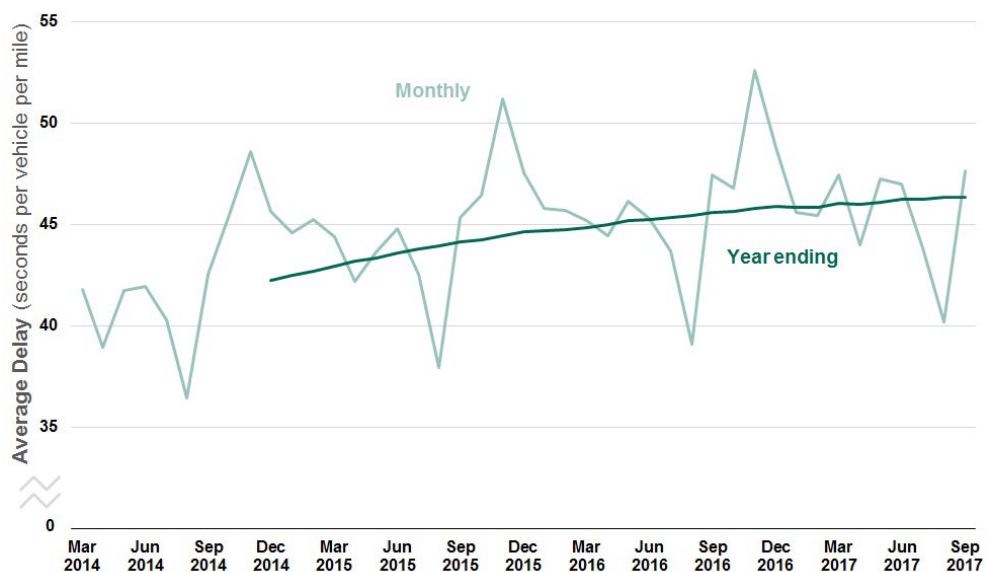


Average delay at peak times and in urban and rural areas

In the year ending September 2017, average delay on local 'A' roads during the **weekday morning peak (7am to 10am) was 53.9 spvpm** and **weekday evening peak (4pm to 7pm) was 65.3 spvpm** compared to free flow.

Since the start of the time series (the year ending December 2014), average delay during weekday morning peak has increased by 3.0 spvpm (5.8%). Average delay during the weekday evening peak has increased by 6.1 spvpm (10.3%).

Due to the small variation in the series, a small decline in delay produces a proportionally larger effect on the index. Therefore, users should take caution when drawing conclusions from the index. For example, any small decline in morning peak is highly emphasized, as shown in Figure 11.

Figure 11: Average delay (indexed) on local 'A' roads in England: Rolling 12-month average from 2014 (Table [CGN0502a](#))

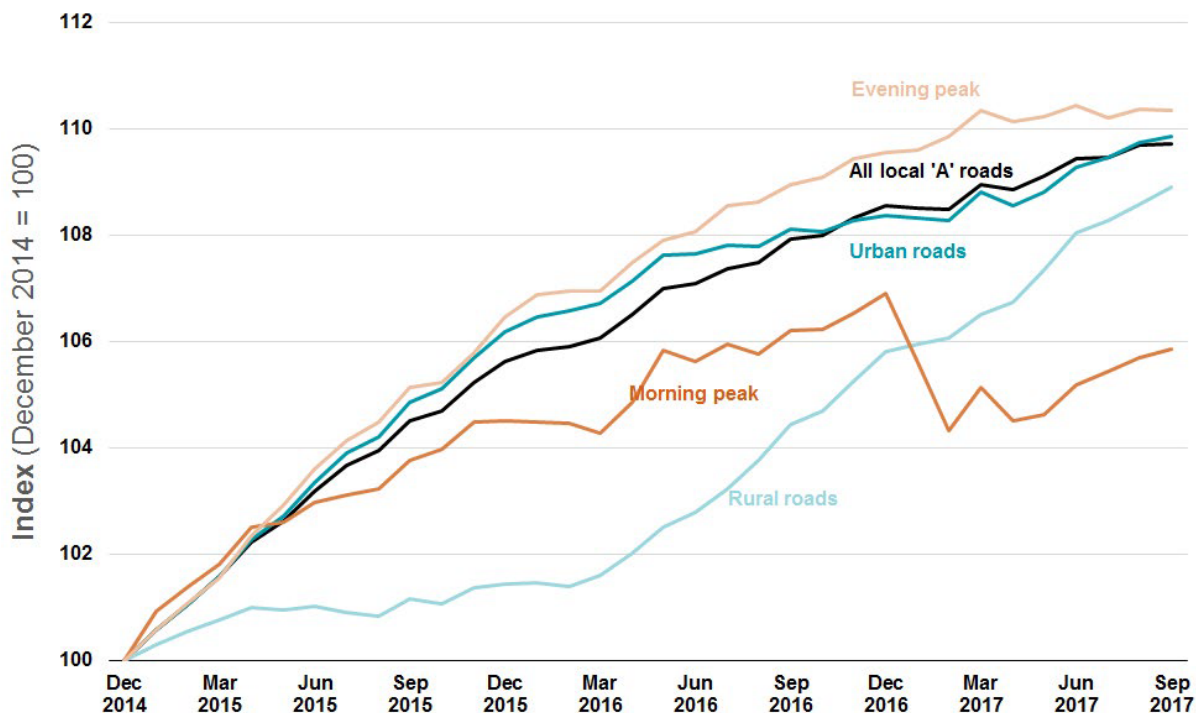


On urban classified local 'A' roads, average delay was 76.5 spvpm in the year ending September 2017, compared to 21.2 spvpm on rural classified local 'A' roads.

Since December 2014, this represents a rise in average delay of 6.9 spvpm (or 9.9%) on urban local 'A' roads and 1.7 spvpm (or 8.9%) on rural local 'A' roads (see Figure 11).

It is important to note that urban roads generally have lower free flow speeds than rural roads. As a result, a fixed absolute decrease in observed speeds will generally translate into a higher level of delay on urban roads relative to rural roads. An example of this is illustrated in Figure 12.

Figure 12: Illustrative example of average delay on urban and rural local 'A' roads

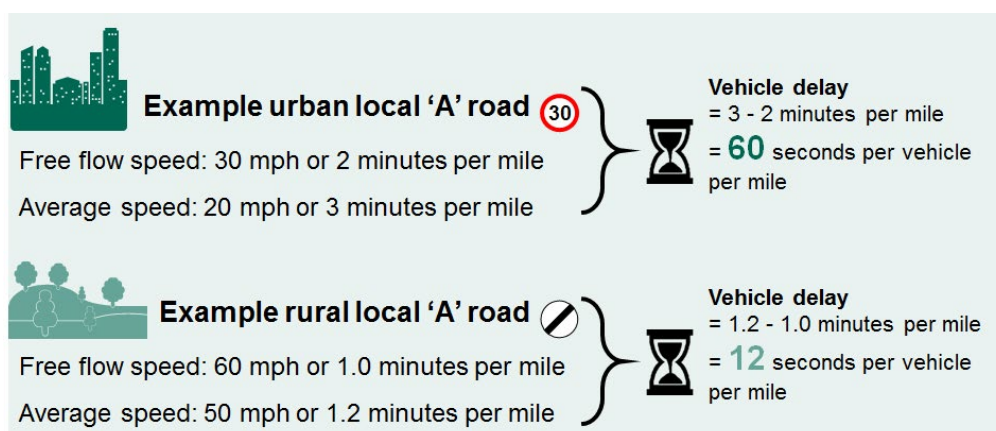

Request for feedback



We are keen to receive feedback from users of transport statistics. If you have any comments about how the statistics in this release are presented or analysed, please contact us using the details listed on the front page of this release.

Context and user feedback

Measures for the Strategic Road Network (SRN) were developed as part of the first Road Investment Strategy (RIS1), which sets out a long-term programme for England's SRN, and the stable funding platform needed to plan ahead effectively. The local 'A' road measures presented in this release were developed to provide a more complete picture of travel times on local 'A' roads and also to align with measures introduced for the SRN.

We will continue to review the content and presentation of these statistics, which we expect to develop further over time. Please contact us using the details at the bottom of the front page with any feedback you have, or if you would like further information.

Methodology and technical details

1. This is the second quarterly publication on travel time measures that has combined the measures for the SRN and local authority 'A' roads into one publication. It is important to note that although there are figures for average speed and average delay on both networks, they are not directly comparable. This is because the methodology for calculating average speed and delay on each of the networks differs. These differences are tabulated below (see Figure 13).

Figure 13: Methodological differences between the SRN and local 'A' roads

Methodological differences	SRN	Local 'A' roads
Geography Network	The data is matched to the NTIS network, a bespoke network model developed by Highways England	The data is matched to the Ordnance Survey ITN mastermap.
Sample fleet size and composition	Travel times from up to 50,000 Cars	Travel times from over 100,000 Cars and Light Commercial Vehicles (LCVs)
Definition of Free Flow on each network link	Free flow travel times are currently calculated using the national speed limits.	Free flow travel times are currently calculated using the 85th percentile speed observation. These are 'capped' at national speed limits (i.e. 60 mph for single carriageway and 70 mph for dual carriageway). As such, there may be cases where derived free flow speeds are greater than the legal speed limit on some road sections.
Weighting	Measures are weighted by profile flows. Profile flows are created by averaging observations from Highways England's automatic traffic counters for each link and time period.	Measures are weighted by annual average traffic flow as well as an indexed weighted flow for each hour, day type, month, road type and urban/rural classification for each link.

National Statistics are produced to high professional standards set out in the National Statistics [Code of Practice](#). They undergo regular quality assurance reviews to ensure they meet customer needs.

Details of ministers and officials who receive pre-release access to these statistics up to 24 hours before release can be found [here](#).

DfT's congestion statistics

For further information, a concise [introduction to the Department's road congestion and reliability statistics](#) is available.

2. In this publication changes in average speed and delay on the SRN are measured on a year-to-year basis rather than comparing to the previous quarter. Therefore the SRN measures now cover the same time period to those for local 'A' roads. The percentage changes in the publication represent year-on-year changes not quarterly change.

3. Users should exercise caution when reviewing the statistics over short periods of time when temporary factors such as road works or bad weather may have had an impact on the measures reported. This is particularly important when interpreting the data for relatively small areas where a small change on one or two roads may have a relatively large effect on the overall speeds or delays presented. In addition users should be cautious when comparing road travel time measure outputs reported for different local authorities or regions as a measure of the relative levels of congestion within these areas. Physical differences in the types of roads in these areas and their speed limits will also have a large bearing on travel times.

4. The travel times are estimated using Global Positioning Systems (GPS) data. All measures use real, observed travel time data with a good temporal match where available.

- a. For local 'A' roads, where there is insufficient data for individual road sections for a particular time period, travel times are imputed using corresponding monthly and hourly averages from individual road sections with similar road characteristics. Imputation figures can be found [here](#).
- b. For SRN, where there is insufficient data for individual road sections, national daytime and night-time averages, for each road type ('A' road single carriageway, 'A' road dual carriageway and motorway) are used for these measures. For the reliability measure, national daytime (6am to 8pm) averages, by road type, are used to impute individual road sections with fewer than 100 car observations, during the daytime, in the month. Imputation figures can be found [here](#).

5. The underlying datasets used to produce the statistics on local 'A' roads are similar to those used for the previous [average speeds on local A roads during the weekday morning peak statistics](#).

6. The underlying datasets used to produce the analysis in this report are similar to those used for the ['On Time' Reliability Measure \(OTRM\)](#), the previous reliability statistics that DfT published for the SRN. The travel times are estimated using Global Positioning Systems (GPS) data and traffic flows are estimated using Highways England automatic traffic counters. These flows are calculated in a different way to those used to produce the [Road Traffic Statistics](#) that DfT publish.

7. The average speed and average delay measures published for the SRN from April 2015 show higher imputation levels than those recorded for the previous OTRM measure. This is due to a combination of factors, including the use of cars only, the change in geographical representation of the SRN, and a reduction in the sample size of cars from August 2015.

Other sources of information

8. In addition to these travel time statistics, the Department also publishes [Journey Time statistics](#). These provide estimates of journey times to key local services (food stores, health care, education, town centres & employment centres) and to key strategic locations (e.g. transport hubs like major airports).
9. An '[Analysis of Travel Times on the SRN](#)' was published in July 2015 to introduce the travel time measures to users and to seek feedback. Statistics in this release are not directly comparable with those published in the analysis, however, due to changes in the way the underlying data are captured and processed.
10. The Department for Transport publishes a separate statistics series on [free flow vehicle speeds](#) on roads in Great Britain. That series focuses more on the speeds at which drivers choose to travel and their compliance with speed limits. Free flow speeds presented in that release are calculated in a different way and use a different data source to the free flow speeds used in this release.
11. Attitudes on road congestion can be found in the British Social Attitudes Survey, which is available at: [British Social Attitudes Survey: 2016](#).

Next update

The next release in this series is expected to be published in February 2018. This will contain monthly, and annual (year ending) figures, for the period January 2017 to December 2017. This will include new figures for the period October to December 2017.

Changes in ITN network

Some of the previously published congestion figures for local 'A' roads in 2017 will be revised in February 2018.

The travel time measures for local 'A' roads are based on data matched to the Ordnance Survey ITN mastermap representation of the local 'A' road network in England. Usually the ITN is refreshed each year so all congestion data matches the same ITN network within a given annual cycle. However, this year the ITN network was refreshed between the first and second quarter publications. To ensure that all of the congestion data for 2017 is matched to the same ITN network, some of the previously published figures will be revised in February.

Department for Transport (DfT) statistics Twitter feed



To hear more about DfT statistics publications as they are released, please follow us on Twitter via our @DfTstats account: <http://twitter.com/DfTstats>. TWITTER, TWEET, RETWEET and the Twitter logo are trademarks of Twitter, Inc. or its affiliates.