



Defence  
Safety Authority

# DSA 03.OME Part 2 (JSP 482) - Defence Code of Practice (DCOP) and Guidance Notes for In-Service and Operational Safety Management of OME

Defence OME Safety Regulator

*DOSR*



## **DSA VISION**

***Protecting Defence personnel and operational capability through effective and independent HS&EP regulation, assurance, enforcement and investigation.***

## PREFACE

### AUTHORITY

1. This document is crown copyright and the intellectual property rights of this publication belong exclusively to the Ministry of Defence (MOD). However, material or information contained in this publication may be reproduced, stored in a retrieval system or transmitted in any form provided it is used for the purposes of furthering safety and environmental management.

### STATUS

2. This document:
  - a. Is uncontrolled when printed.
  - b. Will be updated as part of a continuous improvement programme but at least 12-monthly from the period of document issue date.

### REQUESTS FOR CHANGE

3. Proposed changes, recommendations or amendments to DOSR Regulations and Guidance publications can be submitted by anyone using the DOME Request for Change Function (RFC) available for every Dome publication in the DOME library located [here](#) or by completing the Word version of the Change Proposal Form available from the DOME Library, see figure 1 below for the location.

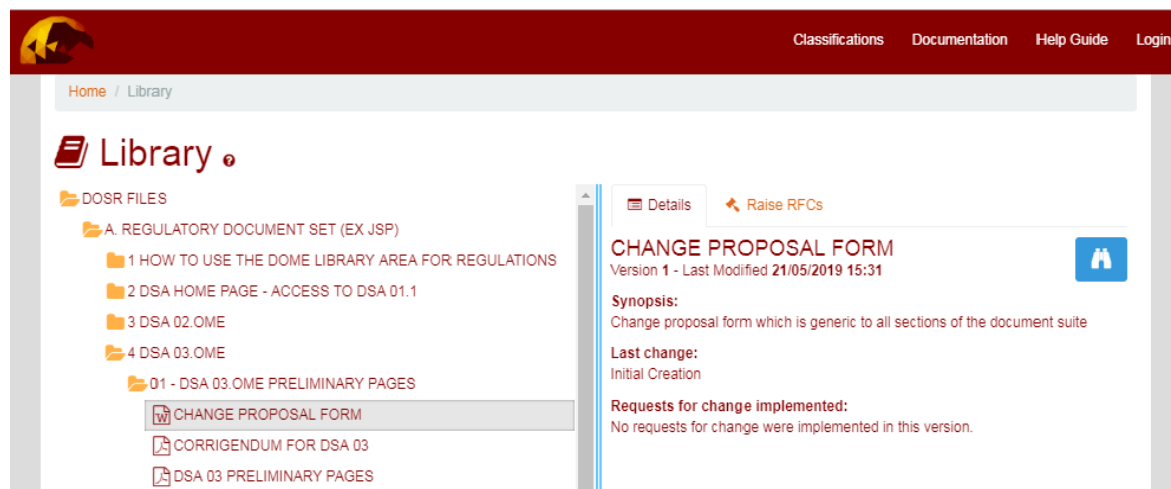


Figure 1. Change Proposal Form (Word version) Location

4. Any post and grammar change proposals can be approved or rejected by the DOSR PRG Authors without involvement of the associated Working Group.
5. Technical change proposals will need to be submitted to the associated Working Group for review and approval or rejection.
6. When incorporating changes care is to be taken to maintain coherence across regulations.
7. Changes effecting Risk to Life will be published immediately.
8. Other changes will be incorporated as part of routine reviews.

**REVIEW PROCESS**

9. The DOSR PRG team will ensure these OME Regulations remain fit for purpose by conducting reviews through the DOSR Governance Committees, involving all Stakeholders.

**FURTHER ADVICE AND FEEDBACK**

10. The document owner is the DOSR. For further information about any aspect of this document, or questions not answered within the subsequent sections, or to provide feedback on the content, contact:

<b>Job Title</b>	DOSR-Policy, Regulations and Guidance
<b>E-mail</b>	<a href="mailto:DSA-DOSR-PRG@mod.gov.uk">DSA-DOSR-PRG@mod.gov.uk</a>
<b>Address</b>	Juniper #5004, Level 0, Wing 1, Abbey Wood North, Bristol, BS34 8QW



**Intentional Blank Page**

**CHAPTER 10****SECTION 9****CRITERIA FOR DISPOSAL GROUNDS CO-LOCATED WITH EXPLOSIVES AREAS****CONTENTS**

## Paragraph

**1 CRITERIA FOR DISPOSAL GROUNDS CO-LOCATED WITH EXPLOSIVES AREAS**

- 1.1 Introduction
- 1.2 Site Selection

**2 QUANTITY DISTANCES**

- 2.1 Inside Quantity Distance
- 2.2 Outside Quantity Distances

**1 CRITERIA FOR DISPOSAL GROUNDS CO-LOCATED WITH EXPLOSIVES AREAS****1.1 Introduction**

1.1.1 The criteria outlined below prescribe measures and procedures for minimizing the risk in the routine destruction, by burning or detonation, of unwanted explosives. Disposal of unwanted explosives should only be carried out in locations designated and licensed for that purpose, using MOD Form 1672TP<sup>1</sup>PT. When licensing using this MOD Form, consideration should be given to the environmental issues addressed in JSP 418, the MOD Environmental Manual.

**1.2 Site Selection**

1.2.1 Sites selected for the destruction of explosives should be located at the maximum practical distance from all PES, traffic routes and inhabited buildings, and from uninhabited buildings considered vital. In addition to the QD considerations given at paras 2, below, there should be no building, above ground storage site or underground storage site, containing explosives, within three times the danger area required for the stores to be destroyed. More details concerning selection criteria for destruction sites and the approval process for them can be found in JSP 403 or the relevant Single Service or DPA Regulations.

**2 QUANTITY DISTANCES****2.1 Inside Quantity Distance**

2.1.1 For the purposes of Inside Quantity Distances, Disposal Grounds are to be considered as untraversed Process Buildings.

**2.2 Outside Quantity Distances**

2.2.1 If disposal is by burning or incineration, and only explosives of HD 1.3 and/or HD 1.4 are to be destroyed, the Outside Quantity Distance (OQD) to be applied is not to be less than the applicable IBD for the quantity and HD of the explosives involved.

---

<sup>1</sup>PT These regulations do not apply to destruction sites associated purely with operational Explosives Ordnance Disposal activities.

2.2.2 If disposal is to be by detonation, or if explosives of HD 1.1 and HD 1.2 are being destroyed by burning, on an unprotected, above-ground open site, the OQD to be applied should be between 5 and 7½ times the blast related IBD subject to an over-riding minimum distance of the maximum fragment throw for the explosives being destroyed. These distances may be relaxed if energy and fragment absorbing devices are employed. For example, destruction by detonation in pits below ground level would not be expected to attract such excessive OQDs. Guidance on fragment throw and safety distances can be found in DSA 03.OME Part 2 Volume 5 table 403/3/4 or in the relevant single Service Destruction of Explosives publications.