March 2025



# Air Quality and Dust Monitoring Monthly Report - March 2025

London Borough of Hillingdon



High Speed Two (HS2) Limited has been tasked by the Department for Transport (DfT) with managing the delivery of a new national high speed rail network. It is a non-departmental public body wholly owned by the DfT.

High Speed Two (HS2) Limited, Two Snowhill Snow Hill Queensway Birmingham B4 6GA

Telephone: 08081 434 434

General email enquiries: HS2enquiries@hs2.org.uk

Website: www.gov.uk/hs2

A report prepared by EWCs and MWCCs on behalf of HS2 Ltd.

High Speed Two (HS2) Limited has actively considered the needs of blind and partially sighted people in accessing this document. The text will be made available in full on the HS2 website. The text may be freely downloaded and translated by individuals or organisations for conversion into other accessible formats. If you have other needs in this regard please contact High Speed Two (HS2) Limited.

© High Speed Two (HS2) Limited, 2025, except where otherwise stated. Copyright in the typographical arrangement rests with High Speed Two (HS2) Limited.

This information is licensed under the Open Government Licence v2.0. To view this licence, visit www.nationalarchives.gov.uk/doc/open-governmentlicence/ version/2 or write to the Information Policy Team, The National Archives, Kew, London TW9 4DU, or e-mail: psi@nationalarchives.gsi.gov.uk. Where we have identified any third-party copyright information you will need to obtain permission from the copyright holders concerned.



### **Monthly Summary**

- 1.1.1 This Summary Report is published in fulfilment of commitments detailed in the High Speed Rail (London-West Midlands) Environmental Minimum Requirements, Annex 1: Code of Construction Practice, for the nominated undertaker to present the results of air quality and dust monitoring undertaken in the London Borough of Hillingdon (LBH) during February and March 2025 respectively.
- 1.1.2 Figure 1 to Figure 4 in Appendix A present the current worksites together with air quality monitoring locations.
- 1.1.3 This summary should be read in conjunction with the overview monitoring report available from <a href="www.gov.uk/government/collections/monitoring-the-environmental-effects-of-hs2">www.gov.uk/government/collections/monitoring-the-environmental-effects-of-hs2</a>, which highlights: the applicable standards and guidance, as well as the air quality and dust monitoring methodologies to be implemented by nominated undertakers throughout construction.
- 1.1.4 The current worksites, as presented in Appendix A, Figure 1 to Figure 4, include:
  - Gatemead and West Ruislip Embankment, Breakspear Road South and River Pinn Underbridge, concreting, groundworks and materials management.
  - Harvil Road realignment groundworks, materials management, concreting and shuttering works at Copthall North.
  - West Ruislip Portal materials management (tunnel boring machine arisings).
  - South Ruislip vent shaft and headhouse construction, ground works, concrete works and materials management.
  - Northern Sustainable Placement Area (NSPA) landscaping, seeding and planting.
  - Southern Sustainable Placement Area (SSPA) seeding, planting and demobilisation.

#### **CVV Dews Lane**

- North Moorhall Compound: Operation;
- HOAC Compound: Operation;
- Haul Road Maintenance: Haul road maintenance;
- ATFS: ATFS permanent drainage, soiling and seeding, ATFS access road construction, Slab removal;
- Pumping Water Management: Pumping water management;
- Satellite Welfares;
- South Abutment: Drainage works, South Abutment construction stage 2 earthworks, yard supporting activities, soiling and seeding works, launching girder platform removal:
- Environmental Maintenance;
- Stockpiling Activity HOAC: Stockpile management;
- Deck Finishes Logistics: Preparation and operation of storage yards and installation of below deck access provision, traffic management on the deck surface, delivery of parapets, noise barriers, troughs, pipes, steel works and other minor material to the

- storage yards and deck, installation of access at the top of the deck (HAKI stairs) and finishes support plant;
- Deck Finishes On-deck Construction: Construction of robust kerbs, installation of parapets, construction of concrete stitch, filling of voids and top openings, verge deck waterproofing, trough installation, noise barrier installation, deck waterproofing, SFRC slab construction, North Embankment and south embankment noise barriers and foundations, noise barrier and concrete panel installation at north embankment and masking wall installation at north embankment and south embankment;
- Deck Finishes In-deck Construction: concrete works within the deck, drainage works within the deck, steel works within the deck, and structural health monitoring;
- Landscaping (pier 57 Pier 1): Advanced works including removal of cofferdams, initial ground drainage including manhole chamber, hardstanding removal, tree removal & vegetation clearance, earthworks cut & fill, landscaping (subsoil, topsoil, cultivating, seeding, planting) and streetworks bellmouth road construction;
- Jetty Removal and associated earthworks: Cutting tubular piles, sheet piles and steelworks; and
- General Works.


#### **CVV Moorhall Road**


- North Moorhall Compound: operation;
- HOAC Compound: operation;
- Haul Road Maintenance: Haul road maintenance;
- ATFS: ATFS permanent drainage, soiling and seeding, ATFS access road construction,
   Slab removal;
- Pumping Water Management: pumping water management;
- Satellite Welfares;
- South Abutment: Drainage works, South Abutment construction stage 2 earthworks, yard supporting activities, soiling and seeding works, launching girder platform removal;
- Environmental Maintenance;
- Stockpiling Activity HOAC: Stockpile management;
- Deck Finishes Logistics: Preparation and operation of storage yards and installation of below deck access provision, traffic management on the deck surface, delivery of parapets, noise barriers, troughs, pipes, steel works and other minor material to the storage yards and deck, installation of access at the top of the deck (HAKI stairs) and finishes support plant;
- Deck Finishes On-deck Construction: construction of robust kerbs, installation of parapets, construction of concrete stitch, filling of voids and top openings, verge deck waterproofing, trough installation, noise barrier installation, deck waterproofing, SFRC slab construction, North Embankment and south embankment noise barriers and foundations, noise barrier and concrete panel installation at north embankment and masking wall installation at north embankment and south embankment;
- Deck Finishes In-deck Construction: Concrete works within the deck, drainage works within the deck, steel works within the deck, and structural health monitoring;


- Landscaping (pier 57 Pier 1): Advanced works including removal of cofferdams, initial ground drainage including manhole chamber, hardstanding removal, tree removal & vegetation clearance, earthworks cut & fill, landscaping (subsoil, topsoil, cultivating, seeding, planting) and streetworks bellmouth road construction;
- Jetty Removal and associated earthworks: Cutting tubular piles, sheet piles and steelworks; and
- General Works.
- 1.1.5 Eleven (11) dust monitors are installed around these worksites, where works are underway. These sites returned a low to medium dust risk rating.
- 1.1.6 Dust monitoring locations and results are presented in Appendix B, Table 1, together with line charts of monthly data from each dust monitor in Figure 5. All continuous dust monitoring is undertaken using indicative monitors. Despite being Environment Agency (MCERTS) certified, indicative monitors carry a higher level of uncertainty than reference monitors, and therefore cannot be strictly compared with Air Quality Standards for human health and the environment. The purpose of the monitoring undertaken is to ensure the effectiveness of the on-site mitigation.
- 1.1.7 The trigger level for  $PM_{10}$  concentrations of  $190\mu g/m^3$ , over a 1-hour period, in accordance with the updated guidance document 'Guidance on Monitoring in the Vicinity of Demolition and Construction Sites (October 2018)' has been applied.
- 1.1.8 Details of the trigger alert investigations and remediations are presented in Appendix B, Table 2.
- 1.1.9 Data capture was below 90% for multiple monitors. AQ052 was due to a fault with the monitor. AQ034 was due to the monitor running out of hydrogen gas, subsequently recharged. CVV-AQMP3 was removed at the start of March and Align are due to relocate this monitor within April.
- 1.1.10 Diffusion tube monitoring of Nitrogen Dioxide (NO<sub>2</sub>) is undertaken at eleven (11) locations around highways within the LBH as part of the management of air quality where significant effects may occur as a result of the scheme.
- 1.1.11 Diffusion tube monitoring results are as provided from the laboratory analysis, and therefore still require various analysis and adjustments to be undertaken. Final corrected results will be presented and described in the annual report. However, based on results to date, no unexpected values were recorded during the monitoring period.
- 1.1.12 NO<sub>2</sub> monitoring locations and results are presented in Appendix C, Table 3, together with the 2025 running mean.
- 1.1.13 There were no (0) complaints received during the reporting period (March 2025).


## **Appendix A – Worksites and Monitoring Locations**

Figure 1 to Figure 4: Current monitoring locations within the LBH

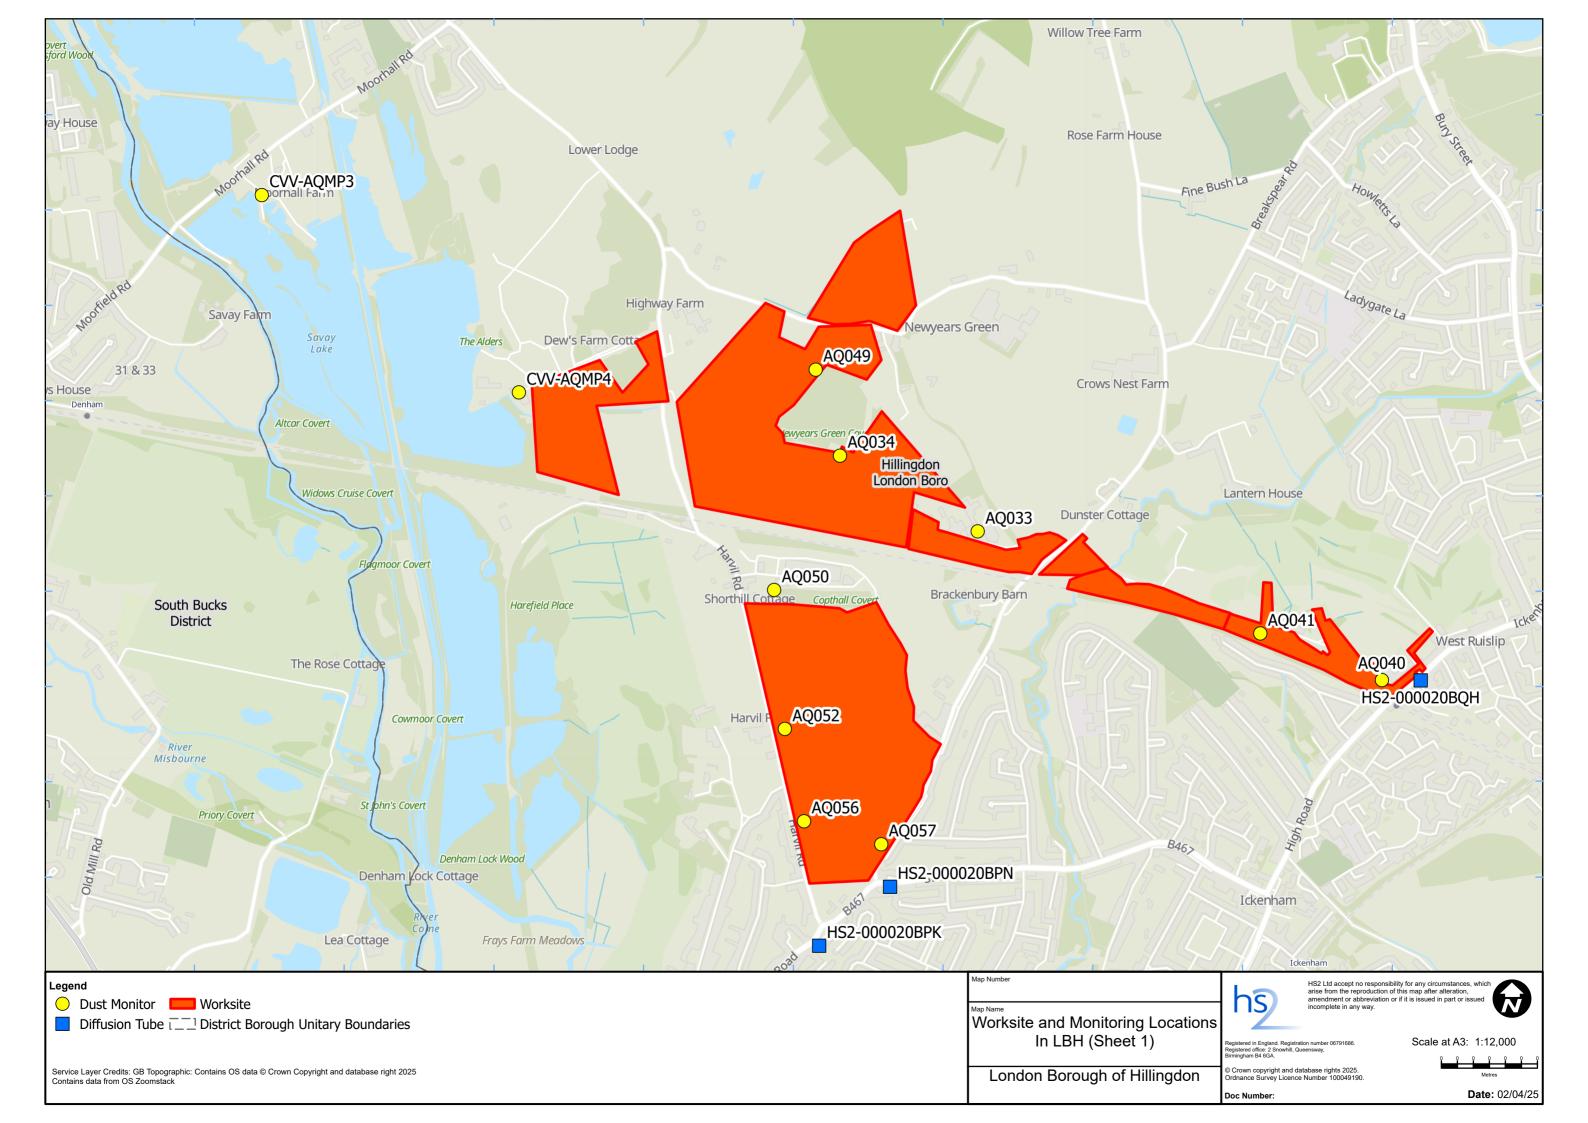

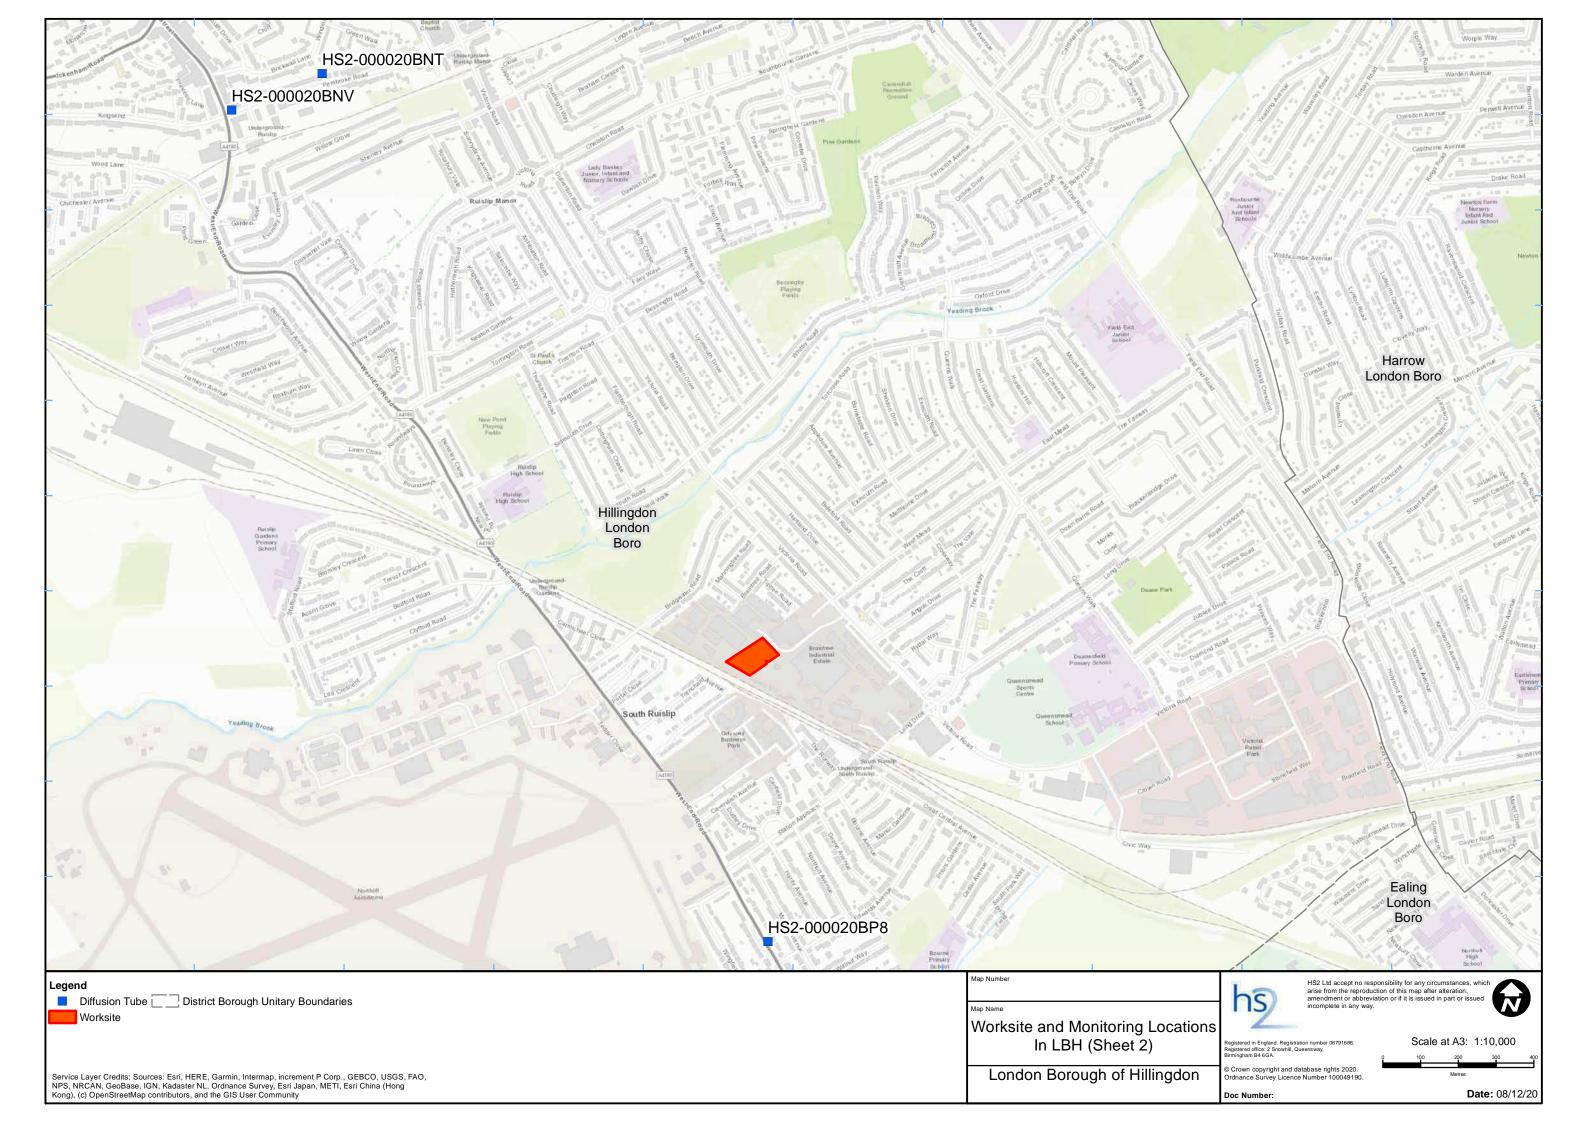

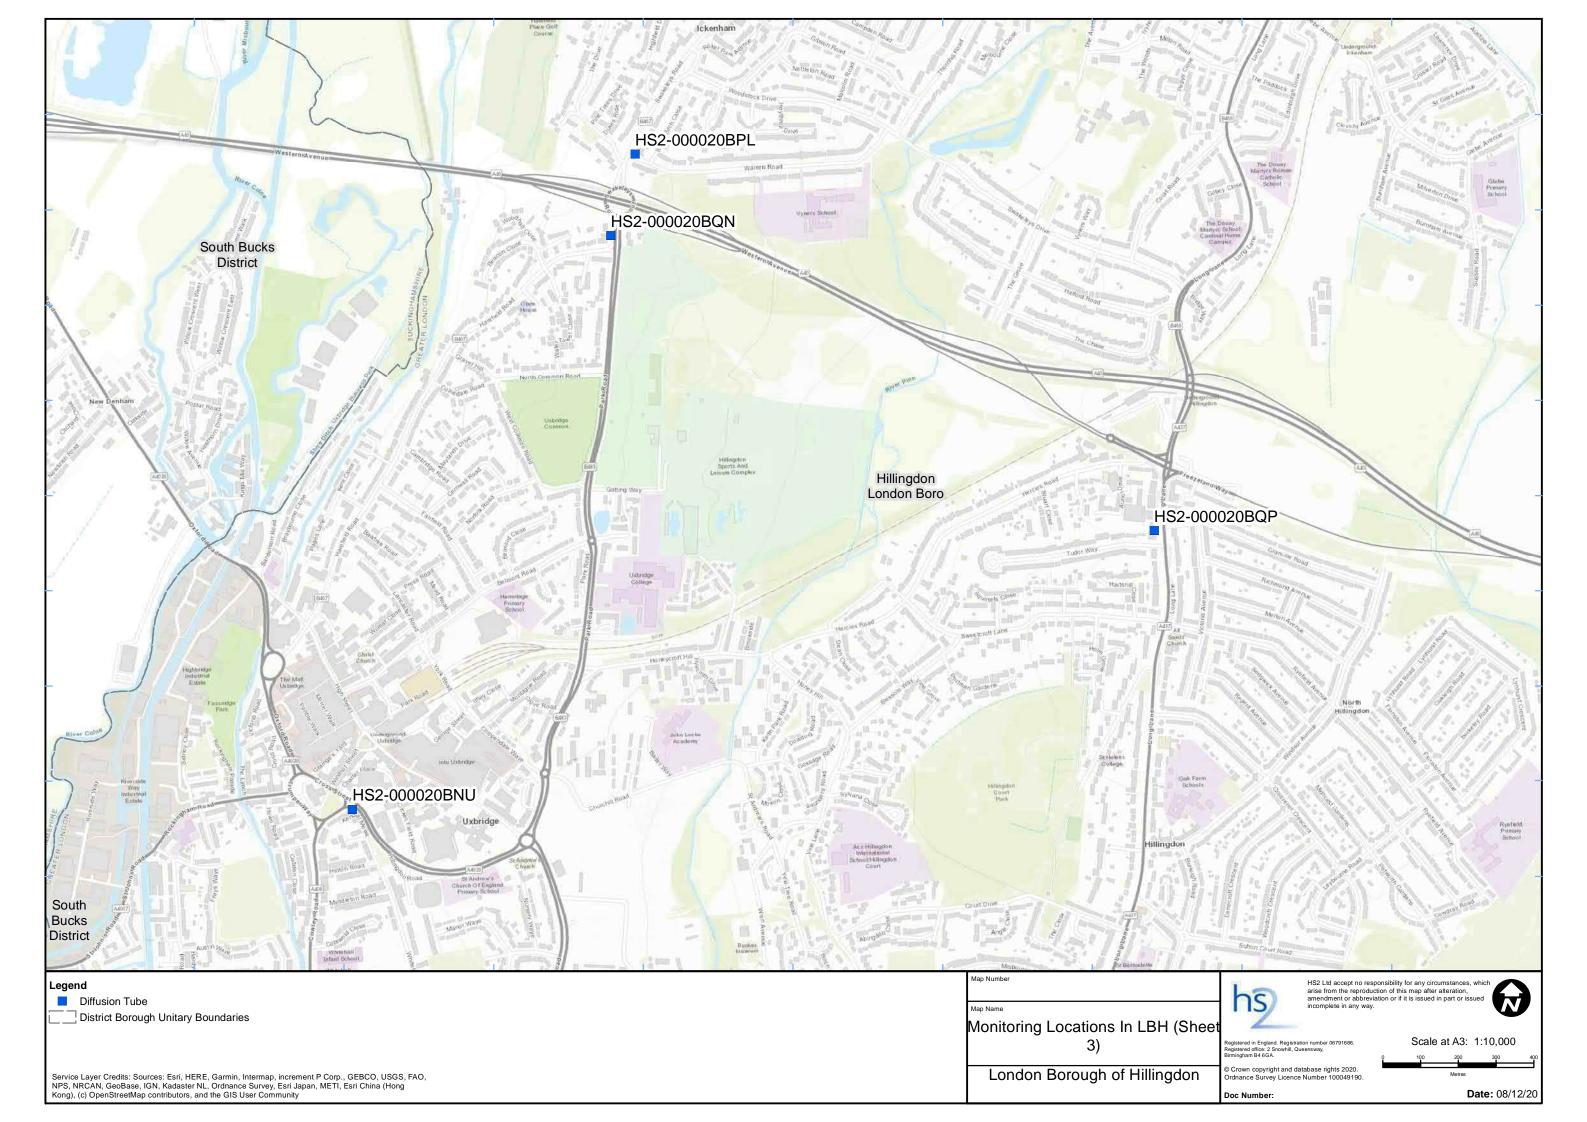

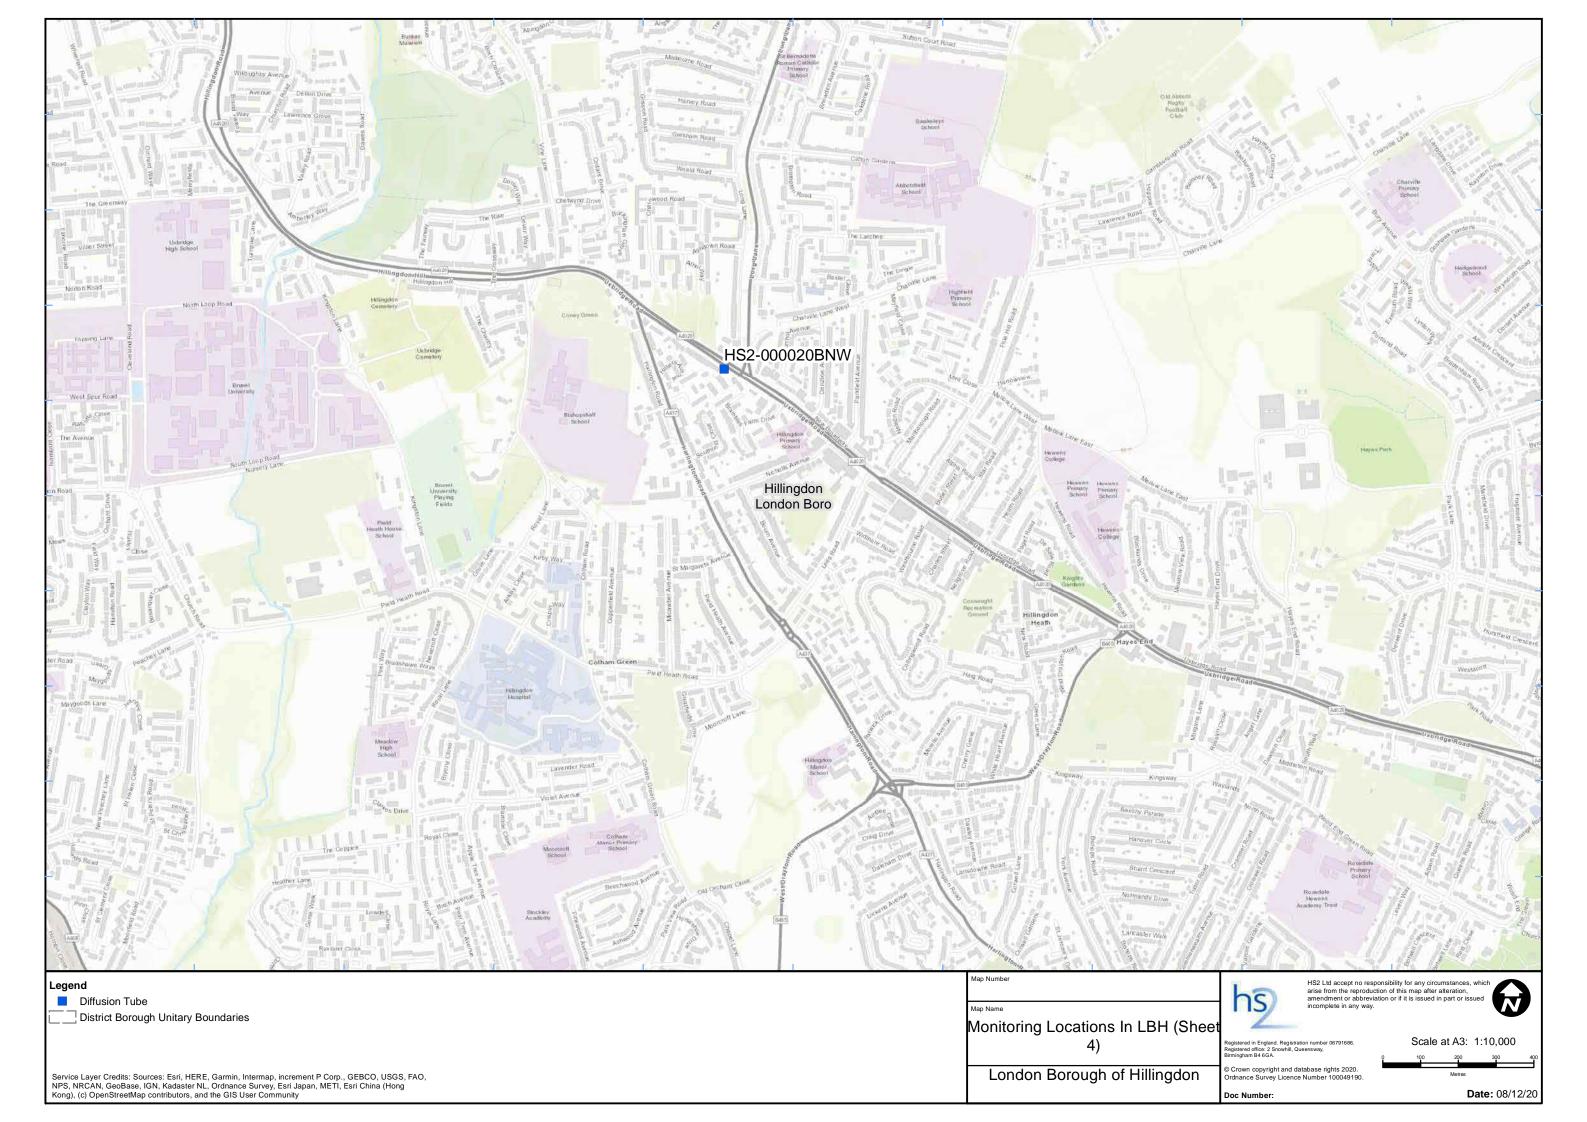

## **Appendix B - Dust Monitoring Results**

Table 1: Dust Monitoring Locations and Results


Monitoring site ID	Coordinate s (X,Y)	Location description	Dust risk rating for site	Monitoring site active during period	Change to site since previous period report  Change to Mean 1-hour concentratio (µg/m³)		Minimum 1- hour PM <sub>10</sub> concentration (μg/m³)	Maximum 1- hour PM <sub>10</sub> concentration (μg/m³)	Number of 1- hour periods exceeding trigger level of 190 µg/m³	Data capture (%)
AQ033	507045, 187352	Breakspear Road South	М	Yes	N	58.5	1.6	5932.1	12	95.4
AQ034	506608, 187592	Copthall Cutting	L	Yes	N	17.3	1.5	87.6	0	79.6
AQ040	508328, 186880	West Ruislip Golf Course	М	Yes	N	13.5	1.6	68.8	0	99.9
AQ041	507942, 187028	West Ruislip Portal	М	Yes	N	19.4	1.6	331.7	4	99.9
AQ049	506531, 187865	Copthall North, Ancient Woodland	М	Yes	N	9.9	0.8	56.2	0	99.9
AQ050	506399, 187166	Copthall South Compound	М	Yes	N	15.0	1.5	83.3	0	99.9
AQ052	506433, 186725	Southern Sustainable Placement Area	М	Yes	N	32.5	11.0	91.0	0	25.4
AQ056	506494, 186432	Southern Sustainable Placement Area	М	Yes	N	10.8	1.0	60.0	0	97.8
AQ057	506739, 186359	Southern Sustainable Placement Area	М	Yes	N	39.4	10.0	109.0	0	100.0


Monitoring site ID	Coordinate s (X,Y)	Location description	Dust risk rating for site	Monitoring site active during period	Change to site since previous period report	Mean 1-hour PM <sub>10</sub> concentration (μg/m³)	Minimum 1- hour PM <sub>10</sub> concentration (μg/m³)	Maximum 1- hour PM <sub>10</sub> concentration (μg/m³)	Number of 1- hour periods exceeding trigger level of 190 µg/m³	Data capture (%)
CVV-AQMP3	504773, 188419	On the eastern boundary along south side of Moorhall Road	М	No	Y	-	-	-	-	-
CVV-AQMP4	505589, 187793	On the western boundary of HOAC at Dews Lane	М	Yes	Y	18.6	1.0	181.0	0	100.0


Table 2: Summary of exceedances during period (March 2025)

Monitoring site ID	Period exceeding trigger level	Investigation	Outcomes / Resolution / Remedial measures implemented
AQ033	03/03/2025 23:01 – 00:00; 203.2 μg/m³ 00:01 – 01:00; 354.0 μg/m³ 01:01 – 02:00; 398.2 μg/m³ 02:01 – 03:00; 481.0 μg/m³ 03:01 – 04:00; 3579.8 μg/m³ 04:01 – 05:00; 5932.1 μg/m³ 05:01 – 06:00; 3054.5 μg/m³ 06/03/2025 03:01 – 04:00; 233.4 μg/m³ 04:01 – 05:00; 367.6 μg/m³ 05:01 – 06:00; 2386.2 μg/m³ 06:01 – 07:00; 5393.9 μg/m³ 07:01 – 08:00; 4691.8 μg/m³	The triggers are considered to be caused by the generator running out of hydrogen gas causing a loss of power to the monitor and spikes in data as the pump and heater stopped.	Monitor and generator subsequently serviced, and the hydrogen cylinders replenished.
AQ041	01/03/2025 06:01 – 07:00; 195.5 μg/m <sup>3</sup>	The triggers are considered to be caused by a faulty heater, confirmed during a subsequent service visit, and replaced. The monitor had been reading erratically during the early hours of the morning and evidently affected by the very misty morning resulting in spikes in data.	Internal heater subsequently replaced.

Figure 5: Construction dust 1-hour mean indicative PM<sub>10</sub> concentration for all dust monitors

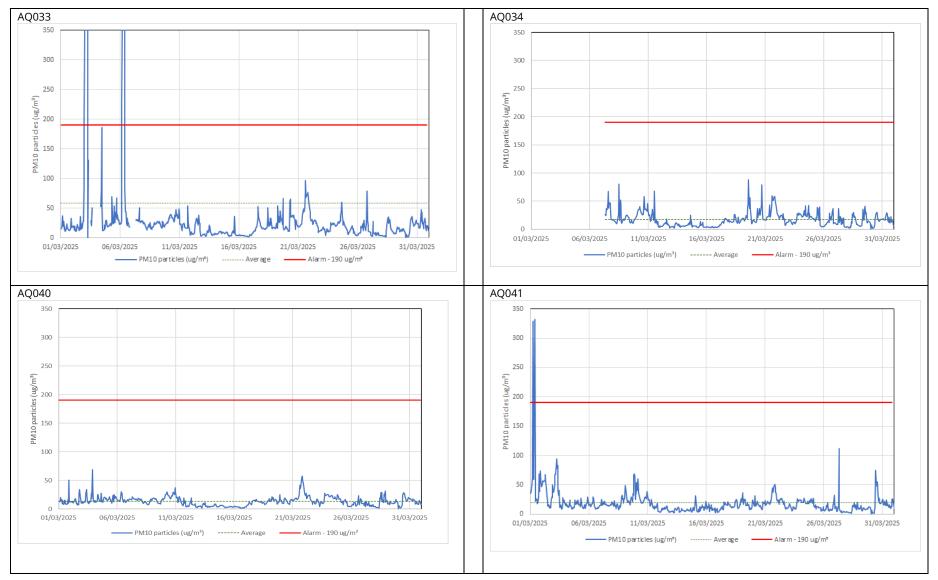

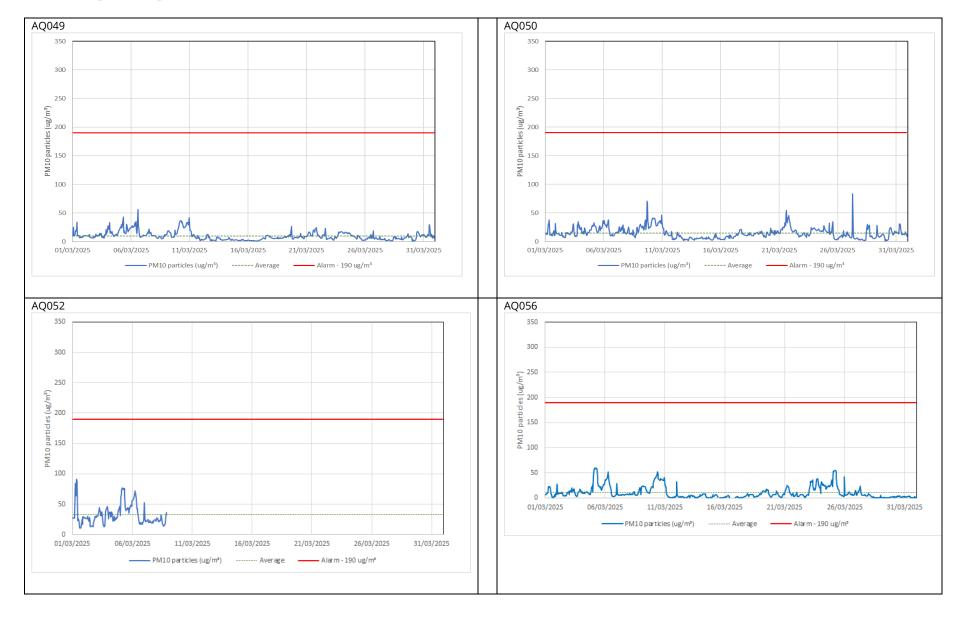

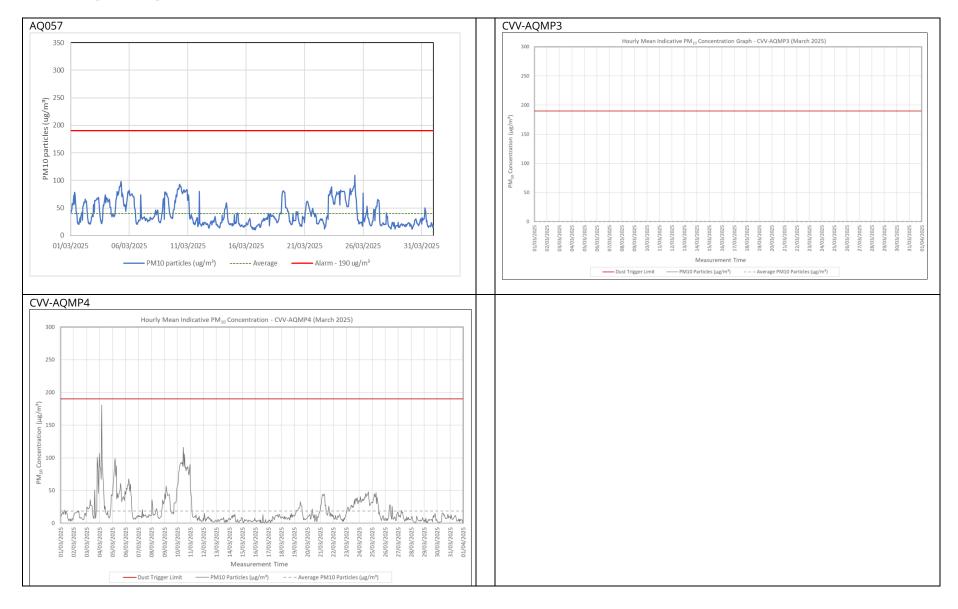

## **Appendix C - Air Quality Monitoring Results**

Table 3: NO₂ monitoring locations around highways, NO₂ concentrations and monthly monitoring results with running mean for 2024 (µg/m³)

Monitoring Site	Location description	Coordinates (X, Y)	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Mean <sup>12</sup>
HS2-000020BNT	Lamp post on Pembroke Road	509678, 187214	32	25											28
HS2-000020BNU	Cowley Road sign post at junction with Hillingdon Road	505492, 183926	44	34											39
HS2-000020BNV	High Street sign post at junction with Pembroke Road	509439, 187117	47	33											40
HS2-000020BNW	Signpost on A4020 Uxbridge Road at junction with Long Lane	507365, 182687	38	43											40
HS2-000020BPK	Lamp post in crescent off Swakeleys Road	506542, 186037	34	32											33
HS2-000020BPL	Warren Road sign post on corner of Swakeleys Road and Warren Road	506240, 185660	43	20											31

<sup>&</sup>lt;sup>1</sup> Note: to aid interpretation and conform with best practice, the monthly measurements in this table are reported rounded to the nearest whole number. The annual mean presented here is calculated based on laboratory data to 4 significant figures, rounded to a whole number, and therefore may differ slightly to a mean derived from averaging the rounded monthly measurements in the table.

<sup>&</sup>lt;sup>2</sup> The annual mean for diffusion tubes presented in the table above still require various analysis and adjustments to be undertaken before comparison to the Air Quality Objectives. The final corrected annual mean will be presented in the HS2 Annual Air Quality Report.

Monitoring Site	Location description	Coordinates (X, Y)	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Mean <sup>12</sup>
HS2-000020BPN	Lamp post on B467	506767, 186224	41	38											39
HS2-000020BQH	Lamp post on High Road Ickenham	508451, 186879	37	36											36
HS2-000020BQN	Lamp post on Park Road	506176, 185444	50	37											43
HS2-000020BQP	Sign post on Long Lane	507614, 184663	44	42											43
HS2-000020BP8	Triplicate site at South Ruislip roadside automatic monitoring station	510858, 184916	34	30											32