

Notice of variation and consolidation with introductory note

The Environmental Permitting (England & Wales) Regulations 2016

EDF Energy (Thermal Generation) Limited

West Burton CCGT Power Station West Burton Power Station Retford Nottinghamshire DN22 9BL

Variation application number

EPR/CP3035MK/V009

Permit number

EPR/CP3035MK

West Burton CCGT Power Station Permit number EPR/CP3035MK

Introductory note

This introductory note does not form a part of the notice.

Under the Environmental Permitting (England & Wales) Regulations 2016 (schedule 5, part 1, paragraph 19) a variation may comprise a consolidated permit reflecting the variations and a notice specifying the variations included in that consolidated permit.

Schedule 2 of the notice comprises a consolidated permit which reflects the variations being made. All the conditions of the permit have been varied and are subject to the right of appeal.

Article 21(3) of the Industrial Emissions Directive (IED) requires the Environment Agency to review conditions in permits that it has issued and to ensure that the permit delivers compliance with relevant standards, within four years of the publication of updated decisions on Best Available Techniques (BAT) Conclusions. We have reviewed the permit for this installation against the revised BAT Conclusions for the large combustion plant sector published on 17th August 2017. Only activities covered by this BAT Reference Document have been reviewed and assessed.

This variation makes the below changes following the review under Article 21(3) of the IED and the consolidation of the Environmental Permitting Regulations that came into force on the 4 January 2017:

- Revised emission limits and monitoring requirements for emissions to air applicable from 17 August 2021 in table S3.1a; and
- Inclusion of process monitoring for energy efficiency in table S3.3.

Permit condition 2.3.7 has been included in the permit with corresponding improvement condition IC01 requiring the operator to submit a report in relation to potential Black Start operation of the plant. In addition, we have included conditions 2.4 relating to the improvement programme.

As a result of the installation of a new oil interceptor the requirement to carry out visual inspection for oil and grease in the discharge at points W5 and W6 is no longer necessary and has been removed from table S3.2 in accordance with an agreement made in 2018.

The rest of the installation is unchanged and continues to be operated as follows:

The West Burton Combined Cycle Gas Turbine (CCGT) Power Station is built on land adjacent to the existing coal fired West Burton Power Station in Nottinghamshire. It has been designed to provide EDF Energy (West Burton Power) Limited with an efficient and flexible power station to meet its future energy supply requirements and to help promote an environmental policy of clean fuel. The power station is designed to use proven technology and consists of an efficient gas fired CCGT module to meet power demand.

The power station provides in the order of 1,311 MWe of electrical power and uses natural gas. The power station is capable of operating on a base load, part load and 'two shifting' basis and comprises three main generating units, each having a gas turbine heat recovery steam generator and associated steam turbine. However, although they are capable of this, the operator has chosen to operate under the Emission Limit Value (ELV) compliance route with no derogations or part load ELVs.

Fuel is burned in the combustion chamber of a gas turbine from where the hot gases expand through and drive a gas turbine to generate electricity. The hot exhaust gases are then used in a heat recovery steam generator to generate steam, which in turn is used to generate electricity via a steam turbine. The spent steam leaving the steam turbine passes to water cooled condensers where it is condensed. The resultant condensate is returned to the waste heat recovery steam generator for re-use.

Abstracted water from the River Trent is treated prior to its use in a hybrid cooling water system. Hybrid cooling is whereby the visible plume normally associated with conventional cooling can be eliminated under

most weather conditions. Typically the plume is only visible when the ambient air temperature is below 5°C and the relative humidity is above 95%.

The power station connects to the National Grid Transmission System 0.7 km to the south of the site via the existing West Burton 400 kV substation, which is in the confines of the overall West Burton site. The power station is served by a gas pipeline connection. Natural gas is not stored on site. A gas fired standby boiler (36 MWth) provides steam during start up of each of the three gas turbines. Four standby diesel engines (2.5 MWth each) provide emergency electrical supply to the power station.

The main emissions from the regulated facility to air result from the combustion of fuel in the gas turbines and to water from the use of cooling water. Combustion products from the three gas turbines are released to air via three separate 80 metre high chimneys. Emissions to water discharge to the River Trent.

Also present at the site is a Visitor Centre and a 49MW Battery Storage Facility. The Battery Storage Facility commenced operation in 2017 and supports the National Grid by providing Frequency Response and other services.

The CCGT power station and adjacent coal fired power station are operated independently and share no technical links and are therefore separately permitted under the Environmental Permitting (England and Wales) Regulations 2016.

The status log of a permit sets out the permitting history, including any changes to the permit reference number.

Status log of the permit		
Description	Date	Comments
Application duly made EPR/CP3035MK/A001	13/10/06	
Permit determined EPR/CP3035MK	18/06/07	Permit issued to EDF Energy (West Burton Power) Limited.
Variation Application duly made EPR/CP3035MK/V002	05/11/08	To increase temperature of cooling water discharge, remove suspended solids limits and administrative amendments.
Variation determined EPR/CP3035MK/V002	02/04/09	Varied permit issued.
Environment Agency initiated variation EPR/CP3035MK/V003	11/03/13	Varied permit issued. To incorporate Eel Regulations improvement condition.
Regulation 60 Notice sent to the Operator	31/10/14 (Amended Regulation 60 Notice sent on 09/12/14)	Issue of a Notice under Regulation 60(1) of the EPR. Environment Agency initiated review and variation to vary the permit under IED to implement the special provisions for LCP under Chapter III, introducing new Emission Limit Values (ELVs) applicable to LCP, referred to in Article 30(2) and set out in Annex V. The permit is also updated to modern conditions.
Regulation 60 Notice response	31/03/15	Response received from the Operator.
Additional information received	26/06/15	Response to request for further information dated 04/06/15.
Additional information received	30/06/15	Response to request for further information dated 26/06/15.
Variation determined EPR/CP3035MK/V004	15/12/15	Varied and Consolidated Permit issued in modern condition format. Variation effective from 01/01/16.

Description	Date	Comments
Variation Application duly made EPR/CP3035MK/V009	06/04/16	To update the monitoring conditions for residual total chlorine and pH for the discharge to the River Trent.
Variation determined EPR/CP3035MK/V005	30/06/16	Varied and Consolidated permit issued.
Variation Application duly made EPR/CP3035MK/V009	13/10/16	To modify the W5 discharge temperature to the River Trent.
Request for Further Information – Schedule 5 Notice dated 15/11/16	31/12/16	Responses received Thermal plume modelling updated (2015 WFD standards). Ecological Appraisal.
Request for Further Information	26/01/17 17/02/17	Timescale for installation of continuous monitor at
sent 09/02/17	11702711	water intake.
Request for updated site plan sent 17/02/17 (river water uptake) and 22/02/17 (Outfall B)	24/02/17	Updated site plan showing river water uptake and Outfall B.
Request for information on River water intake sent 28/02/17	01/03/17	
Variation determined EPR/CP3035MK/V006	17/03/17	Varied and Consolidated permit issued.
Notified of change of Company Name and Registered Office	12/01/18	Name and Registered office changed to EDF Energy (Thermal Generation) Limited of 90 Whitfield Street, London, England, W1T 4EZ
Variation issued EPR/CP3035MK/V007	15/01/18	Varied permit issued to EDF Energy (Thermal Generation) Limited
Regulation 61 Notice sent to the Operator	01/05/18	Issue of a Notice under Regulation 61(1) of the EPR. Environment Agency initiated review and variation to vary the permit under IED to implement Chapter II following the publication of the revised Best Available Techniques (BAT) Reference Document for large combustion plant.
Regulation 61 Notice response.	29/10/18	Response received from the Operator.
Variation application EPR/CP3035MK/V008	Duly made 08/10/19	Application to vary to add OCGT peaking plant
Request for information EPR/CP3035MK/V008	19/11/19	Noise modelling spreadsheet and calculations
Request for information EPR/CP3035MK/V008	05/02/20	Thermal input for each OCGT and additional air quality assessment tables
Request for information EPR/CP3035MK/V008	17/02/20 18/02/20	Information to enable request for LCP number
Request for information EPR/CP3035MK/V009	09/03/20	Clarification of proposed annual average CO limit
Additional information EPR/CP3035MK/V009	05/06/20	Updated thermal input for each LCP
Additional information	30/06/20	Confirmation of DLN effectiveness

Status log of the permit		
Description	Date	Comments
EPR/CP3035MK/V009		
Variation determined EPR/CP3035MK/V009 (Billing ref: ZP3908BW)	02/07/20	Varied and consolidated permit issued. Note that this variation under the Large Combustion Plant review was completed and issued prior to the completion of variation EPR/CP3035MK/V008.

End of introductory note

The Environmental Permitting (England and Wales) Regulations 2016

The Environment Agency in exercise of its powers under regulation 20 of the Environmental Permitting (England and Wales) Regulations 2016 varies

Permit number

EPR/CP3035MK

Issued to

EDF Energy (Thermal Generation) Limited ("the operator")

whose registered office is

90 Whitfield Street London W1T 4EZ

company registration number 04267569

to operate a regulated facility at

West Burton CCGT Power Station West Burton Power Station Retford Nottinghamshire DN22 9BL

to the extent set out in the schedules.

The notice shall take effect from 02/07/2020.

Name	Date
Claire Roberts	02/07/2020

Authorised on behalf of the Environment Agency

Schedule 1

All conditions have been varied by the consolidated permit as a result of an Environment Agency initiated variation.

Schedule 2 – consolidated permit

Consolidated permit issued as a separate document.

Permit

The Environmental Permitting (England and Wales) Regulations 2016

Permit number

EPR/CP3035MK

This is the consolidated permit referred to in the variation and consolidation notice for application EPR/CP3035MK/V009 authorising,

EDF Energy (Thermal Generation) Limited ("the operator"),

whose registered office is

90 Whitfield Street London W1T 4EZ

company registration number 04267569

to operate an installation at

West Burton CCGT Power Station West Burton Power Station Retford Nottinghamshire DN22 9BL

to the extent authorised by and subject to the conditions of this permit.

Name	Date
Claire Roberts	02/07/2020

Authorised on behalf of the Environment Agency

Conditions

1 Management

1.1 General management

- 1.1.1 The operator shall manage and operate the activities:
 - (a) in accordance with a written management system that identifies and minimises risks of pollution, including those arising from operations, maintenance, accidents, incidents, non-conformances, closure and those drawn to the attention of the operator as a result of complaints; and
 - (b) using sufficient competent persons and resources.
- 1.1.2 Records demonstrating compliance with condition 1.1.1 shall be maintained.
- 1.1.3 Any person having duties that are or may be affected by the matters set out in this permit shall have convenient access to a copy of it kept at or near the place where those duties are carried out.

1.2 Energy efficiency

- 1.2.1 The operator shall:
 - (a) take appropriate measures to ensure that energy is used efficiently in the activities;
 - (b) take appropriate measures to ensure the efficiency of energy generation at the permitted installation is maximised;
 - (c) review and record at least every four years whether there are suitable opportunities to improve the energy efficiency of the activities; and
 - (d) take any further appropriate measures identified by a review.

1.3 Efficient use of raw materials

- 1.3.1 The operator shall:
 - (a) take appropriate measures to ensure that raw materials and water are used efficiently in the activities;
 - (b) maintain records of raw materials and water used in the activities;
 - (c) review and record at least every four years whether there are suitable alternative materials that could reduce environmental impact or opportunities to improve the efficiency of raw material and water use; and
 - (d) take any further appropriate measures identified by a review.

1.4 Avoidance, recovery and disposal of wastes produced by the activities

- 1.4.1 The operator shall take appropriate measures to ensure that:
 - (a) the waste hierarchy referred to in Article 4 of the Waste Framework Directive is applied to the generation of waste by the activities;
 - (b) any waste generated by the activities is treated in accordance with the waste hierarchy referred to in Article 4 of the Waste Framework Directive; and
 - (c) where disposal is necessary, this is undertaken in a manner which minimises its impact on the environment.

1.4.2 The operator shall review and record at least every four years whether changes to those measures should be made and take any further appropriate measures identified by a review.

2 Operations

2.1 Permitted activities

2.1.1 The operator is only authorised to carry out the activities specified in schedule 1, table S1.1 (the "activities").

2.2 The site

2.2.1 The activities shall not extend beyond the site, being the land shown edged in yellow on the site plan at schedule 7 to this permit.

2.3 Operating techniques

- 2.3.1 The activities shall, subject to the conditions of this permit, be operated using the techniques and in the manner described in the documentation specified in schedule 1, table S1.2, unless otherwise agreed in writing by the Environment Agency.
- 2.3.2 For the following activities referenced in schedule 1, table S1.1: LCP121, LCP122 and LCP123. The activities shall be operated in accordance with the "Electricity Supply Industry IED Compliance Protocol for Utility Boilers and Gas Turbines" dated December 2015 or any later version unless otherwise agreed in writing by the Environment Agency.
- 2.3.3 If notified by the Environment Agency that the activities are giving rise to pollution, the operator shall submit to the Environment Agency for approval within the period specified, a revision of any plan or other documentation ("plan") specified in schedule 1, table S1.2 or otherwise required under this permit which identifies and minimises the risks of pollution relevant to that plan, and shall implement the approved revised plan in place of the original from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 2.3.4 Any raw materials or fuels listed in schedule 2, table S2.1 shall conform to the specifications set out in that table.
- 2.3.5 For the following activities referenced in schedule 1, table S1.1:.LCP121, LCP122 and LCP123. The end of the start up period and the start of the shutdown period shall conform to the specifications set out in schedule 1, tables S1.2 and S1.4.
- 2.3.6 For the following activities referenced in schedule 1, table S1.1: LCP121, LCP122 and LCP123. The effective Dry Low NOx threshold shall conform to the specifications set out in schedule 1, tables S1.2 and S1.5.
- 2.3.7 The emission limit values from emission points A1, A2 and A3 listed in tables S3.1 and S3.1a of schedule 3 following the issue of a Black Start Instruction by the National Grid shall be disregarded for the purposes of compliance whilst that instruction remains effective and in accordance with the report submitted in response to improvement condition IC01.
- 2.3.8 The operator shall ensure that where waste produced by the activities is sent to a relevant waste operation, that operation is provided with the following information, prior to the receipt of the waste:
 - (a) the nature of the process producing the waste;
 - (b) the composition of the waste;
 - (c) the handling requirements of the waste;
 - (d) the hazardous property associated with the waste, if applicable; and

- (e) the waste code of the waste.
- 2.3.9 The operator shall ensure that where waste produced by the activities is sent to a landfill site, it meets the waste acceptance criteria for that landfill.

2.4 Improvement programme

- 2.4.1 The operator shall complete the improvements specified in schedule 1, table S1.3 by the date specified in that table unless otherwise agreed in writing by the Environment Agency.
- 2.4.2 Except in the case of an improvement which consists only of a submission to the Environment Agency, the operator shall notify the Environment Agency within 14 days of completion of each improvement.

3 Emissions and monitoring

3.1 Emissions to water, air or land

- 3.1.1 There shall be no point source emissions to water, air or land except from the sources and emission points listed in schedule 3 tables S3.1, S3.1a and S3.2.
- 3.1.2 The limits given in schedule 3 shall not be exceeded.
- 3.1.3 Periodic monitoring shall be carried out at least once every 5 years for groundwater and 10 years for soil, unless such monitoring is based on a systematic appraisal of the risk of contamination.

3.2 Emissions of substances not controlled by emission limits

- 3.2.1 Emissions of substances not controlled by emission limits (excluding odour) shall not cause pollution. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved emissions management plan, have been taken to prevent or where that is not practicable, to minimise, those emissions.
- 3.2.2 The operator shall:
 - (a) if notified by the Environment Agency that the activities are giving rise to pollution, submit to the Environment Agency for approval within the period specified, an emissions management plan which identifies and minimises the risks of pollution from emissions of substances not controlled by emission limits;
 - (b) implement the approved emissions management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 3.2.3 All liquids in containers, whose emission to water or land could cause pollution, shall be provided with secondary containment, unless the operator has used other appropriate measures to prevent or where that is not practicable, to minimise, leakage and spillage from the primary container.

3.3 Odour

- 3.3.1 Emissions from the activities shall be free from odour at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved odour management plan, to prevent or where that is not practicable to minimise the odour.
- 3.3.2 The operator shall:
 - (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to odour, submit to the Environment Agency for approval within the period specified, an odour management plan which identifies and minimises the risks of pollution from odour;

(b) implement the approved odour management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.4 Noise and vibration

3.4.1 Emissions from the activities shall be free from noise and vibration at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved noise and vibration management plan to prevent or where that is not practicable to minimise the noise and vibration.

3.4.2 The operator shall:

- (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to noise and vibration, submit to the Environment Agency for approval within the period specified, a noise and vibration management plan which identifies and minimises the risks of pollution from noise and vibration;
- (b) implement the approved noise and vibration management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.5 Monitoring

- 3.5.1 The operator shall, unless otherwise agreed in writing by the Environment Agency, undertake the monitoring specified in the following tables in schedule 3 to this permit:
 - (a) point source emissions specified in tables S3.1, S3.1a and S3.2; and
 - (b) process monitoring specified in table S3.3.
- 3.5.2 The operator shall maintain records of all monitoring required by this permit including records of the taking and analysis of samples, instrument measurements (periodic and continuous), calibrations, examinations, tests and surveys and any assessment or evaluation made on the basis of such data.
- 3.5.3 Monitoring equipment, techniques, personnel and organisations employed for the emissions monitoring programme and the environmental or other monitoring specified in condition 3.5.1 shall have either MCERTS certification or MCERTS accreditation (as appropriate), where available, unless otherwise agreed in writing by the Environment Agency.
- 3.5.4 Permanent means of access shall be provided to enable sampling/monitoring to be carried out in relation to the emission points specified in schedule 3 tables S3.1, S3.1a and S3.2 unless otherwise agreed in writing by the Environment Agency.

3.6 Monitoring for Large Combustion Plant

- 3.6.1 All monitoring required by this permit shall be carried out in accordance with the provisions of Annex V of the Industrial Emissions Directive and the Large Combustion Plant Best Available Techniques Conclusions.
- 3.6.2 If the monitoring results for more than 10 days a year are invalidated within the meaning set out in condition 3.6.7, the operator shall:
 - (a) within 28 days of becoming aware of this fact, review the causes of the invalidations and submit to the Environment Agency for approval, proposals for measures to improve the reliability of the continuous measurement systems, including a timetable for the implementation of those measures; and
 - (b) implement the approved proposals.

- 3.6.3 Continuous measurement systems on emission points from the LCP shall be subject to quality control by means of parallel measurements with reference methods at least once every calendar year.
- 3.6.4 Unless otherwise agreed in writing by the Environment Agency in accordance with condition 3.6.5 below, the operator shall carry out the methods, including the reference measurement methods, to use and calibrate continuous measurement systems in accordance with the appropriate CEN standards.
- 3.6.5 If CEN standards are not available, ISO standards, national or international standards which will ensure the provision of data of an equivalent scientific quality shall be used, as agreed in writing with the Environment Agency.
- 3.6.6 Where required by a condition of this permit to check the measurement equipment, the operator shall submit a report to the Environment Agency in writing, within 28 days of the completion of the check.
- 3.6.7 Where Continuous Emission Monitors are installed to comply with the monitoring requirements in schedule 3, tables S3.1 and S3.1a, the Continuous Emission Monitors shall be used such that:
 - (a) for the continuous measurement systems fitted to the LCP release points defined in tables S3.1 and S3.1a the validated hourly, monthly, yearly and daily averages shall be determined from the measured valid hourly average values after having subtracted the value of the 95% confidence interval;
 - (b) the 95% confidence interval for nitrogen oxides and sulphur dioxide of a single measured result shall be taken to be 20%;
 - (c) the 95% confidence interval for dust releases of a single measured result shall be taken to be 30%:
 - (d) the 95% confidence interval for carbon monoxide releases of a single measured result shall be taken to be 10%;
 - (e) an invalid hourly average means an hourly average period invalidated due to malfunction of, or maintenance work being carried out on, the continuous measurement system. However, to allow some discretion for zero and span gas checking, or cleaning (by flushing), an hourly average period will count as valid as long as data has been accumulated for at least two thirds of the period. Such discretionary periods are not to exceed more than 5 in any one 24-hour period unless agreed in writing. Where plant may be operating for less than the 24-hour period, such discretionary periods are not to exceed more than one quarter of the overall valid hourly average periods unless agreed in writing; and
 - (f) any day, in which more than three hourly average values are invalid shall be invalidated.

4 Information

4.1 Records

- 4.1.1 All records required to be made by this permit shall:
 - (a) be legible;
 - (b) be made as soon as reasonably practicable;
 - (c) if amended, be amended in such a way that the original and any subsequent amendments remain legible, or are capable of retrieval; and
 - (d) be retained, unless otherwise agreed in writing by the Environment Agency, for at least 6 years from the date when the records were made, or in the case of the following records until permit surrender:
 - (i) off-site environmental effects; and

- (ii) matters which affect the condition of the land and groundwater.
- 4.1.2 The operator shall keep on site all records, plans and the management system required to be maintained by this permit, unless otherwise agreed in writing by the Environment Agency.

4.2 Reporting

- 4.2.1 The operator shall send all reports and notifications required by the permit to the Environment Agency using the contact details supplied in writing by the Environment Agency.
- 4.2.2 A report or reports on the performance of the activities over the previous year shall be submitted to the Environment Agency by 31 January (or other date agreed in writing by the Environment Agency) each year. The report(s) shall include as a minimum:
 - (a) a review of the results of the monitoring and assessment carried out in accordance with the permit including an interpretive review of that data;
 - (b) the resource efficiency metrics set out in schedule 4, table S4.2; and
 - (c) the performance parameters set out in schedule 4, table S4.3 using the forms specified in table S4.4 of that schedule.
- 4.2.3 Within 28 days of the end of the reporting period the operator shall, unless otherwise agreed in writing by the Environment Agency, submit reports of the monitoring and assessment carried out in accordance with the conditions of this permit, as follows:
 - (a) in respect of the parameters and emission points specified in schedule 4, table S4.1;
 - (b) for the reporting periods specified in schedule 4, table S4.1 and using the forms specified in schedule 4, table S4.4; and
 - (c) giving the information from such results and assessments as may be required by the forms specified in those tables.
- 4.2.4 The operator shall, unless notice under this condition has been served within the preceding four years, submit to the Environment Agency, within six months of receipt of a written notice, a report assessing whether there are other appropriate measures that could be taken to prevent, or where that is not practicable, to minimise pollution.

4.3 Notifications

- 4.3.1 In the event:
 - that the operation of the activities gives rise to an incident or accident which significantly affects
 or may significantly affect the environment, the operator must immediately—
 - (i) inform the Environment Agency,
 - (ii) take the measures necessary to limit the environmental consequences of such an incident or accident, and
 - (iii) take the measures necessary to prevent further possible incidents or accidents;
 - (b) of a breach of any permit condition the operator must immediately—
 - (i) inform the Environment Agency, and
 - (ii) take the measures necessary to ensure that compliance is restored within the shortest possible time;
 - (c) of a breach of permit condition which poses an immediate danger to human health or threatens to cause an immediate significant adverse effect on the environment, the operator must immediately suspend the operation of the activities or the relevant part of it until compliance with the permit conditions has been restored.

- 4.3.2 Any information provided under condition 4.3.1 (a)(i), 4.3.1 (b)(i) where the information relates to the breach of a condition specified in the permit, shall be confirmed by sending the information listed in schedule 5 to this permit within the time period specified in that schedule.
- 4.3.3 Where the Environment Agency has requested in writing that it shall be notified when the operator is to undertake monitoring and/or spot sampling, the operator shall inform the Environment Agency when the relevant monitoring and/or spot sampling is to take place. The operator shall provide this information to the Environment Agency at least 14 days before the date the monitoring is to be undertaken.
- 4.3.4 The Environment Agency shall be notified within 14 days of the occurrence of the following matters, except where such disclosure is prohibited by Stock Exchange rules:

Where the operator is a registered company:

- (a) any change in the operator's trading name, registered name or registered office address; and
- (b) any steps taken with a view to the operator going into administration, entering into a company voluntary arrangement or being wound up.

Where the operator is a corporate body other than a registered company:

- (c) any change in the operator's name or address; and
- (d) any steps taken with a view to the dissolution of the operator.

In any other case:

- (e) the death of any of the named operators (where the operator consists of more than one named individual);
- (f) any change in the operator's name(s) or address(es); and
- (g) any steps taken with a view to the operator, or any one of them, going into bankruptcy, entering into a composition or arrangement with creditors, or, in the case of them being in a partnership, dissolving the partnership.
- 4.3.5 Where the operator proposes to make a change in the nature or functioning, or an extension of the activities, which may have consequences for the environment and the change is not otherwise the subject of an application for approval under the Regulations or this permit:
 - (a) the Environment Agency shall be notified at least 14 days before making the change; and
 - (b) the notification shall contain a description of the proposed change in operation.
- 4.3.6 The Environment Agency shall be given at least 14 days' notice before implementation of any part of the site closure plan.
- 4.3.7 The operator shall inform the Environment Agency in writing of the closure of any LCP within 28 days of the date of closure.

4.4 Interpretation

- 4.4.1 In this permit the expressions listed in schedule 6 shall have the meaning given in that schedule.
- 4.4.2 In this permit references to reports and notifications mean written reports and notifications, except where reference is made to notification being made "immediately", in which case it may be provided by telephone.

Schedule 1 – Operations

Table S1.1 ac	Table S1.1 activities				
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity	Limits of specified activity		
AR1	Section 1.1 A(1) (a): Burning any fuel in an appliance with a rated thermal input of 50 megawatts or more.	LCP 121: Operation of a combined cycle gas turbine power plant (CCGT) burning gas to produce electricity, with a net rated thermal input of 740MW. LCP 122: Operation of a combined cycle gas turbine power plant (CCGT) burning gas to produce electricity, with a net rated thermal input of 754MW. LCP 123: Operation of a combined cycle gas turbine power plant (CCGT) burning gas to produce electricity, with a net rated thermal input of 751MW. One 36 MWth auxiliary gas fired boiler.	From receipt of natural gas to discharge of exhaust gases and the generation of electricity.		
		Four 2.5 MWth standby diesel generators.			
Directly Asso	ciated Activity				
AR2	Directly associated activity	Raw materials handling and storage – receipt, storage and handling of water treatment chemicals, fuel and lubricating oils, turbine cleaning chemicals and all other raw materials.	From receipt of raw materials to their point of use.		
AR3	Directly associated activity	Water treatment - boiler feed water treatment.	From receipt of water treatment chemicals to discharge of demineralisation effluent to the River Trent at Outfall B.		
AR4	Directly associated activity	Cooling water system – River Trent water abstraction and treatment.	The pumping, filtering and chemical treatment of river water, its use in the condensers and cooling water system and discharge back to the River Trent at Outfall B.		
AR5	Directly associated activity	Cooling water system – hybrid cooling towers.	From receipt of warmed water from the steam condensers to the return of cooled water to the condensers.		

Table S1.1 activities			
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity	Limits of specified activity
AR6	Directly associated activity	Cooling water system – chemical treatment of bulk water to control bio fouling and risk of legionellosis	From receipt of water dosing agent to their point of use.
AR7	Directly associated activity	Waste handling and storage – handling, storage and dispatch of waste.	From the generation of a waste through to its dispatch from site including handling, monitoring and storage.

Table S1.2 Operating techniques			
Description	Parts	Date Received	
Application EPR/CP3035MK/A001	The response to sections B2.1 and B2.2 in the Application.	13/10/06	
Application for variation EPR/CP3035MK/V002	All parts submitted 3 rd November 2008. General layout drawing YEE0UPPPPGAX0043.	05/11/08 20/03/09	
Response to improvement condition 3 of schedule 1 table S1.3	All parts submitted in response to IC3 Document: GEN# 10041562 v01 date 27 March 2014.	28/03/14	
Response to regulation 60(1) Notice – request for information dated 31/10/14 and amended version dated 09/12/14	Compliance route and operating techniques identified in response to questions 2 (compliance route), 4 (type of combustion unit), 5 (thermal input), 6 (minimum start up load and minimum shut down load), 9i (proposed ELVs), 9iii (proposed MSUL and MSDL ELVs) and 11 (monitoring requirements).	31/03/15	
Receipt of additional information to the regulation 60(1) Notice. requested by letter dated 04/06/15	Responses to questions 1 (date of operational commencement of each LCP), 2 (the method which the net rated thermal input of each LCP was derived) and 3 (details of how the MSUL and MSDL were derived) of the request for further information.	26/06/15	
Receipt of additional information to the regulation 60(1) Notice. requested by email dated 26/06/15	Responses to question 1 (MSUL and MSDL differ with differing fuel usage), 2i (proposed ELVs) and 2iii (proposed MSUL and MSDL ELVs) of the email dated 26/06/15.	30/06/15	
Application for variation EPR/CP3035MK/V005	Responses to sections C3 in the Application.	06/04/16	
Review of permit application information regarding typical ammonia content of the emissions to water.			
(H1 Assessment)			

Table S1.2 Operating techniques			
Description	Parts	Date Received	
Application for variation EPR/CP3035MK/V006	Response to Section 3a Technical standards in Part C3 of the Application form.	13/10/16	
Response to regulation 61(1) Notice – request for information dated 01/05/18 EPR/CP3035MK/V009	Compliance and operating techniques identified in response to the BAT Conclusions for large combustion plant published on 17th August 2017.	29/10/18	
Additional information requested 12/02/20 EPR/CP3035MK/V009	Indicative annual average carbon monoxide limit and justification for higher limit than BAT 44.	09/03/20	

Table S1.3 Improvement programme requirements		
Reference	Requirement	Date
IC01	A written report shall be submitted to the Environment Agency for approval. The report shall contain an impact assessment demonstrating that there is no significant environmental risk associated with black start operations and propose a methodology for minimisation of environmental impact during such a period of operation and for reporting instances of black start operation.	12 months from variation issue
	The plant can be operated as set out in condition 2.3.7 of the permit once the report has been approved by the Environment Agency. The methodology for operation and reporting set out in the report shall be implemented by the Operator from the date of approval by the Environment Agency.	

Table S1.4 Start-up and Shut-down thresholds				
Emission Point and Unit Reference	"Minimum start up load" When the criteria listed below for the specified start up mode, for the LCP or unit have been met	"Minimum shut-down load" When the criteria listed below for the specified shut down mode, for the LCP or unit have been met		
A1, LCP121	 The gas turbine is in the burner mode 6.3 The gas turbine is running above 2900 rpm The generator load is greater than 35 MW 	 The gas turbine load is less than 35 MW The burner is not in mode 6.3 The gas turbine speed is running below 2900 rpm The Operator shut down is selected The fast runback control flag is on 		
A2, LCP122	 The gas turbine is in the burner mode 6.3 The gas turbine is running above 2900 rpm The generator load is greater than 35 MW 	 The gas turbine load is less than 35 MW The burner is not in mode 6.3 The gas turbine speed is running below 2900 rpm The Operator shut down is selected The fast runback control flag is on 		
A3, LCP123	 The gas turbine is in the burner mode 6.3 The gas turbine is running above 2900 rpm The generator load is greater than 35 MW 	 The gas turbine load is less than 35 MW The burner is not in mode 6.3 The gas turbine speed is running below 2900 rpm The Operator shut down is selected The fast runback control flag is on 		

Table S1.5 Dry Low NOx effective definition		
Emission Point and Unit Reference	Dry Low NOx effective definition	
A1, LCP121	 The gas turbine is in the burner mode 6.3; The gas turbine is running above 2900 rpm; and The generator load is greater than 35 MW. 	
A2, LCP122	 The gas turbine is in the burner mode 6.3; The gas turbine is running above 2900 rpm; and The generator load is greater than 35 MW. 	
A3, LCP123	 The gas turbine is in the burner mode 6.3; The gas turbine is running above 2900 rpm; and The generator load is greater than 35 MW. 	

Schedule 2 - Raw materials and fuels

Table S2.1 Raw materials and fuels					
Raw materials and fuel description	Specification				
-	-				

Schedule 3 - Emissions and monitoring

Table S3.1 Point source emissions to air - emission limits and monitoring requirements shall apply until 16 August 2021 **Emission** Source **Parameter** Limit (including Reference Monitoring Monitoring point ref. unit)-these frequency standard or period & location method limits do not apply during start up or shut down. A1, A2 and LCP 121 Oxides of 50 mg/m³ Monthly Continuous BS EN 14181 А3 mean of nitrogen LCP 122 MSUL/MSDL to validated (NO and NO₂ base load Note 2 LCP 123 hourly expressed as [Points A1, averages NO₂) A2 and A3 Gas on site 50 mg/m³ Daily mean Continuous BS EN 14181 turbine plan in of validated 70% to base fired on Schedule load Note 1 hourly natural 7] via averages gas separate 50 mg/m³ 80 metre stacks MSUL/MSDL to base load Note 2 100 mg/m³ 95% of Continuous BS EN 14181 validated MSUL/MSDL to hourly base load averages within a calendar year A1, A2 and LCP 121 Carbon 100 mg/m³ Monthly Continuous BS EN 14181 mean of А3 monoxide LCP 122 70% to base load Note 1 validated LCP 123 hourly [Points A1, averages A2 and A3 100 mg/m³ Gas on site turbine MSUL/MSDL to plan in base load Note 2 fired on Schedule natural 7] via 100 mg/m³ Daily mean Continuous **BS EN 14181** gas separate of validated 70% to base 80 metre load Note 1 hourly stacks averages 100 mg/m³ MSUL/MSDL to base load Note 2 200 mg/m³ 95% of Continuous **BS EN 14181** validated MSUL/MSDL to hourly base load Note 2 averages within a calendar vear

Table S3.1 Point source emissions to air - emission limits and monitoring requirements shall apply until 16 August 2021

until 16 Aug	just 2021	1	1			
Emission point ref. & location	Source	Parameter	Limit (including unit)-these limits do not apply during start up or shut down.	Reference period	Monitoring frequency	Monitoring standard or method
A1, A2 and A3 [Points A1, A2 and A3 on site plan in Schedule 7] via separate 80 metre stacks	LCP 121 LCP 122 LCP 123 Gas turbine fired on natural gas	Sulphur dioxide		-	At least every 6 months	Concentration by calculation, as agreed in writing with the Environment Agency
A1, A2 and A3 [Points A1, A2 and A3 on site plan in Schedule 7] via separate 80 metre stacks	LCP 121 LCP 122 LCP 123 Gas turbine fired on natural gas	Oxygen	-	-	Continuous as appropriate to reference	BS EN 14181
A1, A2 and A3 [Points A1, A2 and A3 on site plan in Schedule 7] via separate 80 metre stacks	LCP 121 LCP 122 LCP 123 Gas turbine fired on natural gas	Water vapour	-	-	Continuous as appropriate to reference	BS EN 14181
A1, A2 and A3 [Points A1, A2 and A3 on site plan in Schedule 7] via separate 80 metre stacks	LCP 121 LCP 122 LCP 123 Gas turbine fired on natural gas	Stack gas temperature	-	-	Continuous as appropriate to reference	Traceable to national standards

Table S3.1 Point source emissions to air - emission limits and monitoring requirements shall apply until 16 August 2021

until 16 Aug	until 16 August 2021									
Emission point ref. & location	Source	Parameter	Limit (including unit)-these limits do not apply during start up or shut down.	Reference period	Monitoring frequency	Monitoring standard or method				
A1, A2 and A3 [Points A1, A2 and A3 on site plan in Schedule 7] via separate 80 metre stacks	LCP 121 LCP 122 LCP 123 Gas turbine fired on natural gas	Stack gas pressure	-	-	Continuous as appropriate to reference	Traceable to national standards				
A1, A2 and A3 [Points A1, A2 and A3 on site plan in Schedule 7] via separate 80 metre stacks	LCP 121 LCP 122 LCP 123 Gas turbine fired on natural gas	As required by the Method Implementation Document for BS EN 15259	-	-	Pre- operation and when there is a significant operational change	BS EN 15259				
A4 Via 15 metre stack	Standby boiler	-	-	-	-	-				
A5	Four standby diesel generators	-	-	-	-	-				
Natural gas vents	On site distribution system	-	-	-	-	-				
Hydrogen vents	Gas turbine generator cooling	-	-	-	-	-				
Emergency pressure relief vents	Pressure vessels	-	-	-	-	-				

Table S3.1 Point source emissions to air - emission limits and monitoring requirements shall apply until 16 August 2021

Emission point ref. & location	Source	Parameter	Limit (including unit)-these limits do not apply during start up or shut down.	Reference period	Monitoring frequency	Monitoring standard or method
Tank vents	Liquid chemicals and fuel oils storage tanks	-	-	-	-	-

Note 1: This ELV applies when the load is >70% throughout the reference period.

Note 2: This ELV applies when the load varies between MSUL/MSDL and base load during the daily reference period. MSUL and MSDL are defined in Table S1.4.

Table S3.1a Point source	ce emissions to air - emissi	ion limits and monitor	ing requirements shall
apply from 17 August 20	021		

Emission point ref. & location	Source	Parameter	Limit (including unit)-these limits do not apply during start up or shut down	Referenc e period	Monitoring frequency	Monitoring standard or method
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	Oxides of Nitrogen (NO and NO ₂ expressed as NO ₂)	50 mg/m³ DLN effective to baseload	Monthly mean of validated hourly averages	Continuous	BS EN 14181
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	Oxides of Nitrogen (NO and NO ₂ expressed as NO ₂)	100 mg/m ³ DLN effective to baseload	95% of validated hourly averages within a calendar year	Continuous	BS EN 14181
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	Oxides of Nitrogen (NO and NO ₂ expressed as NO ₂)	50 mg/m³ DLN effective to baseload 50 mg/m³ MSUL/MSDL to base load	Daily mean of validated hourly averages	Continuous	BS EN 14181

Table S3.1a Point source emissions to air - emission limits and monitoring requirements shall apply from 17 August 2021 Source Referenc Monitoring **Emission Parameter** Limit Monitorina point ref. & (including e period frequency standard or location unit)-these method limits do not apply during start up or shut down A1, A2, A3 LCP121. Oxides of 40 ma/m³ Yearly Continuous BS EN 14181 LCP122. Nitrogen average [Points A1, LCP123 A2 and A3 on (NO and NO₂ DLN effective site plan in Gas turbine expressed as to baseload Schedule 7] NO₂) fired on natural gas Carbon 100 mg/m³ Monthly Continuous BS EN 14181 A1, A2, A3 LCP121, LCP122. Monoxide mean of [Points A1, LCP123 validated A2 and A3 on **DLN** effective hourly site plan in Gas turbine to baseload averages Schedule 7] fired on natural gas 100 mg/m³ BS EN 14181 A1, A2, A3 LCP121, Carbon Daily Continuous LCP122. Monoxide mean of [Points A1, DLN effective LCP123 validated A2 and A3 on to baseload hourly site plan in Gas turbine averages Schedule 7] fired on 100 mg/m³ natural gas MSUL/MSDL to base load A1, A2, A3 LCP121, Carbon 200 mg/m³ 95% of Continuous BS EN 14181 LCP122. Monoxide validated [Points A1, LCP123 hourly A2 and A3 on DLN effective averages site plan in Gas turbine to baseload within a Schedule 7] fired on calendar natural gas year A1, A2, A3 LCP121, Carbon 100 mg/m³ Yearly Continuous BS EN 14181 LCP122, monoxide average [Points A1, LCP123 A2 and A3 on DLN site plan in Gas turbine effective to Schedule 71 fired on baseload natural gas Concentratio A1, A2, A3 LCP121, Sulphur dioxide At least n by LCP122, every 6 [Points A1, calculation, LCP123 months A2 and A3 on as agreed in site plan in Gas turbine writing with Schedule 7] fired on the natural gas Environment Agency EN ISO A1, A2, A3 LCP121. Flow Continuous 16911 and LCP122, [Points A1, As M2 LCP123 A2 and A3 on appropriate site plan in Gas turbine to reference Schedule 7] fired on natural gas

Table S3.1a Point source emissions to air - emission limits and monitoring requirements shall apply from 17 August 2021

Emission point ref. & location	Source	Parameter	Limit (including unit)-these limits do not apply during start up or shut down	Referenc e period	Monitoring frequency	Monitoring standard or method
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	Oxygen	-	-	Continuous As appropriate to reference	BS EN 14181
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	Water vapour Note 1	-	-	Continuous As appropriate to reference	BS EN 14181
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	Stack gas temperature	-	-	Continuous As appropriate to reference	Traceable to national standards
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	Stack gas pressure	-	-	Continuous As appropriate to reference	Traceable to national standards
A1, A2, A3 [Points A1, A2 and A3 on site plan in Schedule 7]	LCP121, LCP122, LCP123 Gas turbine fired on natural gas	As required by the Method Implementation Document for BS EN 15259	-	-	Pre- operation and when there is a significant operational change	BS EN 15259
A4 Via 15 metre stack	Standby boiler	-	-	-	-	-
A5	Four standby diesel generators	-	-	-	-	-
Natural gas vents	On site distribution system	-	-	-	-	-
Hydrogen vents	Gas turbine generator cooling	-	-	-	-	-

Table S3.1a Point source emissions to air - emission limits and monitoring requirements shall
apply from 17 August 2021

Emission point ref. & location	Source	Parameter	Limit (including unit)-these limits do not apply during start up or shut down	Referenc e period	Monitoring frequency	Monitoring standard or method
Emergency pressure relief vents	Pressure vessels	-	-	-	-	-
Tank vents	Liquid chemicals and fuel oils storage tanks	-	-	ı	-	-

Note 1 – Not required if standards for monitoring do not require this.

Emission point ref. & location	Source	Parameter	Limit (incl. unit)	Reference period	Monitoring frequency	Compliance Statistic	Monitoring standard or method
W5 Marked on drawing number: 01-04-02-0034 as WPW. Grid ref: SK804 859.	Process effluent comprising cooling water, basin purge water and boiler feed water demineralis	Temperature	Winter 25 °C Note 1 Summer 30 °C Note 1 Or differential limit applies Note 2	Instantaneous	Continuous	Maximum daily	Resistance temperature detector
Discharge	ation effluent						
to River Trent at Outfall B, via coal fired power station emission point W3.	Temperature	Differential limit of 13°C up to a maximum of 33°C	Instantaneous	Continuous	Maximum daily increase compared to maximum daily river water intake temperature Note 3	Resistance temperature detector	
[Note: emissions							
points W1 – W4 relate to the adjacent coal fired power station permit no: SP3935LW]		Flow	22,500 m ³ per day	24 hour period	Continuous	Maximum	MCERTS Flow meter
		Residual total chlorine	0.25 mg/l	24 hour period	15 minute continuous	Maximum	Proprietary instrument
		рН	5 – 9.5	Instantaneous	Continuous	Minimum and maximum	pH monitor MCERTS

Table S3.2 P	Table S3.2 Point Source emissions to water (other than sewer) – emission limits and monitoring requirements									
Emission point ref. & location	Source	Parameter	Limit (incl. unit)	Reference period	Monitoring frequency	Compliance Statistic	Monitoring standard or method			
W6 Marked on drawing number: 01-04-02-0034 as SW. Grid ref: SK802 855. Discharge to River Trent via coal fired power station emission point W3. [Note: emissions points W1 – W4 relate to the adjacent coal fired power station	Site surface water and oily water, surface water drainage via oil interceptors	None set		-		-	-			
permit no: SP3935LW]										

Note 1: For cooling water temperature limits: Winter = 1 October – 30 April Summer = 1 May – 30 September

Note 3: River water intake location (abstraction from River) shown on site plan in Schedule 7 of this permit.

Note 2: Differential limit of 13°C up to a maximum of 33°C. This limit applies if the temperature does not meet the requirements of Note 1 and when temperature monitoring of the River water intake is taking place as defined in Table S3.3 of this permit.

Table S3.3 Proc	Table S3.3 Process monitoring requirements									
Emission point reference or source or description of point of measurement	Source	Parameter	Reference period	Monitoring frequency	Monitoring standard or method					
River Water Temperature Monitoring As shown on site plan in schedule 7 of this permit	River Trent	Temperature Note1	24 Hours	Hourly during abstraction	Resistance temperature detector					
LCP121, LCP122, LCP123	-	Net electrical efficiency	-	After each modification that could significantly affect these parameters	EN Standards or equivalent					

Note 1: Monitoring shall apply following installation of temperature monitoring equipment at the River water intake and is required for application of the differential limit as defined in table S3.2 of this permit.

Schedule 4 – Reporting

Parameters, for which reports shall be made, in accordance with conditions of this permit, are listed below.

Table S4.1 Reporting of monitoring data			
Parameter	Emission or monitoring point/reference	Reporting period	Period begins
Oxides of nitrogen	A1, A2, A3	Every 3 months	1 January, 1 April, 1 July, 1 October
		Every year for annual parameters	1 January
Carbon Monoxide	A1, A2, A3	Every 3 months	1 January, 1 April, 1 July, 1 October
		Every year for annual parameters	1 January
Sulphur dioxide	A1, A2, A3	Every 6 months	1 January, 1 July
Emissions to Water Parameters as required by condition 3.5.1	W5, W6, River Water Temperature Monitoring	Every 3 months	1 January, 1 April, 1 July, 1 October

Table S4.2 Resource Efficiency Metrics		
Parameter	Units	
Electricity Exported	GWhr	
Heat Exported	GWhr	
Mechanical Power Provided	GWhr	
Fossil Fuel Energy Consumption	GWhr	
Non-Fossil Fuel Energy Consumption	GWhr	
Annual Operating Hours	hr	
Water Abstracted from Fresh Water Source	m ³	
Water Abstracted from Borehole Source	m ³	
Water Abstracted from Estuarine Water Source	m³	
Water Abstracted from Sea Water Source	m³	
Water Abstracted from Mains Water Source	m³	
Gross Total Water Used	m³	
Net Water Used	m³	
Hazardous Waste Transferred for Disposal at another installation	t	

Table S4.2 Resource Efficiency Metrics		
Parameter	Units	
Hazardous Waste Transferred for Recovery at another installation	t	
Non-Hazardous Waste Transferred for Disposal at another installation	t	
Non-Hazardous Waste Transferred for Recovery at another installation	t	
Waste recovered to Quality Protocol Specification and transferred off-site	t	
Waste transferred directly off-site for use under an exemption / position statement	t	

Table S4.3 Large Combustion Plant Performance parameters for reporting to DEFRA			
Parameter	Frequency of assessment	Units	
Thermal Input Capacity for each LCP	Annually	MW	
Annual Fuel Usage for each LCP	Annually	TJ	
Total Emissions to Air of NOx for each LCP	Annually	t	
Total Emissions to Air of SO2 for each LCP	Annually	t	
Total Emissions to Air of Dust for each LCP	Annually	t	
Operating Hours for each LCP	Annually	hr	

Table S4.4 Reporting forms			
Media/ parameter	Reporting format	Agency recipient	
Air & Energy	Form IED AR1 $-$ SO ₂ , NO _x and dust mass emission and energy. Form as agreed in writing by the Environment Agency.	National and Area Office	
LCP	Form IED HR1 – operating hours. Form as agreed in writing by the Environment Agency.	National and Area Office	
Air	Form IED CON 2 – continuous monitoring. Form as agreed in writing by the Environment Agency	Area Office	
CEMs	Form IED CEM – invalidation Log. Form as agreed in writing by the Environment Agency.	Area Office	
Resource Efficiency	Form REM1 – resource efficiency annual report Form as agreed in writing by the Environment Agency.	National and Area Office	
Water	Form water 1 or other form as agreed in writing by the Environment Agency	Area Office	
River Water Temperature Monitoring	Form water 2 or other form as agreed in writing by the Environment Agency	Area Office	

Schedule 5 - Notification

These pages outline the information that the operator must provide.

Units of measurement used in information supplied under Part A and B requirements shall be appropriate to the circumstances of the emission. Where appropriate, a comparison should be made of actual emissions and authorised emission limits.

If any information is considered commercially confidential, it should be separated from non-confidential information, supplied on a separate sheet and accompanied by an application for commercial confidentiality under the provisions of the EP Regulations.

Part A

Permit Number

Name of operator	
Location of Facility	
Time and date of the detection	
	any malfunction, breakdown or failure of equipment or techniques, ince not controlled by an emission limit which has caused, is pollution
To be notified within 24 hours of	detection
Date and time of the event	
Reference or description of the location of the event	
Description of where any release into the environment took place	
Substances(s) potentially released	
Best estimate of the quantity or rate of release of substances	
Measures taken, or intended to be taken, to stop any emission	
Description of the failure or accident.	
(b) Notification requirements for t	the breach of a limit
To be notified within 24 hours of d	letection unless otherwise specified below
Emission point reference/ source	
Parameter(s)	

Measured value and uncertainty

Date and time of monitoring

(b) Notification requirements for t	the breach of a lim	nit	
To be notified within 24 hours of d	etection unless of	therwise specified belo	DW .
Measures taken, or intended to be taken, to stop the emission			
Time periods for notification following	g detection of a bre	each of a limit	
Parameter			Notification period
(c) Notification requirements for t	he detection of an	y significant adverse	environmental effect
To be notified within 24 hours of	detection		
Description of where the effect on the environment was detected			
Substances(s) detected			
Concentrations of substances detected			
Date of monitoring/sampling			
Part B – to be submited Any more accurate information on the notification under Part A.		as practicabl	e
Measures taken, or intended to be t a recurrence of the incident	aken, to prevent		
Measures taken, or intended to be t limit or prevent any pollution of the e which has been or may be caused by	environment		
The dates of any unauthorised emis facility in the preceding 24 months.	ssions from the		
Name*			
Post			
Signature			
Date			

^{*} authorised to sign on behalf of the operator

Schedule 6 - Interpretation

"accident" means an accident that may result in pollution.

"Air Quality Risk Assessment" has the meaning given in Annex D of IED Compliance Protocol for Utility Boilers and Gas Turbines.

"application" means the application for this permit, together with any additional information supplied by the operator as part of the application and any response to a notice served under Schedule 5 to the EP Regulations.

"authorised officer" means any person authorised by the Environment Agency under section 108(1) of The Environment Act 1995 to exercise, in accordance with the terms of any such authorisation, any power specified in section 108(4) of that Act.

"average of samples obtained during one year" means the average of the values obtained during one year of the periodic measurements taken with the monitoring frequency set for each parameter.

"background concentration" means such concentration of that substance as is present in:

for emissions to surface water, the surface water quality up-gradient of the site; or

"base load" means: (i) as a mode of operation, operating for >4000hrs pa; and (ii) as a load, the maximum load under ISO conditions that can be sustained continuously, i.e. maximum continuous rating.

"Black Start" means the procedure to recover from a total or partial shutdown of the UK Transmission System which has caused an extensive loss of supplies. This entails isolated power stations being started individually and gradually being reconnected to other power stations and substations in order to form an interconnected system again.

"calendar monthly mean" means the value across a calendar month of all validated hourly means.

"CEN" means Commité Européen de Normalisation.

"Combustion Technical Guidance Note" means IPPC Sector Guidance Note Combustion Activities, version 2.03 dated 27th July 2005 published by Environment Agency.

"commissioning" means testing of the installation that involves any operation of a Large Combustion Plant referenced in schedule 1, table S1.1.

"daily average" means the average over a period of 24 hours of validated hourly averages obtained by continuous measurements.

"disposal" means any of the operations provided for in Annex I to Directive 2008/98/EC of the European Parliament and of the Council on waste.

"DLN" means dry, low NO_x burners.

"emissions of substances not controlled by emission limits" means emissions of substances to air, water or land from the activities, either from the emission points specified in schedule 3 or from other localised or diffuse sources, which are not controlled by an emission or background concentration limit.

"Energy efficiency" means the annual net plant energy efficiency, the value for which is calculated from the operational data collected over the year.

"EP Regulations" means The Environmental Permitting (England and Wales) Regulations SI 2016 No.1154 and words and expressions used in this permit which are also used in the Regulations have the same meanings as in those Regulations.

"groundwater" means all water, which is below the surface of the ground in the saturation zone and in direct contact with the ground or subsoil.

"Industrial Emissions Directive" means DIRECTIVE 2010/75/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 24 November 2010 on industrial emissions.

"large combustion plant" or "LCP" is a combustion plant or group of combustion plants discharging waste gases through a common windshield or stack, where the total thermal input is 50 MW or more, based on net calorific value. The calculation of thermal input, excludes individual combustion plants with a rated thermal input below 15MW.

"Mid-merit" means combustion plant operating between 1,500 and 4,000 hrs/yr.

"MCERTS" means the Environment Agency's Monitoring Certification Scheme.

"MCR" means maximum continuous rating.

"MSDL" means minimum shut-down load as defined in Implementing Decision 2012/249/EU.

"MSUL" means minimum start-up load as defined in Implementing Decision 2012/249/EU.

"Natural gas" means naturally occurring methane with no more than 20% by volume of inert or other constituents.

"ncv" means net calorific value.

"Net electrical efficiency" means the ratio between the net electrical output (electricity produced minus the imported energy) and the fuel/feedstock energy input (as the fuel/feedstock lower heating value) at the combustion unit boundary over a given period of time.

"operational hours" are whole hours commencing from the first unit ending start up and ending when the last unit commences shut down.

"quarter" means a calendar year quarter commencing on 1 January, 1 April, 1 July or 1 October.

"recovery" means any of the operations provided for in Annex II to Directive 2008/98/EC of the European Parliament and of the Council on waste.

"SI" means site inspector.

"year" means calendar year ending 31 December.


"yearly average" means the average over a period of one year of validated hourly averages obtained by continuous measurements.

Where a minimum limit is set for any emission parameter, for example pH, reference to exceeding the limit shall mean that the parameter shall not be less than that limit.

Unless otherwise stated, any references in this permit to concentrations of substances in emissions into air means:

- in relation to emissions from combustion processes, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 3% dry for liquid and gaseous fuels, 6% dry for solid fuels; and/or
- in relation to emissions from gas turbine or compression ignition engine combustion processes, the concentration in dry air at a temperature of 273K, at a pressure of 101.3kPa and with an oxygen content of 15% dry for liquid and gaseous fuels; and/or
- in relation to emissions from combustion processes comprising a gas turbine with a waste heat boiler, the concentration in dry air at a temperature of 273K, at a pressure of 101.3kPa and with an oxygen content of 15% dry, unless the waste heat boiler is operating alone, in which case, with an oxygen content of 3% dry for liquid and gaseous fuels; and/or
- in relation to emissions from non-combustion sources, the concentration at a temperature of 273K and at a pressure of 101.3 kPa, with no correction for water vapour content.

Schedule 7 - Site plan

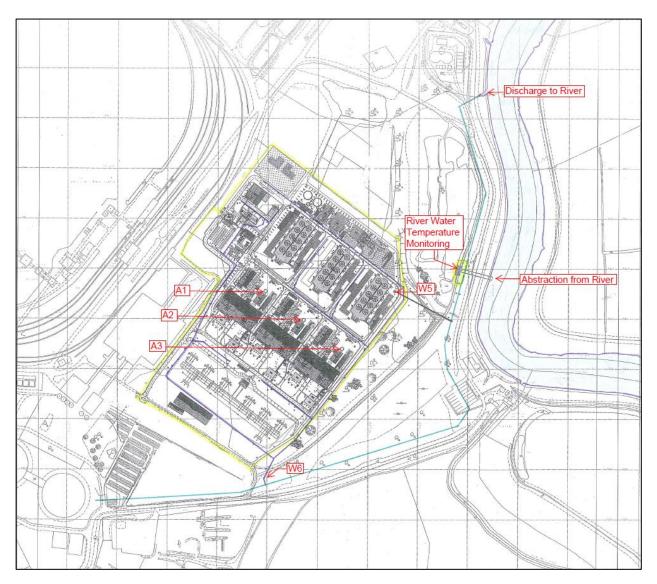

EDF Energy West Burton B CCGT Power Station Site Plan

Key:

WBB Site Boundary
Process and Cooling Water Effluent (GMX) Drainage
Surface water / Storm Water (GU) Drainage
Hyperbolic Cooling Tower Purge Drain

© Crown Copyright. All rights reserved. Environment Agency, 100026380, 2020.

END OF PERMIT