

EU Type Examination Certificate Number: 0120/SGS0420

Eetarp Engineering Pte. Ltd

11 Woodlands Close #08-13 Woodlands 11 Singapore 737853

Instrument Identification: GPM96-MID

Polyphase, Active Import/Export (kWh), Indoor, Transformer Operated, Multi-function, Electricity Meter

Instrument Traceable Number 0120/SGS0420

has been assessed and certified as meeting the requirements of

EU Directive 2014/32/EU

on Measuring Instruments Annex II, Module B

It is certified that the manufacturer's technical design and specimen for the above instrument has been examined and, based on the evidence submitted, it is considered that the instrument conforms to the requirements of Annex V of EU Directive 2014/32/EU

This certificate must be used in conjunction with a certificate covering the product verification as required in Annex II, Module D or Annex II, Module F

This certificate is valid until 23rd April 2027 Issue 1

Certification is based on report number(s) EMA234440/2 dated 24th April 2017 EMA268113

Authorised Signature

SGS United Kingdom Limited, Notified Body 0120 Unit 202B Worle Parkway, Weston-super-Mare, BS22 6WA, UK t +44 (0)1934 522917 f +44 (0)1934 522137 www.sgs.com

Contact Address

SGS United Kingdom Limited, Units 12A & 12B, South Industrial Estate, Bowburn, Durham, DH6 5AD, UK t +44 (0)191 377 2000 f +44 (0)191 377 2020 www.sgs.com



EU-Type Examination Certificate Number:

0120/SGS0420

Issue Number: 1

Dated: 14th August 2019

1. Technical Data

Eetarp Engineering Pte. Ltd
GPM96-MID
1P2W: 230V 3P3W: 3x230V 3P4W: 3 x 230/400V
0.25-5(6)A
50Hz
B or C (kWh)
1p2w, 3p3w, 3p4w
-25°C to +55°C
V1.3
0x0059DD5E
LCD
DH-JS-160010-1.3
IP51 Front Display Meter body not rated. Must be installed in a suitable IP rated enclosure
Class I / Class II
3200imp/kWh
6kV
4kV
Wire & Crimp
Laser Welded
Inaccessible without breaking seals
Indoor
LCD
DIN
Associated Documents



EU-Type Examination Certificate Number:

0120/SGS0420


Issue Number: 1

Dated: 14th August 2019

2. Photograph of Meter and Sealing Plan






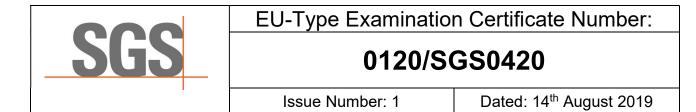

3. Example of Nameplate



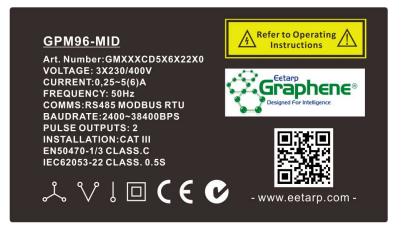



Issue Number: 1

Dated: 14th August 2019


4. Calculation of the composite error/ MPE

During the type approval examination the influence factors for temperature, frequency and voltage are determined per load point. The table below represents the sum of the square values per load, determined via the following formula:-

δ e (*T*, *U*, *f*) = $\sqrt{(\delta e^2(T, I, \cos \varphi), \delta e^2(U, I, \cos \varphi), \delta e^2(f, I, \cos \varphi))}$

where

$\delta \mathbf{e}(T, I, \cos \varphi)$	=	Additional error due to variation of the temperature at the same load
$\delta \mathbf{e}(U, I, \cos \varphi)$	=	Additional error due to variation of the voltage at the same load
$\delta \mathbf{e}(f, I, \cos \phi)$	=	Additional error due to variation of the frequency at the same load



Issue Number: 1

SGS

Dated: 14th August 2019

		Influenc	e Factors	for Tempe	rature. Fre	equency &	Voltage
Current	PF Cos	-25°C	-10°C	5°C	30°C	40°C	55°C
Imin	1.0	0.21	0.20	0.14	0.07	0.19	0.39
Itr	1.0	0.25	0.24	0.20	0.10	0.17	0.37
10ltr	1.0	0.24	0.23	0.19	0.10	0.20	0.39
Imax	1.0	0.24	0.24	0.18	0.10	0.18	0.39
Itr	0.5ind	0.25	0.25	0.21	0.10	0.19	0.44
10ltr	0.5ind	0.20	0.06	0.11	0.31	0.56	0.70
Imax	0.5ind	0.23	0.19	0.10	0.36	0.51	0.51
Itr	0.8cap	0.25	0.25	0.20	0.12	0.18	0.37
10ltr	0.8cap	0.35	0.30	0.23	0.09	0.11	0.33
Imax	0.8cap	0.33	0.29	0.27	0.16	0.18	0.30
L1							
ltr	1.0	0.19	0.17	0.11	0.08	0.19	0.40
10ltr	1.0	0.18	0.17	0.11	0.10	0.20	0.41
Imax	1.0	0.18	0.16	0.10	0.10	0.20	0.40
ltr	0.5ind	0.21	0.19	0.13	0.07	0.20	0.45
10ltr	0.5ind	0.23	0.22	0.17	0.12	0.18	0.39
Imax	0.5ind	0.19	0.17	0.13	0.09	0.19	0.41
L2							
ltr	1.0	0.35	0.35	0.31	0.19	0.21	0.40
10ltr	1.0	0.29	0.30	0.25	0.16	0.22	0.47
Imax	1.0	0.30	0.30	0.27	0.15	0.20	0.43
Itr	0.5ind	0.31	0.32	0.28	0.16	0.16	0.35
10ltr	0.5ind	0.74	0.14	0.33	0.77	0.46	0.92
Imax	0.5ind	0.33	0.34	0.37	0.63	0.47	1.19
L3							
ltr	1.0	0.16	0.15	0.10	0.08	0.19	0.40
10ltr	1.0	0.18	0.16	0.10	0.10	0.20	0.41
Imax	1.0	0.17	0.16	0.10	0.11	0.21	0.41
Itr	0.5ind	0.17	0.20	0.17	0.12	0.26	0.58
10ltr	0.5ind	0.18	0.18	0.11	0.36	0.40	0.62
Imax	0.5ind	0.18	0.15	0.08	0.62	0.37	0.57



Issue Number: 1

Dated: 14th August 2019

5. Annex of Variants

Product Variant Identification Details:

Type Designation	Description of meter		
GPM96-MID	Active Import/Export (kWh), 3x230/400V, 5(6)A, Transformer operated, Multifunction, RS485 Modbus RTU		

Modifications to the meter(s) described according to approval No.**0120/SGS0420** must be notified to the issuing body to confirm the meter(s) continuing compliance to the relevant pattern approval standard(s).



Issue Number: 1

Dated: 14th August 2019

6. Document Revision History

Issue	Date	Comments
1	14/08/2019	Initial Issue

This document is issued by the Company subject to its General Conditions for Certification Services, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 28 days only.

END OF CERTIFICATE