



## Abbreviated Vibration Monitoring Reports

Monitoring Period: 30 March 2026 to 03 May 2026

---

**Project:** Grenfell Tower

**Document Ref:** EEMC-VMR-201/108 – Grenfell Tower Rev 00

**Period:** 30 March 2026 to 03 May 2026

---

**(EEMC) Limited Contact Information:**  
European Environmental Monitoring & Consultancy (EEMC) Ltd.  
Suite 11, 5a Lombard Road, Wimbledon, London SW19 3TZ  
t: [0203 6271312](tel:02036271312)  
e: [info@eemc.london](mailto:info@eemc.london)  
w: [www.eemc.london](http://www.eemc.london)

**Details of Vibration Monitor at Receptor Point VMP1 – VMP3**

ID Reference	Location
VMP1	Opposite Southeast corner of tower between two (2) concrete blocks
VMP2	Base of North hoarding co located with NMP2
VMP3	Mobile unit- Located base of NW hoarding with DMP5 and NMP3

**Contents**

1. Exceedance Summary.....	3
Figure 1- Map of Vibration, Dust & Vibration Monitoring Locations.....	5
Image 2 – VMP1 Monitoring Location.....	6
Image 3 –VMP2 Monitoring Location .....	7
Image 4 – VMP3 Monitoring Location.....	8
2. Introduction.....	9
3. Instrumentation .....	9
4. Methodology .....	9
5. Measurement Results .....	10
6. Vibration Monitoring Graphs .....	11

**Review and Authorisation**

	Name	Role	Signature	
<b>Author:</b>	Ibrahim Busari MSc	Acoustic Consultant		05/05/2026
<b>Technical Reviewer:</b>	Emma Howard AMIOA, AISEP	Senior Acoustic Consultant		11/05/2026

*(EEMC) Limited have prepared this document for the sole use of the client, using all reasonable skill and care, for the intended purpose(s) and within the resources made available and agreed with the client. No responsibility is accepted for matters outside the terms and scope of the agreement under which this document has been prepared. Similarly, no responsibility in any form is accepted for third party use of this report or parts thereof, the contents of which are confidential to the client. No other warranty, expressed or implied, is made as to the professional advice included in this report.*

## 1. Exceedance Summary

### At VMP1:

There were **five (5) exceedances** of the 3.0mm/s Red Action level, occurring mostly on 01 May 2026 and **twenty-four (24) exceedances** of the 1.0mm/s Amber Trigger level during working hours in this reporting period.

### At VMP2:

There were **no exceedances** of the Red Action level 5.0mm/s, or of the Amber Trigger level 3.0mm/s during working hours in this reporting period.

### At VMP3:

There were **no exceedances** of the Red Action level 5.0mm/s, or of the Amber Trigger level 3.0mm/s in this reporting period.

Any exceedances that do occur will be shown in **Tables 0.1 and 0.2**, if there are no exceedances these tables will remain blank.

For more information regarding the trigger limits, refer to Section 4 – Methodology.

There were works adjacent to VMP1 throughout this monitoring period as outlined in Tables 0.1 and 0.2, and the location of works and the monitor are shown in Image 1.

**Table 0.1. – Amber Trigger Exceedance Count**

Monitoring Location	Time and Date of Exceedance	Measured Level of Exceedance (mm/s)	Amber Trigger Level (mm/s)	Cause of Exceedance
VMP1	10/04/2026 11:45	1.01	1.0mm/s	Accidental disturbance of the monitor during cleaning works.
	13/04/2026 12:20	2.75		Scaffolders replacing Monarflex to ground floor level
	15/04/2026 12:35	1.88		Scaffolders carrying out adaptions ground floor to 2 <sup>nd</sup> floor level
	01/05/2026 09:05	1.04		Removal of Temporary support from Link bridge
	01/05/2026 09:15	1.84		
	01/05/2026 09:20	1.53		
	01/05/2026 11:00	1.15		
	01/05/2026 11:05	1.05		
	01/05/2026 11:10	2.86		
	01/05/2026 11:20	1.12		
	01/05/2026 11:30	1.33		
	01/05/2026 11:35	1.02		
	01/05/2026 11:45	1.43		

	01/05/2026 11:50	1.54		
	01/05/2026 11:55	1.48		
	01/05/2026 12:00	1.27		
	01/05/2026 12:05	1.76		
	01/05/2026 12:10	1.77		
	01/05/2026 12:15	1.20		
	01/05/2026 12:20	1.25		
	01/05/2026 12:30	2.15		
	01/05/2026 12:40	1.71		
	01/05/2026 12:45	2.67		
	01/05/2026 12:50	1.63		
<b>VMP2</b>	-	-	3.0mm/s	No exceedances
<b>VMP3</b>	-	-		No exceedances

**Table 0.2. Red Action Exceedance Count**

Monitoring Location	Date and Time of Exceedance	Measured Level of Exceedance (mm/s)	Red Action Level (mm/s)	Cause of Exceedance	Mitigation
<b>VMP1</b>	01/05/2026 09:25	5.44	3.0mm/s	Removal of Temporary support from Link bridge	Methodology reviewed with operatives; works briefed to minimise direct impact adjacent to monitor. Reduced use of percussive tools within exclusion zone and increased supervision during close-proximity activities.
	01/05/2026 11:15	3.02			
	01/05/2026 11:25	3.08			
	01/05/2026 11:40	3.47			
	01/05/2026 12:25	3.83			
<b>VMP2</b>	-	-	5.0mm/s		No exceedances
<b>VMP3</b>	-	-			No exceedances

Figure 1- Map of Vibration, Dust & Vibration Monitoring Locations

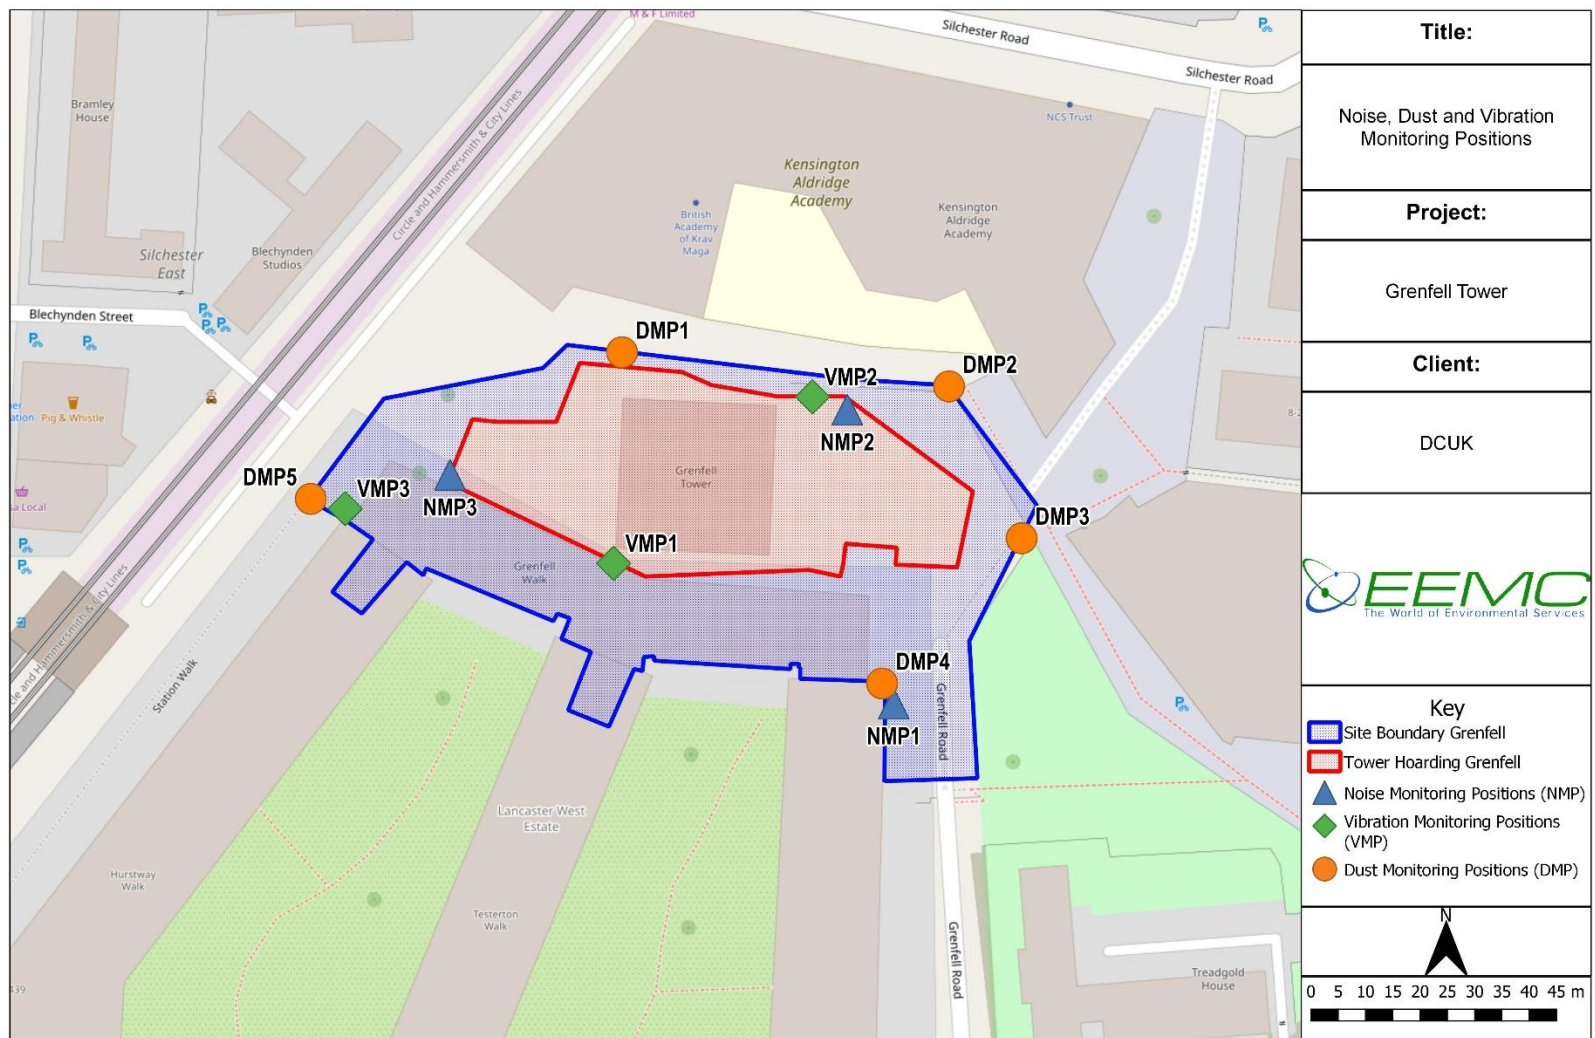


Image 2 – VMP1 Monitoring Location



Image 3 –VMP2 Monitoring Location



Image 4 – VMP3 Monitoring Location



## 2. Introduction

European Environmental Monitoring and Consultancy (EEMC) Limited have been appointed by Deconstruct to undertake vibration monitoring work during the Deconstruction works at the Grenfell Tower project.

The site boundary and hoarding line of this project is shown in Figure 1. The project is located at Grenfell Tower, Grenfell Road, W11 1TQ. The entire site is located within Royal Borough of Kensington & Chelsea (RBKC) and is bordered by residential blocks to the south, and a school and football pitches to the north and a leisure centre to the east. The London Underground viaduct is 70m to the west and Latimer Road Tube station is 200m from the project

This report presents the measured and recorded unattended vibration monitoring data for the period 30 March 2026 to 03 May 2026.

Deconstruct will ensure ongoing liaison with MHCLG and RBKC when required to obtain any required consents and permits for the project.

## 3. Instrumentation

Three (3) Omnidots Swarm vibration (DIN45669-2 compliant) monitoring systems, affixed to ground vibration base plates, are installed positioned on a solid floor structure, close to the site boundary. A copy of the calibration certificates for the monitor located at VMP1 is attached as Appendix 1.

The Swarm monitor has built in logging and telemetry, data is managed, configured, and viewed on the Honeycomb cloud portal. Email alerts are generated when trigger levels are exceeded.

## 4. Methodology

The Swarm monitors record Peak Particle Velocity (PPV) in orthogonal (x, y and z) directions in mm/s continuously over 1-minute periods. A map showing the locations of the monitors is in Figure 1. A photograph showing the monitoring location is shown in Image 1.

The Trigger and Action levels for the project are set out in the **Noise and Vibration Management Plan** (ref: [Noise and vibration management plan - Grenfell Tower](#)) and are reproduced for reference in Table 3.1. The NVMP sets out different limits depending on if the closest sensitive receptor is residential or commercial.

The closest sensitive receptors for the three (3) monitoring positions are outlined below and directly link to the limits used:

- The closest sensitive receptor to VMP1 is the **residential** Receptor: E - Testerton Walk.
- The closest sensitive receptor to VMP2 is the **commercial** Receptor: A - Kensington Aldridge Academy.
- The closest sensitive receptor to VMP3 is the **commercial** adjacent Hammersmith and City and Circle Tube Lines.

**Table 3.1 – Trigger & Action Levels**


	Green Trigger Level	Amber Trigger Level	Red Action Level
<b>VMP1</b> <i>Residential</i>		1 mm/s	3 mm/s
<b>VMP2 and VMP3</b> <i>Commercial</i>	1 mm/s	3 mm/s	5 mm/s

*\*Green Trigger Alerts are a pre-warning for site only. These are not actionable and therefore the green alerts are not reported on in this report. Amber are a warning for site and red alerts are exceedances which require investigation and mitigation measures.*

## 5. Measurement Results

The results of the Vibration measurements in this period are presented graphically in Section 6 of this report.

6. Vibration Monitoring Graphs

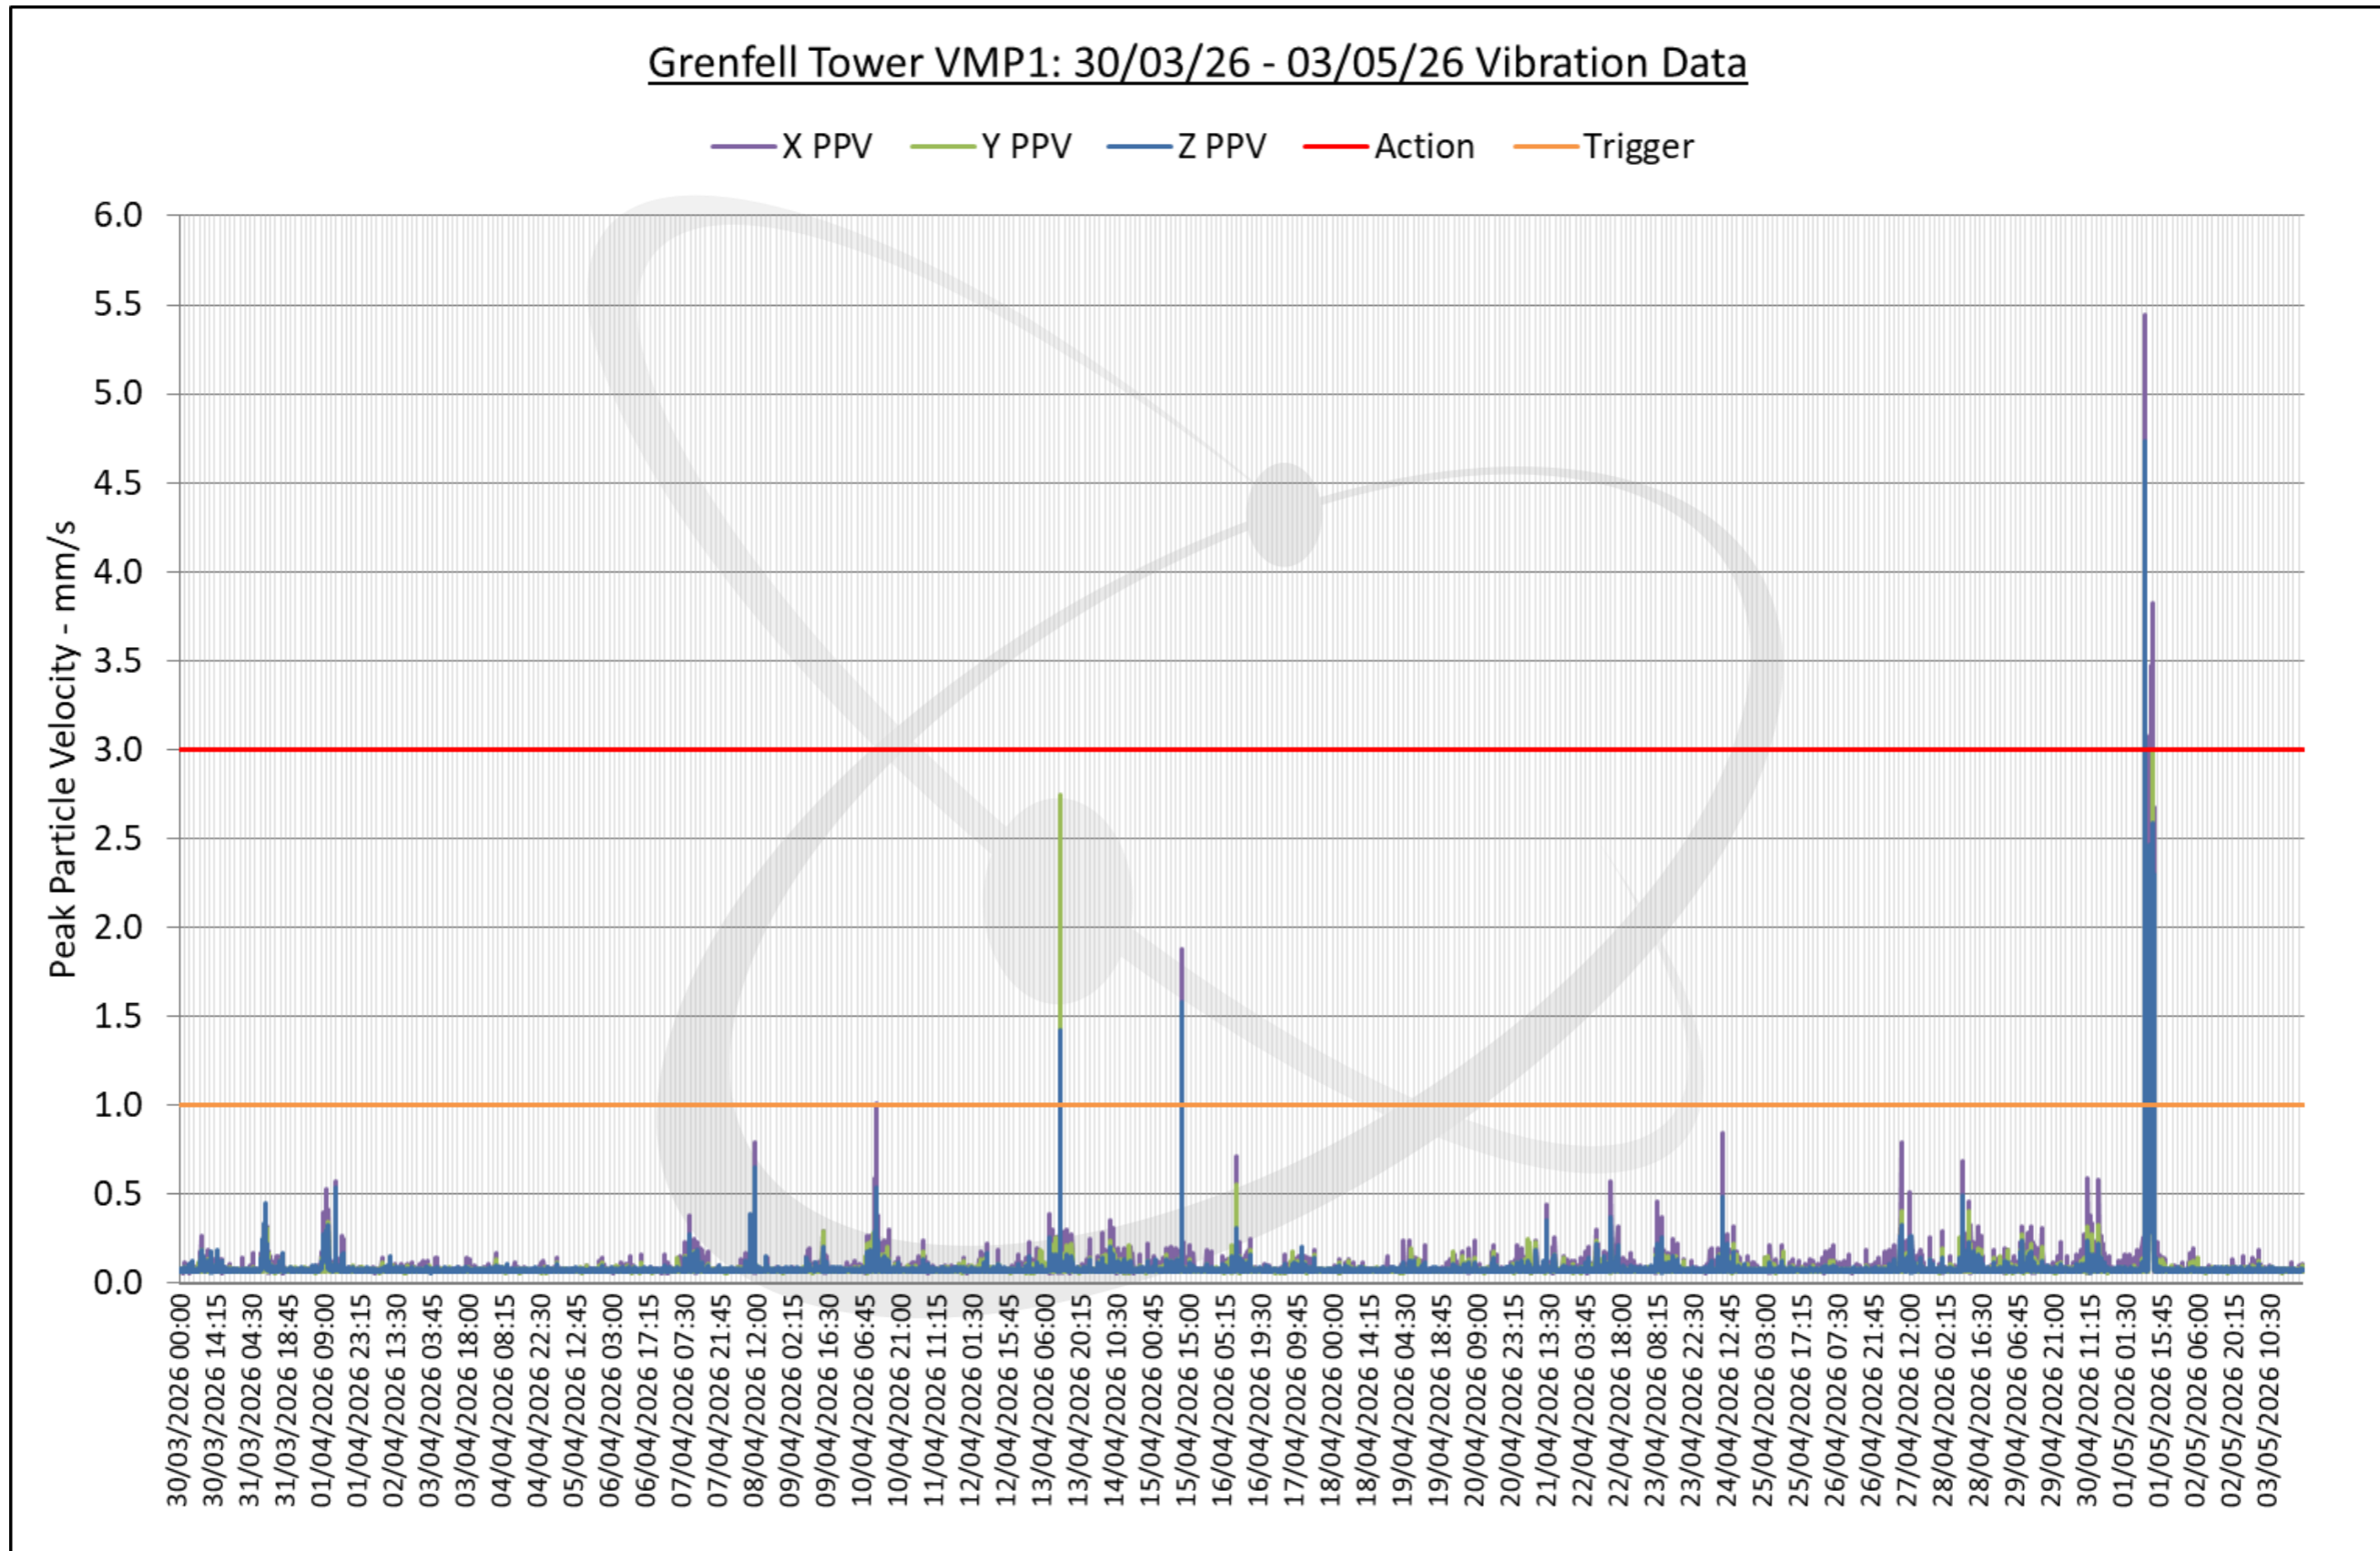

### Grenfell Tower VMP2: 30/03/26 - 03/05/26 Vibration Data

— X PPV — Y PPV — Z PPV — Action — Trigger

