

# Notice of variation and consolidation with introductory note

The Environmental Permitting (England & Wales) Regulations 2016

Cannington Enterprises Limited

Swang Farm Anaerobic Digestion Facility Swang Farm Bridgwater Somerset TA5 2NJ

Variation application number

EPR/EP3398VZ/V005

#### Permit number

EPR/EP3398VZ

## Swang Farm Anaerobic Digestion Facility Permit number EPR/EP3398VZ

## Introductory note

## This introductory note does not form a part of the notice

Under the Environmental Permitting (England & Wales) Regulations 2016 (schedule 5, part 1, paragraph 19) a variation may comprise a consolidated permit reflecting the variations and a notice specifying the variations included in that consolidated permit.

Schedule 1 of the notice specifies the conditions that have been varied and schedule 2 comprises a consolidated permit which reflects the variations being made. All the conditions of the permit have been varied and are subject to the right of appeal.

#### Changes introduced by this variation notice/statutory review

The Industrial Emissions Directive (IED) came into force on 7 January 2014 with the requirement to implement all relevant Best Available Techniques (BAT) Conclusions as described in the Commission Implementing Decision. Article 21(3) of the IED requires the Environment Agency to review conditions in permits that it has issued and to ensure that the permit delivers compliance with relevant standards, within four years of the publication of updated decisions on Best Available Techniques (BAT) Conclusions. The BAT Conclusions for Waste Treatment (the BREF) was published on 17 August 2018 following a European Union wide review of BAT, implementing decision (EU) 2018/1147 of 10 August 2018.

The scope of the permit review also covers the assessment of:

- the bioaerosols monitoring and compliance with M9 bioaerosols monitoring requirements;
- the design and construction of secondary containment and storage lagoons;
- the available storage facilities and measures to reduce ammonia emissions from storage; and
- information on existing medium combustion plant and/or specified generators on site.

This variation has been issued to update some of the conditions following a statutory review of the permits in the industry sector for biowaste treatment. The opportunity has also been taken to consolidate the original permit and subsequent variations.

#### Brief description of the process

The Environmental Permit is for the operation of an anaerobic digestion (AD) facility (i.e. biological treatment facility) processing a range of up to 100,000 tonnes per annum of non-hazardous waste types including agricultural crops, animal by-products and kerbside collections from local authorities. As the site can take in animal by-products, the installation is permitted as a Section 6.8 A(1)(c) listed schedule activity:

"Disposing of or recycling of animal carcasses or animal waste, other than by rendering or by incineration at a plant with a treatment capacity exceeding 10 tonnes per day of animal carcasses or animal wastes or both in aggregate".

The AD facility is operated by Cannington Enterprises Limited and is located at the Swang Farm complex, near Cannington, Bridgewater, Somerset, TA5 2NJ. The AD facility is located at NGR ST 2326 3899.

The site accepts both liquid and solid waste. Liquid waste is directed to a liquid storage tank and solid waste to the reception hall. The reception hall contains hammer mills to reduce the waste size to <12 mm, then it is pumped onwards for further treatment. Also within the hall is a polywash plastics separator to reduce plastics in the system and a skip for unsuitable waste, which is then sent off site to a suitably licenced landfill facility. The waste reception building is served by an air extraction and odour abatement system.

The pumpable waste is directed to a buffer tank before being fed into the digesters. There are four tanks which can be used flexibly as primary digesters, secondary digesters and storage tanks, depending on the nature of the feedstock, followed by two storage tanks. Waste is pasteurised to comply with the Animal By-

Products Regulations. There are three digestate lagoons to the north of the site providing additional storage prior to being sent off site for further recovery.

The biogas produced from the anaerobic digestion of the waste is stored in the roof space of the digesters and then upgraded via a biogas upgrading plant (BUP) for injection into the National Gas Grid.

There are five combined heat and power (CHPs) plants on site (4 x 923kWth and 1 x 4900kWth), which utilize the biogas produced from the AD process. These engines are defined as existing Medium Combustion Plant (MCP) under Schedule 25A of the EPR.

There is an emergency gas flare for use in an emergency, or under abnormal operating conditions.

There is an area on site where the operator proposes to store wastes under a registered waste exemption. This environmental permit does not include the registered waste exemption which is a separate authorisation.

The operator has an Environmental Management System for the facility.

The schedules specify the changes made to the permit.

The status log of a permit sets out the permitting history, including any changes to the permit reference number.

Status log of the permit			
Description	Date	Comments	
Application EPR/EP3398VZ/A001 (EAWML 101114)	Duly made 14/08/2009	Application for an anaerobic digestion facility (with combustion of resultant biogas).	
Additional information received	30/11/2009		
Additional information received	08/12/2009		
Permit determined EPR/EP3398VZ	15/01/2010	Permit issued to Cannington Cold Stores Limited.	
Application EPR/EP3398VZ/V002 (variation)	Duly made 07/02/2011	Application to add new site infrastructure and include scheduled activity.	
Additional information received	23/06/2011		
Variation determined	05/09/2011	Variation permit issued.	
Application EPR/EP3398VZ/V003 (variation and consolidation)	Duly made 31/01/2013	Application to add new site infrastructure.	
Variation determined	16/04/2013	Varied and consolidated permit issued in modern condition format.	
Application EPR/EP3398VZ/V004 (variation and consolidation)	Duly made 10/02/2015	Application to add new site infrastructure and emission points.	
Additional information received	14/04/2015	Response to Schedule 5 questions (except BAT options appraisal).	
Additional information received	23/04/2015	Confirmation of external storage of specified wastes in container.	
Additional information received	05/05/2015	Response to Schedule 5 notice – BAT options appraisal and exclusion of natural gas as fuel.	
Variation determined EPR/EP3398VZ	07/07/2015	Varied and consolidated permit issued in modern condition format.	
Regulation 61 Notice sent to Operator	21/10/2019	Regulation 61 Notice requiring information for statutory review of permit.	
Regulation 61 Notice response	14/05/2020	Response received from the operator.	
Application EPR/EP3398VZ/V005 (variation and consolidation)	Environment Agency Initiated Variation	Statutory review of permit occasioned by Waste Treatment BAT Conclusions published on 17 August 2018.	

Status log of the permit		
Description	Date	Comments
Environment Agency Biowaste Treatment Sector Review Permit reviewed Variation determined EPR/EP3398VZ (Billing Ref: QP3104LA)	10/08/2021	Varied and consolidated permit issued.

End of introductory note

## Notice of variation and consolidation

## The Environmental Permitting (England and Wales) Regulations 2016

The Environment Agency in exercise of its powers under regulation 20 of the Environmental Permitting (England and Wales) Regulations 2016 varies and consolidates

#### Permit number

EPR/EP3398VZ

#### Issued to

Cannington Enterprises Limited ("the operator")

whose registered office is

Swang Farm Cannington Bridgwater Somerset TA5 2NJ

company registration number 03967462

to operate a regulated facility at

Swang Farm Anaerobic Digestion Facility Swang Farm Bridgwater Somerset TA5 2NJ

to the extent set out in the schedules.

The notice shall take effect from 10/08/2021.

Name	Date
Louise Hann	10/08/2021

Authorised on behalf of the Environment Agency

#### Schedule 1

All conditions have been varied by the consolidated permit as a result of an Environment Agency initiated variation.

### Schedule 2 – consolidated permit

Consolidated permit issued as a separate document.

## Permit

## The Environmental Permitting (England and Wales) Regulations 2016

#### Permit number

#### EPR/EP3398VZ

This is the consolidated permit referred to in the variation and consolidation notice for application EPR/EP3398VZ/V005 authorising,

Cannington Enterprises Limited ("the operator"),

whose registered office is

Swang Farm Cannington Bridgwater Somerset TA5 2NJ

company registration number 03967462

to operation an installation at

Swang Farm Anaerobic Digestion Facility Swang Farm Bridgwater Somerset TA5 2NJ

to the extent authorised by and subject to the conditions of this permit.

Name	Date
Louise Hann	10/08/2021

Authorised on behalf of the Environment Agency

# Conditions

## 1 Management

#### 1.1 General management

- 1.1.1 The operator shall manage and operate the activities:
  - (a) in accordance with a written management system that identifies and minimises risks of pollution, including those arising from operations, maintenance, accidents, incidents, non-conformances, closure and those drawn to the attention of the operator as a result of complaints; and
  - (b) using sufficient competent persons and resources.
- 1.1.2 Records demonstrating compliance with condition 1.1.1 shall be maintained.
- 1.1.3 Any person having duties that are or may be affected by the matters set out in this permit shall have convenient access to a copy of it kept at or near the place where those duties are carried out.
- 1.1.4 The operator shall comply with the requirements of an approved competence scheme.

## 1.2 Energy efficiency

- 1.2.1 The operator shall:
  - (a) take appropriate measures to ensure that energy is used efficiently in the activities;
  - (b) review and record at least every four years whether there are suitable opportunities to improve the energy efficiency of the activities; and
  - (c) take any further appropriate measures identified by a review.

## 1.3 Efficient use of raw materials

- 1.3.1 The operator shall:
  - (a) take appropriate measures to ensure that raw materials and water are used efficiently in the activities;
  - (b) maintain records of raw materials and water used in the activities;
  - (c) review and record at least every four years whether there are suitable alternative materials that could reduce environmental impact or opportunities to improve the efficiency of raw material and water use; and
  - (d) take any further appropriate measures identified by a review.

# 1.4 Avoidance, recovery and disposal of wastes produced by the activities

- 1.4.1 The operator shall take appropriate measures to ensure that:
  - (a) the waste hierarchy referred to in Article 4 of the Waste Framework Directive is applied to the generation of waste by the activities; and
  - (b) any waste generated by the activities is treated in accordance with the waste hierarchy referred to in Article 4 of the Waste Framework Directive; and
  - (c) where disposal is necessary, this is undertaken in a manner which minimises its impact on the environment.

1.4.2 The operator shall review and record at least every four years whether changes to those measures should be made and take any further appropriate measures identified by a review.

## 2 **Operations**

## 2.1 Permitted activities

- 2.1.1 The operator is only authorised to carry out the activities specified in schedule 1 table S1.1 (the "activities").
- 2.1.2 The activities shall be undertaken in accordance with best available techniques.
- 2.1.3 All process plant and equipment shall be commissioned, operated and maintained and shall be fully documented and recorded in accordance with the manufacturer's recommendations.

### 2.2 The site

2.2.1 The activities shall not extend beyond the site, being the land shown edged in green on the site plan at schedule 7 to this permit.

## 2.3 Operating techniques

- 2.3.1 The activities shall, subject to the conditions of this permit, be operated using the techniques and in the manner described in the documentation specified in schedule 1, table S1.2, unless otherwise agreed in writing by the Environment Agency.
- 2.3.2 If notified by the Environment Agency that the activities are giving rise to pollution, the operator shall submit to the Environment Agency for approval within the period specified, a revision of any plan or other documentation ("plan") specified in schedule 1, table S1.2 or otherwise required under this permit which identifies and minimises the risks of pollution relevant to that plan, and shall implement the approved revised plan in place of the original from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 2.3.3 Any raw materials or fuels listed in schedule 2 table S2.1 shall conform to the specifications set out in that table.
- 2.3.4 Waste shall only be accepted if:
  - (a) it is of a type and quantity listed in schedule 2 table S2.2;
  - (b) it conforms to the description in the documentation supplied by the producer and holder; and
  - (c) the facility has sufficient free capacity to store and treat the waste.
- 2.3.5 The operator shall ensure that where waste produced by the activities is sent to a relevant waste operation, that operation is provided with the following information, prior to the receipt of the waste:
  - (a) the nature of the process producing the waste;
  - (b) the composition of the waste;
  - (c) the handling requirements of the waste;
  - (d) the hazardous property associated with the waste, if applicable; and
  - (e) the waste code of the waste.
- 2.3.6 The operator shall ensure that where waste produced by the activities is sent to a landfill site, it meets the waste acceptance criteria for that landfill.
- 2.3.7 Waste pre-acceptance and acceptance procedures shall be undertaken in accordance with best available techniques.

- 2.3.8 For the following activities referenced in schedule 1, table S1.1 AR4:
  - (a) each MCP must be operated in accordance with the manufacturer's instructions and records must be made and retained to demonstrate this.
  - (b) the operator must keep periods of start-up and shut-down of each MCP as short as possible.
  - (c) there must be no persistent emission of 'dark smoke' as defined in section 3(1) of the Clean Air Act 1993.

#### 2.4 Improvement programme

- 2.4.1 The operator shall complete the improvements specified in schedule 1 table S1.3 by the date specified in that table unless otherwise agreed in writing by the Environment Agency.
- 2.4.2 Except in the case of an improvement which consists only of a submission to the Environment Agency, the operator shall notify the Environment Agency within 14 days of completion of each improvement.

## 3 Emissions and monitoring

#### 3.1 Emissions to water, air or land

- 3.1.1 There shall be no point source emissions to water, air or land except from the sources and emission points listed in schedule 3 tables S3.1, S3.2 and S3.3.
- 3.1.2 The limits given in schedule 3 shall not be exceeded.
- 3.1.3 Periodic monitoring shall be carried out at least once every 5 years for groundwater and 10 years for soil, unless such monitoring is based on a systematic appraisal of the risk of contamination.

## 3.2 Emissions of substances not controlled by emission limits

- 3.2.1 Emissions of substances not controlled by emission limits (excluding odour) shall not cause pollution. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved emissions management plan, have been taken to prevent or where that is not practicable, to minimise, those emissions.
- 3.2.2 All liquids in containers, whose emission to water or land could cause pollution, shall be provided with secondary containment, unless the operator has used other appropriate measures to prevent or where that is not practicable, to minimise, leakage and spillage from the primary container.
- 3.2.3 The operator shall implement a leak detection and repair (LDAR) programme to detect and mitigate the release of volatile organic compounds, including methane from diffuse sources.

### 3.3 Odour

3.3.1 Emissions from the activities shall be free from odour at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved odour management plan, to prevent or where that is not practicable to minimise the odour.

## 3.4 Noise and vibration

3.4.1 Emissions from the activities shall be free from noise and vibration at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any

approved noise and vibration management plan to prevent or where that is not practicable to minimise the noise and vibration.

## 3.5 Monitoring

- 3.5.1 The operator shall, unless otherwise agreed in writing by the Environment Agency, undertake the monitoring specified in the following tables in schedule 3 to this permit:
  - (a) point source emissions specified in tables S3.1 and S3.2;
  - (b) process monitoring specified in table S3.4.
- 3.5.2 The operator shall maintain records of all monitoring required by this permit including records of the taking and analysis of samples, instrument measurements (periodic and continual), calibrations, examinations, tests and surveys and any assessment or evaluation made on the basis of such data.
- 3.5.3 Monitoring equipment, techniques, personnel and organisations employed for the emissions monitoring programme and the environmental or other monitoring specified in condition 3.5.1 shall have either MCERTS certification or MCERTS accreditation (as appropriate), where available, unless otherwise agreed in writing by the Environment Agency.
- 3.5.4 Permanent means of access shall be provided to enable sampling/monitoring to be carried out in relation to the emission points specified in schedule 3 tables S3.1, S3.2, and S3.3 unless otherwise agreed in writing by the Environment Agency.
- 3.5.5 In the case of new medium combustion plant, the first monitoring measurements shall be carried out within four months of the issue date of the permit or the date when the MCP is first put into operation, whichever is later.
- 3.5.6 Monitoring shall not take place during periods of start-up or shut-down.

## 3.6 Pests

- 3.6.1 The activities shall not give rise to the presence of pests which are likely to cause pollution, hazard or annoyance outside the boundary of the site. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved pests management plan, have been taken to prevent or where that is not practicable, to minimise the presence of pests on the site.
- 3.6.2 The operator shall:
  - (a) only use approved products for pest control;
  - (b) treat pest infestations promptly;
  - (c) reject pest-infected incoming waste;
  - (d) if notified by the Environment Agency, submit to the Environment Agency for approval within the period specified, a pests management plan which identifies and minimises risks of pollution from pests;
  - (e) implement the pests management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

## 3.7 Fire prevention

3.7.1 The operator shall take all appropriate measures to prevent fires on site and minimise the risk of pollution from them including, but not limited to, those specified in any approved fire prevention plan.

#### 3.7.2 The operator shall:

- (a) if notified by the Environment Agency that the activities are giving rise to a risk of fire, submit to the Environment Agency for approval within the period specified, a fire prevention plan which prevents fires and minimises the risk of pollution from fires;
- (b) implement the fire prevention plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

## 4 Information

#### 4.1 Records

- 4.1.1 All records required to be made by this permit shall:
  - (a) be legible;
  - (b) be made as soon as reasonably practicable;
  - (c) if amended, be amended in such a way that the original and any subsequent amendments remain legible, or are capable of retrieval; and
  - (d) be retained, unless otherwise agreed in writing by the Environment Agency, for at least 6 years from the date when the records were made, or in the case of the following records until permit surrender:
    - (i) off-site environmental effects; and
    - (ii) matters which affect the condition of the land and groundwater.
- 4.1.2 The operator shall keep on site all records, plans and the management system required to be maintained by this permit, unless otherwise agreed in writing by the Environment Agency.

## 4.2 Reporting

- 4.2.1 The operator shall send all reports and notifications required by the permit to the Environment Agency using the contact details supplied in writing by the Environment Agency.
- 4.2.2 A report or reports on the performance of the activities over the previous year shall be submitted to the Environment Agency by 31 January (or other date agreed in writing by the Environment Agency) each year. The report(s) shall include as a minimum:
  - (a) a review of the results of the monitoring and assessment carried out in accordance with the permit including an interpretive review of that data;
  - (b) the annual production/treatment data set out in schedule 4 table S4.2; and
  - (c) the performance parameters set out in schedule 4 table S4.3 using the forms specified in table S4.4 of that schedule.
- 4.2.3 Within 28 days of the end of the reporting period the operator shall, unless otherwise agreed in writing by the Environment Agency, submit reports of the monitoring and assessment carried out in accordance with the conditions of this permit, as follows:
  - (a) in respect of the parameters and emission points specified in schedule 4 table S4.1;
  - (b) for the reporting periods specified in schedule 4 table S4.1 and using the forms specified in schedule 4 table S4.4; and
  - (c) giving the information from such results and assessments as may be required by the forms specified in those tables.
- 4.2.4 The operator shall, unless notice under this condition has been served within the preceding four years, submit to the Environment Agency, within six months of receipt of a written notice, a report

assessing whether there are other appropriate measures that could be taken to prevent, or where that is not practicable, to minimise pollution.

- 4.2.5 Within 1 month of the end of each quarter, the operator shall submit to the Environment Agency using the form made available for the purpose, the information specified on the form relating to the site and the waste accepted and removed from it during the previous quarter.
- 4.2.6 The operator shall keep records of non-waste materials leaving the site, including the type of material, the batch number, the date of export off-site and the tonnage exported on that date. These records shall be maintained for at least 2 years.

## 4.3 Notifications

- 4.3.1 In the event:
  - (a) that the operation of the activities gives rise to an incident or accident which significantly affects or may significantly affect the environment, the operator must immediately—
    - (i) inform the Environment Agency,
    - (ii) take the measures necessary to limit the environmental consequences of such an incident or accident, and
    - (iii) take the measures necessary to prevent further possible incidents or accidents;
  - (b) of a breach of any permit condition the operator must immediately-
    - (i) inform the Environment Agency, and
    - (ii) take the measures necessary to ensure that compliance is restored within the shortest possible time;
  - (c) of a breach of permit condition which poses an immediate danger to human health or threatens to cause an immediate significant adverse effect on the environment, the operator must immediately suspend the operation of the activities or the relevant part of it until compliance with the permit conditions has been restored.
- 4.3.2 Any information provided under condition 4.3.1 (a)(i), or 4.3.1 (b)(i) where the information relates to the breach of a limit specified in the permit, shall be confirmed by sending the information listed in schedule 5 to this permit within the time period specified in that schedule.
- 4.3.3 Following the detection of an issue listed in condition 4.3.1, the operator shall review and revise the management system and implement any changes as necessary to minimise the risk of reoccurrence of the issue.
- 4.3.4 Where the Environment Agency has requested in writing that it shall be notified when the operator is to undertake monitoring and/or spot sampling, the operator shall inform the Environment Agency when the relevant monitoring and/or spot sampling is to take place. The operator shall provide this information to the Environment Agency at least 14 days before the date the monitoring is to be undertaken.
- 4.3.5 The Environment Agency shall be notified within 14 days of the occurrence of the following matters, except where such disclosure is prohibited by Stock Exchange rules:

Where the operator is a registered company:

- (a) any change in the operator's trading name, registered name or registered office address; and
- (b) any steps taken with a view to the operator going into administration, entering into a company voluntary arrangement or being wound up.

Where the operator is a corporate body other than a registered company:

- (a) any change in the operator's name or address; and
- (b) any steps taken with a view to the dissolution of the operator.

In any other case:

- (a) the death of any of the named operators (where the operator consists of more than one named individual);
- (b) any change in the operator's name(s) or address(es); and
- (c) any steps taken with a view to the operator, or any one of them, going into bankruptcy, entering into a composition or arrangement with creditors, or, in the case of them being in a partnership, dissolving the partnership.
- 4.3.6 Where the operator proposes to make a change in the nature or functioning, or an extension of the activities, which may have consequences for the environment and the change is not otherwise the subject of an application for approval under the Regulations or this permit:
  - (a) the Environment Agency shall be notified at least 14 days before making the change; and
  - (b) the notification shall contain a description of the proposed change in operation.
- 4.3.7 The Environment Agency shall be given at least 14 days' notice before implementation of any part of the site closure plan.
- 4.3.8 The operator shall notify the Environment Agency as soon as is practicable, in writing of any change of the medium combustion plant.

#### 4.4 Interpretation

- 4.4.1 In this permit the expressions listed in schedule 6 shall have the meaning given in that schedule.
- 4.4.2 In this permit references to reports and notifications mean written reports and notifications, except where reference is made to notification being made "immediately", in which case it may be provided by telephone.

# Schedule 1 – Operations

Table S1.1	Table S1.1 activities			
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	Limits of specified activity and waste types	
AR1	S6.8 A(1) (c) Disposing of or recycling of animal carcasses or animal waste, other than by rendering or by incineration at a plant with a treatment capacity exceeding 10 tonnes per day of animal carcasses or animal wastes or both in aggregate.	R3: Recycling/reclamation of organic substances which are not used as solvents	From receipt of wastes (including animal and non-animal wastes) through to digestion and recovery of by-products (digestate). Anaerobic digestion of waste in digester tanks followed by burning of biogas produced from the process. Digesters shall be located on an impermeable surface (a permeability of at least 10 <sup>-9</sup> m/s) with sealed construction joints within a bunded area. The bunded area shall have a capacity of at least 110% of the largest vessel or 25% of the total tankage volume, whichever is the greatest. Connections and fill points shall be within the bunded area and no pipework shall penetrate the bund wall.	
			Waste types suitable for acceptance are limited to those specified in Table S2.2.	
	Directly Associated Ac	tivity		
AR2	Storage of waste pending recovery or disposal	R13: Storage of waste pending the operations numbered R1 and R3 (excluding temporary storage, pending collection, on the site where it is produced).	From the receipt of permitted waste to pre-treatment and despatch for anaerobic digestion on site or despatch off site for recovery. Storage of residual wastes from pre- treatment to despatch off-site for recovery. Storage of waste in an enclosed building fitted with appropriate odour abatement and on an impermeable surface with sealed drainage. Storage of waste in the external container shall be undertaken as stated in the Application (email dated 23/04/15).	
			Waste types suitable for acceptance are limited to those specified in Table S2.2.	

Table S1.1 activities				
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	Limits of specified activity and waste types	
AR3	Physical treatment for the purpose of recycling	R3: Recycling/reclamation of organic substances which are not used as solvents	From the receipt of waste to despatch for anaerobic digestion or despatch off site for recovery.	
			Pre-treatment of waste for anaerobic digestion in enclosed building and on impermeable surface with sealed drainage system including shredding, sorting, screening, compaction, baling, mixing and maceration.	
			Post-treatment of digestate in an enclosed building and on an impermeable surface with sealed drainage system, including screening to remove contraries, centrifuge or pressing and addition of thickening agents (polymers) or drying for use as a fertiliser or soil conditioner (drying for the purpose of use as a fuel is not permitted).	
			Wastes from pre-treatment of waste for anaerobic digestion and post- treatment of digestate shall be removed from site within 3 working days.	
			Heat treatment (pasteurisation) of waste in 2 tanks for the purpose of recovery.	
			Gas cleaning by biological or physical (carbon filtration) or chemical scrubbing.	
			Waste types suitable for acceptance are limited to those specified in Table S2.2.	
AR4	Steam and electrical power supply	R1:Use principally as a fuel to generate energy	From the receipt of biogas produced at the on-site anaerobic digestion process to combustion with the release of combustion gases.	
			Combustion of biogas in 5 combined heat and power (CHP) engines with an aggregated thermal input of 8.592 MWth.	
AR5	Emergency flare operation	D10: Incineration on land	From the receipt of biogas produced at the on-site anaerobic digestion process to incineration with the release of combustion gases.	

Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	Limits of specified activity and waste types
			Use of one auxiliary flare required only during periods of breakdown or maintenance of the CHP engines and biogas upgrading plant.
AR6	Gas upgrading	Upgrading of biogas to biomethane (including the removal of moisture and other substances such as carbon dioxide, hydrogen sulphide and volatile organic compounds (VOCs)) for injection into the National Grid.	From the receipt of biogas produced at the on-site anaerobic digestion process to injection into the National Grid. This includes return of off- specification biogas for combustion to the on-site CHP engines, and/or emergency flare.
AR7	Raw material storage	Storage of raw materials including lubrication oil, antifreeze, propane, ferric chloride, activated carbon, diesel.	From the receipt of raw materials to despatch for use within the facility.
AR8	Gas storage	R13: Storage of waste pending any of the operations numbered R1 to R12 (excluding temporary storage, pending collection, on the site where it is produced)	Storage of biogas produced from on- site anaerobic digestion of permitted waste in roof space of digesters. From the receipt of biogas produced at the on-site anaerobic digestion process to despatch for use within the facility.
AR9	Digestate storage	R13: Storage of waste pending any of the operations numbered R1 to R12 (excluding temporary storage, pending collection, on the site where it is produced)	From the receipt of processed uncertified digestate produced from the on-site anaerobic digestion process to despatch for use off-site. Storage of processed uncertified whole digestate in two or three storage tanks and three lagoons.
AR10	Surface water collection and storage	Collection and storage of uncontaminated roof and site surface water.	From the collection of uncontaminated roof and site surface water from non- operational areas only to re-use within the facility or discharge off-site.
AR11	Air treatment	Collection and treatment of air from the buildings or plant using abatement system (trickling biofilter) prior to release to atmosphere.	From the collection of air from site processes to treatment and release of treated air to atmosphere.

Table S1.2 Operating tec	chniques	
Description	Parts	Date Received
Application	Documents: EPB-B-5a and EPB-B-8 of the application document in response to section 5a – technical standards, Part B of the application form.	24/07/2009
Application	Odour management plan reference OMP1 in response to section 5B, Table 3 – General Requirements, Part B of the application form.	24/07/2009 Superseded
Application	Fugitive Emissions management plan reference FMP-0709 in response to section 5B, Table 3 – General Requirements, Part B of the application form.	08/12/2009
Variation application EPR/EP3398VZ/V002	Response to section 3 in Application Form Part B3	26/01/2011
Response to Schedule 5 notice dated 18/05/11	Response to Question 2 detailing third digester storage requirements, Question 15 and 16 detailing engineering of digestate storage lagoons, Question 21 detailing pollution prevention measures, Question 24 detailing mixing of digestate within the lagoons, Question 27 detailing fate of wash down water, Question 33 detailing clean/dirty water management system, Question 34 detailing accident risk and management plan, Question 39 detailing pre-acceptance procedures, Question 40 detailing waste pre-acceptance procedures, Question 40 detailing procedures for non- conforming wastes, Question 42 detailing waste storage procedures, Question 43 detailing odour management plan, Question 45 detailing fugitive emissions management plan, Question 48 detailing ventilation system in waste reception hall.	24/06/2011
Variation application EPR/EP3398VZ/V003	Response to section 3 in Application Form Part C3.	31/01/2013
Variation application EPR/EP3398VZ/V003	Best Available Techniques and Operating Techniques Document 416.01211.00011/BATOT September 2012.	31/01/2013
Variation application EPR/EP3398VZ/V003	Swang Farm Anaerobic Digestion Facility Environmental Permit Variation Application H1 Assessment (Fugitive Emissions) SLR Ref: 416.01211.00011/H1 September 2012, Tables A1, A2, A3, A4 and A5 only.	31/01/2013
Variation application EPR/EP3398VZ/V004	Document 416.01211.00014/H1 December 2014 in response to section 6 – Environmental risk assessment, Part C2 of the application form; Standard Operating Procedures – EMS/04/SOP in response to Appendix 5, Part C3 of the application form.	10/02/2015
Response to Schedule 5 Notice dated 03/03/15	Best Available Techniques and Operating Techniques Document 416.01211.00011/BATOT April 2015	14/04/2015
Response to Schedule 5 Notice dated 03/03/15	Clarification of wastes to be stored in external container.	23/04/2015
Response to Schedule 5 Notice dated 03/03/15	BAT options appraisal; exclusion of natural gas as fuel on site.	05/05/2015
Response to Regulation	Annex 1 Returns Spreadsheet	Received
61 Notice dated 21/10/2019	<ul> <li>Odour management plan (ref. SOP 10_1 OMP v5 June 2018)</li> </ul>	14/05/2020
	Compliance and operating techniques identified in response to BAT Conclusions 1 to 8, 10 to 24 and 33	

Table S1.2 Operating techniques		
Description	Parts	Date Received
	to 38 in the Waste Treatment BREF published on 17 August 2018.	

Table S1.3 Improvement programme requirements			
Reference	Requirement	Date	
IC1 to IC7	Complete	-	
IC8	<ul> <li>The operator shall develop and submit a fire prevention plan to the Environment Agency in writing. The plan shall take into account the required information as specified in the Environment Agency's technical guidance, Fire prevention plans (version 2, dated March 2015). The appropriate measures for fire prevention shall, as a minimum, include: <ul> <li>the management of storage of feedstock, product and/or waste piles</li> <li>the measures to prevent, detect and contain fires; and</li> <li>the management of fire-waters.</li> </ul> </li> <li>The notification requirements of condition 2.4.1 will be deemed to have been complied with on submission of the written proposals.</li> <li>The fire prevention plan shall be subject to a written approval by the Environment Agency. The operator shall implement the procedures and measures as approved, and from the date stipulated by the Environment Agency.</li> </ul>	15/09/2015	
Improvement	condition for progress report to achieve BAT-AELs	1	
IC9	<ul> <li>The operator shall submit, for approval by the Environment Agency, a report setting out progress to achieving the Best Available Techniques Conclusion Associated Emission Levels (BAT-AELs) where BAT is currently not achieved, but will be achieved before 17 August 2022.</li> <li>The report shall include, but not be limited to, the following: <ol> <li>Current performance against the BAT-AELs.</li> <li>Methodology for reaching the BAT-AELs.</li> <li>Methodology for reaching the BAT-AELs.</li> <li>Associated targets /timelines for reaching compliance by 17 August 2022.</li> <li>Any alterations to the initial plan (in progress reports).</li> </ol> </li> <li>The report shall address the BAT Conclusions for Waste Treatment with respect to the following: <ul> <li>BAT 34 Table 6.7 (compliance with BAT-AELs for channelled NH<sub>3</sub>, / odour emissions to air from the biological treatment of waste)</li> </ul> </li> <li>Refer to BAT conclusions 2018/1147 issued 17.08.2018 for a full description of the BAT requirement.</li> </ul>	Progress reports at three monthly intervals from date of permit issue: 10/11/2021 10/02/2022 10/05/2022	
Improvement	condition for progress report to achieve Narrative BAT	1	
IC10	<ul> <li>The operator shall submit, for approval by Environment Agency, a report setting out progress to achieving the 'Narrative' BAT where BAT is currently not achieved, but will be achieved before 17 August 2022.</li> <li>The report shall include, but not be limited to, the following: <ol> <li>Methodology for achieving BAT</li> <li>Associated targets /timelines for reaching compliance by 17 August 2022</li> </ol> </li> </ul>	Progress reports at three monthly intervals from date of permit issue: 10/11/2021	

Table S1.3 Improvement programme requirements			
Reference	Requirement	Date	
	3) Any alterations to the initial plan (in progress reports).	10/02/2022	
	The report shall address the BAT Conclusions for Waste Treatment with respect to:	10/05/2022	
	BAT 2 a – set up and implement waste characterisation and pre acceptance procedures		
	Undertake a detailed characterisation of the following EWC waste codes prior to acceptance for treatment at the site, in accordance with BAT2a:-		
	02 03 02; 02 06 02; 03 03 02; 03 03 08; 03 03 10; 04 01 01; 04 01 05 04 01 07; 07 02 13		
	BAT 14 h – leak detection and repair programme		
	Set up and implement a leak detection and repair programme.		
	BAT 23 a – energy efficiency plan		
	Submit an Energy Efficiency Plan that demonstrates compliance with the techniques prescribed in BAT conclusion 23(a).		
	Refer to BAT conclusions 2018/1147 issued 17.08.2018 for a full description of the BAT requirement.		
Improvement	condition for primary containment		
IC11	The operator shall submit a written 'primary containment plan' and shall obtain the Environment Agency's written approval to it. The plan shall contain the results of an inspection and program of works undertaken by a qualified engineer, and shall assess the extent design specification and condition of primary containment systems where polluting liquids and solids are being stored, treated, and/or handled. The plan shall include:	10/02/2022 or other date as agreed in writing with the Environment Agency	
	<ul> <li>an assessment of the physical condition of all primary containment systems (storage and treatment vessels) using a Written Scheme of Examination and their suitability for providing primary containment when subjected to the dynamic and static loads caused by catastrophic tank failure;</li> </ul>		
	• a program of works with timescales for the implementation of individual improvement measures necessary to demonstrate that the primary containment is fit for purpose or alternative appropriate measures to ensure all polluting materials will be contained on site; and		
	a preventative maintenance and inspection regime  The plan shall be implemented in accordance with the Environment		
	The plan shall be implemented in accordance with the Environment Agency's written approval.		
Improvement	condition for secondary containment design		
IC12	The operator shall submit a written 'secondary and tertiary containment plan' and shall obtain the Environment Agency's written approval to it. The plan shall contain the results of an inspection and program of works undertaken by a competent structural engineer, in accordance with the risk assessment methodology detailed within CIRIA C736	10/02/2022 or other date as agreed in writing with the	

Table S1.3 Improvement programme requirements			
Reference	Requirement	Date	
	(2014) guidance, of the condition and extent of secondary and tertiary containment systems where all polluting liquids and solids are being stored, treated, and/or handled.	Environment Agency	
	The inspection shall consider, but not be limited to, the storage vessels, bunds, loading and unloading areas, transfer pipework/pumps, temporary storage areas, and liners underlying the site. The plan shall include:		
	<ul> <li>an assessment of the physical condition of all secondary and/or tertiary containment systems, using a Written Scheme of Examination and their suitability for providing containment when subjected to the dynamic and static loads caused by catastrophic tank failure;</li> <li>a program of works with timescales for the implementation of individual improvement measures necessary for the secondary and/or tertiary containment systems to comply with CIRIA C736 (2014) guidance, or equivalent.</li> </ul>		
	a preventative maintenance and inspection regime		
	The plan shall be implemented in accordance with the Environment Agency's written approval.		
Improvement	condition for storage lagoon design		
IC13	<ul> <li>The operator shall submit a written 'storage lagoon plan' and shall obtain the Environment Agency's written approval to it. The plan shall contain the results of an inspection and program of works undertaken by a competent structural engineer, in accordance with the risk assessment methodology detailed within CIRIA C736 (2014) guidance, of the condition and extent of the site lagoon(s) where digestate or compost leachate are being stored, treated, and/or handled.</li> <li>The inspection shall consider, but not be limited to, the transfer pipework/pumps, and liners underlying the storage lagoon.</li> <li>The plan shall include: <ul> <li>an assessment of the physical condition of the suitability for providing containment when subjected to the dynamic and static loads caused by the digestate or compost leachate;</li> </ul> </li> </ul>	10/02/2022 or other date as agreed in writing with the Environment Agency	
	<ul> <li>a program of works with timescales for the implementation of individual improvement measures necessary for the storage lagoon to comply with CIRIA C736 (2014) guidance, or equivalent.</li> <li>a preventative maintenance and inspection regime</li> </ul>		
	The plan shall be implemented in accordance with the Environment Agency's written approval.		
Improvement	condition for lagoon cover and operational storage capacity	1	
IC14	The operator shall provide a written "digestate /compost liquor storage plan" and shall obtain the Environment Agency's written approval to it. The plan shall contain the results of a review of the current storage of	10/02/2022 or other date as agreed in	

Reference	provement programme requirements	Date		
Reference	Requirement           digestate and/or compost liquor produced from site operations. The	vriting with the		
	review shall examine site contingency arrangements in the event of closed landspreading periods, extreme weather conditions, site closure, disease outbreak etc.	Environment Agency		
	The storage plan shall include:			
	<ul> <li>Existing cover arrangements on storage lagoons used to store digestate and/or compost liquor to minimise odour, ammonia and methane emissions;</li> </ul>			
	<ul> <li>Additional storage capacity on-site (at least 2 months storage) and storage capacity off-site;</li> </ul>			
	<ul> <li>Identification of alternative outlets for digestate and/or compost liquor – identify companies /permitted waste facilities that would be able to manage the digestate and/or liquor output(s), taking into account their permits and capacity constraints.</li> <li>The plan shall be implemented in accordance with the Environment</li> </ul>			
	Agency's written approval.			
Improvement	condition for assessment of methane slip			
IC15	The operator shall establish the methane emissions in the exhaust gas from engines burning biogas and compare these to the manufacturer's specification and benchmark levels agreed in writing with the Environment Agency. The operator shall, as part of the methane leak detection and repair (LDAR) programme, develop proposals to assess the potential for methane slip and take corrective actions where emissions above the manufacturer's specification or appropriate benchmark levels are identified.	10/02/2022 or other date as agreed in writing with the Environment Agency		
Improvement	condition for review of effectiveness of abatement plant			
IC16	The operator shall carry out a review of the abatement plant on site, in order to determine whether the measures have been effective and adequate to prevent and where not possible minimise emissions released to air including but not limited to odour and ammonia. The operator shall submit a written report to the Environment Agency following this review for assessment and approval.	10/02/2022 or other date as agreed in writing with the Environment Agency		
	The report shall include but not limited to the following aspects:			
	<ul> <li>Full investigation and characterisation of the waste gas streams.</li> </ul>			
	<ul> <li>Abatement stack monitoring results (not limited to odour and ammonia)</li> </ul>			
	<ul> <li>Abatement process monitoring results (not limited to odour and ammonia)</li> </ul>			
	<ul> <li>Details of air quality quantitative impact assessment including modelling and a proposal for site-specific "action levels" (not limited to odour concentration, hydrogen sulphide and ammonia).</li> </ul>			
	animonia).			
	<ul> <li>Odour monitoring results at the site boundary</li> </ul>			

Table S1.3 Im	provement programme requirements				
Reference	Reference Requirement				
	Recommendations for improvement including the replacement or upgrading the abatement plant				
	<ul> <li>Timescales for implementation of improvements to the abatement plant</li> </ul>				
	The operator shall implement the improvements in line with the timescales as approved by the Environment Agency.				

# Schedule 2 – Waste types, raw materials and fuels

Table S2.1 Raw materials and fuels	
Raw materials and fuel description Specification	
Fuel oil	Sulphur content not exceeding 0.1% by mass

Maximum quantity	Annual throughput of wastes shall not exceed 100,000 tonnes.						
	Maximum storage of wastes shall not exceed 27,100 tonnes at any one time, with individual limits as follows:						
	<ul> <li>External storage – 100 tonnes at any one time</li> <li>Main reception hall – 120 tonnes at any one time</li> </ul>						
	Digestate storage tanks – 12,330 tonnes at any one time						
	<ul> <li>Northern lagoon complex – 12,508 tonnes at any one time</li> </ul>						
	Digestate stored in tanks prior to dispatch – 2,000 tonnes at any one time						
	<ul> <li>Wastes from pre-treatment and post-treatment operations shall be removed from the anaerobic digestion facility within 3 working days.</li> </ul>						
Exclusions	<ul> <li>Wastes having any of the following characteristics shall not be accepted:</li> <li>separately collected loads of plastic unless the whole load is certified compostable to BS EN13432</li> </ul>						
	<ul> <li>co-mingled green and food waste containing more than 5% w/w plastic, unless the plastic is certified compostable to BS EN 13432</li> </ul>						
	<ul> <li>food wastes containing more than 5% w/w plastic unless there is sufficient technology to remove non-compostable plastic prior to treatment from package food waste to a processing limit of 1% w/w or decreasing year on year by 2025.</li> </ul>						
	<ul> <li>wastes containing wood-preserving agents or other biocides and post- consumer wood</li> </ul>						
	<ul> <li>wastes containing persistent organic pollutants</li> <li>wastes containing Japanese Knotweed or other invasive plant species listed in the Alien Invasive Species Regulations 2014</li> </ul>						
	<ul> <li>manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> </ul>						
Waste code	Description						
02	Wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing, food preparation and processing						
02 01	wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing						
02 01 01	sludges from washing and cleaning - vegetables, fruit and other crops						
02 01 02	animal tissue waste						
02 01 03	plant tissue waste						
02 01 06	animal faeces, urine and manure (including spoiled straw) only						
02 02	wastes from the preparation and processing of meat, fish and other foods of animal origin						

Table S2.2 Permitte	d waste types and quantities for anaerobic digestion
Maximum quantity	Annual throughput of wastes shall not exceed 100,000 tonnes.
	Maximum storage of wastes shall not exceed 27,100 tonnes at any one time, with individual limits as follows:
	External storage – 100 tonnes at any one time
	<ul> <li>Main reception hall – 120 tonnes at any one time</li> </ul>
	Digestate storage tanks – 12,330 tonnes at any one time
	Northern lagoon complex – 12,508 tonnes at any one time
	• Digestate stored in tanks prior to dispatch – 2,000 tonnes at any one time
	<ul> <li>Wastes from pre-treatment and post-treatment operations shall be removed from the anaerobic digestion facility within 3 working days.</li> </ul>
Exclusions	<ul> <li>Wastes having any of the following characteristics shall not be accepted:</li> <li>separately collected loads of plastic unless the whole load is certified compostable to BS EN13432</li> <li>co-mingled green and food waste containing more than 5% w/w plastic, unless the plastic is certified compostable to BS EN 13432</li> </ul>
	• food wastes containing more than 5% w/w plastic unless there is sufficient technology to remove non-compostable plastic prior to treatment from package food waste to a processing limit of 1% w/w or decreasing year on year by 2025.
	wastes containing wood-preserving agents or other biocides and post- consumer wood
	<ul> <li>wastes containing persistent organic pollutants</li> <li>wastes containing Japanese Knotweed or other invasive plant species listed</li> </ul>
	<ul> <li>manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> </ul>
Waste code	Description
02 02 01	sludges from washing and cleaning
02 02 02	animal tissue waste
02 02 03	materials unsuitable for consumption or processing
02 02 04	sludges from on-site effluent treatment
02 03	wastes from fruit, vegetables, cereals, edible oils, cocoa, coffee, tea and tobacco preparation and processing; conserve production; yeast and yeast extract production, molasses preparation and fermentation
02 03 01	sludges from washing, cleaning, peeling, centrifuging and separation
02 03 02	Wastes from preserving agents
02 03 04	materials unsuitable for consumption or processing
02 03 05	sludges from on-site effluent treatment
02 04	wastes from sugar processing
02 04 03	sludges from on-site effluent treatment
02 05	wastes from the dairy products industry
02 05 01	materials unsuitable for consumption or processing
02 05 02	sludges from on-site effluent treatment
02 06	wastes from the baking and confectionery industry
02 06 01	materials unsuitable for consumption or processing

Maximum quantity	Annual throughput of wastes shall not exceed 100,000 tonnes. Maximum storage of wastes shall not exceed 27,100 tonnes at any one time, with individual limits as follows:
	External storage – 100 tonnes at any one time
	<ul> <li>Main reception hall – 120 tonnes at any one time</li> </ul>
	<ul> <li>Digestate storage tanks – 12,330 tonnes at any one time</li> </ul>
	<ul> <li>Northern lagoon complex – 12,508 tonnes at any one time</li> </ul>
	<ul> <li>Digestate stored in tanks prior to dispatch – 2,000 tonnes at any one time</li> </ul>
	<ul> <li>Wastes from pre-treatment and post-treatment operations shall be removed from the anaerobic digestion facility within 3 working days.</li> </ul>
Exclusions	<ul> <li>Wastes having any of the following characteristics shall not be accepted:</li> <li>separately collected loads of plastic unless the whole load is certified compostable to BS EN13432</li> </ul>
	<ul> <li>co-mingled green and food waste containing more than 5% w/w plastic, unless the plastic is certified compostable to BS EN 13432</li> <li>food wastes containing more than 5% w/w plastic unless there is sufficient</li> </ul>
	technology to remove non-compostable plastic prior to treatment from package food waste to a processing limit of 1% w/w or decreasing year on year by 2025.
	<ul> <li>wastes containing wood-preserving agents or other biocides and post- consumer wood</li> </ul>
	wastes containing persistent organic pollutants
	<ul> <li>wastes containing Japanese Knotweed or other invasive plant species listed in the Alien Invasive Species Regulations 2014</li> </ul>
	<ul> <li>manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> </ul>
Waste code	Description
02 06 02	Wastes from preserving agents
02 06 03	sludges from on-site effluent treatment
02 07	wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa)
02 07 01	wastes from washing, cleaning and mechanical reduction of raw materials including brewing waste, food processing waste, fermentation waste
02 07 02	wastes from spirits distillation including spent grains, fruit and potato pulp, sludge from distilleries
02 07 04	materials unsuitable for consumption or processing including brewing waste, food processing waste, fermentation waste, beer, alcoholic drinks, fruit juice
02 07 05	sludges from on-site effluent treatment
03	Wastes from wood processing and the production of panels and furniture, pulp, paper and cardboard
03 03	wastes from pulp, paper and cardboard production and processing
	green liquor sludge
03 03 02	
03 03 02 03 03 08	Paper and cardboard – not allowed if any non-biodegradable coating or preserving substance is present

Table S2.2 Permitte	ed waste types and quantities for anaerobic digestion
Maximum quantity	Annual throughput of wastes shall not exceed 100,000 tonnes.
	Maximum storage of wastes shall not exceed 27,100 tonnes at any one time, with individual limits as follows:
	External storage – 100 tonnes at any one time
	<ul> <li>Main reception hall – 120 tonnes at any one time</li> </ul>
	Digestate storage tanks – 12,330 tonnes at any one time
	<ul> <li>Northern lagoon complex – 12,508 tonnes at any one time</li> </ul>
	Digestate stored in tanks prior to dispatch – 2,000 tonnes at any one time
	<ul> <li>Wastes from pre-treatment and post-treatment operations shall be removed from the anaerobic digestion facility within 3 working days.</li> </ul>
Exclusions	<ul> <li>Wastes having any of the following characteristics shall not be accepted:</li> <li>separately collected loads of plastic unless the whole load is certified compostable to BS EN13432</li> <li>co-mingled green and food waste containing more than 5% w/w plastic, unless the plastic is certified compostable to BS EN 13432</li> <li>food wastes containing more than 5% w/w plastic unless there is sufficient technology to remove non-compostable plastic prior to treatment from package food waste to a processing limit of 1% w/w or decreasing year on year by 2025.</li> <li>wastes containing wood-preserving agents or other biocides and post-consumer wood</li> <li>wastes containing Japanese Knotweed or other invasive plant species listed in the Alien Invasive Species Regulations 2014</li> <li>manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> </ul>
Waste code	Description
04 01	wastes from the leather and fur industry
04 01 01	fleshings and lime split wastes
04 01 05	tanning liquor free of chromium
04 01 07	sludges not containing chromium
04.02	
04 02	wastes from the textile industry
04 02 04 02 10	wastes from the textile industry           organic matter from natural products, e.g. grease, wax
04 02 10	organic matter from natural products, e.g. grease, wax
04 02 10 <b>07</b>	organic matter from natural products, e.g. grease, wax Wastes from organic chemical processes
04 02 10 07 07 02	organic matter from natural products, e.g. grease, wax         Wastes from organic chemical processes         wastes from the MFSU of plastics, synthetic rubber and man-made fibres         Waste plastic (compostable plastics only, unused and uncontaminated excess)
04 02 10 07 07 02 07 02 13	organic matter from natural products, e.g. grease, wax         Wastes from organic chemical processes         wastes from the MFSU of plastics, synthetic rubber and man-made fibres         Waste plastic (compostable plastics only, unused and uncontaminated excess production only)         Waste packaging, absorbents, wiping cloths, filter materials and protective
04 02 10 07 07 02 07 02 13 15	organic matter from natural products, e.g. grease, wax         Wastes from organic chemical processes         wastes from the MFSU of plastics, synthetic rubber and man-made fibres         Waste plastic (compostable plastics only, unused and uncontaminated excess production only)         Waste packaging, absorbents, wiping cloths, filter materials and protective clothing not otherwise specified

Maximum quantity	d waste types and quantities for anaerobic digestion Annual throughput of wastes shall not exceed 100,000 tonnes.
Maximum quantity	Maximum storage of wastes shall not exceed 27,100 tonnes at any one time, with individual limits as follows:
	External storage – 100 tonnes at any one time
	Main reception hall – 120 tonnes at any one time
	Digestate storage tanks – 12,330 tonnes at any one time
	Northern lagoon complex – 12,508 tonnes at any one time
	Digestate stored in tanks prior to dispatch – 2,000 tonnes at any one time
	<ul> <li>Wastes from pre-treatment and post-treatment operations shall be removed from the anaerobic digestion facility within 3 working days.</li> </ul>
Exclusions	<ul> <li>Wastes having any of the following characteristics shall not be accepted:</li> <li>separately collected loads of plastic unless the whole load is certified compostable to BS EN13432</li> </ul>
	<ul> <li>co-mingled green and food waste containing more than 5% w/w plastic, unless the plastic is certified compostable to BS EN 13432</li> </ul>
	<ul> <li>food wastes containing more than 5% w/w plastic unless there is sufficient technology to remove non-compostable plastic prior to treatment from package food waste to a processing limit of 1% w/w or decreasing year on year by 2025.</li> </ul>
	<ul> <li>wastes containing wood-preserving agents or other biocides and post- consumer wood</li> </ul>
	<ul> <li>wastes containing persistent organic pollutants</li> <li>wastes containing Japanese Knotweed or other invasive plant species listed in the Alien Invasive Species Regulations 2014</li> </ul>
	<ul> <li>manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> </ul>
Waste code	Description
15 01 03	untreated wooden packaging – not allowed if any non-biodegradable coating or preserving substance is present
15 01 05	composite packaging – must conform to BS EN 13432 and not allowed if any non- biodegradable coating or preserving substance is present
20	Municipal wastes (household waste and similar commercial, industrial and institutional wastes) including separately collected fractions
20 01	separately collected fractions (except 15 01)
20 01 01	paper and cardboard packaging – excludes laminates such as Tetrapaks and must conform to BS EN 13432 and not allowed if any non-biodegradable coating or preserving substance is present.
20 01 08	biodegradable kitchen and canteen waste
20 01 25	edible oil and fat
20 02	garden and park wastes (including cemetery waste)
20 02 01	biodegradable waste
20 03	other municipal wastes
20 03 01	mixed municipal waste – only separately collected biodegradable wastes of types listed within this table, Table S2.2
20 03 02	waste from markets – allowed only if source segregated biodegradable fractions e.g plant material, fruit and vegetables

# Schedule 3 – Emissions and monitoring

Table S3.1	Point source emiss	sions to air – em	nission limits an	d monitoring	requirements	;
Emission point ref. & location	Source	Parameter	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
Existing me	dium combustion	plant which are	engines fuelled	l on biogas (1	MW to 5 MW)	
Emission point A1 on Drawing No 003 dated November	CHP engine 1 stack [note 1]	stack Nitrogen over	Nitrogenover(NO and NO2sampleexpressed asperiod	over sample	Annual	BS EN 14792
2014		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791
		Sulphur dioxide	162 mg/m <sup>3</sup> [note 3]			or CEN TS 17021 or by
						calculation based on fuel sulphur
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			BS EN 12619
Emission point A2 on Drawing No 003 dated November 2014	CHP engine 2 stack [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	500 mg/m <sup>3</sup>	Hourly average	Annual	BS EN 14792
		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791
		Sulphur dioxide	162 mg/m <sup>3</sup> [note 3]			or CEN TS 17021
						or by calculation based on fuel sulphur
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			BS EN 12619
Emission point A3 on Drawing No 003 dated	CHP engine 3 stack [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	500 mg/m <sup>3</sup>	Hourly average	Annual	BS EN 14792
November 2014		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791

Emission point ref. & location	Source	Parameter	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
		Sulphur dioxide	162 mg/m <sup>3</sup> [note 3]			or CEN TS 17021 or
						by calculation based on fuel sulphur
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			BS EN 12619
Emission point A4 on Drawing No 003 dated November	CHP engine 4 stack [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	500 mg/m <sup>3</sup>	Hourly average	Annual	BS EN 14792
2014		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791
		Sulphur dioxide	162 mg/m <sup>3</sup> [note 3]			or CEN TS 17021
						or by calculation based on fuel sulphur
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			BS EN 12619
Emission point A6 on Drawing No 003 dated November 2014	CHP engine 5 stack [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	500 mg/m <sup>3</sup>	Hourly average	Annual	BS EN 14792
		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791
		Sulphur dioxide	162 mg/m <sup>3</sup> [note 3]			or CEN TS 17021
						or by calculation based on fuel sulphur
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			BS EN 12619

Emission point ref. & location	Source	Parameter	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
Emission point A5 on Drawing No 003 dated	Emergency flare stack [note 4]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	150 mg/m <sup>3</sup>	Average over sample period	[note 5]	BS EN 14792
November 2014		Carbon monoxide	50 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	10 mg/m <sup>3</sup>			BS EN 12619
Emission point A7 on Drawing No 003 dated November 2014	Biogas upgrading plant stack	VOCs including methane	No limit set	Leak detection and repair (LDAR) programme	In accordance with written management system	BS EN15446
Emission point A8 on Drawing No 003 dated November 2014	Channelled emissions such as odour abatement (biofilter) stack or vent(s)	Hydrogen sulphide	No limit set	Average over sample period	Once every 6 months	CEN TS 13649 for sampling NIOSH 6013 for analysis
		Ammonia	20 mg/m <sup>3</sup>	Average over sample period	Once every 6 months	EN ISO 21877
		Odour concentration	No limit set		Once every 6 months	BS EN 13725
Pressure relief valves P1, P2, P3, P4, P5 and P6 on Drawing No 003 dated February 2013	Digesters and digestate storage tanks	Biogas release and operational events	No limit set	Recorded duration and frequency	Daily inspection	
Floating cover vents	Digestate storage lagoons	Methane	No limit set			

Note 1 – These emission limits are based on normal operating conditions and load - temperature 0°C (273 K); pressure 101.3 kPa and oxygen 5% (for gas engines burning biogas) and oxygen 3% (for medium combustion plants other than engines and gas turbines burning biogas).

Note 2 – This emission limit applies until 31 December 2029, unless the gas engine is replaced.

Note 3 – This emission limit applies from 1 January 2030, unless otherwise advised by the Environment Agency.

Note 4 – These emission limits are based on normal operating conditions and load - temperature 0°C (273K); pressure 101.3 kPa and oxygen 3%.

Note 5 – Following commissioning, monitoring to be undertaken in the event the emergency flare has been operational for more than 10 per cent of a year (876 hours). Record of operating hours to be submitted annually to the Environment Agency.

Table S3.2 Point source emissions to water (other than sewer) and land – emission limits and
monitoring requirements

monitoring requirements						
Emission point ref. & location	Source	Parameter	Limit (incl. unit)	Reference Period	Monitoring frequency	Monitoring standard or method
Emission point SW1 on Drawing No 003 dated November 2014	Uncontaminated site surface water from roofs and non-operational areas	No parameter set	No limit set		Weekly	Visual assessment – no visible oil or grease
Emission point SW2 on Drawing No 003 dated November 2014 – emission to Padnoller Brook	Uncontaminated site surface water from roofs and non-operational areas	No parameter set	No limit set		Weekly	Visual assessment – no visible oil or grease

Table S3.3 Groundwater – other monitoring requirements				
Emission point reference or source or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
Emission point G1 on Drawing No 003 dated November 2014 – well located north west of the facility	Groundwater level	Weekly	None specified	

Table S3.4 Process mor	nitoring requirements			
Emission point reference or source or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
Digester feed	рН	As described in	As described	Process monitoring to be recorded using a SCADA system where relevant.
(digestion process)	Alkalinity	site operating techniques	in site operating	
	Temperature	-	techniques	
	Hydraulic loading rate			
	Organic loading rate (OLR)			
	Volatile fatty acids concentration			
	Ammonia			
	Liquid / foam level			
Biogas in digester	Flow	Continuous	In accordance with EU weights and measures Regulations	Process monitoring to be recorded using a SCADA system where relevant.
	Methane	Continuous	None specified	Gas monitors to be calibrated every 6 months or in accordance with the manufacturer's recommendations.
	CO <sub>2</sub>	Continuous	None specified	
	O <sub>2</sub>	Continuous	None specified	
	Hydrogen sulphide	Continuous	None specified	
	Pressure	Continuous	None specified	
Digestate batch	Volatile fatty acids concentration	One sample at the end of each batch	As described in site operating techniques	
	Ammonia	(hydraulic retention time) cycle.		
Digesters and storage tanks	Integrity checks	Weekly	Visual assessment	
Digesters	Agitation / mixing	Continuous	Systems controls. Yearly lithium or thermal	Records maintained in daily operational records.
	Tank capacity and sediment assessment	Once a year	imaging	In accordance with design specification and tank integrity checks.
Waste reception building; digesters and storage tanks, external storage container, storage lagoons	Odour	Daily	Olfactory monitoring	Odour detection at the site boundary.

Table S3.4 Process monitoring requirements				
Emission point reference or source or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
Diffuse emissions from all sources identified in the Leak Detection and Repair (LDAR) programme	VOCs including methane	Every 6 months or otherwise agreed in accordance with the LDAR programme	In accordance with the LDAR programme	Leak detection and repair (LDAR) programme in accordance with permit condition 3.2.4.
CHP engine stacks	VOCs including methane	Annually	BS EN 12619	Total annual VOCs emissions from the CHP engine to be calculated and submitted to the Environment Agency.
	Exhaust gas temperature		Traceable to National Standards	
	Exhaust gas pressure		Traceable to National Standards	
	Exhaust gas water vapour content		BS EN 14790-1	Unless gas is dried before analysis of emissions.
	Exhaust gas oxygen		BS EN 14789	
	Exhaust gas flow		BS EN 16911-1	
Meteorological conditions	Wind speed, air temperature, wind direction	Continuous	Method as specified in management system	Conditions to be recorded in operational diary and records.
				Equipment shall be calibrated on a 4 monthly basis, in accordance with manufacturer's recommendations or as agreed in writing by the Environment Agency.
Emergency flare	Operating hours	Continuous	Recorded duration and frequency. Recording using a	Date, time and duration of use of auxiliary flare shall be recorded.

Table S3.4 Process monitoring requirements				
Emission point reference or source or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
	Quantity of gas sent to emergency flare		SCADA system or similar system	Quantity can be estimated from gas flow composition, heat content, ratio of assistance, velocity, purge gas flow rate, pollutant emissions.
Pressure relief valves and vacuum systems	Re-seating	Weekly inspection	Visual and gas pressure	Continuous gas pressure shall be monitored. Operator must ensure that valves are re-seated after release in accordance with the manufacturer's design.
	Maintenance	Written scheme of examination in accordance with condition 1.1.1	Written scheme of examination in accordance with condition 1.1.1	Continuous gas pressure shall be monitored. Operator must ensure that valves are re-seated after release in accordance with the manufacturer's design.
	Inspection calibration and validation report	In accordance with design and construction specifications or after over topping or foaming event		Operator must ensure that valves are re-seated after release, after a foaming event or sticking, build-up of debris, obstructions or damage.
				Operator must ensure that PRV function remains within designed operation gas pressure in accordance with the manufacturer's design by suitably trained/qualified personnel.
				Inspection, calibration and

Table S3.4 Process mor	nitoring requirements			
Emission point reference or source or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
				validation report. In accordance with industry Approved Code of Practice and guidance in relation to The Pressure Systems Safety Regulations 2000 (PSSR).
Storage lagoons and storage tanks	Volume	Daily	Visual or flow metre measurement	750 mm freeboard must be maintained for storage lagoons.
Open biofilter				
Trickling biofilter	Gas temperature – inlet and outlet	Daily	Temperature probe / Traceable to national standards	Odour abatement plant shall be regularly checked and maintained to ensure
	Biofilter media moisture	Daily	Moisture meter or recognised industry method	appropriate temperature and moisture content. Odour abatement
	Gas flow rate – inlet	Continuous	Gas flow meter / EN 16911-1 and MID for EN 16911-1	plant shall be managed in accordance with permit condition 3.3, the odour management plan
	pH (biofilter drainage effluent)	Daily	pH metre	and manufacturer's
	Efficiency assessment	Annual	Media health, air-flow distribution and emission removal efficiency (BS EN 13725 for odour removal)	Equipment shall be calibrated on a 4 monthly basis, or as agreed in
	Hydrogen sulphide – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	As agreed in the odour management plan and approved by the Environment Agency	Action levels to be agreed on completion of IC16 as approved in writing by the Environment Agency. Action levels to be achieved in

Table S3.4 Process mor Emission point reference or source or	Parameter	Monitoring frequency	Monitoring standard or	Other specifications
description of point of measurement		nequency	method	specifications
				accordance with permit condition 3.2 and the odour management plan.
	Ammonia – inlet	Every 6 months or as agreed in writing by the Environment Agency.	As agreed in the odour management plan and approved by the Environment Agency.	Action levels to be agreed on completion of IC16 as approved in writing by the Environment Agency. Action levels to be achieved in accordance with
				permit condition 3.2 and the odour management plan.
	Odour concentration – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	BS EN 13725	Action levels to be agreed on completion of IC16 as approved in writing by the Environment Agency.
				Action levels to be achieved in accordance with permit condition 3.2 and the odour management plan.

# Schedule 4 – Reporting

Parameters, for which reports shall be made, in accordance with conditions of this permit, are listed below.

Table S4.1 Reporting of monitoring data				
Parameter	Emission or monitoring point/reference	Reporting period	Period begins	
Emissions to air from combustion plant Parameters as required by condition 3.5.1.	A1, A2, A3, A4, A5, A6	Every 12 months	1 January	
Emissions to air from odour abatement plant Parameters as required by condition 3.5.1.	A8	Every 6 months	1 January, 1 July	
Groundwater level Parameters as required by condition 3.5.1	G1	Every 3 months	1 January, 1 April, 1 July, 1 October	
Process monitoring Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.4	Every 12 months	1 January	
Total annual VOCs emissions from gas engines (calculated)	As specified in schedule 3 table S3.4	Every 12 months	1 January	

Table S4.2 Annual production/treatment			
Parameter	Units		
Electricity generated	MWh		
Biomethane generated	tonnes or m <sup>3</sup>		
Whole digestate	tonnes		

Table S4.3 Performance parameters			
Parameter	Frequency of assessment	Units	
Water usage	Annually	tonnes or m <sup>3</sup>	
Energy usage	Annually	MWh	
Raw material usage	Annually	tonnes or m <sup>3</sup>	
Emergency flare operation	Annually	hours	
Biomethane exported	Annually	tonnes or m <sup>3</sup>	
CHP engine usage	Annually	hours	
CHP engine efficiency	Annually	%	

Table S4.4 Reporting forms				
Media/parameter	Reporting format	Date of form		
Air	Form air 1 or other form as agreed in writing by the Environment Agency	10/08/2021		
Process monitoring	Form process 1 or other form as agreed in writing by the Environment Agency	10/08/2021		
Water usage	Form water usage 1 or other form as agreed in writing by the Environment Agency	10/08/2021		
Energy usage	Form energy 1 or other form as agreed in writing by the Environment Agency	10/08/2021		
Groundwater	Form groundwater 1 or other form as agreed in writing by the Environment Agency	07/07/2015		
Other performance indicators	Form performance 1 or other form as agreed in writing by the Environment Agency	10/08/2021		
Waste returns	E-waste Return Form or other form as agreed in writing by the Environment Agency			

# Schedule 5 – Notification

These pages outline the information that the operator must provide.

Units of measurement used in information supplied under Part A and B requirements shall be appropriate to the circumstances of the emission. Where appropriate, a comparison should be made of actual emissions and authorised emission limits.

If any information is considered commercially confidential, it should be separated from non-confidential information, supplied on a separate sheet and accompanied by an application for commercial confidentiality under the provisions of the EP Regulations.

## Part A

Permit Number	
Name of operator	
Location of Facility	
Time and date of the detection	

(a) Notification requirements for any malfunction, breakdown or failure of equipment or techniques, accident, or emission of a substance not controlled by an emission limit which has caused, is causing or may cause significant pollution		
To be notified within 24 hours of detection		
Date and time of the event		
Reference or description of the location of the event		
Description of where any release into the environment took place		
Substances(s) potentially released		
Best estimate of the quantity or rate of release of substances		
Measures taken, or intended to be taken, to stop any emission		
Description of the failure or accident.		

(b) Notification requirements for the breach of a limit		
To be notified within 24 hours of detection unless otherwise specified below		
Emission point reference/ source		
Parameter(s)		
Limit		
Measured value and uncertainty		
Date and time of monitoring		
Measures taken, or intended to be taken, to stop the emission		

Time periods for notification following detection of a breach of a limit	
Parameter	Notification period

(c) Notification requirements for the detection of any significant adverse environmental effect To be notified within 24 hours of detection		
Substances(s) detected		
Concentrations of substances detected		
Date of monitoring/sampling		

## Part B – to be submitted as soon as practicable

Any more accurate information on the matters for notification under Part A.	
Measures taken, or intended to be taken, to prevent a recurrence of the incident	
Measures taken, or intended to be taken, to rectify, limit or prevent any pollution of the environment which has been or may be caused by the emission	
The dates of any unauthorised emissions from the facility in the preceding 24 months.	

Name*	
Post	
Signature	
Date	

\* authorised to sign on behalf of the operator

# Schedule 6 – Interpretation

"accident" means an accident that may result in pollution.

"ADQP" means Anaerobic Digestion Quality Protocol

"anaerobic digestion" means a process of controlled decomposition of biodegradable materials under managed conditions where free oxygen is absent, at temperatures suitable for naturally occurring mesophilic or thermophilic anaerobes and facultative anaerobe bacteria species, which convert the inputs to a methanerich biogas and whole digestate.

"animal waste" means any waste consisting of animal matter that has not been processed into food for human consumption.

"application" means the application for this permit, together with any additional information supplied by the operator as part of the application and any response to a notice served under Schedule 5 to the EP Regulations.

"authorised officer" means any person authorised by the Environment Agency under section 108(1) of The Environment Act 1995 to exercise, in accordance with the terms of any such authorisation, any power specified in section 108(4) of that Act.

"Best available techniques" means the most effective and advanced stage in the development of activities and their methods of operation which indicates the practical suitability of particular techniques for providing the basis for emission limit values and other permit conditions designed to prevent and, where that is not practicable, to reduce emissions and the impact on the environment as a whole:

(a) 'techniques' includes both the technology used and the way in which the installation is designed, built, maintained, operated and decommissioned;

(b) 'available techniques' means those developed on a scale which allows implementation in the relevant industrial sector, under economically and technically viable conditions, taking into consideration the costs and advantages, whether or not the techniques are used or produced inside the Member State in question, as long as they are reasonably accessible to the operator;

(c) 'best' means most effective in achieving a high general level of protection of the environment as a whole.

"Biodegradable" means a material is capable of undergoing biological anaerobic or aerobic degradation leading to the production of CO<sub>2</sub>, H<sub>2</sub>O, methane, biomass, and mineral salts, depending on the environmental conditions of the process.

"building" means a construction that has the objective of providing sheltering cover and minimising emissions of noise, particulate matter, odour and litter.

"capacity" means the potential capacity and not historical or actual production levels or throughput. This means that the designed capacity is the maximum rate at which the site can operate. Biological treatment of waste usually takes place over more than one day, so the physical daily capacity can be calculated by dividing the maximum quantity of waste that could be subject to biological treatment at any one time by the minimum residence time. For in-vessel composting, the residence time for sanitisation should be calculated separately and then aggregated to the complete composting time.

"channelled emissions" means the emissions of pollutants into the environment through any kind of duct, pipe, stack, etc. This also includes emissions from open top biofilters.

"combined heat and power" (CHP) or Cogeneration means the simultaneous generation in one process of thermal energy and electrical or mechanical energy.

"compost" means a solid particulate material that is the result of composting, which has been sanitised and stabilised, and which confers beneficial effects when added to soil, used as a component of growing media or used in another way in conjunction with plants.

"compostable plastics" means plastics that are certified to meet the standards of EN 13432, EN 14995 or equivalent and is capable of breaking down by microbial digestion to create compost.

"diffuse emissions" mean non-channelled emissions (e.g. of dust, organic compounds, odour) which can result in 'area' sources (e.g. tanks) or 'point' sources (e.g. pipe flanges). This also includes emissions from open-air windrow composting.

"digestate" means material resulting from an anaerobic digestion process.

"disposal" means any of the operations provided for in Annex I to Directive 2008/98/EC of the European Parliament and of the Council on waste.

"emissions of substances not controlled by emission limits" means emissions of substances to air, water or land from the activities, either from the emission points specified in schedule 3 or from other localised or diffuse sources, which are not controlled by an emission limit.

"emissions to land" includes emissions to groundwater.

"EP Regulations" means The Environmental Permitting (England and Wales) Regulations SI 2016 No.1154 and words and expressions used in this permit which are also used in the Regulations have the same meanings as in those Regulations.

"existing medium combustion plant" means an MCP which was put into operation before 20 December 2018.

"generator" means any combustion plant which is used to generate electricity, excluding mobile, unless it is connected to the national grid.

"groundwater" means all water, which is below the surface of the ground in the saturation zone and in direct contact with the ground or subsoil.

"impermeable surface" means a surface or pavement constructed and maintained to a standard sufficient to prevent the transmission of liquids beyond the pavement surface.

"Industrial Emissions Directive" means DIRECTIVE 2010/75/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 24 November 2010 on industrial emissions, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

"Leak detection and repair (LDAR) programme" means a structured approach to reduce fugitive emissions of organic compounds by detection and subsequent repair or replacement of leaking components. Currently, sniffing (described by EN 15446) and optical gas imaging methods are available for the identification of leaks as set out in BAT 14 and section 6.6.2 of the Waste Treatment BAT Conclusions.

"MCERTS" means the Environment Agency's Monitoring Certification Scheme.

"medium combustion plant" or "MCP" means a combustion plant with a rated thermal input equal to or greater than 1 MW but less than 50 MW.

"Medium Combustion Plant Directive" or "MCPD" means Directive 2015/2193/EU of the European Parliament and of the Council on the limitation of emissions of certain pollutants into the air from medium combustion plants, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

"new medium combustion plant" means an MCP which was put into operation after 20 December 2018. This includes replacement MCP and Generators.

"operational area" means any part of a facility used for the handling, storing and treatment of waste.

"operator" means in relation to a regulated facility:

- (a) the person who has control over the operation of the regulated facility,
- (b) if the regulated facility has not yet been put into operation, the person who will have control over the regulated facility when it is put into operation, or
- (c) if a regulated facility authorised by an environmental permit ceases to be in operation, the person who holds the environmental permit

"pests" means Birds, Vermin and Insects.

"pollution" means emissions as a result of human activity which may-

- (a) be harmful to human health or the quality of the environment,
- (b) cause offence to a human sense,
- (c) result in damage to material property, or
- (d) impair or interfere with amenities and other legitimate uses of the environment.

"quarter" means a calendar year quarter commencing on 1 January, 1 April, 1 July or 1 October.

"recovery" means any of the operations provided for in Annex II to Directive 2008/98/EC of the European Parliament and of the Council on waste.

"representative internal" – means representative monitoring at a point internally of the windrows that will give a representative assessment of temperature. Note: Larger windrows will require more bespoke temperature equipment to adequate assess temperature profiles accurately.

"sealed drainage system" in relation to an impermeable surface, means a drainage system with impermeable components which does not leak and which will ensure that:

- no liquids will run off the surface otherwise than via the system
- all liquids entering the system are collected in a sealed sump, except where liquids may be lawfully discharged to foul sewer.

"specified generator" means a group of generators other than excluded between 1 and 50 megawatts or less than 50 megawatts as defined in Schedule 25B(2) of SI 2018 No.110 of the EPR.

"treated wood" means any wood that has been chemically treated (e.g. to enhance or alter the performance of the original wood). Treatments may include penetrating oils, tar oil preservatives, water-borne preservatives, organic-based preservatives, boron and organo-metallic based preservatives, boron and halogenated flame retardants and surface treatments (including paint and venner).

"VOC" means Volatile organic compounds as defined in Article 3(45) of Directive 2010/75/EU – 'volatile organic compound' means any organic compound as well as the fraction of creosote, having at 293.15K a vapour pressure of 0.01 kPa or more, or having a corresponding volatility under the particular conditions of use.

"Waste code" means the six digit code referable to a type of waste in accordance with the List of Wastes (England)Regulations 2005, or List of Wastes (Wales) Regulations 2005, as appropriate, and in relation to hazardous waste, includes the asterisk.

"Waste Framework Directive" or "WFD" means Waste Framework Directive 2008/98/EC of the European Parliament and of the Council on waste, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

Where a minimum limit is set for any emission parameter, for example pH, reference to exceeding the limit shall mean that the parameter shall not be less than that limit.

Unless otherwise stated, any references in this permit to concentrations of substances in emissions into air means:


- in relation to emissions from combustion processes, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 3% dry for liquid fuels and gaseous fuels, 6% dry for solid fuels; and/or
- in relation to emissions from non-combustion sources, the concentration at a temperature of 273K and at a pressure of 101.3 kPa, with no correction for water vapour content.

"year" means calendar year ending 31 December.

# Schedule 7 – Site plan



©Crown Copyright. All rights reserved. Environment Agency, 100026380, 2021.

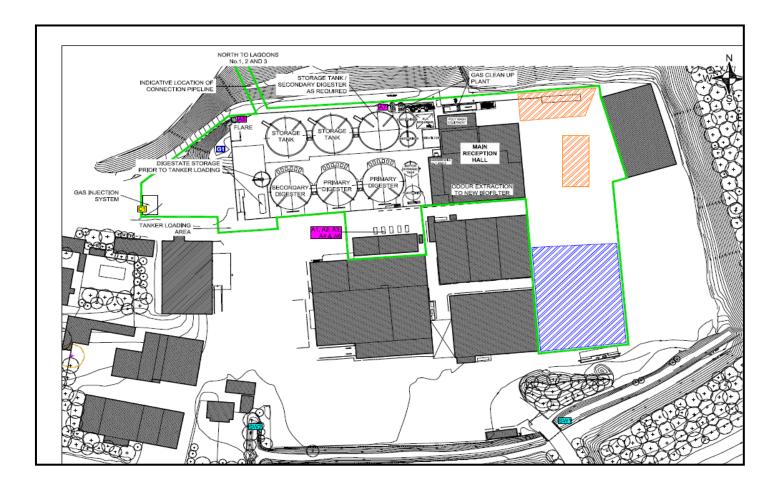

# Annex 1 of MCP

1. Rated thermal input (MW) of the medium combustion plant.	4 x 923 kWth 1 x 4900 kWth
2. Type of the medium combustion plant (diesel engine, gas turbine, dual fuel engine, other engine or other medium combustion plant).	СНР
3. Type and share of fuels used according to the fuel categories laid down in Annex II.	Biogas
4. Date of the start of the operation of the medium combustion plant or, where the exact date of the start of the operation is unknown, proof of the fact that the operation started before 20 December 2018.	Previously authorised
5. Sector of activity of the medium combustion plant or the facility in which it is applied (NACE code.	E38.3.2
6. Where the option of exemption under Article 6(3) or Article 6(8) is used, a declaration signed by the operator that the medium combustion plant will not be operated more than the number of hours referred to in those paragraphs.	NA
7. Name and registered office of the operator and, in the case of stationary medium combustion plants, the address where the plant is located.	Name and registered office         Cannington Farm Enterprises Limited         Swang Farm         Cannington         Bridgwater         Somerset         TA5 2NJ         Site address         Swang Farm AD facility         Swang Farm         Cannington         Bridgwater         Somerset         TA5 2NJ

END OF PERMIT