

Notice of variation and consolidation with introductory note

The Environmental Permitting (England & Wales) Regulations 2016

MVV Environment Devonport Limited
Devonport Energy from Waste CHP
Creek Road
Plymouth
Devon
PL5 1FL

Variation application number

EPR/WP3833FT/V007

Permit number

EPR/WP3833FT

Devonport Energy from Waste CHP

Permit number EPR/WP3833FT

Introductory note

This introductory note does not form a part of the notice

Under the Environmental Permitting (England & Wales) Regulations 2016 (schedule 5, part 1, paragraph 19) a variation may comprise a consolidated permit reflecting the variations and a notice specifying the variations included in that consolidated permit.

This variation has been issued to update the permit following a statutory review of the permits in the industry sector for incineration. The opportunity has also been taken to consolidate the original permit and subsequent variations. The Industrial Emissions Directive (IED) came into force on 7th January 2014 with the requirement to implement all relevant Best Available Techniques (BAT) conclusions as described in the Commission Implementing Decision. The BAT conclusions for incineration were published on 03 December 2019 in the Official Journal of the European Union (L323) following a European Union wide review of BAT, implementing decision 2017/2117/EU of 21 November 2017.

The schedules specify the changes made to the permit. Schedule 1 of the notice specifies the conditions that have been varied and schedule 2 comprises a consolidated permit which reflects the variations being made. All the conditions of the permit have been varied and are subject to the right of appeal.

Brief description of the process

This permit controls the operation of a waste incineration plant. The relevant listed activity is Section 5.1 Part A(1)(b) – incineration of non-hazardous waste in an incineration plant with a capacity of 3 tonnes or more per hour. The permit implements the requirements of the EU Directives on Industrial Emissions and Waste.

The main features of the permit are as follows:

The installation is designed to dispose of residual municipal waste, and commercial and industrial waste of a similar nature to residual municipal waste, by incineration. Energy is recovered from the incineration process in the form of electricity, which is fed into the national grid, and steam, which is used within the adjacent naval dockyard.

The installation is designed with a maximum operating capacity of 265,000 tonnes per year. The incinerator is of a mass burn design. Waste is delivered by road and tipped within the main building in the Tipping Hall directly into the Waste Bunker. The waste is stored and mixed in the waste bunker prior to being burnt in a moving grate incinerator plant.

The installation includes baling equipment and a bale store. When the incinerator is not in operation, the incoming waste is compacted and sealed in a strong plastic film. It is then stored onsite until the incinerator plant is back in operation when it is re-introduced to the process.

Heat from the combustion process is used to generate steam at high pressure. The high pressure steam is fed to a steam turbine to generate electricity. Lower pressure steam is supplied to the Devonport dockyard. This replaces steam currently generated at the dockyard in a combustion plant burning natural gas. Heat not recovered in the form of electricity or steam is dissipated through air cooled condensers.

The installation uses a combination of techniques for treating emissions from the combustion process in order to prevent and minimise pollution. These are:

Good combustion control

Selective non catalytic reduction for NO_x control

Dry scrubbing with sodium bicarbonate and activated carbon for the control of acid gases, metals and dioxins and furans

Bag filters for particulate control

A 95m chimney

The incineration process results in solid residues of incinerator bottom ash and air pollution control residues. Treatment for recovery or disposal of solid residues takes place away from the installation with only minimal storage occurring onsite.

The installation processes seek to reuse and recycle all its own water, which comprises that from periodic boiler blowdown and boiler feed water treatment waste water. However from time to time, disposal of waste water to sewer will be required.

The site is located in the northern section of Her Majesty's Naval Base, Devonport Dockyard in Plymouth.

The installation receives primarily mixed residual municipal wastes, but also receives a range of commercial and industrial wastes which can be safely burnt in the incineration plant. Pre-treatment of waste is not carried out, other than the shredding of some bulky items. However, the installation will not receive wastes intended to be recovered or recycled unless they are contaminated to the extent that they are unsuitable for recovery or recycling or would otherwise be destined for landfill.

The permit sets conditions controlling the management, operation and the control of emissions from the installation, including the monitoring and reporting of emissions to all environmental media.

Furnace technology	Moving Grate
Number of lines	1
Principal waste type	Municipal Waste
Stack height	95m
Permitted plant capacity	265,000 tonnes per year
Electrical generation capacity	Gross 25 MWe, Exported 22.75MWe
Heat export capacity	23.MWth

The status log of a permit sets out the permitting history, including any changes to the permit reference number.

Status log of the permit		
Description	Date	Comments
Application received EPR/WP3833FT/A001	Duly made 07/06/2011	
Additional information received	29/07/2011	
Issue of Notice seeking further information	17/08/2011	
Additional information received	29/09/2011	
Issue of Notice seeking further information	28/10/2011	
Additional information received	14/11/2011	
Permit determined EPR/WP3833FT	06/03/2012	Permit issued to MVV Environment Devonport Limited
Agency variation issued EPR/WP3833FT/V002 (Variation)	04/03/2014	Agency variation to implement the changes introduced by IED

Status log of the permit		
Description	Date	Comments
Notified of change to site address	09/03/2015	Site address changed to Devonport Energy from Waste CHP, Creek Road, Plymouth, Devon, PL5 1FL
Variation issued EPR/WP3833FT/V003 (Variation)	27/04/2015	Varied permit issued to MVV Environment Devonport Limited
Notified of change of registered office address	17/01/2017	Registered office address changed to Devonport Energy from Waste CHP, Creek Road, Plymouth, PL5 1FL
Variation issued EPR/WP3833FT/V004 (Variation)	27/02/2017	Varied permit issued to MVV Environment Devonport Limited
Application EPR/WP3833FT/V005 (variation)	Duly made 06/09/2017	Application to vary the permit to amend pH limit for discharges to foul sewer to match the Trade Effluent Discharge Consent.
Variation determined EPR/WP3833FT (Billing reference MP3830JY)	29/09/2017	Varied permit issued to MVV Environment Devonport Limited
Application received EPR/WP3833FT/V006	Duly made 05/01/2018	Application to vary the permit to add one non-hazardous waste code, 07 05 12, to the permitted waste types. We have also included a standard condition that requires operators to take all appropriate measures to prevent fires on site.
Variation determined EPR/WP3833FT (Billing reference UP3334JL)	21/03/2018	Varied permit issued to MVV Environment Devonport Limited
Permit review EPR/WP3833FT/V007	Environment Agency initiated variation	Statutory review of permit. BAT Conclusions published 03 December 2019.
Variation determined EPR//WP3833FT/V007	23/03/2022	

End of introductory note

Notice of variation and consolidation

The Environmental Permitting (England and Wales) Regulations 2016

The Environment Agency in exercise of its powers under regulation 20 of the Environmental Permitting (England and Wales) Regulations 2016 varies

Permit number

EPR/WP3833FT

Issued to

MVV Environment Devonport Limited (“the operator”)

whose registered office is

Devonport Efw Chp Facility

Creek Road

Plymouth

Devon

PL5 1FL

company registration number 07412959

to operate a regulated facility at

Devonport Energy from Waste CHP

Creek Road

Plymouth

Devon

PL5 1FL

to the extent set out in the schedules.

The notice shall take effect from 23/03/22

Name	Date
Claire Roberts	23/03/2022

Authorised on behalf of the Environment Agency

Schedule 1

All conditions have been varied by the consolidated permit as a result of an Environment Agency initiated variation.

Schedule 2 – consolidated permit

Consolidated permit issued as a separate document.

Permit

The Environmental Permitting (England and Wales) Regulations 2016

Permit number

EPR/WP3833FT

This is the consolidated permit referred to in the variation and consolidation notice for application EPR/WP3833FT/V007 authorising,

MVV Environment Devonport Limited (“the operator”),

whose registered office is

Devonport Efw Chp Facility

Creek Road

Plymouth

Devon

PL5 1FL

company registration number 07412959

to operate an installation at

Devonport Energy from Waste CHP

Creek Road

Plymouth

Devon

PL5 1FL

to the extent authorised by and subject to the conditions of this permit.

Name	Date
Claire Roberts	23/03/2022

Authorised on behalf of the Environment Agency

Conditions

Management

1.1 General management

- 1.1.1 The operator shall manage and operate the activities:
- (a) in accordance with a written management system that identifies and minimises risks of pollution, including those arising from operations, maintenance, accidents, incidents, non-conformances, closure and those drawn to the attention of the operator as a result of complaints; and
 - (b) using sufficient competent persons and resources.
 - (c) referenced in schedule 1, table S1.1 (AR1) from 03/12/2023, in accordance with a written other than normal operating conditions (OTNOC) management plan.
- 1.1.2 Records demonstrating compliance with condition 1.1.1 shall be maintained.
- 1.1.3 The operator shall review the written management system at least every 3 years or otherwise as requested by the Environment Agency.
- 1.1.4 Any person having duties that are or may be affected by the matters set out in this permit shall have convenient access to a copy of it kept at or near the place where those duties are carried out.

1.2 Energy efficiency

- 1.2.1 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR5) The operator shall:
- (a) take appropriate measures to ensure that energy is recovered with a high level of energy efficiency and energy is used efficiently in the activities.
 - (b) review and record at least every four years whether there are suitable opportunities to improve the energy efficiency of the activities; and
 - (c) take any further appropriate measures identified by a review.

1.3 Efficient use of raw materials

- 1.3.1 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR5) The operator shall:
- (a) take appropriate measures to ensure that raw materials and water are used efficiently in the activities;
 - (b) maintain records of raw materials and water used in the activities;
 - (c) review and record at least every four years whether there are suitable alternative materials that could reduce environmental impact or opportunities to improve the efficiency of raw material and water use; and
 - (d) take any further appropriate measures identified by a review.

1.4 Avoidance, recovery and disposal of wastes produced by the activities

- 1.4.1 The operator shall take appropriate measures to ensure that:
- (a) the waste hierarchy referred to in Article 4 of the Waste Framework Directive is applied to the generation of waste by the activities; and

- (b) any waste generated by the activities is treated in accordance with the waste hierarchy referred to in Article 4 of the Waste Framework Directive; and
 - (c) where disposal is necessary, this is undertaken in a manner which minimises its impact on the environment.
- 1.4.2 The operator shall review and record at least every four years whether changes to those measures should be made and take any further appropriate measures identified by a review.

Operations

2.1 Permitted activities

- 2.1.1 The operator is only authorised to carry out the activities specified in schedule 1 table S1.1 (the “activities”).
- 2.1.2 Waste authorised by this permit shall be clearly distinguished from any other waste on the site.

2.2 The site

- 2.2.1 The activities shall not extend beyond the site, being the land shown edged in green on the site plan at schedule 7 to this permit.

2.3 Operating techniques

- 2.3.1 The activities shall, subject to the conditions of this permit, be operated using the techniques and in the manner described in the documentation specified in schedule 1, table S1.2, unless otherwise agreed in writing by the Environment Agency.
- 2.3.2 If notified by the Environment Agency that the activities are giving rise to pollution, the operator shall submit to the Environment Agency for approval within the period specified, a revision of any plan specified in schedule 1, table S1.2 or otherwise required under this permit which identifies and minimises the risks of pollution relevant to that plan, and shall implement the approved revised plan in place of the original from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 2.3.3 Any raw materials or fuels listed in schedule 2 table S2.1 shall conform to the specifications set out in that table.
- 2.3.4 Waste shall only be accepted if:
- (a) it is of a type and quantity listed in schedule 2 table S2.2; and
 - (b) it conforms to the description in the documentation supplied by the producer or holder.
- 2.3.5 Waste paper, metal, plastic or glass that has been separately collected for the purpose of preparing for re-use or recycling shall not be accepted. Waste from the treatment of these separately collected wastes shall only be accepted if incineration delivers the best environmental outcome in accordance with regulation 12 of the Waste (England and Wales) Regulations 2011.
- 2.3.6 Separately collected fractions other than those listed in condition 2.3.5 shall not be accepted unless they are unsuitable for recovery by recycling.
- 2.3.7 The operator shall ensure that where waste produced by the activities is sent to a relevant waste operation, that operation is provided with the following information, prior to the receipt of the waste:
- (a) the nature of the process producing the waste;
 - (b) the composition of the waste;

- (c) the handling requirements of the waste;
 - (d) the hazardous property associated with the waste, if applicable; and
 - (e) the waste code of the waste.
- 2.3.8 The operator shall ensure that where waste produced by the activities is sent to a landfill site, it meets the waste acceptance criteria for that landfill.
- 2.3.9 Waste shall not be charged if:
- (a) the combustion chamber temperature is below 850 °C,
 - (b) any continuous emission limit value in schedule 3 table S3.1(a) is exceeded; or
 - (c) any continuous emission limit value in schedule 3 table S3.1 is exceeded, other than during abnormal operation; or
 - (d) continuous emission monitors to demonstrate compliance with any continuous emission limit value in schedule 3 table S3.1 are unavailable other than during abnormal operation; or
 - (e) there is a stoppage, disturbance or failure of the activated carbon abatement system, other than during abnormal operation.
 - (f) continuous emission monitors to demonstrate compliance with the emission limit values for particulates, TOC or CO in schedule 3 are unavailable unless alternative techniques, as agreed in writing with the Environment Agency, are used to demonstrate compliance with those emission limit values.
- 2.3.10 The operator shall record the beginning and end of each period of “abnormal operation”.
- 2.3.11 During a period of “abnormal operation”, the operator shall restore normal operation of the failed equipment or replace the failed equipment as soon as possible.
- 2.3.12 The operator shall interpret the start of the period of “abnormal operation” as the earliest of the following:
- (a) a technically unavoidable stoppage, disturbance, or failure of continuous emission monitors.
 - (b) a technically unavoidable stoppage, disturbance, or failure of the activated carbon abatement system
 - (c) Any other technically unavoidable stoppage, disturbance, or failure of the plant which is causing or could lead to an exceedance of an emission limit value in table S3.1.
- 2.3.13 The operator shall interpret the end of the period of “abnormal operation” as the earliest of the following:
- (a) when the failed equipment is repaired and brought back into normal operation;
 - (b) when the operator initiates a shut down of the waste combustion activity, as described in the application or as agreed in writing with the Environment Agency;
 - (c) The failed equipment has not been repaired and brought back into normal operation and a single period of abnormal operation reaches a duration of 4 hours after the start of abnormal operation on an incineration line
 - (d) Abnormal operation occurs on an incineration line and the cumulative duration of abnormal operation periods over 1 calendar year has reached 60 hours on that incineration line;
- 2.3.14 The operator shall have at least one auxiliary burner in each line which shall be operated at start up, shut down and as required during operation to ensure that the operating temperature specified in condition 2.3.9 is maintained as long as incompletely burned waste is present in the combustion chamber. Unless the temperature specified in condition 2.3.9 is maintained in the combustion chamber, such burner(s) shall be fed only with fuels which result in emissions no higher than those arising from the use of gas oil, liquefied gas or natural gas.

2.3.15 Bottom ash and APC residues shall not be mixed.

2.4 Improvement programme

2.4.1 The operator shall complete the improvements specified in schedule 1 table S1.3 by the date specified in that table unless otherwise agreed in writing by the Environment Agency.

2.4.2 Except in the case of an improvement which consists only of a submission to the Environment Agency, the operator shall notify the Environment Agency within 14 days of completion of each improvement.

3 Emissions and monitoring

3.1 Emissions to water, air or land

3.1.1 There shall be no point source emissions to water, air or land except from the sources and emission points listed in schedule 3 tables S3.1 and S3.2.

3.1.2 The limits given in schedule 3, subject to condition 3.2.1, shall not be exceeded.

3.1.3 Wastes produced at the site shall, as a minimum, be sampled and analysed in accordance with schedule 3 table S 3.4. Additional samples shall be taken and tested and appropriate action taken, whenever:

- (a) disposal or recovery routes change; or
- (b) it is suspected that the nature or composition of the waste has changed such that the route currently selected may no longer be appropriate.

3.2 Emissions limits and monitoring for emission to air for incineration plant

3.2.1 The limits for emissions to air apply as follows:

- (a) The limits in table S3.1 shall not be exceeded except during periods of abnormal operation.
- (b) The limits in table S3.1 (a) shall not be exceeded.

3.2.2 Where Continuous Emission Monitors are installed to comply with the monitoring requirements in schedule 3 table S3.1 and S3.1(a); the Continuous Emission Monitors shall be used such that;

(a) the values of the 95% confidence intervals of a single measured result at the daily emission limit value shall not exceed the following percentages of the emission limit values:

• Carbon monoxide	10%
• Sulphur dioxide	20%
• Oxides of nitrogen (NO & NO ₂ expressed as NO ₂)	20%
• Particulate matter	30%
• Total organic carbon (TOC)	30%
• Hydrogen chloride	40%
• Ammonia	40%

(b) valid half-hourly average values or 10-minute averages shall be determined within the effective operating time (excluding the start-up and shut-down periods) from the measured values after having subtracted the value of the confidence intervals in condition 3.2.2 (a).

- (c) where it is necessary to calibrate or maintain the monitor and this means that data are not available for a complete half-hour or 10 minute period, the half-hourly average or 10-minute average shall in any case be considered valid if measurements are available for a minimum of 20 minutes or 7 minutes during the half-hour or 10-minute period respectively. The number of half-hourly or 10-minute averages so validated shall not exceed 5 or 15 respectively per day;
- (d) daily average values shall be calculated as follows:
 - (i) the average of valid half hourly or 10 minute averages over a calendar day excluding half hourly averages or 10 minute averages during periods of abnormal operation. The daily average value shall be considered valid if no more than five half-hourly average or fifteen 10-minute average values in any day have been determined not to be valid;
- (e) no more than ten daily average values per year shall be determined not to be valid.

3.3 Emissions of substances not controlled by emission limits

- 3.3.1 Emissions of substances not controlled by emission limits (excluding odour) shall not cause pollution. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved emissions management plan, have been taken to prevent or where that is not practicable, to minimise, those emissions.
- 3.3.2 The operator shall:
 - (a) if notified by the Environment Agency that the activities are giving rise to pollution, submit to the Environment Agency for approval within the period specified, an emissions management plan which identifies and minimises the risks of pollution from emissions of substances not controlled by emission limits;
 - (b) implement the approved emissions management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 3.3.3 All liquids in containers, whose emission to water or land could cause pollution, shall be provided with secondary containment, unless the operator has used other appropriate measures to prevent or where that is not practicable, to minimise, leakage and spillage from the primary container.
- 3.3.4 Periodic monitoring shall be carried out at least once every 5 years for groundwater and 10 years for soil, unless such monitoring is based on a systematic appraisal of the risk of contamination.

3.4 Odour

- 3.4.1 Emissions from the activities shall be free from odour at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved odour management plan, to prevent or where that is not practicable to minimise the odour.

3.5 Noise and vibration

- 3.5.1 Emissions from the activities shall be free from noise and vibration at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved noise and vibration management plan to prevent or where that is not practicable to minimise the noise and vibration.
- 3.5.2 The operator shall:
 - (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to noise and vibration, submit to the Environment Agency for approval within the period

specified, a noise and vibration management plan which identifies and minimises the risks of pollution from noise and vibration;

- (b) implement the approved noise and vibration management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.6 Monitoring

- 3.6.1 The operator shall, unless otherwise agreed in writing by the Environment Agency, undertake the monitoring specified in the following tables in schedule 3 to this permit:
 - (a) point source emissions specified in tables S3.1, S3.1(a) and S3.2;
 - (b) process monitoring specified in table S3.3;
 - (c) residue quality in table S3.4
- 3.6.2 The operator shall maintain records of all monitoring required by this permit including records of the taking and analysis of samples, instrument measurements (periodic and continual), calibrations, examinations, tests and surveys and any assessment or evaluation made on the basis of such data.
- 3.6.3 Monitoring equipment, techniques, personnel and organisations employed for the emissions monitoring programme and the environmental or other monitoring specified in condition 3.6.1 shall have either MCERTS certification or MCERTS accreditation (as appropriate) unless otherwise agreed in writing by the Environment Agency. Newly installed CEMs, or CEMs replacing existing CEMs, shall have MCERTS certification and unless otherwise agreed in writing by the Environment Agency have an MCERTS certified range which is not greater than 1.5 times the daily emission limit value (ELV) specified in schedule 3 table S3.1. The CEM shall also be able to measure instantaneous values over the ranges which are to be expected during all operating conditions. If it is necessary to use more than one range setting of the CEM to achieve this requirement, the CEM shall be verified for monitoring supplementary, higher ranges. Newly installed Data handling and acquisition systems (DAHS), or DAHS replacing existing DAHS, shall have MCERTS certification.
- 3.6.4 Permanent means of access shall be provided to enable sampling/monitoring to be carried out in relation to the emission points specified in schedule 3 tables S3.1, S3.1(a) and S3.2. unless otherwise agreed in writing by the Environment Agency.

3.7 Pests

- 3.7.1 The activities shall not give rise to the presence of pests which are likely to cause pollution, hazard or annoyance outside the boundary of the site. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved pests management plan, have been taken to prevent or where that is not practicable, to minimise the presence of pests on the site.
- 3.7.2 The operator shall:
 - (a) if notified by the Environment Agency, submit to the Environment Agency for approval within the period specified, a pests management plan which identifies and minimises risks of pollution from pests;
 - (b) implement the pests management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.8 Fire prevention

- 3.8.1 The operator shall take all appropriate measures to prevent fires on site and minimise the risk of pollution from them including, but not limited to, those specified in any approved fire prevention plan.

3.8.2 The operator shall:

- (a) if notified by the Environment Agency that the activities are giving rise to a risk of fire, submit to the Environment Agency for approval within the period specified, a fire prevention plan which prevents fires and minimises the risk of pollution from fires;
- (b) implement the fire prevention plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

4 Information

4.1 Records

4.1.1 All records required to be made by this permit shall:

- (a) be legible;
- (b) be made as soon as reasonably practicable;
- (c) if amended, be amended in such a way that the original and any subsequent amendments remain legible, or are capable of retrieval; and
- (d) be retained, unless otherwise agreed in writing by the Environment Agency, for at least 6 years from the date when the records were made, or in the case of the following records until permit surrender:
 - (i) off-site environmental effects; and
 - (ii) matters which affect the condition of the land and groundwater.

4.1.2 The operator shall keep on site all records, plans and the management system required to be maintained by this permit, unless otherwise agreed in writing by the Environment Agency.

4.2 Reporting

4.2.1 The operator shall send all reports and notifications required by the permit to the Environment Agency using the contact details supplied in writing by the Environment Agency.

4.2.2 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR5) A report or reports on the performance of the activities over the previous year shall be submitted to the Environment Agency by 31 January (or other date agreed in writing by the Environment Agency) each year using the annual report form specified in schedule 4, table S4.4 or otherwise in a format agreed with the Environment Agency. The report(s) shall include as a minimum:

- (a) a review of the results of the monitoring and assessment carried out in accordance with the permit including an interpretive review of that data;
- (b) the annual production /treatment data set out in schedule 4 table S4.2;
- (c) the performance parameters set out in schedule 4 table S4.3
- (d) the functioning and monitoring of the incineration plant in a format agreed with the Environment Agency. The report shall, as a minimum requirement (as required by Chapter IV of the Industrial Emissions Directive) give an account of the running of the process and the emissions into air and water compared with the emission standards in the IED.

4.2.3 Within 28 days of the end of the reporting period the operator shall, unless otherwise agreed in writing by the Environment Agency, submit reports of the monitoring and assessment carried out in accordance with the conditions of this permit, as follows:

- (a) in respect of the parameters and emission points specified in schedule 4 table S4.1;

- (b) for the reporting periods specified in schedule 4 table S4.1 and using the forms specified in schedule 4 table S4.4; and
 - (c) giving the information from such results and assessments as may be required by the forms specified in those tables.
- 4.2.4 The operator shall, unless notice under this condition has been served within the preceding four years, submit to the Environment Agency, within six months of receipt of a written notice, a report assessing whether there are other appropriate measures that could be taken to prevent, or where that is not practicable, to minimise pollution.
- 4.2.5 Within 1 month of the end of each quarter, the operator shall submit to the Environment Agency using the form made available for the purpose, the information specified on the form relating to the site and the waste accepted and removed from it during the previous quarter.

4.3 Notifications

- 4.3.1 In the event:
- (a) that the operation of the activities gives rise to an incident or accident which significantly affects or may significantly affect the environment, the operator must immediately:
 - (i) inform the Environment Agency,
 - (ii) take the measures necessary to limit the environmental consequences of such an incident or accident, and
 - (iii) take the measures necessary to prevent further possible incidents or accidents;
 - (b) of a breach of any permit condition the operator must immediately:
 - (i) inform the Environment Agency, and
 - (ii) take the measures necessary to ensure that compliance is restored within the shortest possible time;
 - (c) of a breach of permit condition which poses an immediate danger to human health or threatens to cause an immediate significant adverse effect on the environment, the operator must immediately suspend the operation of the activities or the relevant part of it until compliance with the permit conditions has been restored.
- 4.3.2 Any information provided under condition 4.3.1 shall be confirmed by sending the information listed in schedule 5 to this permit within the time period specified in that schedule.
- 4.3.3 Where the Environment Agency has requested in writing that it shall be notified when the operator is to undertake monitoring and/or spot sampling, the operator shall inform the Environment Agency when the relevant monitoring and/or spot sampling is to take place. The operator shall provide this information to the Environment Agency at least 14 days before the date the monitoring is to be undertaken.
- 4.3.4 The Environment Agency shall be notified within 14 days of the occurrence of the following matters, except where such disclosure is prohibited by Stock Exchange rules:
- Where the operator is a registered company:
- (a) any change in the operator's trading name, registered name or registered office address; and
 - (b) any steps taken with a view to the operator going into administration, entering into a company voluntary arrangement or being wound up.
- Where the operator is a corporate body other than a registered company:
- (a) any change in the operator's name or address; and
 - (b) any steps taken with a view to the dissolution of the operator.

In any other case:

- (a) the death of any of the named operators (where the operator consists of more than one named individual);
- (b) any change in the operator's name(s) or address(es); and

4.3.5 Where the operator proposes to make a change in the nature or functioning, or an extension of the activities, which may have consequences for the environment and the change is not otherwise the subject of an application for approval under the Regulations or this permit:

- (a) the Environment Agency shall be notified at least 14 days before making the change; and
- (b) the notification shall contain a description of the proposed change in operation.

4.3.6 The Environment Agency shall be given at least 14 days notice before implementation of any part of the site closure plan.

4.4 Interpretation

4.4.1 In this permit the expressions listed in schedule 6 shall have the meaning given in that schedule.

4.4.2 In this permit references to reports and notifications mean written reports and notifications, except where reference is made to notification being made "immediately", in which case it may be provided by telephone.

Schedule 1 – Operations

Table S1.1 activities			
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity	Limits of specified activity
AR1	S5.1 A1 (b)	The incineration of non-hazardous waste in a waste incineration plant with a capacity of 3 tonnes per hour or more.	From receipt of waste to emission of exhaust gas and removal from site of waste arising. Waste types and quantities as specified in Table S2.2 of this permit.
Directly Associated Activities			
AR2	Electricity Generation	Generation of 25MWe electrical power using a steam turbine from energy recovered from the flue gases.	
AR3	Steam supply system	Supply of steam to neighbouring commercial clients.	Steam supply, condensate collection, water treatment (equipment and pipework within the installation boundary).
AR4	Back up electrical generator	For providing emergency electrical power to the plant in the event of supply interruption.	Emergency use to a maximum of 500 hours operation per year. Maximum of 50 hours testing per year.
AR5	Operation of Bailing Equipment	Bailing of waste for on-site storage	Limited to periods when the incineration plant is not operational. Such waste to be retained indoors on site.

Table S1.2 Operating techniques		
Description	Parts	Date Received
Application EPR/WP3833FT/A001	Techniques Document (03 Jun 2011) •Sections 3.3, 3.4, 4.4, 4.5, 4.6, 5.4, 5.5, 5.7, 5.12, 6.2, 6.3, & 6.4 Emissions Management (03 Jun 2011) •Sections 4.4, 5.2 Energy Management Report (06 Jun 2011) •Section 5.2 Odour Management Plan (03 Jun 2011)	7 June 2011
Response to improvement condition IC1	Operating techniques as set out in improvement condition response as approved by the Environment Agency	Date IC1 response was received

Table S1.3 Improvement programme requirements		
Reference	Requirement	Date
IC1	<p>The operator shall submit a report to the Environment Agency for approval (using the form provided by the Environment Agency) that addresses compliance with each BAT conclusion. The report shall include:</p> <ol style="list-style-type: none"> i. If any BAT conclusion is not relevant explain why ii. Whether and how the installation complies with the standards in set out in each BAT conclusion iii. If the installation does not currently comply with a standard set in a BAT conclusion describe how and when the installation will comply with that standard. iv. If the installation will continue operating in a manner which would not comply with a BAT Conclusion, after 03/12/2023 the operator shall submit to the Environment Agency: <ul style="list-style-type: none"> • a justification for being allowed to do so • a description of alternative measures to be adopted that will provide equivalent environmental protection 	3 months from issue of variation notice
IC2	The operator shall submit a report to the Environment Agency on whether waste feed to the plant can be proven to have a low and stable mercury content. The report shall have regard to BAT 4 of the BAT conclusions, be based on historic mercury emissions monitoring data and have regard to the Environment Agency Mercury Monitoring Protocol.	30/09/23
IC3	The operator shall submit a report to the Environment Agency on whether dioxin emissions to air are stable. The report shall have regard to BAT 4 of the BAT conclusions, be based on historic dioxin emissions monitoring data and have regard to the Environment Agency Dioxins Monitoring Protocol.	30/09/23
IC4	<p>The operator shall perform a study to determine the extent to which the operation of the current systems in place at the plant to minimise NOx emissions can be further optimised such that emissions are reduced as far as possible below 180 mg/Nm³ as a daily average, without significantly increasing emissions of other pollutants or having a significant negative effect on plant operation, reliability or bottom ash quality. The study shall be based on the results of trials carried out at the installation and shall have regard to the recommendations for test conditions set out in Section 5.4.3 of report titled 'Establishing factors that influence NOx reduction at waste incineration plant to levels below the upper end of the BAT-AELs' (dated 14/01/2022), or other methodology agreed in writing with the Environment Agency. A written report of the study shall be submitted to the Environment Agency which shall include but not necessarily be limited to the following:</p> <ul style="list-style-type: none"> • A brief description of the currently installed measures at the installation to minimise NOx emissions, including details of how the reagent dosing system responds to emissions monitoring data and historic data which illustrates the current achievable level of daily NOx emissions. • The results of trials conducted to further reduce daily average NOx emissions using currently installed measures, including: <ul style="list-style-type: none"> ○ a description of the parameters that were varied during the trial e.g. ammonia or urea feed rates, physical form of urea 	30/09/23

Table S1.3 Improvement programme requirements		
Reference	Requirement	Date
	<p>injected, air flows, and the range over which they were varied</p> <ul style="list-style-type: none"> ○ the levels of NOx achieved and associated levels of ammonia and nitrous oxide emissions and reagent consumption ○ observed effects and predicted long-term impacts on plant operation, reliability and maintenance regime ○ any changes to the composition of the bottom ash and boiler ash and the implications of those changes for the ability to process and use the ash, as well as for the pollution potential of the ash both during processing and its subsequent use as a secondary aggregate ○ any other relevant cross-media effects <p>The report shall also include a description of the extent to which current systems in place at the plant to minimise NOx emissions can be optimised on a permanent basis, including justification and an implementation plan where relevant.</p>	
IC5	<p>Where the response to IC1 shows that the energy efficiency will be below the bottom of the BAT AEEL range specified in BAT 20 after 02/12/2023 the operator shall carry out an assessment of the opportunities to increase the energy efficiency of the installation.</p> <p>The assessment shall include but not necessarily be limited to:</p> <ul style="list-style-type: none"> • Improvements that could be made to the furnace (including control systems) in order to increase the amount of thermal energy produced per unit of thermal energy in the waste. • Improvements that could be made to the steam system and related components to allow a greater quantity of electricity to be generated per unit of thermal energy in the steam. • Improvements in the heat and electrical efficiency of the plant's ancillary systems that could be made in order to reduce the parasitic heat and electrical loads of the plant. • Where relevant, an implementation plan for the improvements identified, including the anticipated increase in the gross and/or net electrical efficiency of the plant which would be achieved. <p>A written copy of the assessment shall be submitted to the Environment Agency.</p>	12 months from issue of variation notice

Schedule 2 – Waste types, raw materials and fuels

Table S2.1 Raw materials and fuels	
Raw materials and fuel description	Specification
Gas Oil	< 0.1% sulphur content

Table S2.2 Permitted waste types and quantities for incineration plant	
Maximum quantity	Maximum total throughput = 265,000 tonnes per year. The aggregated throughput of waste codes 15 01 04, 15 01 07, 19 04 01, 19 12 02, 19 12 03 and 19 12 09 shall not exceed 5% by weight of the total throughput. The aggregated throughput of waste codes 04 01 08, 09 01 07 and 19 10 04 shall not exceed 1% by weight of the total throughput.
Waste code	Description
02	Wastes from Agriculture, Horticulture, Aquaculture, Forestry, Hunting & Fishing, Food Preparation & Processing
02 01	Wastes from agriculture, horticulture, aquaculture, forestry, hunting & fishing
02 01 02	Animal-tissue waste
02 01 03	Plant-tissue waste
02 01 04	Waste plastics (except packaging)
02 01 06	Animal faeces, urine and manure (including spoiled straw), effluent, collected separately and treated offsite
02 01 07	Wastes from forestry
02 01 09	Agrochemical waste other than those mentioned in 02 01 08
02 02	Wastes from the preparation and processing of meat, fish & other foods of animal origin
02 02 02	Animal-tissue waste
02 02 03	Materials unsuitable for consumption or processing
02 03	Wastes from fruit, vegetables, cereals edible oils, cocoa, coffee, tea and tobacco preparation & processing; conserve production; yeast & yeast extract production, molasses preparation & fermentation
02 03 04	Materials unsuitable for consumption or processing
02 05	Wastes from the dairy products industry
02 05 01	Materials unsuitable for consumption or processing
02 06	Wastes from the baking and confectionery industry
02 06 01	Materials unsuitable for consumption or processing
02 06 02	Wastes from preserving agents
02 07	Wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea & cocoa)
02 07 01	Wastes from washing, cleaning and mechanical reduction of raw materials
02 07 02	Wastes from spirits distillation

Table S2.2 Permitted waste types and quantities for incineration plant	
Maximum quantity	Maximum total throughput = 265,000 tonnes per year. The aggregated throughput of waste codes 15 01 04, 15 01 07, 19 04 01, 19 12 02, 19 12 03 and 19 12 09 shall not exceed 5% by weight of the total throughput. The aggregated throughput of waste codes 04 01 08, 09 01 07 and 19 10 04 shall not exceed 1% by weight of the total throughput.
Waste code	Description
02 07 04	Materials unsuitable for consumption or processing
03	Wastes from Wood Processing and the Production of Panels and Furniture, Pulp, Paper and Cardboard
03 01	Wastes from Wood Processing and the Production of Panels and Furniture
03 01 01	waste bark and cork
03 01 05	sawdust, shavings, cuttings, wood, particle board and veneer other than those mentioned in 03 01 04
03 03	Wastes from Pulp, Paper and Cardboard production and processing
03 03 01	waste bark and wood
03 03 07	mechanically separated rejects from pulping of waste paper and cardboard
03 03 08	wastes from sorting of paper and cardboard destined for recycling
04	Wastes from the Leather, Fur and Textile Industries
04 01	Wastes from the Leather and Fur Industry
04 01 08	Waste tanned leather (blue sheetings, shavings, cuttings, buffing dust) containing chromium
04 01 09	Wastes from dressing and finishing
04 02	Wastes from the Textile Industry
04 02 09	wastes from composite materials (impregnated textile, elastomer, plastomer)
04 02 10	organic matter from natural products (for example grease, wax)
04 02 21	Wastes from unprocessed textile fibres
04 02 22	Wastes from processed textile fibres
07	Wastes from organic chemical processes
07 05	wastes from the MFSU of pharmaceuticals
07 05 12	sludges from on-site effluent treatment other than those mentioned in 07 05 11
09	Wastes from the Photographic Industry
09 01	Wastes from the Photographic Industry
09 01 07	photographic film and paper containing silver or silver compounds
09 01 08	photographic film and paper free of silver or silver compounds
15	Waste Packaging; absorbents, wiping cloths, filter materials and protective clothing not otherwise specified.
15 01	Packaging (including separately collected municipal packaging waste)
15 01 01	Paper and cardboard packaging
15 01 02	Plastic packaging

Table S2.2 Permitted waste types and quantities for incineration plant	
Maximum quantity	Maximum total throughput = 265,000 tonnes per year. The aggregated throughput of waste codes 15 01 04, 15 01 07, 19 04 01, 19 12 02, 19 12 03 and 19 12 09 shall not exceed 5% by weight of the total throughput. The aggregated throughput of waste codes 04 01 08, 09 01 07 and 19 10 04 shall not exceed 1% by weight of the total throughput.
Waste code	Description
15 01 03	Wooden packaging
15 01 04	Metallic packaging
15 01 05	Composite packaging
15 01 06	Mixed packaging
15 01 07	Glass packaging
15 01 09	Textile packaging
15 02	Absorbents, wiping cloths, filter materials and protective clothing
15 02 03	Absorbents, filter materials, wiping cloths and protective clothing other than those mentioned in 15 02 02
17	Construction and Demolition Wastes (Including excavated soil from contaminated sites)
17 02	Wood Glass and Plastic
17 02 01	Wood
17 02 03	Plastic
17 09	Other Construction and Demolition Wastes
17 09 04	Mixed construction and demolition wastes other than those mentioned in 17 09 01, 17 09 02 and 17 09 03
19	Wastes from Waste Management Facilities, off-site Waste Water Treatment Plants & Preparation of Water intended for Human Consumption / Industrial Use
19 02	Wastes from physico/chemical treatments of waste (including dechromatation, decyanidation, neutralisation)
19 02 03	Premixed wastes composed only of non-hazardous wastes
19 02 10	Combustible wastes other than those mentioned in 19 02 08 and 19 02 09
19 04	Vitrified waste and wastes from vitrification
19 04 01	Vitrified waste
19 05	Wastes from aerobic treatment of solid wastes
19 05 01	Non-composted fraction of municipal and similar wastes
19 05 02	Non-composted fraction of animal and vegetable waste
19 05 03	Off-specification compost
19 06	wastes from anaerobic treatment of waste
19 06 04	digestate from anaerobic treatment of municipal waste
19 06 06	digestate from anaerobic treatment of animal and vegetable waste

Table S2.2 Permitted waste types and quantities for incineration plant	
Maximum quantity	Maximum total throughput = 265,000 tonnes per year. The aggregated throughput of waste codes 15 01 04, 15 01 07, 19 04 01, 19 12 02, 19 12 03 and 19 12 09 shall not exceed 5% by weight of the total throughput. The aggregated throughput of waste codes 04 01 08, 09 01 07 and 19 10 04 shall not exceed 1% by weight of the total throughput.
Waste code	Description
19 08	wastes from waste water treatment plants not otherwise specified
19 08 01	screenings
19 10	wastes from shredding of metal-containing wastes
19 10 04	fluff-light fraction and dust other than those mentioned in 19 10 03
19 12	Wastes from the mechanical treatment of waste (for example sorting, crushing, compacting, pelletising) not otherwise specified
19 12 01	Paper and cardboard
19 12 02	Ferrous metal
19 12 03	Non-ferrous metal
19 12 04	Plastic and rubber
19 12 07	Wood other than that mentioned in 19 12 06
19 12 08	Textiles
19 12 09	Minerals (for example sand, stones)
19 12 10	Combustible waste (refuse derived fuel)
19 12 12	other wastes (including mixtures of materials) from mechanical treatment of wastes other than those mentioned in 19 12 11
20	Municipal Wastes (Household and Similar Commercial, Industrial and Institutional Wastes) including separately collected fractions
20 01	Separately Collected Fractions (except 15 01)
20 01 01	Paper and cardboard
20 01 08	Biodegradable food waste
20 01 10	Clothes
20 01 11	Textiles
20 01 25	edible oil and fat
20 01 37*	Wood containing dangerous substances (content of dangerous substances not to exceed in threshold for classification as hazardous waste)
20 01 38	Wood other than that mentioned in 20 01 37
20 01 39	Plastics
20 01 99	Other fractions not otherwise specified
20 02	Garden and Park Wastes (including cemetery wastes)
20 02 01	Biodegradable waste

Table S2.2 Permitted waste types and quantities for incineration plant	
Maximum quantity	Maximum total throughput = 265,000 tonnes per year. The aggregated throughput of waste codes 15 01 04, 15 01 07, 19 04 01, 19 12 02, 19 12 03 and 19 12 09 shall not exceed 5% by weight of the total throughput. The aggregated throughput of waste codes 04 01 08, 09 01 07 and 19 10 04 shall not exceed 1% by weight of the total throughput.
Waste code	Description
20 02 03	Other non-biodegradable waste
20 03	Other Municipal Wastes
20 03 01	Mixed municipal waste
20 03 02	Waste from markets
20 03 03	Street sweeping residues
20 03 04	Street cleaning residues
20 03 06	Waste from sewage cleaning
20 03 07	Bulky waste
20 03 99	Municipal wastes not otherwise specified

Schedule 3 – Emissions and monitoring

Table S3.1 Point source emissions to air – emission limits and monitoring requirements.						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1	Particulate matter		30 mg/m ³	½-hr average	Continuous	EN 14181
A1	Particulate matter		10 mg/m ³ Until 02/12/2023	daily average	Continuous	EN 14181
			5 mg/m ³ from 03/12/2023			
A1	Total Organic Carbon (TOC)		20 mg/m ³	½-hr average	Continuous	EN 14181
A1	Total Organic Carbon (TOC)		10 mg/m ³	daily average	Continuous	EN 14181
A1	Hydrogen chloride		60 mg/m ³	½-hr average	Continuous	EN 14181
A1	Hydrogen chloride		10 mg/m ³ Until 02/12/2023	daily average	Continuous	EN 14181
			8 mg/m ³ from 03/12/2023			
A1	Hydrogen fluoride		2 mg/m ³ until 02/12/2023 1 mg/m ³ from 03/12/2023	Average of three consecutive measurements of at least 30 minutes each	Bi-annually	CEN TS 17340 [BS ISO 15713 can be used until 01/03/22]

Table S3.1 Point source emissions to air – emission limits and monitoring requirements.						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1	Carbon monoxide		100 mg/m ³	½-hr average	Continuous	EN 14181
A1	Carbon monoxide		50 mg/m ³	daily average	Continuous	EN 14181
A1	Sulphur dioxide		200 mg/m ³	½-hr average	Continuous	EN 14181
A1	Sulphur dioxide		50 mg/m ³ Until 02/12/2023	daily average	Continuous	EN 14181
			40 mg/m ³ from 03/12/2023			
A1	Oxides of nitrogen (NO and NO ₂ expressed as NO ₂)		400 mg/m ³	½-hr average	Continuous	EN 14181
A1	Oxides of nitrogen (NO and NO ₂ expressed as NO ₂)		200 mg/m ³ Until 02/12/2023	daily average	Continuous	EN 14181
			180 mg/m ³ from 03/12/2023			
A1	Cadmium & thallium and their compounds (total)		0.05 mg/m ³ until 02/12/2023	Average of three consecutive measurements of at least 30 minutes each	Bi-annually	BS EN 14385
			0.02 mg/m ³ from 03/12/2023			
A1	Mercury and its compounds		0.05 mg/m ³ until 02/12/2023	Average of three consecutive measurements of at least 30 minutes each	Bi-annually until 02/12/2023	BS EN 13211

Table S3.1 Point source emissions to air – emission limits and monitoring requirements.						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1	Mercury and its compounds		0.02 mg/m ³ from 03/12/2023 Limit does not apply if continuous monitoring has been specified in writing by the Environment Agency	Average of three consecutive measurements of at least 30 minutes each	Bi-annually from 03/12/2023 Not required if continuous monitoring has been specified in writing by the Environment Agency	BS EN 13211
A1	Mercury and its compounds		0.02 mg/m ³ from 03/12/2023	Daily average	Continuous from 03/12/2023 Not required unless continuous monitoring has been specified by in writing by the Environment Agency in line with sampling protocol	EN 14181
A1	Sb, As, Pb, Cr, Co, Cu, Mn, Ni and V and their compounds (total)		0.5 mg/m ³ Until 02/12/2023 0.3 mg/m ³ from 03/12/2023	Average of three consecutive measurements of at least 30 minutes each	Bi-annually	BS EN 14385
A1	Exhaust gas temperature		No limit set	-	Continuous	Traceable to national standards

Table S3.1 Point source emissions to air – emission limits and monitoring requirements.						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1	Exhaust gas pressure		No limit set	-	Continuous	Traceable to national standards
A1	Exhaust gas flow		No limit set	-	Continuous from 01/01/2023	BS EN 16911-2
A1	Exhaust gas oxygen content		No limit set	-	Continuous	EN 14181
A1	Exhaust gas water vapour content		No limit set	-	Continuous	EN 14181
A1	Nitrous oxide (N ₂ O)		No limit set	½-hr average and daily average from 01/01/2023	Continuous from 01/01/2023	EN 14181
A1	Carbon dioxide		No limit set	Continuous	Continuous from 01/01/2023	EN 14181
A1	Dioxins / furans (I-TEQ)		0.1 ng/m ³ Until 02/12/2023	periodic over minimum 6 hours, maximum 8 hour period	Bi-annually Until 02/12/2023	BS EN 1948 Parts 1, 2 and 3
A1	Dioxins / furans (I-TEQ)		0.06 ng/m ³ or	periodic over minimum 6 hours, maximum 8 hour period or	Bi-annually from 03/12/2023	EN 1948 Parts 1, 2 and 3

Table S3.1 Point source emissions to air – emission limits and monitoring requirements.

Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
			0.08 ng/m ³ if long term limit is specified by the Environment Agency in line with sampling protocol from 03/12/2023	value over sampling period of 2 to 4 weeks for long term sampling	or long term sampling if specified by the Environment Agency in line with sampling protocol from 03/12/2023	or CEN TS 1948-5 if specified by the Environment Agency in line with sampling protocol
A1	Dioxin-like PCBs (WHO-TEQ Humans / Mammals, Fish, Birds)		No limit set	periodic over minimum 6 hours, maximum 8 hour period or value over sampling period of 2 to 4 weeks for long term sampling	Bi-annually; or long term sampling if specified by the Environment Agency in line with sampling protocol from 03/12/2023. No monitoring is required if emissions have been shown to be below 0.01 ng/m ³ as agreed with the Environment Agency.	EN 1948 Parts 1, 2 and 4 or CEN TS 1948-5 if specified by the Environment Agency in line with sampling protocol

Table S3.1 Point source emissions to air – emission limits and monitoring requirements.						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A1	Dioxins / furans (WHO-TEQ Humans / Mammals, Fish, Birds)		No limit set	periodic over minimum 6 hours, maximum 8 hour period	Bi-annually	BS EN 1948 Parts 1, 2 and 3
A1	Polybrominated dibenzo-dioxins and furans		No limit set	periodic over minimum 6 hours, maximum 8 hour period	Bi-annually from 01/01/2023	Method based on procedural requirements of EN 1948
A1	Specific individual polycyclic aromatic hydrocarbons (PAHs), as specified in Schedule 6.		No limit set	periodic over minimum 6 hours, maximum 8 hour period	Annually	BS ISO 11338 Parts 1 and 2.
A2	Carbon monoxide	Back-up electrical generator	No limit set	In line with web guide 'Monitoring stack emissions: low risk MCPs and specified generators' Published 16 February 2021 (formerly known as TGN M5)	Every 1500 hours of operation or once every five years (whichever comes first) from 01/01/2025	In line with web guide 'Monitoring stack emissions: low risk MCPs and specified generators' Published 16 February 2021 (formerly known as TGN M5)

Table S3.1 Point source emissions to air – emission limits and monitoring requirements.						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard(s) or method(s)
A3	Odour	Odour control system	No limit set			

Table S3.1(a) Point source emissions to air during abnormal operation of incineration plant – emission limits and monitoring requirements						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
A1	Particulate matter		150 mg/m ³	½-hr average	Continuous	EN 14181 or alternative surrogate as agreed in writing with the environment agency during failure of the continuous emission monitor
A1	Total Organic Carbon (TOC)		20 mg/m ³	½-hr average	Continuous	EN 14181 or alternative surrogate as agreed in writing with the environment agency during failure of the continuous emission monitor

Table S3.1(a) Point source emissions to air during abnormal operation of incineration plant – emission limits and monitoring requirements						
Emission point ref. & location	Parameter	Source	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
A1	Carbon monoxide		100 mg/m ³	½-hr average	Continuous	EN 14181 or alternative surrogate as agreed in writing with the environment agency during failure of the continuous emission monitor

Table S3.2 Point source emissions to sewer, effluent treatment plant or other transfers off-site- emission limits and monitoring requirements						
Emission point ref. & location	Source	Parameter	Limit (incl. Unit)	Reference period	Monitoring frequency	Monitoring standard or method
S1	Boiler sampling and Blow Down	Flow	No Limit Set	Daily average	Continuous	
S1	Boiler sampling and Blow Down	Temperature	No Limit Set	Instantaneous	Continuous	BS6068-2.50

Table S3.3 Process monitoring requirements				
Emission point reference or source or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
As identified in the Application	Wind Speed and Direction	Continuous	Anemometer	
Location close to the Combustion Chamber inner wall or as identified and justified in Application.	Temperature (° C)	Continuous	Traceable to national standards	As agreed in writing with the Agency.
Incineration plant	Gross energy efficiency	within 6 months of any modification that significantly affects energy efficiency	Performance test at full load or other method as agreed in writing with the Environment Agency	

Table S3.4 Residue quality					
Emission point reference or source or description of point of measurement	Parameter	Limit	Monitoring frequency	Monitoring standard or method *	Other specifications
Bottom Ash	TOC	3%	Quarterly	EN 14899 and either EN 13137 or EN 15936	Environment Agency Guidance, 'TGN M4 – Guidelines for Ash Sampling and Analysis'
Bottom Ash	Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs.		Quarterly	Environment Agency Guidance, 'TGN M4 – Guidelines for Ash Sampling and Analysis'	
Bottom Ash	Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions		Before use of a new disposal or recycling route	Environment Agency Guidance, 'TGN M4 – Guidelines for Ash Sampling and Analysis'	
APC Residues	Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs.		Quarterly	Environment Agency Guidance, 'TGN M4 – Guidelines for Ash Sampling and Analysis'	
APC Residues	Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions		Before use of a new disposal or recycling route	Environment Agency Guidance, 'TGN M4 – Guidelines for Ash Sampling and Analysis'	

Table S3.4 Residue quality					
Emission point reference or source or description of point of measurement	Parameter	Limit	Monitoring frequency	Monitoring standard or method *	Other specifications
Waste water from boiler blowdown and water treatment not sent to sewer.	Quantity and pH	pH 6 - 9	Each disposal		

* Or other equivalent standard as agreed in writing with the Environment Agency.

Schedule 4 – Reporting

Parameters, for which reports shall be made, in accordance with conditions of this permit, are listed below.

Table S4.1 Reporting of monitoring data			
Parameter	Emission or monitoring point/reference	Reporting period	Period begins
Emissions to air Parameters as required by condition 3.6.1	A1	Quarterly	1 Jan, 1 Apr, 1 Jul and 1 Oct
Emissions to sewer Parameters as required by condition 3.6.1	S1	Quarterly	1 Jan, 1 Apr, 1 Jul and 1 Oct
TOC Parameters as required by condition 3.6.1	Bottom Ash	Quarterly	1 Jan, 1 Apr, 1 Jul and 1 Oct
Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs Parameters as required by condition 3.6.1	Bottom Ash	Quarterly	1 Jan, 1 Apr, 1 Jul and 1 Oct
Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions Parameters as required by condition 3.6.1	Bottom Ash	Before use of a new disposal or recycling route	
Metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) and their compounds, dioxins/furans and dioxin-like PCBs Parameters as required by condition 3.6.1	APC Residues	Quarterly	1 Jan, 1 Apr, 1 Jul and 1 Oct
Total soluble fraction and metals (Antimony, Cadmium, Thallium, Mercury, Lead, Chromium, Copper, Manganese, Nickel, Arsenic, Cobalt, Vanadium, Zinc) soluble fractions Parameters as required by condition 3.6.1	APC Residues	Before use of a new disposal or recycling route	

Table S4.2: Annual production/treatment	
Parameter	Units
Total Municipal Waste Incinerated	tonnes

Table S4.2: Annual production/treatment	
Parameter	Units
Total Commercial Waste Incinerated	tonnes
Electrical energy produced	KWh
Thermal energy produced e.g. steam for export	KWh
Electrical energy exported	KWh
Electrical energy used on installation	KWh
Waste heat utilised by the installation	KWh

Table S4.3 Performance parameters		
Parameter	Frequency of assessment	Units
Annual Report as required by condition 4.2.2	Annually	-
Electrical energy exported, imported and used at the installation	Annually	KWh / tonne of waste incinerated
Fuel oil consumption	Annually	Kg / tonne of waste incinerated
Bottom Ash residue	Annually	Route, tonnes and tonnes / tonne of waste incinerated
APC residue	Annually	Route, tonnes and tonnes / tonne of waste incinerated
Urea consumption	Annually	Kg / tonne of waste incinerated
Activated Carbon consumption	Annually	Kg / tonne of waste incinerated
Sodium Bicarbonate consumption	Annually	Kg / tonne of waste incinerated
Water consumption	Annually	Kg / tonne of waste incinerated
Periods of abnormal operation	Annually	No of occasions and cumulative hours for current calendar year for each line.

Table S4.4 Reporting forms		
Media/parameter	Reporting format	Date of form
Annual report required by condition 4.2.2	Annual performance report template	13/08/19
Emissions to air until 02/12/2023	Forms Air 1 – 7 or other forms as agreed in writing by the Environment Agency	06/03/12
Emissions to air from 03/12/2023	Forms air 1-9 or other forms as agreed in writing by the Environment Agency	23/03/22
Sewer	Form sewer 1 or other form as agreed in writing by the Environment Agency	06/03/12

Table S4.4 Reporting forms		
Media/parameter	Reporting format	Date of form
Residue quality	Form residue 1 and 2 or other form as agreed in writing by the Environment Agency	23/03/22
Other performance indicators	Form performance 1 or other form as agreed in writing by the Environment Agency	06/03/12

Schedule 5 – Notification

These pages outline the information that the operator must provide.

Units of measurement used in information supplied under Part A and B requirements shall be appropriate to the circumstances of the emission. Where appropriate, a comparison should be made of actual emissions and authorised emission limits.

If any information is considered commercially confidential, it should be separated from non-confidential information, supplied on a separate sheet and accompanied by an application for commercial confidentiality under the provisions of the EP Regulations.

Part A

Permit Number	
Name of operator	
Location of Facility	
Time and date of the detection	

(a) Notification requirements for any malfunction, breakdown or failure of equipment or techniques, accident, or emission of a substance not controlled by an emission limit which has caused, is causing or may cause significant pollution	
To be notified within 24 hours of detection	
Date and time of the event	
Reference or description of the location of the event	
Description of where any release into the environment took place	
Substances(s) potentially released	
Best estimate of the quantity or rate of release of substances	
Measures taken, or intended to be taken, to stop any emission	
Description of the failure or accident.	

(b) Notification requirements for the breach of a limit	
To be notified within 24 hours of detection unless otherwise specified below	
Emission point reference/ source	
Parameter(s)	
Limit	
Measured value and uncertainty	
Date and time of monitoring	

(b) Notification requirements for the breach of a limit	
To be notified within 24 hours of detection unless otherwise specified below	
Measures taken, or intended to be taken, to stop the emission	

Time periods for notification following detection of a breach of a limit	
Parameter	Notification period

(c) Notification requirements for the breach of permit conditions not related to limits	
To be notified within 24 hours of detection	
Condition breached	
Date, time and duration of breach	
Details of the permit breach i.e. what happened including impacts observed.	
Measures taken, or intended to be taken, to restore permit compliance.	

(d) Notification requirements for the detection of any significant adverse environmental effect	
To be notified within 24 hours of detection	
Description of where the effect on the environment was detected	
Substances(s) detected	
Concentrations of substances detected	
Date of monitoring/sampling	

Part B – to be submitted as soon as practicable

Any more accurate information on the matters for notification under Part A.	
Measures taken, or intended to be taken, to prevent a recurrence of the incident	

Measures taken, or intended to be taken, to rectify, limit or prevent any pollution of the environment which has been or may be caused by the emission	
The dates of any unauthorised emissions from the facility in the preceding 24 months.	

Name*	
Post	
Signature	
Date	

* authorised to sign on behalf of the operator

Schedule 6 – Interpretation

“abatement equipment” means that equipment dedicated to the removal of polluting substances from releases from the installation to air or water media.

“*abnormal operation*” means: any technically unavoidable stoppages, disturbances, or failures of the plant or the measurement devices. Abnormal operation starts as defined in condition 2.3.12 and ends as defined in condition 2.3.13. Abnormal operation is limited to 4 hours for a single occurrence and a total of 60 hours per year per line.

“accident” means an accident that may result in pollution.

“APC residues” means air pollution control residues

“application” means the application for this permit, together with any additional information supplied by the operator as part of the application and any response to a notice served under Schedule 5 to the EP Regulations.

“authorised officer” means any person authorised by the Environment Agency under section 108(1) of The Environment Act 1995 to exercise, in accordance with the terms of any such authorisation, any power specified in section 108(4) of that Act.

“background concentration” means such concentration of that substance as is present in:

for emissions to surface water, the surface water quality up-gradient of the site; or

for emissions to sewer, the surface water quality up-gradient of the sewage treatment works discharge.

“BAT conclusions” means Commission Implementing Decision (EU) 2019/2010 of 12 November 2019 establishing the best available techniques (BAT) conclusions, under Directive 2010/75/EU of the European Parliament and of the Council, for Waste Incineration

“bottom ash” means ash falling through the grate and transported by the grate;

“CEM” Continuous emission monitor

“CEN” means Comité Européen de Normalisation

“bi-annual” means twice per year with at least five months between tests;

“Commissioning” means testing of the new incineration plant that involves any operation of the furnace

Daily average emissions value means ‘the average of at least 43 valid half hourly averages or for CO the average of at least 43 valid half hourly averages or 129 valid 10 min averages’

“dioxin and furans” means polychlorinated dibenzo-p-dioxins and polychlorinated dibenzofurans.

“disposal”. Means any of the operations provided for in Annex I to Directive 2008/98/EC of the European Parliament and of the Council on waste.

“emissions to land” includes emissions to groundwater.

“EP Regulations” means The Environmental Permitting (England and Wales) Regulations SI 2016 No.1154 and words and expressions used in this permit which are also used in the Regulations have the same meanings as in those Regulations.

“emissions of substances not controlled by emission limits” means emissions of substances to air, water or land from the activities, either from the emission points specified in schedule 3 or from other localised or diffuse sources, which are not controlled by an emission or background concentration limit.

“groundwater” means all water, which is below the surface of the ground in the saturation zone and in direct contact with the ground or subsoil.

‘*Hazardous property*’ has the meaning in Annex III of the Waste Framework Directive

“incineration line” means all of the incineration equipment related to a common discharge to air location.

“Industrial Emissions Directive” means DIRECTIVE 2010/75/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 24 November 2010 on industrial emissions

“infectious clinical waste” means clinical waste incorporating substances containing viable micro-organisms or their toxins which are known or reliably believed to cause disease in man or other living organisms

“ISO” means International Standards Organisation.

‘*List of Wastes*’ means the list of wastes established by Commission Decision 2000/532/EC replacing Decision 94/3/EC establishing a list of wastes pursuant to Article 1(a) of Council Directive 75/442/EEC on waste and Council Decision 94/904/EC establishing a list of hazardous waste pursuant to Article 1(4) of Council Directive 91/689/EEC on hazardous waste, as amended from time to time

“LOI” means loss on ignition a technique used to determine the combustible material by heating the ash residue to a high temperature

“MCERTS” means the Environment Agency’s Monitoring Certification Scheme.

“PAH” means Poly-cyclic aromatic hydrocarbon, and comprises Anthanthrene, Benzo[a]anthracene, Benzo[b]fluoranthene, Benzo[k]fluoranthene, Benzo[b]naph(2,1-d)thiophene, Benzo[c]phenanthrene, Benzo[ghi]perylene, Benzo[a]pyrene, Cholanthrene, Chrysene, Cyclopenta[c,d]pyrene, Dibenzo[ah]anthracene, Dibenzo[a,i]pyrene Fluoranthene, Indo[1,2,3-cd]pyrene, Naphthalene

“PCB” means Polychlorinated Biphenyl. Dioxin-like PCBs are the non-ortho and mono-ortho PCBs listed in the table below.

“Pests” means Birds, Vermin and Insects.

“quarter” means a calendar year quarter commencing on 1 January, 1 April, 1 July or 1 October.

“recovery” means any of the operations provided for in Annex II to Directive 2008/98/EC of the European Parliament and of the Council on waste.

“start up” is any period, where the plant has been non-operational, until waste has been fed to the plant in a sufficient quantity to initiate steady-state conditions as described in the application or agreed in writing with the Environment Agency.

“shut down” is any period where the plant is being returned to a non-operational state as described in the application or agreed in writing with the Environment Agency.

“TOC” means Total Organic Carbon. In respect of releases to air, this means the gaseous and vaporous organic substances, expressed as TOC. In respect of Bottom Ash, this means the total carbon content of all organic species present in the ash (excluding carbon in elemental form).

‘*Waste code*’ means the six digit code referable to a type of waste in accordance with the List of Wastes and in relation to hazardous waste, includes the asterisk

“Waste Framework Directive” or “WFD” means Waste Framework Directive 2008/98/EC of the European Parliament and of the Council on waste

Where a minimum limit is set for any emission parameter, for example pH, reference to exceeding the limit shall mean that the parameter shall not be less than that limit.

Unless otherwise stated, any references in this permit to concentrations of substances in emissions into air means:

- (a) in relation to emissions from combustion processes, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 3% dry for liquid and gaseous fuels, 6% dry for solid fuels; and/or
- (b) in relation to emissions from non-combustion sources, the concentration at a temperature of 273K and at a pressure of 101.3 kPa, with no correction for water vapour content
- (c) in relation to gases from incineration plants other than those burning waste oil, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 11% dry,

For dioxins/furans and dioxin-like PCBs the determination of the toxic equivalence concentration (I-TEQ, & WHO-TEQ for dioxins/furans, WHO-TEQ for dioxin-like PCBs) stated as a release limit and/ or reporting requirement, the mass concentrations of the following congeners have to be multiplied with their respective toxic equivalence factors before summing. When reporting on measurements of dioxins/furans and dioxin-like PCBs, the toxic equivalence concentrations should be reported as a range based on: all congeners less than the detection limit assumed to be zero as a minimum, and all congeners less than the detection limit assumed to be at the detection limit as a maximum. However the minimum value should be used when assessing compliance with the emission limit value in table S3.1.

TEF schemes for dioxins and furans				
Congener	I-TEF	WHO-TEF		
	1990	2005	1997/8	
		Humans / Mammals	Fish	Birds
Dioxins				
2,3,7,8-TCDD	1	1	1	1
1,2,3,7,8-PeCDD	0.5	1	1	1
1,2,3,4,7,8-HxCDD	0.1	0.1	0.5	0.05
1,2,3,6,7,8-HxCDD	0.1	0.1	0.01	0.01
1,2,3,7,8,9-HxCDD	0.1	0.1	0.01	0.1
1,2,3,4,6,7,8-HpCDD	0.01	0.01	0.001	<0.001
OCDD	0.001	0.0003	-	-
Furans				
2,3,7,8-TCDF	0.1	0.1	0.05	1
1,2,3,7,8-PeCDF	0.05	0.03	0.05	0.1
2,3,4,7,8-PeCDF	0.5	0.3	0.5	1
1,2,3,4,7,8-HxCDF	0.1	0.1	0.1	0.1
1,2,3,7,8,9-HxCDF	0.1	0.1	0.1	0.1
1,2,3,6,7,8-HxCDF	0.1	0.1	0.1	0.1
2,3,4,6,7,8-HxCDF	0.1	0.1	0.1	0.1
1,2,3,4,6,7,8-HpCDF	0.01	0.01	0.01	0.01
1,2,3,4,7,8,9-HpCDF	0.01	0.01	0.01	0.01
OCDF	0.001	0.0003	0.0001	0.0001

TEF schemes for dioxin-like PCBs			
Congener	WHO-TEF		
	2005	1997/8	
	Humans / mammals	Fish	Birds
Non-ortho PCBs			
3,4,4',5-TCB (81)	0.0001	0.0005	0.1

TEF schemes for dioxin-like PCBs			
Congener	WHO-TEF		
	2005	1997/8	
	Humans / mammals	Fish	Birds
3,3',4,4'-TCB (77)	0.0003	0.0001	0.05
3,3',4,4',5 - PeCB (126)	0.1	0.005	0.1
3,3',4,4',5,5'-HxCB(169)	0.03	0.00005	0.001
Mono-ortho PCBs			
2,3,3',4,4'-PeCB (105)	0.00003	<0.000005	0.0001
2,3,4,4',5-PeCB (114)	0.00003	<0.000005	0.0001
2,3',4,4',5-PeCB (118)	0.00003	<0.000005	0.00001
2',3,4,4',5-PeCB (123)	0.00003	<0.000005	0.00001
2,3,3',4,4',5-HxCB (156)	0.00003	<0.000005	0.0001
2,3,3',4,4',5'-HxCB (157)	0.00003	<0.000005	0.0001
2,3',4,4',5,5'-HxCB (167)	0.00003	<0.000005	0.00001
2,3,3',4,4',5,5'-HpCB (189)	0.00003	<0.000005	0.00001

“year” means calendar year ending 31 December.

When the following terms appear in the waste code list in Schedule 2, table 2.2, for that table, they have the meaning given below:

‘hazardous substance’ means a substance classified as hazardous as a consequence of fulfilling the criteria laid down in parts 2 to 5 of Annex I to Regulation (EC) No 1272/2008

‘heavy metal’ means any compound of antimony, arsenic, cadmium, chromium (VI), copper, lead, mercury, nickel, selenium, tellurium, thallium and tin, as well as these materials in metallic form, as far as these are classified as hazardous substances

‘PCBs’ means

- polychlorinated biphenyls
- polychlorinated terphenyls
- monomethyl-tetrachlorodiphenyl methane, Monomethyl-dichloro-diphenyl methane, Monomethyldibromo-diphenyl methane
- any mixture containing any of the above mentioned substances in a total of more than 0,005 %by weight


‘transition metals’ means any of the following metals: any compound of scandium, vanadium, manganese, cobalt, copper, yttrium, niobium, hafnium, tungsten, titanium, chromium, iron, nickel, zinc, zirconium, molybdenum and tantalum, as well as these materials in metallic form, as far as these are classified as hazardous substances

‘stabilisation’ means processes which change the hazardousness of the constituents in the waste and transform hazardous waste into non-hazardous waste

‘solidification’ means processes which only change the physical state of the waste by using additives without changing the chemical properties of the waste

'partly stabilised wastes' means wastes containing, after the stabilisation process, hazardous constituents which have not been changed completely into non-hazardous constituents and could be released into the environment in the short, middle or long term.

Schedule 7 – Site plan

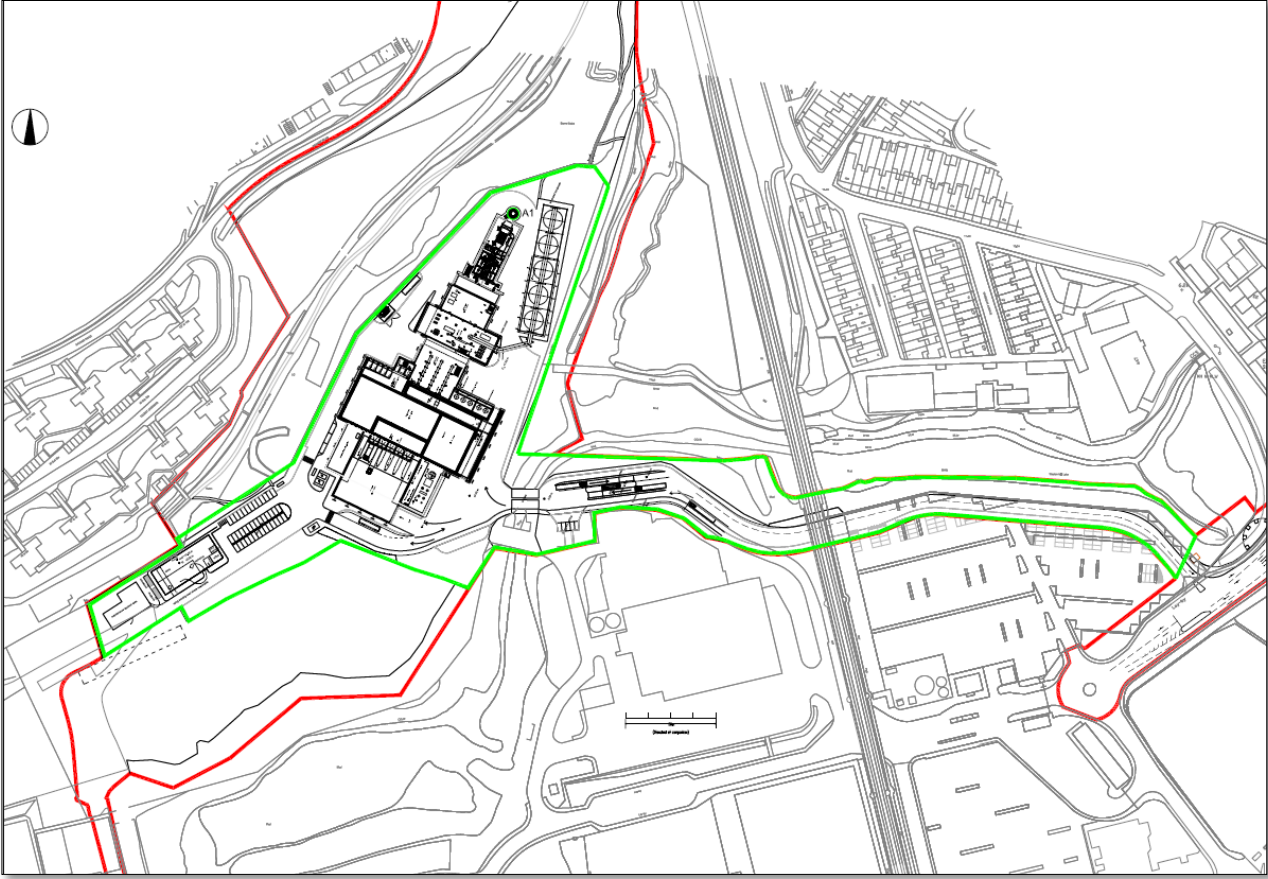

END OF PERMIT