


2021 Annual Environmental Performance – Rough Offshore Facilities

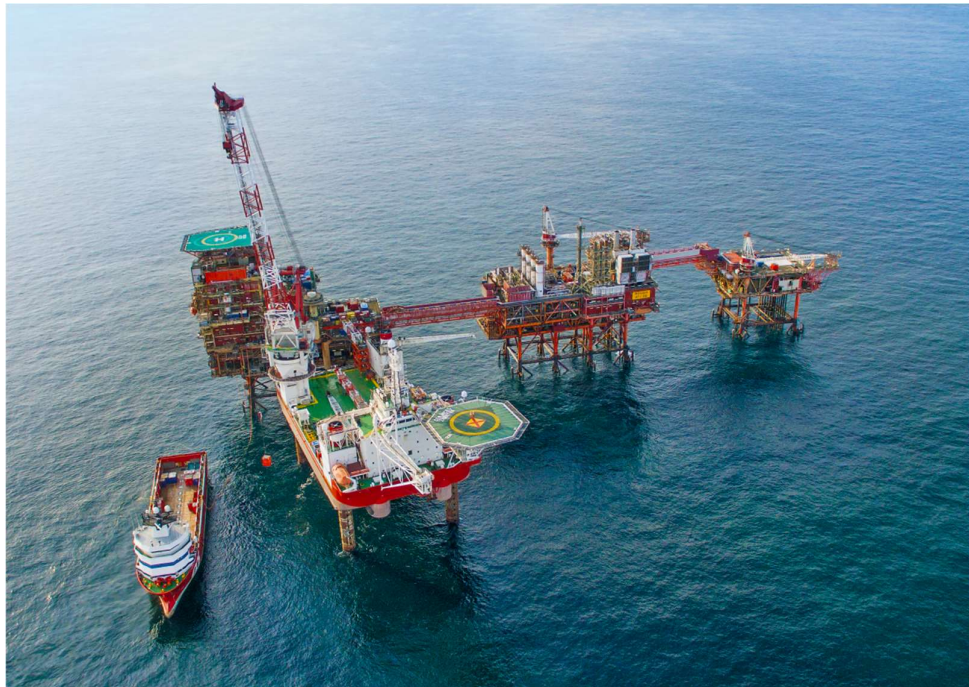

OLP/72/8

Contents

1	Overview.....	3
2	Executive Summary	4
	Releases to Air	4
3	Introduction.....	5
3.1	Site Location & Operation.....	5
3.2	47/8 Alpha.....	5
3.3	Environmental Permits	6
3.4	Environmental Management System	7
4	Emissions Monitoring	8
4.1	Releases to Air.....	8
4.2	Releases to Water	9
4.3	Waste	11
5	Emissions Reporting	12
5.1	Performance	12
5.2	Releases to Air.....	13
5.3	Releases to Water	19
5.4	Waste	22
6	Non-Conformities	26
6.1	Oil in Water	26
6.2	IR Standards and Calibration graphs.....	27
6.3	PON1's.....	28
7	2021 Audits.....	29
8	Future Activities.....	29
9	Summary.....	29
	Appendix 1: Centrica Health, Safety, Environment and Security Policy	30

1 Overview

In 2016, Centrica Storage Limited (CSL) conducted testing and verification work on all of the Rough field wells. After experiencing several issues associated with the integrity of the wells, during 2017 CSL made the decision to no longer operate the Rough field as a storage facility. CSL submitted a Field Development Plan Addendum and received approval to permanently cease Storage Operations and operate the Rough field as a Production Facility.

CSL now produces gas from the Rough field under a Production Licence. From Q4 2017 until November 2018, gas was extracted from the Rough field under its own pressure (High Pressure mode). From November 2018, the Rough Compressor at the Easington Gas Terminal was used to extract gas from the Rough field in a Medium Pressure mode until Q1 2021. Since Q4 2021, gas extraction has been in a Low-Pressure mode and will continue to do so until the Cessation of Production, which is expected to be Q4 2023.

After the decision was made to permanently cease Storage Operations, it was also decided to permanently withdraw the Rough 47/8 Alpha platform from service and start the preparations to decommission the platform. During 2018, Well Plug and Abandonment (P&A) work was initiated leaving the Rough 47/8 Alpha wells in a mechanically plugged state. During 2019, a jack-up vessel was acquired to support Non-Permanently Attended Installation (NPAI) enabling works to enable the de-manning of 47/8 Alpha platform. It is planned that by the end of 2022, a drill rig will be used to support the full plug and abandonment of the Rough 47/8 Alpha wells, therefore isolating the platform from the reservoir.

For all the above-mentioned activities, environmental aspects and impacts were assessed prior to commencement of the work and monitored throughout, giving consideration to the whole life cycle impacts on resources to prevent pollution, reduce waste and ensure their efficient use.

Throughout 2021, as per the Centrica Health, Safety, Environmental and Security Policy (Appendix 1), CSL have continued to place a huge importance on their environmental responsibilities and continue to be committed to understanding, managing and reducing the environmental and ecological impacts of our activities through innovation, technology and cultural change. As part of this, CSL successfully transitioned from ISO 14001:2004 to the updated ISO 14001:2015 standard in 2018 and continue to maintain certification.

2 Executive Summary

Centrica Storage Limited owns and operates the Rough Gas Facilities which is located approximately 29 kilometres off the east coast of Yorkshire. The platforms are permitted to undertake regulated activities under a Production Licence, Consent to Vent, OPPC Permit, Chemical Permit, Greenhouse Gas Permit, PPC Permit and Consent to Locate. Under these permits and consents, CSL have the requirement to monitor, record and report emissions released to air and water. The amount and classification of waste is also required to be reported.

Throughout 2021, the Rough Offshore Facilities operated for 151 days. During this time, 426.77 Mscm of gas was produced. There was a planned maintenance outage on the 47/3B platform between 6th April 2021 to 15th October 2021. Production on the Rough 47/3B stopped again on 18th October 2021 to 5th November due to issues at the Easington Terminal.

Releases to Air

Under the Greenhouse Gas Emissions Permit (UK-D-IN-13143) the Rough Gas Facilities released 14,848 tCO₂e during 2021. This is a 23 tonnes reduction on 2020 emissions.

Releases to Water

The 47/3 Bravo generated Produced Water on 151 days, with a total of 3010.6m³ of Produced Water discharged to sea and 180.2 kg of associated oil.

The Produced Water was analysed for radioactivity during Q1 and Q4. With no radiation detected and it is considered that the Produced Water generated in 2021 was not radioactive.

All chemicals used were within permitted limits. Throughout 2021, the Rough Gas Facilities discharged a total of 442 Kg (permit limit – 1,670 Kg) of chemicals into the sea. All other chemicals used were returned to shore through the sealine.

Waste

The Rough Gas Facilities generated a total of 254.5 tonnes of waste throughout 2021, of which all but 0.14 tonnes were recovered (recycled or sent for treatment). From the total amount of waste generated, 105.3 tonnes were categorised as non-hazardous and 149.2 tonnes as hazardous waste.

Non-Conformities

CSL exceeded the maximum concentration for Oil in Water on 16 occasions and exceeded the Monthly Average Oil in Water concentration 3 times during 2021. CSL submitted 6 PON1's throughout 2021.

CSL also submitted a Non-Conformities for the expiration of the Infra-Red Standards and Calibration graphs.

With the exception of the non-conformities mentioned above, all releases to the environment have been within the permitted limits set out by the various Permits and Consents under which the Rough Gas Facilities operate.

3 Introduction

3.1 Site Location & Operation

The Rough offshore gas field is located approximately 29 kilometres off the east coast of Yorkshire. The Rough Offshore Facilities comprises of the Rough 47/8 Alpha (two bridge-linked platforms), which is no longer producing, and Rough 47/3 Bravo (three bridge-linked platforms) complexes. The complexes are approximately 2 kilometres apart and were designed to produce gas from the reservoirs 30 wells. There are now 14 operational wells available on 47/3B only for production of natural gas and condensate.

During production, the nature of the reservoir results in some contamination with water and indigenous hydrocarbons, necessitating separation offshore. Water and condensed hydrocarbons are removed by the offshore process prior to transmission via the 36-inch sealine to shore. The small quantities of produced water are discharged to sea and the natural gas condensate is re-injected into the pipeline and carried ashore with the gas.

Corrosion inhibitor is injected on the 47/3 Bravo platform to prevent corrosion of the sealine. Methanol is also injected into the sealine as a to prevent the build-up of hydrates. Production fluids are transferred, via the subsea pipeline to the onshore Easington Terminal.

3.2 47/8 Alpha

With the 47/8 Alpha no longer operational, CSL made the decision to isolate the platform from the reservoir through mechanical plugging and to kill the wells with inhibited seawater. In addition to this, CSL also made the decision to de-man the installation in 2019. The activities associated with the wells took place from October 2018 through to March 2019, with the Non-Permanently Attended Installation (NPAI) enabling works taking place in May 2019.

It was planned to complete the full Plug and Abandon of the wells in 2020, however, due to Covid-19, this has been postponed and is scheduled for 2022.

The necessary environmental permits for this work will be applied for, with all work activities for this project conducted in accordance with the permits.

3.3 Environmental Permits

The Rough Gas Facilities operate under the following permits.

3.3.1 Production Licence

On 23rd April 2020, CSL applied for and obtained a Long-Term Production Consent (PCON/5439/0 (Version 1)) which permits CSL to extract gas from the Rough Gas Field until 31st December 2023. Pervious to this, CSL operated and extracted gas under Production Licence PCON4517/0 (Version 2).

3.3.2 Consent to Vent

The Consent to Vent (VCON/5276/0) permits CSL to dispose of unignited natural gas into the atmosphere won under the Rough Gas Field Petroleum Production Licence.

The purpose of venting under this consent is to

- facilitate the planned start-up, shut-down or maintenance of plant and equipment, or to ensure its efficient operation, or
- to protect plant, equipment or persons.

As venting is a loss of primary product, CSL endeavour to limit the amount of gas lost through venting.

3.3.3 OPPC Permits

The Rough Offshore Facilities operated under two Offshore Petroleum Activities (Oil Pollution Prevention and Control) Regulations 2005 permits. These permits allow the discharge of oil in accordance with the arrangements described within the permit for the Rough AD platform (OLP/74/6 (Version 1)) and the Rough BP platform (OLP/72/8 (Version 1)).

3.3.4 Chemical Permits

During 2021, the Rough Offshore Facilities operated under two Offshore Chemicals Regulations 2002 permits, the 47/8 Alpha (CP/300/13) and the 47/3 Bravo (CP/197/16). The permits require that all chemicals used or discharged during the course of the operations are listed on the permit. Where chemicals are discharged to sea, the discharge is undertaken in accordance with the conditions detailed within the permit and appropriate measures are taken to minimise discharge.

3.3.5 Greenhouse Gas Permit

The Greenhouse Gas Emissions Permit (UK-D-IN-13143) authorises CSL to emit Carbon Dioxide through the combustion of natural gas, diesel, and Liquefied Petroleum Gases (LPG) from listed regulated activities. CSL are subjected to several conditions, including the monitoring and reporting of such emissions, and the surrendering of allowances and notification requirements.

3.3.6 PPC Permit

The Rough BD Platform operates under the Offshore Combustion Installations (Pollution Prevention and Control) Regulations 2013 Permit (PPC/70/4). The permit authorises the use of listed combustion equipment, ensuring that appropriate measures are taken to minimise discharges, emissions and waste. The permit sets limits on the total annual emissions of air

polluting substances (Nitrogen Oxides, Sulphur Oxides, Carbon Monoxide, Methane and Non-Methane Volatile Organic Compounds) from the listed combustion equipment.

3.3.7 Consent to Locate

The Consent to Locate designates the geographic location of the platforms (47/8 Alpha – CP/151/2 and 47/3 Bravo – CL/150/6) and the aids required to ensure safe navigation of vessel at sea.

3.4 Environmental Management System

CSL have a certified ISO 14001:2015 Environmental Management System which demonstrates our commitment and responsibility to understand, manage and reduce the environmental impact of our operations in a manner which protects the environment and its resources. The environmental management system is integrated within health and safety, as well as the business management activities. Central to the environmental management system is strong leadership, continuous enhancement and good performance baselines. Annual environmental improvement plans are developed to measure and report improvements. The environmental management system is audited internally and externally.

4 Emissions Monitoring

A condition of all the permits described in Section 3.3 is the monitoring and recording of emissions from the activities undertaken by the Rough Offshore Facilities. Throughout 2021, CSL have undertaken the required monitoring of all emission sources and ensured that all reporting requirements have been fulfilled. The following sections discuss the monitoring of each of these activities.

4.1 Releases to Air

Releases to air are emissions of Carbon Dioxide (CO₂), Carbon Monoxide (CO), Oxides of Nitrogen (NO_x), and Methane (CH₄). The quantities of the above gases are calculated from the total volume of fuel gas used, diesel usage, gas vented, and an estimated release of fugitive emissions. The monitoring of emissions includes those from routine, non-routine and abnormal operations, and includes start-up, shut-down and emergency situations.

4.1.1 Fuel Gas Consumption

4.1.1.1 47/8 Alpha

There is no qualifying combustion equipment on the 47/8 Alpha platform therefore the platform is exempt from the EU Emissions Trading Scheme and does not hold a PPC Permit.

4.1.1.2 47/3 Bravo

The total fuel gas consumption and calculation factors for the 47/3 Bravo platform are metered at one fuel gas metering point. This metering point consists of two dual Micro Motion CMF300 coriolis meters and transmitters (FE562260 A & B) operating in duty/stand-by parallel configuration. Secondary pressure (PT562259) and Temperature (TT562262) are also used to calculate flow at reference conditions to provide compensation to raw mass flow rates for the ISO 6976/AGA8 flow calculations. Data from the meter is transferred to a dedicated FloBoss S600+ flow computer on a 5-minute cycle.

Gas composition is taken from continuous online gas chromatographs for AGA8 and ISO6976, NCV calculations, and a site-specific emission factor which are certified annually by an ISO17025 approved organisation. Monthly manual samples of Rough Fuel Gas, taken from the Easington Gas Terminal, are analysed by an ISO17025 certified laboratory. Uncertainty analysis of emissions factors is undertaken to ensure that the flow weighted monthly analysis is within the +/- 0.5% uncertainty threshold for EU ETS top tier monitoring of NCV and emissions factor.

The total CO₂ emissions is calculated using the ISO6976 methodology and is a product of gas combusted, a net calorific value (NCV), an emissions factor (EF) per unit of fuel used, and a standard oxidation factor (OF).

4.1.2 Diesel Consumption

Diesel is used for Power Generation during routine maintenance shutdown, the Heating Medium heater, firewater pumps and crane activities. Diesel on the platform is consumed in relatively small quantities compared to fuel gas usage. Consumption of diesel is considered to be equal to the amount of diesel bunkered on the platforms, therefore equal to the quantities recorded on the

bunker delivery notes. The density factor (0.8540 t/m³) used to convert litres to tonnes is obtained from the most recent Digest of UK Energy Statistics (DUKES), Annex A, Average conversion factors for petroleum found at: <https://www.gov.uk/government/collections/digest-of-uk-energy-statistics-dukes>

The NCV factor (42.5688 GJ/t) and Emissions Factor (74.9375 tCO₂/TJ) for diesel are taken from the UK GHG Latest UK inventory factors. These factors are sourced from the GOV.UK website at <https://www.gov.uk/guidance/participating-in-the-eu-ets#complying-with-the-eu-ets>

The total CO₂ emissions is calculated using the ISO6976 methodology and is a product of diesel combusted, a net calorific value (NCV), an emissions factor (EF) per unit of fuel used, and a standard oxidation factor (OF).

4.1.3 Venting

Venting of natural gas represents a loss of primary energy and the largest source of unburnt hydrocarbon emissions from the platforms. Venting of natural gas is required as a result of planned maintenance or blowdown situations. The amount of gas vented is recorded on the IMAC system.

4.1.4 Fugitive Emissions

Fugitive emissions are emissions of gas from pressurized equipment due to leaks, weeps and seeps, and other unintended or irregular releases from operating activities. These emissions cannot be measured; therefore it is considered that 48 tonnes of fugitive emissions are released every six months from the platforms.

4.2 Releases to Water

The releases to the surrounding sea are subject to the OPPC and Chemical permits. The discharge of these substances is controlled and emitted through dedicated emission points that are specified on the above mentioned permits.

4.2.1 Produced Water

4.2.1.1 47/8 Alpha

The 47/8 Alpha platform does not generate Produced Water; therefore there are no requirements to monitor and sample Produced Water.

4.2.1.2 47/3 Bravo

Produced Water is water which is generated from the reservoir and is extracted along with the extraction of the gas. The water can be contaminated with hydrocarbons and Naturally Occurring Radioactive Material (NORM). The OPPC permit requires the sampling and reporting of oil content at least monthly, an analysis for NORM quarterly, and the in-depth bi-annual analysis of the water. The equipment used on 47/3 Bravo to process Produced Water before sampling and discharging to sea are described below.

- An Inlet Separator – this is a vertical 2-phase separator which acts as a sand trap to minimise sand erosion and blockage of the downstream equipment.
- An Injection Separator – this provides hold-up and separation for bulk liquids.

- Test Separator – allows liquid separation. Condensate will separate from the water phase and is then routed off.
- Off-Spec Condensate Vessel - a horizontal three phase separator with recently-installed baffles and inclined plate pack to assist oil-water separation.
- Oily Water Separator - is an inclined plate separator that separates hydrocarbons from the produced water.
- Oil Absorption Media Filter Package - removes any residual hydrocarbon from the water phase prior to discharge. The water samples for the required permitted analysis are taken from a sample point after the Oil Absorption Media Filter Package prior to discharge.

4.2.1.3 Oil in Water

Analysis of Oil in Water should use the OSPAR reference methodology for oil in produced water. However, this methodology requires the use of gas chromatography using a flame ionisation detector and n-pentane as an extraction solvent, which is unavailable on the platform. CSL use a simpler BEIS approved analytical methodology which is correlated against the OSPAR Reference Method.

4.2.1.4 Radioactivity

There is a requirement under the Radioactive Substances Act 1993 to determine whether produced water is radioactive as defined in Schedule 1 of Radioactive Substances Act 1993. For each Quarter, while generating Produced Water, a sample is taken and sent to Public Health England to undertake the analysis and detection of Polonium-210 (Pb-210), Actinium 228 (Ac-228) and Radium 226 (Ra-226). The analysis follows the fully documented procedures contained in CRCE Glasgow Radiochemistry Group Technical Manual.

4.2.1.5 Bi-annual Water Analysis

The bi-annual water analysis includes testing for the presence of Polycyclic Aromatic Hydrocarbons (PAH), BTEX chemicals (benzene, toluene, ethylbenzene and xylene heavy metals), Heavy Metals, Phenols and Alkyl Phenols, Organic Acids, Oil in Water, NPD's (Naphtalenes, Phenanthrenes, Dibenzothiophenes) and Inorganic compounds.

The purposes for undertaking the bi-annual water analysis is to build-up a regulatory database of information on the amounts of various constituents of produced water discharged to sea.

4.2.2 Chemical Permits

Under the Chemical Permits, all chemicals used are to be monitored and their usage recorded. The chemicals used are essential to the operation and are used sparingly and responsibly to ensure limited impact on the environment.

Under the 47/3 Bravo Chemical Permits, apart from ZOK MX GS and Offshore Degreaser EF, which are discharged to sea, all other chemicals permitted and used on the Rough Offshore Facilities are returned through the 36-inch sealine pipe to Easington Gas Terminal, to be treated ashore.

Only deck cleaning chemicals have remained on the 47/8 Alpha Chemical Permit.

4.3 Waste

CSL have a Duty of Care and takes measures to ensure that all controlled waste generated on the Rough Offshore Facilities are treated, segregated, stored, and disposed in an appropriate manner to prevent the likelihood of pollution or harm to health. The Offshore 47/8 Alpha Garbage Management Plan (DOC-CSL-HSE-ENV-006a) and the Offshore 47/3 Bravo Garbage Management Plan (DOC-CSL-HSE-ENV-006b) provides a detailed description of how waste is managed on the platforms.

The waste generated on the platforms are separated into various waste streams but can be categorised into General/Industrial waste and Hazardous waste. The waste is transferred to the support vessel before been sent to shore to a treatment or disposal facilities. The transfer of waste is accompanied with appropriate transfer documentation.

5 Emissions Reporting

A condition of the Permits is the reporting of emissions from the regulated activities undertaken at the Rough Offshore Facilities. CSL have fulfilled its responsibility to report the 2021 emissions and below is a discussion of the Rough Offshore Facilities performance against the permit conditions. Trends, using historical data, have also been discussed.

5.1 Performance

Throughout 2021, the Rough Offshore Facilities operated for 170 days. During this time 426.8 Mscm of gas was produced. Between 6th April 2021 and 15th October 2021, the Rough stream was offline which allowed an extended period of essential maintenance to be carried out to ensure the safety and integrity of the assets.

5.1.1 Environmental Observations

CSL run an HSE Observation system which allows all employees and contractors to report activities which they may consider to be unsafe or may cause an incident which is harmful to personnel, the environment or plant. The observations are reviewed in a daily meeting by the OIMs, Supervisors, and HSE advisors. These meetings allow opportunity for discussions on safety and environmental themes and include any significant learning from monitoring activities, accidents and near misses.

During 2021, there were 4,524 observations raised on the platforms, of which 696 were directly related to environmental concerns. CSL consider that the number of observations raised in 2021 has had a direct contribution to the prevention of potential incidents.

In addition to the above observations, in 2019 45 offshore workers, including managers and supervisors undertook the Energy Institute's Offshore Environmental Awareness Training to increase their understanding and awareness of environmental aspects and impacts associated with an offshore oil and gas producing platform.

5.2 Releases to Air

5.2.1 EU ETS Emissions

Through the combustion of fuel gas, diesel and LPG, Rough Gas Facilities released 14,848.1 tCO₂e during 2021.

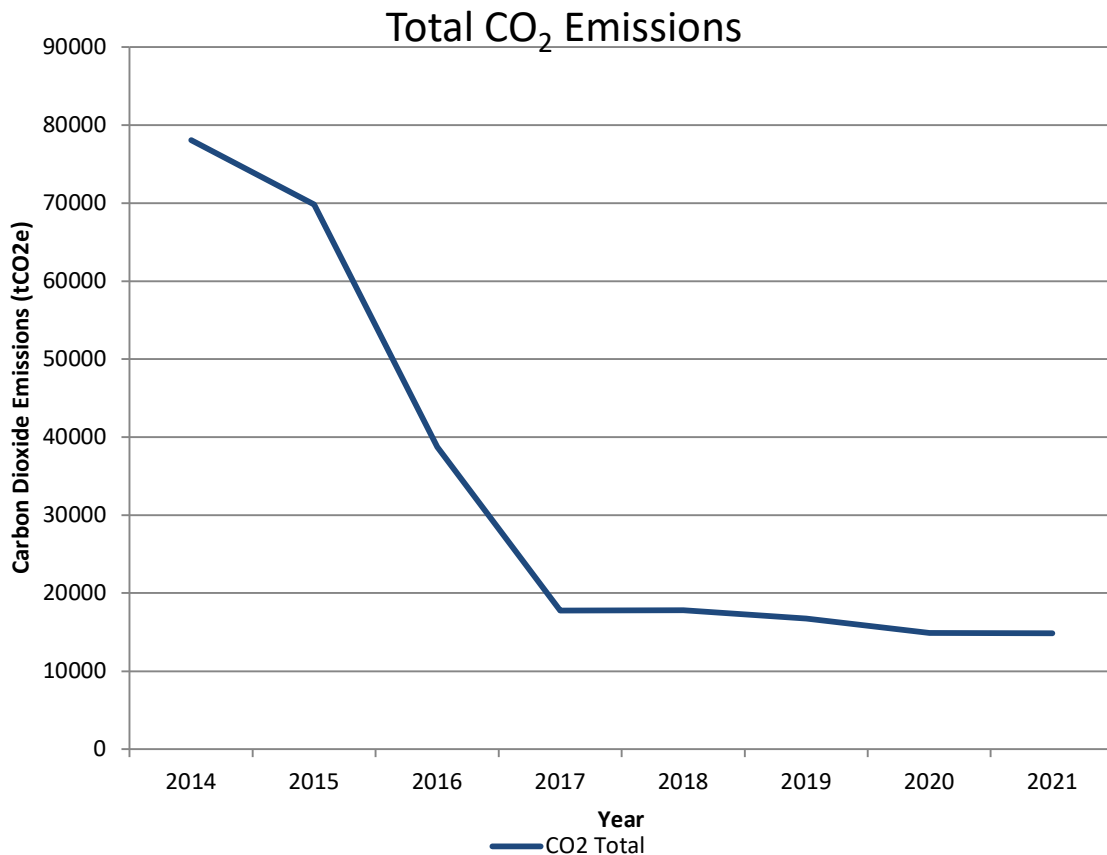


Figure 1: Annual CO₂ emissions from Rough Offshore Facilities.

There has been a reduction in CO₂ emissions since 2014, with the CO₂ emissions plateauing after the cessation of storage operations (injection of gas). Due to large amounts of fuel gas combusted for inject operations, the trend in CO₂ emissions and gas injected was directly proportional. With the amount of gas injected reducing from 2014 until the cessation of storage operations in mid-2016, CO₂ emissions also reduced. Now that injection operations have ceased, CO₂ emissions have remained relatively constant from 2017, however CSL are continuing to look for opportunities to further reducing CO₂ emissions, including the installation of diesel power generators in 2021, due to the inefficiency of the RGT's caused by the low power demand and lower fuel gas pressures on the platform.

Although overall CO₂ emissions have remained constant for the past four years, the amount of CO₂ emissions from the combustion of diesel as increased (

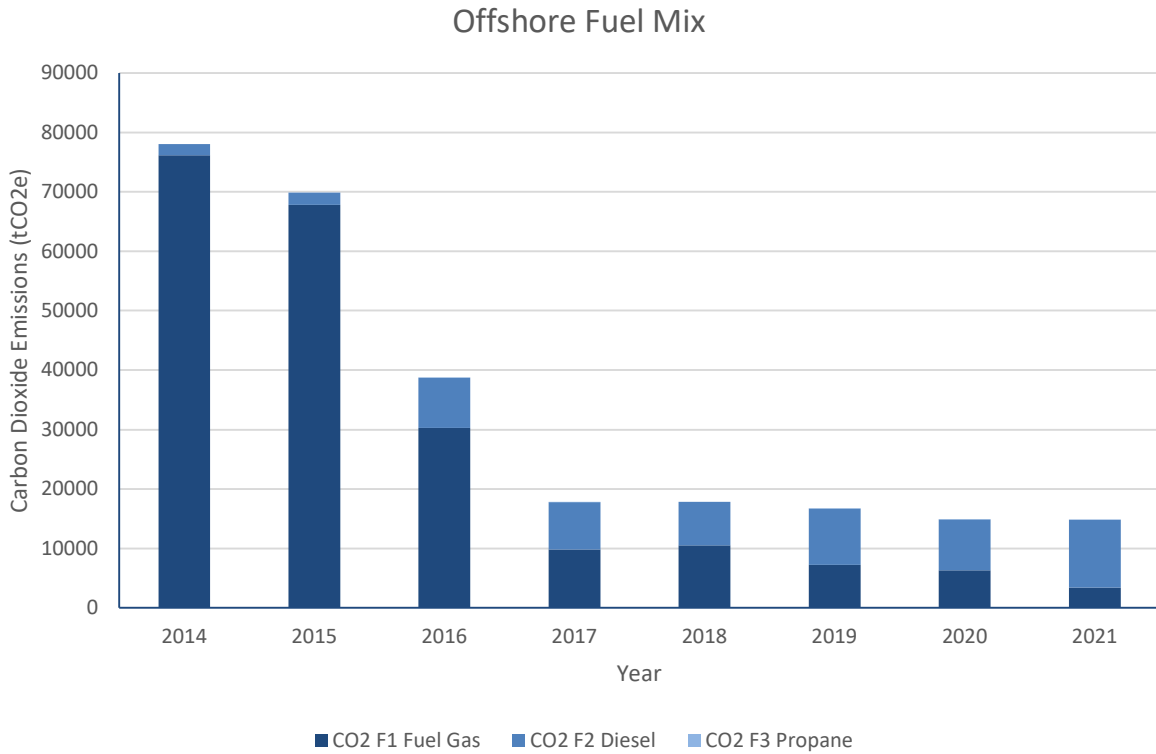


Figure 2: CO₂ emissions from the different fuel types.

). From 2016 to present, there has been an increase in the number of days each year that the RGT's have operated on diesel, instead of fuel gas, accounting for the increase in Carbon dioxide emissions from diesel.

Due to the change of power generation on the Rough 47/3B, from the RGT's to Diesel Power Generation in December 2021, the CO₂ emissions going forward will be all from the combustion of diesel. CS have already seen a reduction in CO₂ emissions since the introduction of the diesel generators.

Offshore Fuel Mix

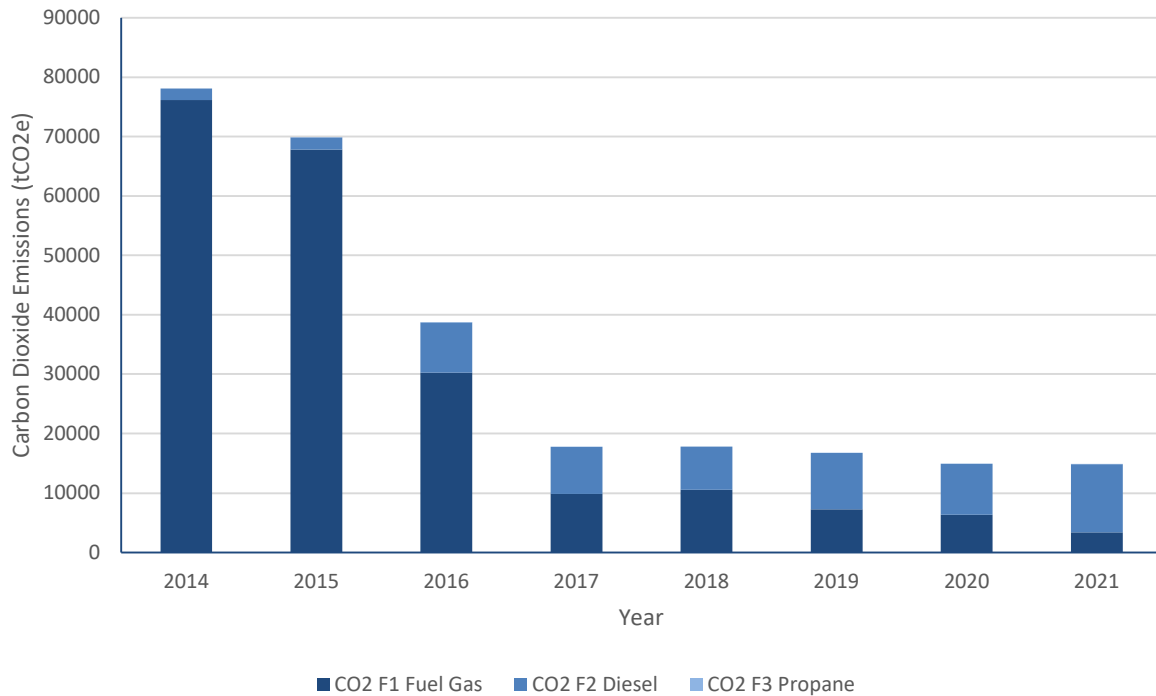


Figure 2: CO2 emissions from the different fuel types.

5.2.2 Non-Greenhouse Gas Emissions

Through the operations on the Rough Gas Facilities the following releases were calculated.

5.2.2.1 Nitrogen Oxides (NOx)

There was a total of 56.1 tonnes of Nitrogen Oxides (NOx) released during 2021. The amount of NOx being released from the Rough Gas Facilities has declined since 2014. This is in line with the reduced use and removal of the RR Avon 1535-161 Gas Turbines, used for gas injection operations, and therefore the reduction in fuel gas consumption.

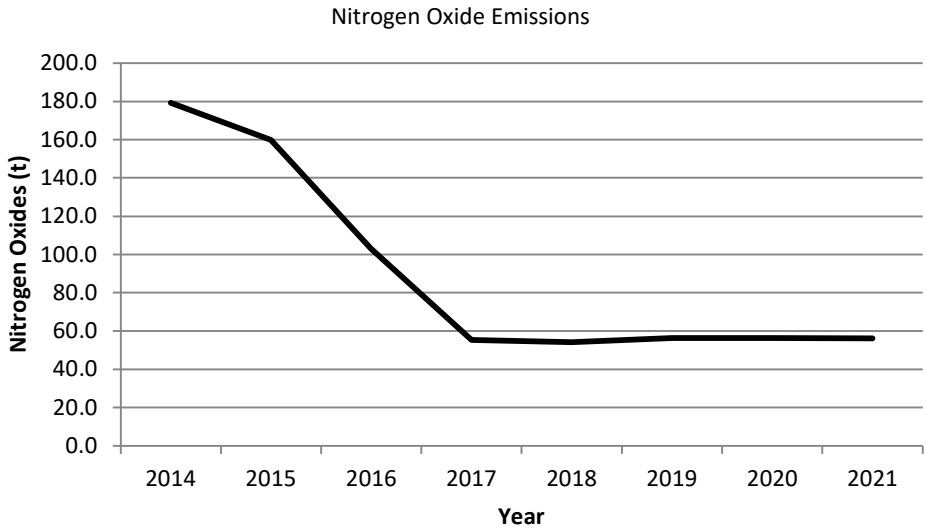


Figure 3: Nitrogen Oxides (NOx) released to the atmosphere between 2014-2021.

5.2.2.2 Sulphur Dioxide (SO₂)

There was a total of 14.4 tonnes of Sulphur Dioxides (SO₂) released during 2021. The increase in SO₂ emissions in 2016 onwards is due to the increase in diesel usage previously discussed.

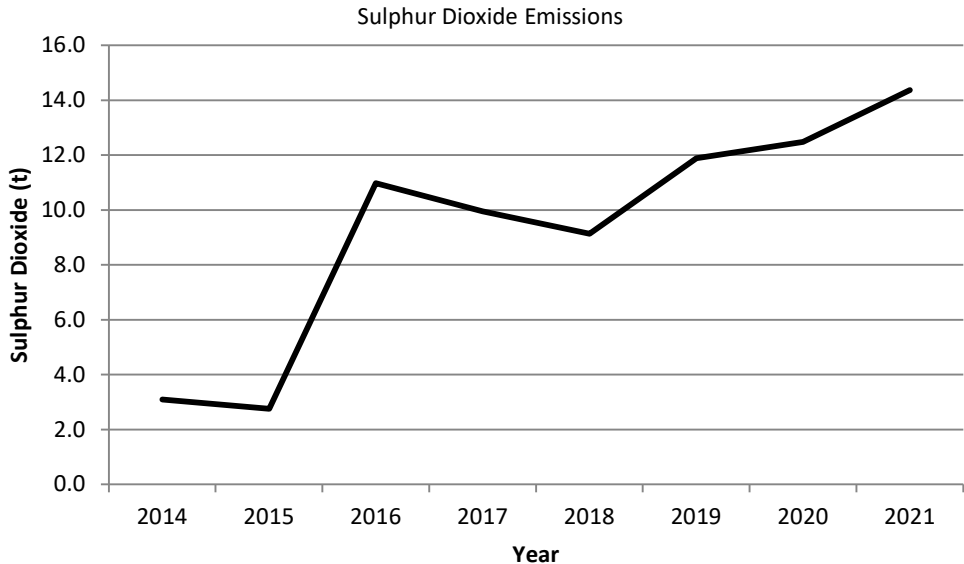


Figure 4: Sulphur Dioxide (SO₂) released to the atmosphere between 2014-2021.

5.2.2.3 Carbon Monoxide (CO)

There was a total of 7.0 tonnes of Carbon Monoxide (CO) released during 2021. The CO emissions continue to follow a downward trend following a spike in CO emissions in 2015. This is in line with the reduction in fuel gas and diesel usage.

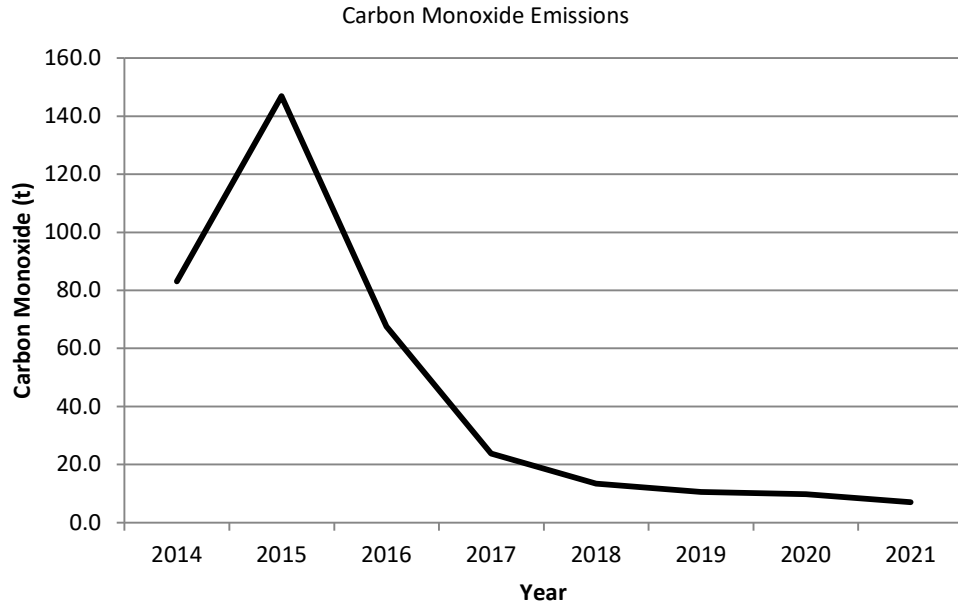


Figure 5: Carbon Monoxide (CO) released to the atmosphere between 2014-2021

5.2.2.4 Volatile Organic Compounds (VOCs)

There was a total of 14.9 tonnes of Volatile Organic Compounds (VOCs) released during 2021. The amount of VOCs released is in line with the amount of gas vented. Due to the venting of gas been a lose of primary product, CSL endeavour to reduce venting to as low as reasonably practicable (ALARP).

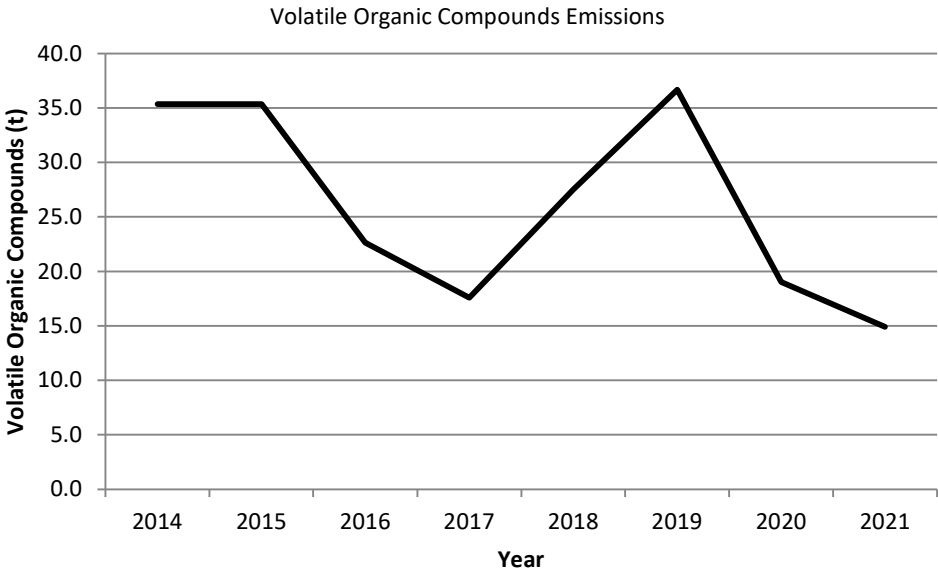


Figure 6: Volatile Organic Compounds (VOCs) released to the atmosphere between 2014-2021

5.2.3 Methane Releases

Methane released is calculated by the amount of gas vented and the estimated amount of fugitive gas. During 2021 it was calculated that 125.4 t of methane was released into the atmosphere.

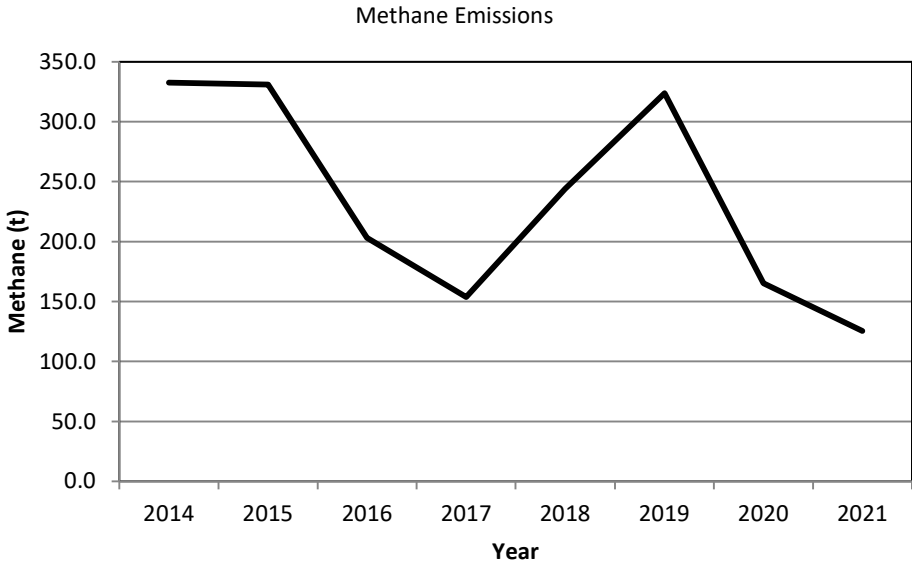


Figure 7: Methane released to the atmosphere between 2014-2021.

5.3 Releases to Water

5.3.1 Oil in Water Content

At the end of 2017, CSL applied for and obtained approval for a transition from storage to production operation licence. A review of the reservoir by a registered third party subsurface specialist, identified that with the production of native gas, produced water would continue to be generated at a rate which is constant to the gas production rate and it is considered very unlikely that there will be any significant influx of formation water. As production rates decrease throughout the life of the reservoir, so will the rates of produced water generated.

Throughout 2021, 3,010.59 m³ of produced water was discharged to sea with 180.2 kg of associated oil.

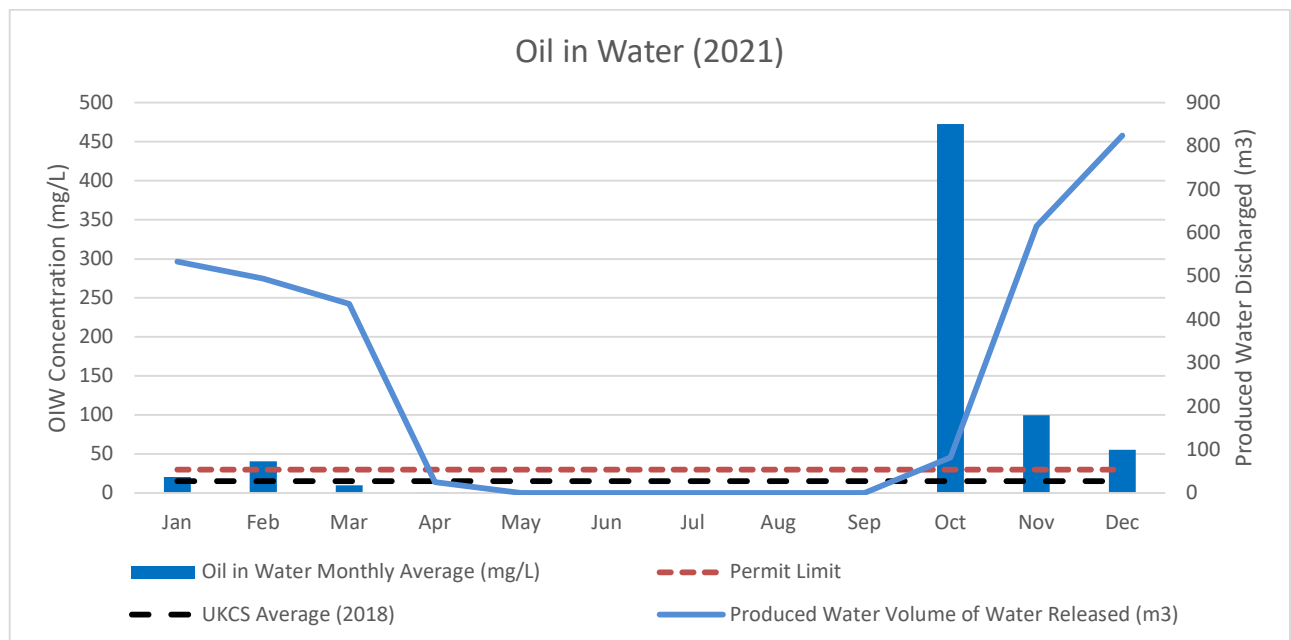


Figure 8: Monthly breakdown of Produced Water discharge and associated oil release.

When produced water was generated, samples were taken and analysed on the platform by qualified trained Operations Technicians. CSL were compliant to the maximum concentration limit (100mg/L) and monthly average concentration limit (30mg/l) during the first half of the year before coming offline on the 6th April 2021. When returning to production after a prolonged shutdown, CSL experienced 16 non-compliances of the maximum concentration limit (100mg/L) and were non-compliant in October, November and December 2021 for the monthly average concentration limit (30mg/l). For each exceedance, an OPPC non-conformance report was submitted to the regulator (see Section 6.1 for more details of the non-conformance).

5.3.2 Radioactivity

A Sample of Produced Water was taken in Q1 & Q4 and sent to Public Health England to conduct analysis. No test was conducted in Q2 & Q3 due to the 47/3 Bravo been in a prolonged shutdown.

Where radioactivity had been detected, the activity concentration was recorded. Where no radioactivity was detected, the laboratory limit of detection (LOD) was provided.

From the analytical results (Table 1), it can be seen that the LOD was recorded for all samples tested; therefore, produced water extracted from the Rough gas field in 2021 would not be considered to be radioactive.

Table 1: Summary of Radiation Analysis of Produced Water.

Quarter	Sample Date	Test Date	Tested Radioactivity Concentrations				
			Pb-210 (Bq/g)	Ac-228 in soluble (Bq/g)	Ra-226 in soluble (Bq/g)	Ac-228 in particulate (Bq/g)	Ra-226 in particulate (Bq/g)
Q1	8 Mar 21	23 Mar 21	0.00005*	0.00004*	0.0004*	0.769	1.38*
Q2	Non-Operational						
Q3	Non-Operational						
Q4	27 Dec 21	13 Jan 22	0.00005*	0.00004*	0.0004*	0.38*	1..5*

*Laboratory Limit of Detection (LOD)

5.3.3 Bi-Annual Analysis of Produced Water

For the purposes of building up a regulatory database of information on the amounts of various constituents of produced water discharged to sea, for each half of 2021, an accredited laboratory, on behalf of CSL, have undertaken a detailed analysis of Produced Water. The results of this analysis were reported on the UK Energy Portal.

5.3.4 Chemical Permits

5.3.4.1 47/8 Alpha

With the suspension of gas extraction on the 47/8 Alpha platform, only deck maintenance chemicals were permitted for use throughout 2021.

Table 2: Chemicals Used under Chemical Permit CP/300/13 in 2021.

Chemical	Permit Limit (Kg)	Amount Used (Kg)
Offshore Degreaser EF.	300	0
Rigger XL-N	432	0
Cleanup DG-N	600	0

5.3.4.2 47/3 Bravo

Figure 9 shows the usage of Corrosion and Hydrate Inhibitors on the 47/3 Bravo platform. All chemicals were within the permit limit and were sent back to shore in the 36-inch sealine pipe. These chemicals are used to prevent the build-up of hydrates and corrosion in the pipeline.

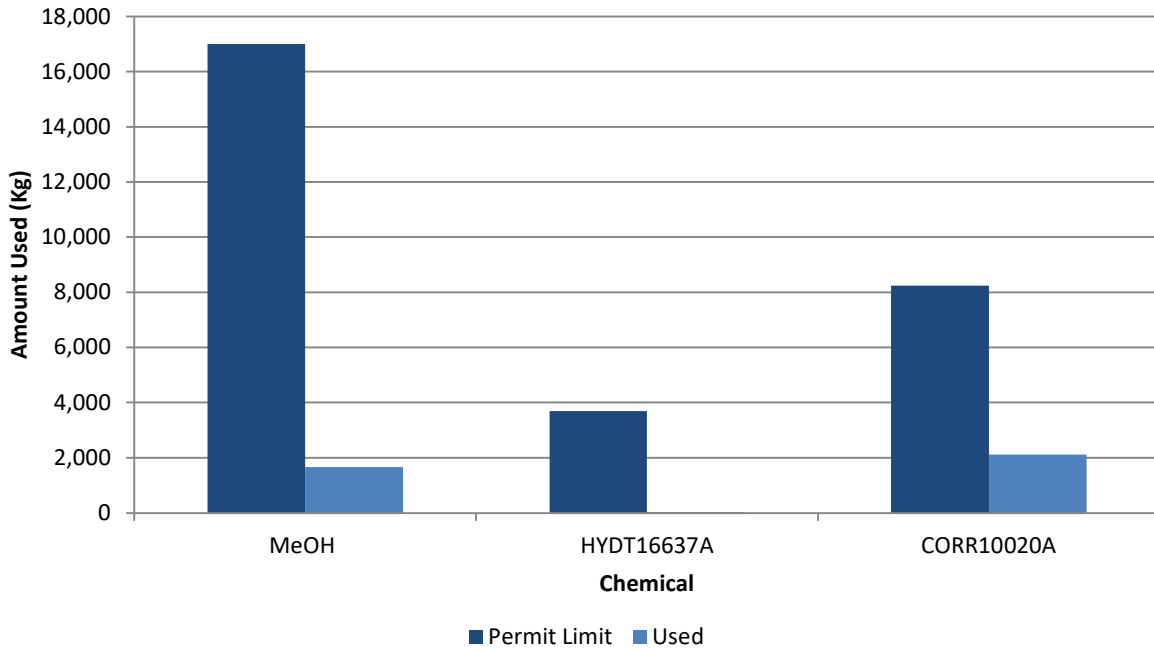


Figure 9: Corrosion and Hydrate Usage on 47/3 Bravo in 2021.

Figure 10 shows the usage of wells chemicals and deck cleaning fluids. All chemicals were within the permit limits. A total of 442 Kg of chemicals (ZOK MX GS, Offshore Degreaser EF) were discharge to sea throughout 2021. Under the permit, a maximum of 1,670 Kg of chemicals were permitted to be discharged to sea.

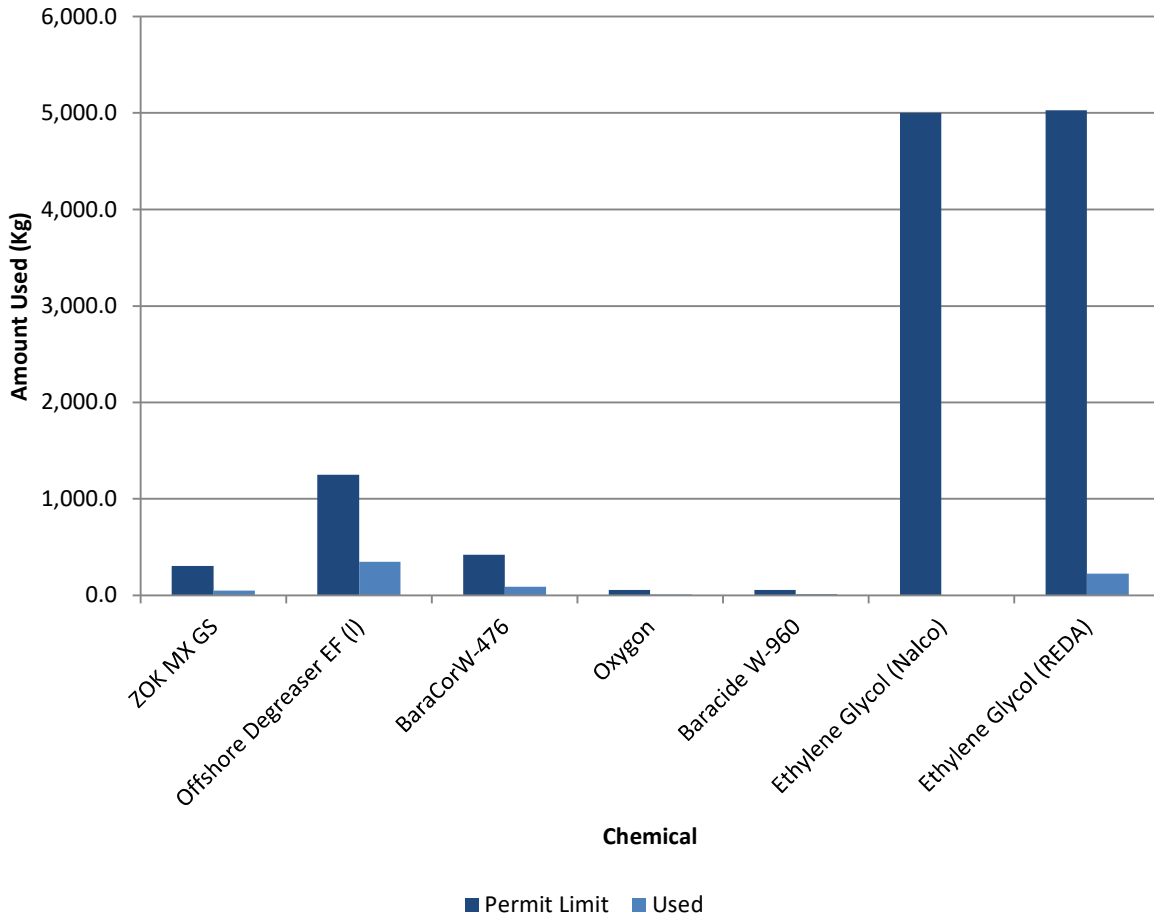


Figure 10: Wells and Deck Cleaning Fluids chemical usage on 47/3 Bravo.

5.4 Waste

5.4.1 Total Waste Generated

The total amount of waste generated from the Rough platforms throughout 2021 was 246.64 tonnes. The decrease in waste generated in 2021 from the amount generated during 2018 - 2020 was due to the completion of the Plug and Abandonment and NPAI enabling works conducted on 47/8 Alpha platform.

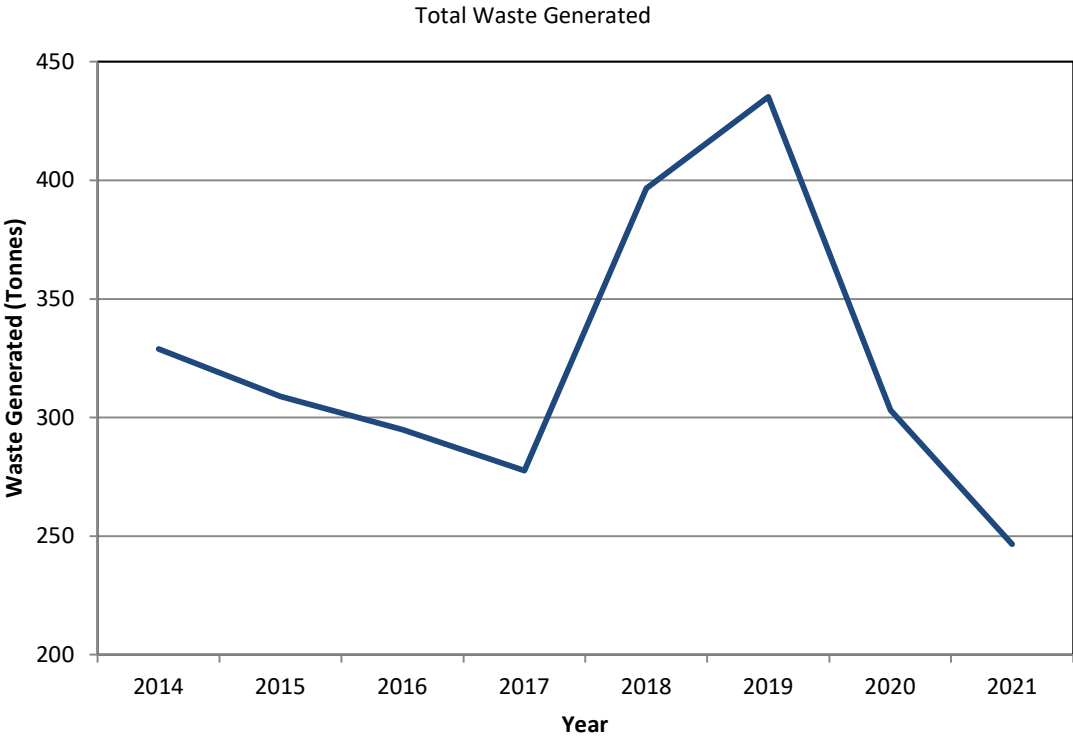


Figure 11: Total waste generated from the Rough Offshore Facilities (2014-2021).

5.4.2 Final Disposal/Recycling

Waste generated on the platforms are transferred to the support vessel to be offloaded ashore where it then goes to appropriate waste facilities. This waste is separated into either final disposal or recovered. Of the total amount of waste generated, 246.5 tonnes was recovered (99.9%) in 2021.

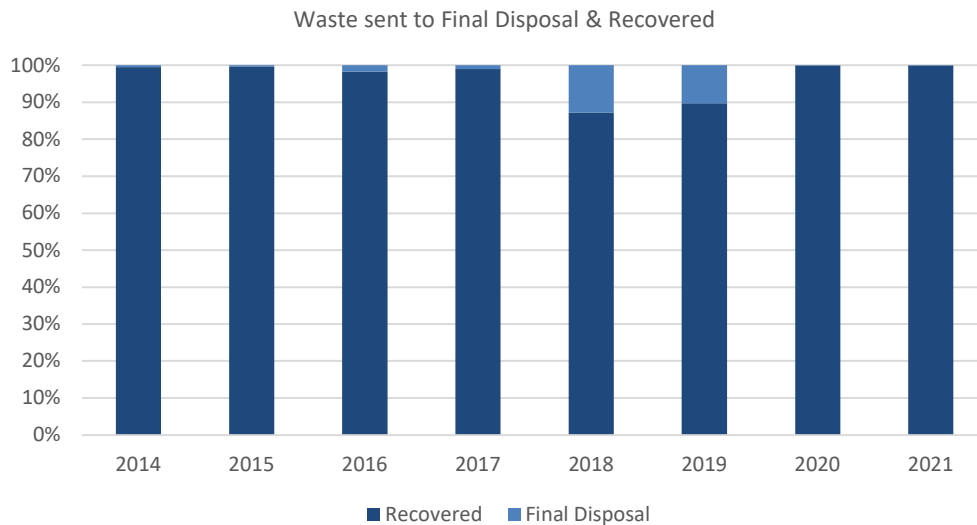


Figure 12: Breakdown of the final destination of generated waste from the Rough Offshore Facilities.

5.4.3 Non-Hazardous/Hazardous Waste

The waste which leaves the platforms can also be categorised as non-hazardous or hazardous waste. Out of the total waste generated, 98.5 tonnes was categorised as non-hazardous and 148.1 tonnes as hazardous waste.

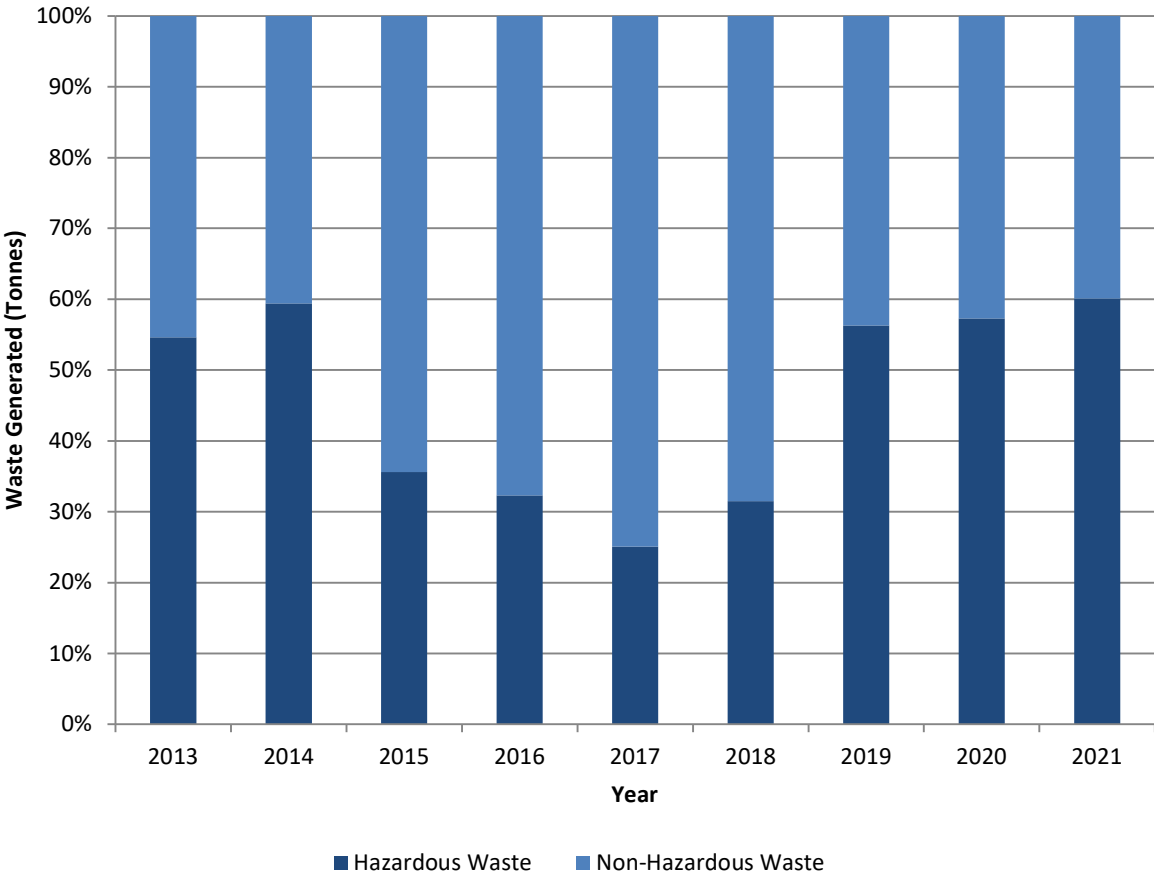


Figure 13: Historical Non-Hazardous and Hazardous Waste generated from the Rough Offshore Facilities.

6 Non-Conformities

Throughout 2021, CSL have reported a number of non-conformities to the environmental regulator and are discussed below.

6.1 Oil in Water

During 2021 the 47/3B platform produced gas on 151 days, of which, produced water was generated on 151 days. CSL exceeded the maximum concentration limit of 100mg/L on 16 days and monthly concentration limit of 30mg/l on 3 occasions. For each exceedance an OPPC non-conformance report has been submitted to BEIS.

Table 3 shows the monthly breakdown of the number of days produced water was generated, the number of maximum concentration non-conformities and the monthly oil in water average.

Table 3: Summary of Oil in Water non-conformities.

	No. of Days Online	No. of Days Produced Water Generated	No. of Days of Maximum Concentration Non-Conformities	Oil in Water	
				Monthly Average (mg/L)	Mass of Oil Released (Kg)
January	30	30	0	20.39	10.88
February	28	28	0	40.48	20.01
March	29	29	0	9.62	4.20
April	5	5	0	0.90	0.02
May	0	0	0	0.00	0.00
June	0	0	0	0.00	0.00
July	0	0	0	0.00	0.00
August	0	0	0	0.00	0.00
September	0	0	0	0.00	0.00
October	4	4	1	472.70	38.65
November	24	24	11	99.29	61.12
December	31	31	4	54.99	45.32
Annual Total	151	191	16	59.85	180.19

On returning to operation on the 15th October 2021 until 18th October 2021 and then returning again on 5th November 2021, after been offline from 6th April 2021, CSL had initiated mitigating measures to negate the potential for high OIW concentrations, including operator training, controlling well choke positions and the removal of residual liquid build-up and controlling the amount of liquid throughput, in order to obtain optimal well performance as soon as practicable and maintaining OPPC permit compliance.

However, CSL still had a number of non-conformities after returning to operation. During investigations, it could be seen that there is a historic trend on non-conformities when returning to operations after an extended period of shutdown. During the previous two production seasons, it can be seen that it takes approximately 2 to 3 months for the Oil in Water Concentration in the Produced Water to become consistently compliant to the OPPC permit requirements. CSL

continued to investigate causes for the exceedances and actioned corrective measures, including the increase change out rate of the polishing filters.

6.2 IR Standards and Calibration graphs

Due to the extended shutdown period a condensate sample for the development of the Infra-Red Standards and Calibration graphs for the validation of the Oil in Water concentration against the GC-FID correlation results could not be taken before the expiration date in October 2021.

A representative condensate sample was taken immediately upon returning to operation and was sent to be developed to generate new IR Standards and Calibration graphs.

Until the new IR Standards and Calibration graphs were developed, CSL used the expired IR Standards and Calibration graphs to calculate the Oil in Water concentration and then re-calculated the Oil and Water concentration when the new IR Standards and Calibration graphs were developed.

6.3 PON1's

In 2021, CSL submitted 6 PON1's to the regulator with regards to non-regulated oil releases to sea, one of which was from an unknown third-party. A review of these submissions is below:

Table 4: Summary of submitted PON1's during 2019.

Date	PON1 Ref	Category	Description	Min Quantity Released (t)	Max Quantity Released (t)	BEIS Status
07-Feb-21	PON1/10088	Oily Waste	Water levels in the BD drain tanks had risen to the point that oily water entered the vent pipe and dripped to sea	0.000006	0.000065	No Further Action Required
17-Feb-21	PON1/10105	Unknown	%psi was seen on the transmitter on the manifold. This was suspected to be gas and was vented via the Chemical injection vent line to the sea.	0.00102	0.0159	No Further Action Required
04-Mar-21	PON1/10141	Condensate	During isolation of plant in preparation for a mini - outage the on spec condensate vessel accidentally lined out to an over side bleed. A head of liquid caused an outflow of natural gas condensate liquid through the over side bleed pipework, spilling to sea.	1.5	1.68	No Further Action Required
18-Mar-21	PON1/10172	Unknown	Whilst carrying out deluge testing around the potable water tanks, the residual water containing oily residues from the deck went over the side and into the sea.	0.000056	0.000655	No Further Action Required
19-Apr-21	PON1/10258	Condensate	After pumping tank contents to a tote tank a technician wiped the transfer hose connections with a rag and placed the rag on the deck, a gust of wind blew the rag overboard. The rag was the source of the reported sheen, there was no liquid release direct to sea.	0.00001	0.00002	No Further Action Required
23-Jul-21	PON1/10498	Diesel	Whilst decanting diesel into a jug a small amount of diesel spilled to sea.	0.000022	0.000049	No Further Action Required

7 2021 Audits

CSL's management systems are highly developed with an operations management system (OMS) in place. The OMS identifies the potential direct and indirect effects associated with the platform and its operations and identifies those that are considered significant. The significance is determined in the context of the legislative and regulatory requirements, platform processes and potential emissions generated. The OMS defines a systematic approach to HSE Management and provides a documented system of procedures which are in place to ensure effective management of environmental and identification of safety related issues. Group-wide procedures and permitting requirements are integrated into local procedures on the platform. All elements of the OMS are regularly reviewed and independently audited by an accredited verification company on a periodic basis to ensure compliance to the accrediting Standard.

CSL conducted both internal compliance audit and external ISO 14001 audits on the Rough 47/3B throughout 2021. Mitigating corrective and preventative actions were identified for non-compliances found throughout the audits and all have been closed out.

Both internal (October 2021) and external (December 2021 & January 2022) UK ETS verification audits were undertaken. Necessary corrective and preventative actions have been identified for all findings and were implemented prior to the submission of the 2021 emission data. The emissions data has been submitted, as well as the submission of the required allocated allowances for 2021 emissions.

8 Future Activities

The cessation of Gas production from the Rough 47/3B is planned for late 2023/early 2024, however, in an effort to support the Government's target to achieve Net Zero by 2050, CSL are undertaking studies to determine the viability for the use of the Rough reservoir for either Carbon Capture and Storage or Hydrogen Storage.

9 Summary

During 2021, CSL produced 426.77 Mscm of gas from the Rough Gas Facilities and exported it into the NTS via Easington Terminal. The production of gas was in accordance with the regulated activities described within the Permits and Consents under which CSL operate.

CSL have reported 19 OPPC permit non-conformances to the regulator during 2021. CSL have implemented corrective and preventative actions to rectify and prevent recurrence of these events.

In 2022, CSL will continue to endeavour to operate within permitted limits and look for opportunities to improve their environmental performance and reduce their environmental impacts.

Appendix 1: Centrica Health, Safety, Environment and Security Policy

Centrica Health, Safety and Environment Policy

At Centrica our priority is to create an environment where an incident free workplace is possible, ensuring the wellbeing of our employees, the safety of our customers and the protection of the environment. All employees and business partners are required to comply with this policy and our commitments outlined below.

We are committed to:

- **Helping our customers** to move towards a low carbon future through our products and services
- **Assessing**, understanding and managing our HSE risks and impacts
- **Enabling** the creation of a positive culture holding each other accountable, helping us to: achieve our HSE goals; support business growth; and realise our vision of an incident free workplace and a low carbon future
- **Proactively** supporting employee health and safety, seeking ways to protect the environment, including the prevention of pollution, efficient use of resources and the reduction of waste and carbon emissions
- **Empowering and encouraging** personnel to work in a safe way, through effective consultation, to prevent injuries and ill-health
- **Intervening** if we believe that the work environment or task is unsafe or may cause environmental damage, or we see an unsafe act
- **Learning** from our successes and incidents, and freely sharing lessons with business partners
- **Working with stakeholders**, suppliers and business partners in the pursuit of good practice in HSE
- **Continually improving** and setting measurable objectives and targets in business plans to enhance HSE performance
- **Developing** and testing prioritised incident response and recovery plans to protect our people, the environment and minimize business impact
- **Ethically conducting our business** and complying with regulatory and other applicable requirements

Our HSE management system enables the delivery of these policy commitments, is structured in line with recognised good practice, and is routinely assured. Our performance is reviewed regularly and relevant results published.



Chris O'Shea
Group Chief Executive Officer
April 2020