

1

# Notice of variation and consolidation with introductory note

The Environmental Permitting (England & Wales) Regulations 2016

Malaby Biogas Limited

Bore Hill Farm Biodigester Deverill Road Warminster BA12 8FB

# Variation application number

EPR/AB3036RT/V005

#### Permit number

EPR/AB3036RT

# Bore Hill Farm Biodigester Permit number EPR/AB3036RT

# Introductory note

### This introductory note does not form a part of the notice

Under the Environmental Permitting (England & Wales) Regulations 2016 (schedule 5, part 1, paragraph 19) a variation may comprise a consolidated permit reflecting the variations and a notice specifying the variations included in that consolidated permit.

Schedule 1 of the notice specifies the conditions that have been varied and schedule 2 comprises a consolidated permit which reflects the variations being made. All the conditions of the permit have been varied and are subject to the right of appeal.

#### Changes introduced by this variation notice

This variation authorises the following:

- increase in annual throughput from 28,000 tonnes to 40,000 tonnes.
- storage of undamaged, packaged, palletised and wrapped food waste in a covered container on the external yard area in front of the Reception Hall (up to 50 tonnes at any one time).
- installation of a modularised green gas fuel (GGF) production plant to provide upgraded biogas (biomethane) and carbon dioxide capture
- installation of a digestate treatment activity as part of a trial (referred to as NOMAD trial); and
- extension of the installation boundary

The previous bespoke waste operation permit authorised the treatment of up to 28,000 tonnes per annum of biodegradable food wastes from source separated commercial and industrial sources, including Category 3 Animal By-Product (ABP) wastes such as catering wastes, blood and animal flesh and Category 2 ABP waste (paunch contents only) as well as manures and slurries. This variation increases the annual throughput to 40,000 tonnes, as a result, the anaerobic digestion of waste is now regulated as an installation activity.

Subject to waste pre-acceptance procedures, solid and liquid waste is accepted over the weighbridge. Solid waste is deposited in the reception hall. The fast-acting roller shutter doors are only open to allow vehicles to enter and leave the building. Packaged food waste is loaded from its reception bay into the de-packaging plant within the reception hall; the resulting residual waste is stored in the reception hall pending removal off-site for recovery (energy from waste). Loose food waste is loaded from its reception bay into a hopper within the reception building. The solid waste streams are macerated and mixed with liquid waste as required and pumped into the feedstock buffer tank (300 m³) which is within the secondary containment area.

Liquid waste deliveries are dispatched via a sealed and pumped direct pipe connection at the liquid waste dispatch point, which is on the external concrete apron, and is fed directly into the feedstock buffer tank.

The prepared feedstock is pumped from the feedstock buffer tank into one of two primary digester tanks, each with a working capacity of 1,420 m³. These digester tanks are gas mixed. The average hydraulic retention time in the digesters is 30 days. Digestate is then screened via a 10mm screen before entering the pasteurisation unit which treats the digestate at least 70°C for one hour. The resulting pasteurised digestate is then stored in the digestate storage tank which has a working capacity of 1,420 m³. Biogas is collected in the gas holders above the digesters and the digestate storage tank.

Digestate is taken off-site in tankers for use as an agricultural fertiliser which is managed under contract. Biogas is burnt in the two Combined Heat and Power engines (CHP) engines to produce electricity and heat which are both used in the anaerobic digestion plant. There are two back-up boilers which are used to provide additional heat if required. There is an emergency flare for use during abnormal or emergency operating conditions only. Any electricity produced which is in excess of the anaerobic digestion plant

requirements is exported to the National Grid. There is also a generator used for site operations in emergency events.

This variation includes the installation of a modularised green gas fuel (GGF) production plant to provide additional processing capacity to support CHP utilisation of biogas from the plant. The GGF system will initially act as a back-up system for the two CHPs and boilers and become the preferred route to the use of biogas instead of the emergency flare. It will also optimise biomethane production in parallel with electrical generation from the biogas produced. The biomethane will be dried and compressed using a 3-stage hydraulic compression system before being stored in compressed biomethane storage modules before being dispensed into vehicles for removal off site. Carbon dioxide will be captured, used and/or stored as appropriate technology is developed to do so.

Air emissions include point source emissions from the CHP engines, the emergency flare, boilers, odour abatement stack (biofilter), gas upgrading plant stack and tank pressure relief valves. All emissions have been assessed in line with our technical guidance and appropriate emissions limits set in the permit. Site surface water run-off is re-used on site and excess water is discharged to ground via a soak-away.

The installation is located at National Grid Reference ST 86709 43655. The site is located on the south side of Warminster, Wiltshire, at the junction of the A36 and Deverill Road. The site is accessed from Deverill Road. The northern part of the site is largely disused, comprising the car parking area and a number of storage units. The nearest residential properties are approximately 250 metres north of the installation. River Avon SAC & SSSI and Salisbury Plain SPA, are located within 10 km of the site. There are 12 non-statutory habitat sites (Local Wildlife Site and Ancient Woodlands) located within 2 km of the installation.

#### **Changes introduced by the Waste Treatment BAT Conclusions**

The Industrial Emissions Directive (IED) came into force on 7 January 2014 with the requirement to implement all relevant Best Available Techniques (BAT) Conclusions as described in the Commission Implementing Decision. Article 21(3) of the IED requires the Environment Agency to review conditions in permits that it has issued and to ensure that the permit delivers compliance with relevant standards, within four years of the publication of updated decisions on Best Available Techniques (BAT) Conclusions. The BAT Conclusions for Waste Treatment (the BREF) was published on 17 August 2018 following a European Union wide review of BAT, implementing decision (EU) 2018/1147 of 10 August 2018.

This variation has been issued to update some of the conditions following a statutory review of the permits in the industry sector for biowaste treatment.

The schedules specify the changes made to the permit.

The status log of a permit sets out the permitting history, including any changes to the permit reference number.

Status log of the permit			
Description	Date	Comments	
Permit determined EPR/AB3036RT/A001	21/02/2012	Permit issued to Malaby Biogas Limited (EAWML 102953).	
Variation determined EPR/AB3036RT/V002	22/12/2014	Variation application to add EWC code 19 05 99 to permit.	
Variation determined EPR/AB3036RT/V003	27/04/2016	Variation application to increase annual throughput from 22,000 to 28,000 tonnes.	
Application Variation EPR/AB3036RT/V004	Duly made 15/11/2016	Application to add EWC code 19 02 03 and remove EWC code 02 04 99 from the permit.	
Variation determined EPR/AB3036RT/V004	26/01/2017	Variation notice issued. Standard fire prevention condition added to permit as an EA initiated variation.	
Application EPR/AB3036RT/V005 (variation and consolidation)	Duly made 22/11/2022	Application to vary permit from bespoke waste to bespoke Installation and update the permit to modern conditions.	

Status log of the permit			
Description	Date	Comments	
Additional information received	20/02/2023	Response to Schedule 5 Notice dated 23/01/2023.	
Additional information received	23/03/2023	Updated site plan and pressure relief valve schedule.	
Additional information received	27/03/2023	Updated odour management plan	
Additional information received	04/04/2023	Email #1 regarding additional measures to external storage of wastes.	
Additional information received	11/04/2023	Email #2 regarding further additional measures to external storage of wastes.	
Variation determined EPR/AB3036RT (Billing Ref: JP3230MC)	19/04/2023	Varied and consolidated permit issued.	

End of introductory note

# Notice of variation and consolidation

# The Environmental Permitting (England and Wales) Regulations 2016

The Environment Agency in exercise of its powers under regulation 20 of the Environmental Permitting (England and Wales) Regulations 2016 varies and consolidates

#### Permit number

EPR/AB3036RT

#### Issued to

Malaby Biogas Limited ("the operator")

whose registered office is

Bore Hill Farm Biodigester Deverill Road Warminster BA12 8FB

company registration number 07008227

to operate a regulated facility at

Bore Hill Farm Biodigester Deverill Road Warminster BA12 8FB

to the extent set out in the schedules.

The notice shall take effect from 19/04/2023.

Name	Date
Maxine Evans	19/04/2023

Authorised on behalf of the Environment Agency

#### Schedule 1

All conditions have been varied by the consolidated permit as a result of an application made by the operator.

# Schedule 2 - consolidated permit

Consolidated permit issued as a separate document.

# **Permit**

# The Environmental Permitting (England and Wales) Regulations 2016

#### Permit number

#### EPR/AB3036RT

This is the consolidated permit referred to in the variation and consolidation notice for application EPR/AB3036RT/V005 authorising,

Malaby Biogas Limited ("the operator"),

whose registered office is

Bore Hill Farm Biodigester Deverill Road Warminster BA12 8FB

company registration number 07008227

to operate an installation at

Bore Hill Farm Biodigester Deverill Road Warminster BA12 8FB

to the extent authorised by and subject to the conditions of this permit.

Name	Date
Maxine Evans	19/04/2023

1

Authorised on behalf of the Environment Agency

# **Conditions**

# 1 Management

# 1.1 General management

- 1.1.1 The operator shall manage and operate the activities:
  - (a) in accordance with a written management system that identifies and minimises risks of pollution, including those arising from operations, maintenance, accidents, incidents, non-conformances, closure and those drawn to the attention of the operator as a result of complaints; and
  - (b) using sufficient competent persons and resources.
- 1.1.2 Records demonstrating compliance with condition 1.1.1 shall be maintained.
- 1.1.3 Any person having duties that are or may be affected by the matters set out in this permit shall have convenient access to a copy of it kept at or near the place where those duties are carried out.
- 1.1.4 The operator shall comply with the requirements of an approved competence scheme.

# 1.2 Energy efficiency

- 1.2.1 The operator shall:
  - (a) take appropriate measures to ensure that energy is used efficiently in the activities;
  - (b) review and record at least every four years whether there are suitable opportunities to improve the energy efficiency of the activities; and
  - (c) take any further appropriate measures identified by a review.

#### 1.3 Efficient use of raw materials

- 1.3.1 The operator shall:
  - (a) take appropriate measures to ensure that raw materials and water are used efficiently in the activities;
  - (b) maintain records of raw materials and water used in the activities;
  - (c) review and record at least every four years whether there are suitable alternative materials that could reduce environmental impact or opportunities to improve the efficiency of raw material and water use; and
  - (d) take any further appropriate measures identified by a review.

# 1.4 Avoidance, recovery and disposal of wastes produced by the activities

- 1.4.1 The operator shall take appropriate measures to ensure that:
  - (a) the waste hierarchy referred to in Article 4 of the Waste Framework Directive is applied to the generation of waste by the activities; and
  - (b) any waste generated by the activities is treated in accordance with the waste hierarchy referred to in Article 4 of the Waste Framework Directive; and
  - (c) where disposal is necessary, this is undertaken in a manner which minimises its impact on the environment.

1.4.2 The operator shall review and record at least every four years whether changes to those measures should be made and take any further appropriate measures identified by a review.

# 2 Operations

#### 2.1 Permitted activities

- 2.1.1 The operator is only authorised to carry out the activities specified in schedule 1 table S1.1 (the "activities").
- 2.1.2 The activities shall be undertaken in accordance with best available techniques.
- 2.1.3 All process plant and equipment shall be commissioned, operated and maintained and shall be fully documented and recorded in accordance with the manufacturer's recommendations.

#### 2.2 The site

2.2.1 The activities shall not extend beyond the site, being the land shown edged in green on the site plan at schedule 7 to this permit.

# 2.3 Operating techniques

- 2.3.1 The activities shall, subject to the conditions of this permit, be operated using the techniques and in the manner described in the documentation specified in schedule 1, table S1.2, unless otherwise agreed in writing by the Environment Agency.
- 2.3.2 If notified by the Environment Agency that the activities are giving rise to pollution, the operator shall submit to the Environment Agency for approval within the period specified, a revision of any plan or other documentation ("plan") specified in schedule 1, table S1.2 or otherwise required under this permit which identifies and minimises the risks of pollution relevant to that plan, and shall implement the approved revised plan in place of the original from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 2.3.3 Any raw materials or fuels listed in schedule 2 table S2.1 shall conform to the specifications set out in that table.
- 2.3.4 Waste shall only be accepted if:
  - (a) it is of a type and quantity listed in schedule 2 tables S2.2, S2.3 and S2.4; and
  - (b) it conforms to the description in the documentation supplied by the producer and holder.
  - (c) the facility has sufficient free capacity to store and treat the waste.
- 2.3.5 The operator shall ensure that where waste produced by the activities is sent to a relevant waste operation, that operation is provided with the following information, prior to the receipt of the waste:
  - (a) the nature of the process producing the waste;
  - (b) the composition of the waste;
  - (c) the handling requirements of the waste;
  - (d) the hazardous property associated with the waste, if applicable; and
  - (e) the waste code of the waste.
- 2.3.6 The operator shall ensure that where waste produced by the activities is sent to a landfill site, it meets the waste acceptance criteria for that landfill.
- 2.3.7 Waste pre-acceptance and acceptance procedures shall be undertaken in accordance with best available techniques.

- 2.3.8 For the following activities referenced in schedule 1, table S1.1 (AR4):
  - (a) each MCP must be operated in accordance with the manufacturer's instructions and records must be made and retained to demonstrate this.
  - (b) the operator must keep periods of start-up and shut-down of each MCP as short as possible.
  - (c) there must be no persistent emission of 'dark smoke' as defined in section 3(1) of the Clean Air Act 1993.

### 2.4 Improvement programme

- 2.4.1 The operator shall complete the improvements specified in schedule 1 table S1.3 by the date specified in that table unless otherwise agreed in writing by the Environment Agency.
- 2.4.2 Except in the case of an improvement which consists only of a submission to the Environment Agency, the operator shall notify the Environment Agency within 14 days of completion of each improvement.

# 2.5 Pre-operational conditions

2.5.1 The operations specified in schedule 1 table S1.4 shall not commence until the measures specified in that table have been completed.

# 3 Emissions and monitoring

### 3.1 Emissions to water, air or land

- 3.1.1 There shall be no point source emissions to water, air or land except from the sources and emission points listed in schedule 3 tables S3.1 and S3.2.
- 3.1.2 The limits given in schedule 3 shall not be exceeded.
- 3.1.3 Periodic monitoring shall be carried out at least once every 5 years for groundwater and 10 years for soil, unless such monitoring is based on a systematic appraisal of the risk of contamination.

# 3.2 Emissions of substances not controlled by emission limits

- 3.2.1 Emissions of substances not controlled by emission limits (excluding odour) shall not cause pollution. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved emissions management plan, have been taken to prevent or where that is not practicable, to minimise, those emissions.
- 3.2.2 The operator shall:
  - (a) if notified by the Environment Agency that the activities are giving rise to pollution, submit to the Environment Agency for approval within the period specified, an emissions management plan which identifies and minimises the risks of pollution from emissions of substances not controlled by emission limits;
  - (b) implement the approved emissions management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 3.2.3 All liquids in containers, whose emission to water or land could cause pollution, shall be provided with secondary containment, unless the operator has used other appropriate measures to prevent or where that is not practicable, to minimise, leakage and spillage from the primary container.
- 3.2.4 The operator shall implement a leak detection and repair (LDAR) programme to detect and mitigate the release of volatile organic compounds, including methane from diffuse sources.

#### 3.3 Odour

3.3.1 Emissions from the activities shall be free from odour at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved odour management plan, to prevent or where that is not practicable to minimise the odour.

#### 3.4 Noise and vibration

- 3.4.1 Emissions from the activities shall be free from noise and vibration at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved noise and vibration management plan to prevent or where that is not practicable to minimise the noise and vibration.
- 3.4.2 The operator shall:
  - (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to noise and vibration, submit to the Environment Agency for approval within the period specified, a noise and vibration management plan which identifies and minimises the risks of pollution from noise and vibration;
  - (b) implement the approved noise and vibration management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

# 3.5 Monitoring

- 3.5.1 The operator shall, unless otherwise agreed in writing by the Environment Agency, undertake the monitoring specified in the following tables in schedule 3 to this permit:
  - (a) point source emissions specified in tables S3.1 and S3.2;
  - (b) process monitoring specified in table S3.3;
  - (c) bioaerosols monitoring specified in table S3.4.
- 3.5.2 The operator shall maintain records of all monitoring required by this permit including records of the taking and analysis of samples, instrument measurements (periodic and continual), calibrations, examinations, tests and surveys and any assessment or evaluation made on the basis of such data.
- 3.5.3 Monitoring equipment, techniques, personnel and organisations employed for the emissions monitoring programme and the environmental or other monitoring specified in condition 3.5.1 shall have either MCERTS certification or MCERTS accreditation (as appropriate), where available, unless otherwise agreed in writing by the Environment Agency.
- 3.5.4 Permanent means of access shall be provided to enable sampling/monitoring to be carried out in relation to the emission points specified in schedule 3 tables S3.1 and S3.2, unless otherwise agreed in writing by the Environment Agency.
- 3.5.5 In the case of new medium combustion plant, the first monitoring measurements shall be carried out within four months of the issue date of the permit or the date when the MCP is first put into operation, whichever is later.
- 3.5.6 Monitoring shall not take place during periods of start-up or shut-down.

#### 3.6 Bioaerosols

3.6.1 The operator shall take all appropriate measures, to prevent or where that is not practicable to minimise the release of bioaerosols. Emissions of bioaerosols from the operational activities should not exceed the emission action levels specified in table S3.4.

- 3.6.2 The operator shall where the emission action levels are exceeded:
  - (a) notify the Environment Agency and investigate and take remedial action;
  - (b) submit to the Environment Agency for approval within the period specified, a bioaerosols management plan which identifies and minimises the risks of pollution from bioaerosols; and
  - (c) implement the bioaerosols management plan from the date of approval and revise the plan periodically, unless otherwise agreed in writing by the Environment Agency.

#### 3.7 Pests

- 3.7.1 The activities shall not give rise to the presence of pests which are likely to cause pollution, hazard or annoyance outside the boundary of the site. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved pests management plan, have been taken to prevent or where that is not practicable, to minimise the presence of pests on the site.
- 3.7.2 The operator shall:
  - (a) only use approved products for pest control;
  - (b) treat pest infestations promptly;
  - (c) reject pest-infected incoming waste;
  - if notified by the Environment Agency, submit to the Environment Agency for approval within the period specified, a pests management plan which identifies and minimises risks of pollution from pests;
  - (e) implement the pests management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

# 3.8 Fire prevention

- 3.8.1 The operator shall take all appropriate measures to prevent fires on site and minimise the risk of pollution from them including, but not limited to, those specified in any approved fire prevention plan.
- 3.8.2 The operator shall:
  - a) if notified by the Environment Agency that the activities are giving rise to a risk of fire, submit to the Environment Agency for approval within the period specified, a fire prevention plan which prevents fires and minimises the risk of pollution from fires;
  - implement the fire prevention plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 3.8.3 The operator shall undertake a DSEAR assessment and maintain an accident management plan.

#### 4 Information

#### 4.1 Records

- 4.1.1 All records required to be made by this permit shall:
  - (a) be legible;
  - (b) be made as soon as reasonably practicable;
  - (c) if amended, be amended in such a way that the original and any subsequent amendments remain legible, or are capable of retrieval; and

- (d) be retained, unless otherwise agreed in writing by the Environment Agency, for at least 6 years from the date when the records were made, or in the case of the following records until permit surrender:
  - (i) off-site environmental effects; and
  - (ii) matters which affect the condition of the land and groundwater.
- 4.1.2 The operator shall keep on site all records, plans and the management system required to be maintained by this permit, unless otherwise agreed in writing by the Environment Agency.

### 4.2 Reporting

- 4.2.1 The operator shall send all reports and notifications required by the permit to the Environment Agency using the contact details supplied in writing by the Environment Agency.
- 4.2.2 A report or reports on the performance of the activities over the previous year shall be submitted to the Environment Agency by 31 January (or other date agreed in writing by the Environment Agency) each year. The report(s) shall include as a minimum:
  - (a) a review of the results of the monitoring and assessment carried out in accordance with the permit including an interpretive review of that data;
  - (b) the annual production/treatment data set out in schedule 4 table S4.2; and
  - (c) the performance parameters set out in schedule 4 table S4.3 using the forms specified in table S4.4 of that schedule.
- 4.2.3 Within 28 days of the end of the reporting period the operator shall, unless otherwise agreed in writing by the Environment Agency, submit reports of the monitoring and assessment carried out in accordance with the conditions of this permit, as follows:
  - (a) in respect of the parameters and emission points specified in schedule 4 table S4.1;
  - (b) for the reporting periods specified in schedule 4 table S4.1 and using the forms specified in schedule 4 table S4.4; and
  - (c) giving the information from such results and assessments as may be required by the forms specified in those tables.
- 4.2.4 The operator shall, unless notice under this condition has been served within the preceding four years, submit to the Environment Agency, within six months of receipt of a written notice, a report assessing whether there are other appropriate measures that could be taken to prevent, or where that is not practicable, to minimise pollution.
- 4.2.5 Within 1 month of the end of each quarter, the operator shall submit to the Environment Agency using the form made available for the purpose, the information specified on the form relating to the site and the waste accepted and removed from it during the previous quarter.
- 4.2.6 The operator shall keep records of non-waste materials leaving the site, including the type of material, the batch number, the date of export off-site and the tonnage exported on that date. These records shall be maintained for at least 2 years.
- 4.2.7 The operator shall submit an annual report detailing the efficiency of removal of non-compostable and non-digestible materials from feedstock prior to processing and the level of contamination in the final recovered digestate and/or compost.

#### 4.3 Notifications

- 4.3.1 In the event:
  - (a) that the operation of the activities gives rise to an incident or accident which significantly affects or may significantly affect the environment, the operator must immediately—

- (i) inform the Environment Agency,
- (ii) take the measures necessary to limit the environmental consequences of such an incident or accident, and
- (iii) take the measures necessary to prevent further possible incidents or accidents;
- (b) of a breach of any permit condition the operator must immediately—
  - (i) inform the Environment Agency, and
  - (ii) take the measures necessary to ensure that compliance is restored within the shortest possible time;
- (c) of a breach of permit condition which poses an immediate danger to human health or threatens to cause an immediate significant adverse effect on the environment, the operator must immediately suspend the operation of the activities or the relevant part of it until compliance with the permit conditions has been restored.
- 4.3.2 Any information provided under condition 4.3.1 (a)(i), or 4.3.1 (b)(i) where the information relates to the breach of a limit specified in the permit, shall be confirmed by sending the information listed in schedule 5 to this permit within the time period specified in that schedule.
- 4.3.3 Following the detection of an issue listed in condition 4.3.1, the operator shall review and revise the management system and implement any changes as necessary to minimise the risk of reoccurrence of the issue.
- 4.3.4 Where the Environment Agency has requested in writing that it shall be notified when the operator is to undertake monitoring and/or spot sampling, the operator shall inform the Environment Agency when the relevant monitoring and/or spot sampling is to take place. The operator shall provide this information to the Environment Agency at least 14 days before the date the monitoring is to be undertaken.
- 4.3.5 The Environment Agency shall be notified within 14 days of the occurrence of the following matters, except where such disclosure is prohibited by Stock Exchange rules:

Where the operator is a registered company:

- (a) any change in the operator's trading name, registered name or registered office address; and
- (b) any steps taken with a view to the operator going into administration, entering into a company voluntary arrangement or being wound up.

Where the operator is a corporate body other than a registered company:

- (a) any change in the operator's name or address; and
- (b) any steps taken with a view to the dissolution of the operator.

In any other case:

- (a) the death of any of the named operators (where the operator consists of more than one named individual):
- (b) any change in the operator's name(s) or address(es); and
- (c) any steps taken with a view to the operator, or any one of them, going into bankruptcy, entering into a composition or arrangement with creditors, or, in the case of them being in a partnership, dissolving the partnership.
- 4.3.6 Where the operator proposes to make a change in the nature or functioning, or an extension of the activities, which may have consequences for the environment and the change is not otherwise the subject of an application for approval under the Regulations or this permit:
  - (a) the Environment Agency shall be notified at least 14 days before making the change; and
  - (b) the notification shall contain a description of the proposed change in operation.

- 4.3.7 The Environment Agency shall be given at least 14 days' notice before implementation of any part of the site closure plan.
- 4.3.8 The operator shall notify the Environment Agency as soon as is practicable, in writing of any change of the medium combustion plant.

# 4.4 Interpretation

- 4.4.1 In this permit the expressions listed in schedule 6 shall have the meaning given in that schedule.
- 4.4.2 In this permit references to reports and notifications mean written reports and notifications, except where reference is made to notification being made "immediately", in which case it may be provided by telephone.

# **Schedule 1 – Operations**

Table S1.1 activ	Table S1.1 activities			
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	Limits of specified activity and waste types	
AR1	S5.4 A(1)(b)(i) Recovery or a mix of recovery and disposal of non-hazardous waste with a capacity exceeding 75 tonnes per day (or 100 tonnes per day if the only waste treatment activity is anaerobic digestion) involving biological treatment.	R3: Recycling/reclamation of organic substances which are not used as solvents	From receipt of waste through to digestion and recovery of by-products (digestate).  Anaerobic digestion of waste in two primary digester tanks followed by burning of biogas produced from the process.  Waste types suitable for acceptance are limited to those specified in Table S2.2, S2.3 and S2.4.  Waste types in Table S2.4 may be accepted subject to the completion of PO1 in Table S1.4 and written	
			approval given by the Environment Agency.	
	Directly Associated Activity			
AR2	Storage of waste pending recovery or disposal	R13: Storage of waste pending the operations numbered R1 and R3 (excluding temporary storage, pending collection, on the site where it is produced)	From the receipt of permitted waste to pretreatment and despatch for anaerobic digestion on site.  Storage of residual wastes from pre-treatment to despatch off-site for recovery.	
			Storage of waste in an enclosed building fitted with appropriate odour abatement and on an impermeable surface with a sealed drainage system.	
			Storage of undamaged, packaged, palletised and wrapped waste (Table S2.3) in covered trailer on external yard area in front of the reception hall.	

Table S1.1 ac	tivities	<del>,</del>	
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	Limits of specified activity and waste types
			The maximum volume of wastes in Table S2.3 stored at any one time shall not exceed 50 tonnes.
			The maximum residence time for storage of waste in Table S2.3 on external yard area shall not exceed 14 days.
			Waste types suitable for acceptance are limited to those specified in Table S2.2, S2.3 and S2.4.
			Waste types in Table S2.4 may be accepted subject to the completion of PO1 in Table S1.4 and written approval given by the Environment Agency.
AR3	Physical treatment for the purpose of recycling	R3: Recycling/reclamation of organic substances which are not used as solvents	From the receipt of waste to despatch for anaerobic digestion or despatch off site for recovery.
			Pre-treatment of waste in enclosed building fitted with appropriate odour abatement and on an impermeable surface with a sealed drainage system including shredding, sorting, screening, compaction, baling, mixing and maceration.
			Post-treatment of digestate (including but not limited to the NOMAD trial) in an enclosed building fitted with appropriate odour abatement and on an impermeable surface with a sealed drainage system, including screening to remove contraries, centrifuge or pressing and
			addition of thickening agents (polymers) or drying for use as a fertiliser or soil conditioner (drying for the

Activity			
reference	1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	activity and waste types
			purpose of use as a fuel is not permitted).
			Heat treatment (pasteurisation) of waste in one tank for the purpose of recovery.
			Gas cleaning by biological or physical (carbon filtration) or chemical scrubbing.
			Waste types suitable for acceptance are limited to those specified in Table S2.2, S2.3 and S2.4.
			Waste types in Table S2.4 may be accepted subject to the completion of PO1 in Table S1.4 and written approval given by the Environment Agency.
AR4	Steam and electrical power supply	R1: Use principally as a fuel to generate energy	From the receipt of biogas produced at the on-site anaerobic digestion process to combustion with the release of combustion gases.
			Combustion of biogas in two combined heat and power (CHP) engines with an aggregated thermal input of 2.51 MW.
			Combustion of biogas in two auxiliary boilers with an aggregated thermal input of 0.42 MW.
			Combustion of diesel in one generator (0.03 MW) for emergency purposes.
			Combustion of diesel in one generator (0.01 MW) for NOMAD trial only.

Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	Limits of specified activity and waste types
AR5	Emergency flare operation	D10: Incineration on land	From the receipt of biogas produced at the on-site anaerobic digestion process to incineration with the release of combustion gases.  Use of one auxiliary flare required only during periods of breakdown or maintenance of the CHP engines, biogas upgrading plant and/or auxiliary boilers.
AR6	Gas upgrading (modularised green gas fuel production plant)	Upgrading of biogas to biomethane (including the removal of moisture and other substances such as carbon dioxide, hydrogen sulphide and Volatile organic compounds) for injection into the National Grid or storage in compressed modules for despatch off-site.	From the receipt of biogas produced at the on-site anaerobic digestion process to injection into the National Grid or storage in compressed modules for despatch off-site. This includes return of off-specification biogas for combustion to the on-site CHP engines, auxiliary boilers and/or emergency flare.
AR7	Raw material storage	Storage of raw materials including lubrication oil, antifreeze, propane, ferric chloride, activated carbon, diesel.	From the receipt of raw materials to despatch for use within the facility.
AR8	Gas storage	R13: Storage of waste pending any of the operations numbered R1 to R12 (excluding temporary storage, pending collection, on the site where it is produced)  Storage of biogas produced from on-site anaerobic digestion of permitted waste in roof space of digesters.  Storage of biomethane produced from the modularised green gas fuel (GGF) production plant in compressed biomethane	From the receipt of biogas produced at the on-site anaerobic digestion process to despatch for use within the facility via combustion in CHP engines or use in modularised green gas fuel (GGF) production plant and subsequent despatch offsite.
		Storage modules.  Storage of carbon dioxide produced from carbon	

Table S1.1 ac	Table S1.1 activities			
Activity reference	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity and WFD Annex I and II operations	Limits of specified activity and waste types	
		dioxide recovery plant subject to pre-operational condition 2.		
AR9	Digestate storage	R13: Storage of waste pending any of the operations numbered R1 to R12 (excluding temporary storage, pending collection, on the site where it is produced)	From the receipt of processed uncertified digestate produced from the on-site anaerobic digestion process to despatch for treatment (NOMAD trial) or use off-site.  Storage of processed whole digestate in one storage tank.	
AR10	Air treatment	Collection and treatment of air from the buildings or plant using abatement system – [biofilter and carbon filters] prior to release to atmosphere.	From the collection of air from site processes to treatment and release of treated air to atmosphere.	

Table S1.2 Operating techniques			
Description	Parts	Date Received	
Application	Part B4, Table 3a – Technical standards	12/08/2011	
Application	Part B2, section 6c – Non-technical summary – October 2011	03/10/2011	
Response to Schedule 5	Response to question 1 – surface water drainage	19/12/2011	
Notice dated 30/11/2011	Response to question 4 – odour management plan dated January 2012	07/02/2012	
Additional information	Report – Collation of Air Quality Information by Air Quality Consultants – December 2011	02/12/2011	
	Odour Management Improvement Scheme Design Specification and Odour Dispersion Modelling – August 2011	03/10/2011	
Variation Application EPR/AB3036RT/V005	The operating techniques described in the application (Responses to Part C2 and C3 of the application forms and references to supporting documentation.	Duly made 22/11/2022	
	<ul> <li>Document Ref: SPC0014/Variation/NTS/V1/Malaby Biogas/February 2022</li> </ul>		
	<ul> <li>Document Ref: SPC0014/Variation/SCR/V1/Malaby Biogas/February 2022</li> </ul>		
	<ul> <li>Document Ref: SPC0014/Variation/BAT/V1/Malaby Biogas/February 2022</li> </ul>		
	Simplified Flow Diagram		
	<ul> <li>Document Ref: SPC/0014/Variation/Permitted Activities/V1/Malaby Biogas February 2022</li> </ul>		
	<ul> <li>Document Ref: SPC0014/Variation/ERA/V1/Malaby Biogas/February 2022</li> </ul>		

Table S1.2 Operating techniques			
Description	Parts	Date Received	
	Document Ref: SPC0014/Variation/Raw Materials/Malaby Biogas February 2022		
Response to Schedule 5 Notice dated 23/01/2023	Operating techniques described in the response to Schedule 5:	20/02/2023	
	Response to questions 1 to 4 (odour management)		
	Response to questions 5 to 8 (digestate treatment)		
	<ul> <li>Response to questions 9 to 11 (biogas upgrading plant)</li> </ul>		
	<ul> <li>Response to question 12 (CO<sub>2</sub> capture &amp; storage)</li> </ul>		
	<ul> <li>Response to questions 13 to 15 (best available techniques)</li> </ul>		
	Response to question 16 (site drainage)		
	Response to question 17 (risk assessment)		
	Response to questions 18 to 20 (emission points)		
	<ul> <li>Response to question 21 (waste codes for external storage)</li> </ul>		
	<ul> <li>Response to question 26 (combustion plant information)</li> </ul>		
Additional information	Updated site plan and pressure relief valve schedule.	23/03/2023	
Additional information	Updated odour management plan	27/03/2023	
Additional information	Email #1 regarding additional measures to external storage of wastes.	04/04/2023	
Additional information	Email #2 regarding further additional measures to external storage of wastes.	11/04/2023	

Table S1.3 Improvement programme requirements			
Reference	Requirement	Date	
Improvemen	t condition for gas upgrading plant		
IC1	The operator shall carry out a monitoring study to verify the assumptions made in the application in relation to the releases of pollutants to air. The study shall include the monitoring of point source releases to air from the biogas upgrading plant emission point EP7 during normal operation, having regard to the Environment Agency technical guidance M2 and to MCERTS standards. As a minimum, two separate monitoring campaigns in a year shall be completed (one monitoring survey six months following commissioning of the biogas upgrading plant).  The pollutants to be monitored shall include:  • total volatile organic compounds; and • hydrogen sulphide	19/04/2024 or other date as agreed in writing with the Environment Agency	
IC2	Following the completion of IC1, the operator shall undertake an impact assessment of all point source releases to air, using the information obtained through the emissions monitoring. The environmental impact assessment report and all associated monitoring reports and	19/06/2024 or otherwise agreed in writing by the	

Table S1.3 Im	provement programme requirements					
Reference	Requirement	Date				
	assessments shall be submitted in writing to the Environment Agency for review.  The environmental impact assessment shall as a minimum include:  Environment Agency Agency					
	The environmental impact assessment shall, as a minimum, include:					
	<ul> <li>reports showing details of the monitoring undertaken and the results obtained;</li> </ul>					
	<ul> <li>results of the assessment of long and short term impacts from the emissions in accordance with Environment Agency Guidance – Air emissions risk assessment for your environmental permit</li> <li>a completed H1 assessment software tool or detailed air</li> </ul>					
	dispersion modelling assessment  If the H1 assessment or air dispersion modelling shows potential long or short term impacts from the emissions, the operator shall propose an action plan to reduce the impacts of the substances identified.					
Improvement	condition for primary containment					
IC3	The operator shall submit a written 'primary containment plan' and shall obtain the Environment Agency's written approval to it. The plan shall contain the results of an inspection and program of works undertaken by a qualified engineer, and shall assess the extent design specification and condition of primary containment systems where polluting liquids and solids are being stored, treated, and/or handled.  The plan shall include:	19/04/2024 or other date as agreed in writing with the Environment Agency				
	<ul> <li>an assessment of the physical condition of all primary containment systems (storage and treatment vessels) using a Written Scheme of Examination and their suitability for providing primary containment when subjected to the dynamic and static loads caused by catastrophic tank failure;</li> </ul>					
	<ul> <li>a program of works with timescales for the implementation of individual improvement measures necessary to demonstrate that the primary containment is fit for purpose or alternative appropriate measures to ensure all polluting materials will be contained on site; and</li> <li>a preventative maintenance and inspection regime</li> </ul>					
	The plan shall be implemented in accordance with the Environment Agency's written approval.					
Improvement	condition for review of effectiveness of abatement plant					
IC4	The operator shall carry out a review of the abatement plant on site, in order to determine whether the measures have been effective and adequate to prevent and where not possible minimise emissions released to air including but not limited to odour and ammonia.  The control of the abatement plant on site, in other date agreed in with the					
	The operator shall submit a written report to the Environment Agency following this review for assessment and approval.  The report shall include but not limited to the following capacita:	Environment Agency				
	The report shall include but not limited to the following aspects:     Full investigation and characterisation of the waste gas streams.					

Table S1.3 Im	provement programme requirements	
Reference	Requirement	Date
	Abatement stack monitoring results (not limited to odour and ammonia)	
	<ul> <li>Abatement process monitoring results (not limited to odour and ammonia)</li> </ul>	
	<ul> <li>Details of air quality quantitative impact assessment including modelling and a proposal for site-specific "action levels" (not limited to odour concentration, hydrogen sulphide and ammonia).</li> </ul>	
	<ul> <li>Odour monitoring results at the site boundary</li> </ul>	
	<ul> <li>Records of odour complaints and odour related incidents</li> </ul>	
	<ul> <li>Recommendations for improvement including the replacement or upgrading the abatement plant</li> </ul>	
	<ul> <li>Timescales for implementation of improvements to the abatement plant</li> </ul>	
	The operator shall implement the improvements in line with the timescales as approved by the Environment Agency.	
Improvement	condition for assessment of methane slip	,
IC5	The operator shall establish the methane emissions in the exhaust gas from engines burning biogas and compare these to the manufacturer's specification and benchmark levels agreed in writing with the Environment Agency.	19/04/2024 or other date as agreed in writing with the
	The operator shall, as part of the methane leak detection and repair (LDAR) programme, develop proposals to assess the potential for methane slip and take corrective actions where emissions above the manufacturer's specification or appropriate benchmark levels are identified.	Environment Agency

Table S1.4 Pre-	Table S1.4 Pre-operational measures		
Reference	Pre-operational measures		
1	The operator shall submit a detailed characterisation of the proposed wastes in Table S2.4 which demonstrates their suitability for biological treatment by anaerobic digestion. The characterisation shall be undertaken in accordance with section 3 and 13 of our guidance, Biological waste treatment: appropriate measures for permitted facilities (published 21 September 2022), and must be accompanied by quantitative analysis.  No waste in Table S2.4 shall be accepted at the installation unless the Environment Agency has given prior written permission under this condition.		
2	At least 8 weeks (or any other date as agreed with the Environment Agency) prior to the commencement of modularised green gas fuel (GGF) production plant (including the carbon dioxide recovery plant) and biofertilizer building, the operator shall provide a final written commissioning plan (including timescales for completion) for approval by the Environment Agency. The commissioning plan shall include the expected emissions to the environment during the different stages of commissioning, the expected durations of commissioning activities and the measures to be taken to protect the environment and report to the Environment Agency in the event that actual emissions exceed expected emissions.		

Table S1.4 Pre-operational measures					
Reference	Pre-operational measures				
	If the commissioning of each plant on site is to be undertaken in phases, the operator shall submit the commissioning plan(s) to the Environment Agency for approval.				
	Commissioning shall be carried out in accordance with the commissioning plan as approved by the Environment Agency.				
3	Following the commissioning of the modularised GGF production plant, the operator shall provide an updated accident management plan to the Environment Agency and receive approval to it.				
	The accident management plan shall include the results and recommendations from the DSEAR assessment and HAZOP assessment for the site. The operator shall include the techniques and procedures relied upon to manage accidents (including flooding) on site as outlined in our guidance, <u>Develop a management system: environmental permits - GOV.UK (www.gov.uk)</u> . The operator shall implement the accident management plan as approved by the Environment Agency.				

# Schedule 2 – Waste types, raw materials and fuels

Table S2.1 Raw materials and fuels			
Raw materials and fuel description	Specification		
Vegetable matter (energy crops)	Substantially free of non-vegetable matter		
Maize silage	Substantially free of non-vegetable matter		

Table S2.2 Permitted waste types and quantities for anaerobic digestion				
Maximum quantity	The total annual throughput of waste in Table S2.2, S2.3 and S2.4 combined shall not exceed 40,000 tonnes.			
Exclusions	Wastes having any of the following characteristics shall not be accepted:			
	<ul> <li>biodegradable wastes that are significantly contaminated with non-compostable or digestible contaminants, in particular plastic and litter shall be no more than 5% w/w and shall be as low as reasonably practicable by 31 December 2025.</li> <li>wastes containing wood-preserving agents or other biocides and post-consumer wood</li> </ul>			
	<ul> <li>wastes containing persistent organic pollutants</li> <li>wastes containing Japanese Knotweed or other invasive plant species listed in the Invasive Species (Amendment etc.) (EU Exit) Regulations 2019</li> <li>manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> <li>pest infected waste</li> </ul>			
Waste code	Description			
02	Wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing, food preparation and processing			
02 01	wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing			
02 01 01	sludges from washing and cleaning – vegetables, fruit and other crops			
02 01 02	animal tissue waste			
02 01 03	plant tissue waste			
02 01 06	animal faeces, urine and manure (including spoiled fully biodegradable animal bedding)			
02 01 07	wastes from forestry			
02 01 99	wastes not otherwise specified – spent mushroom compost from commercial mushroom growing only			
02 02	wastes from the preparation and processing of meat, fish and other foods of animal origin			
02 02 01	sludges from washing and cleaning, peeling, centrifuging and separation including wash waters and sludges from secondary food processing or the cook chill sector			

02 02 02	animal tissue waste			
02 02 03	materials unsuitable for consumption or processing including animal gut contents			
02 02 04	sludges from on-site effluent treatment including sludges from gelatine production			
02 03	wastes from fruit, vegetables, cereals, edible oils, cocoa, coffee, tea and tobacco preparation and processing; conserve production; yeast and yeast extract production, molasses preparation and fermentation			
02 03 01	sludges from washing, cleaning peeling, centrifuging and separation (including sludge from production of edible fats and oils, seasoning residues, molasses residues, residues from production of potato, corn or rice starch only)			
02 03 04	materials unsuitable for consumption or processing (including waste from production of edible fats and oils, seasoning residues, molasses residues, residues from production of potato, corn or rice starch only)			
02 03 05	sludges from on-site effluent treatment (including sludge from production of edible fats and oils, seasoning residues, molasses residues, residues from production of potato, corn or rice starch only)			
02 04	wastes from sugar processing			
02 04 03	sludges from on-site effluent treatment – sludges from the processing of sugar			
02 05	wastes from the dairy products industry			
02 05 01	materials unsuitable for consumption or processing – biodegradable wastes derived from the processing of dairy products only			
02 05 02	sludges from on-site effluent treatment			
02 06	wastes from the baking and confectionery industry			
02 06 01	materials unsuitable for consumption or processing – biodegradable wastes from the processing of materials used in bakery and confectionery			
02 06 03	sludges from on-site effluent treatment – sludges from the processing of materials			
	used in baking and confectionery			
02 07	wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa)			
<b>02 07</b> 02 07 01	wastes from the production of alcoholic and non-alcoholic beverages (except			
	wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa)  wastes from washing, cleaning and mechanical reduction of raw materials – biodegradable wastes from the processing of the raw materials used in the production of such beverages only (wastes from the production of alcoholic and			
02 07 01	wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa)  wastes from washing, cleaning and mechanical reduction of raw materials — biodegradable wastes from the processing of the raw materials used in the production of such beverages only (wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa))  wastes from spirits distillation — spent grains, hops and whisky filter sheets and cloths, yeast and yeast like residues, sludge from production process, or malt			
02 07 01	wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa)  wastes from washing, cleaning and mechanical reduction of raw materials — biodegradable wastes from the processing of the raw materials used in the production of such beverages only (wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa))  wastes from spirits distillation — spent grains, hops and whisky filter sheets and cloths, yeast and yeast like residues, sludge from production process, or malt husks, malt sprouts, yeasts and yeast-like residues only  materials unsuitable for consumption or processing — biodegradable wastes from the processing of the raw materials used in the production of such beverages only (wastes from the production of alcoholic and non-alcoholic beverages (except			
02 07 01 02 07 02 02 07 04	wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa)  wastes from washing, cleaning and mechanical reduction of raw materials — biodegradable wastes from the processing of the raw materials used in the production of such beverages only (wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa))  wastes from spirits distillation — spent grains, hops and whisky filter sheets and cloths, yeast and yeast like residues, sludge from production process, or malt husks, malt sprouts, yeasts and yeast-like residues only  materials unsuitable for consumption or processing — biodegradable wastes from the processing of the raw materials used in the production of such beverages only (wastes from the production of alcoholic and non-alcoholic beverages (except coffee, tea and cocoa))			

15	Waste packaging, absorbents, wiping cloths, filter materials and protective clothing not otherwise specified				
15 01	packaging (including separately collected municipal packaging waste)				
15 01 01	paper and cardboard packaging (excluding veneers, plastic coatings or laminates) certified to EN 13432 or equivalent certified compostable standard				
15 01 02	plastic packaging – compostable plastics only certified to EN 13432 or equivalent certified compostable or digestible standard				
15 01 03	wooden packaging – virgin timber only				
15 01 05	composite packaging meeting EN 13432 or equivalent certified compostable or digestible standard				
16	Wastes not otherwise specified in the list				
16 10	aqueous liquid wastes destined for off-site treatment				
16 10 02	liquor/leachate from a composting process that accepts waste input types listed in this table only and in compliance with Animal By-Products Regulations				
19	Wastes from waste management facilities, off-site waste water treatment plants and the preparation of water intended for human consumption and water for industrial use				
19 02	wastes from physico/chemical treatments of waste (including dechromatation, decyanidation, neutralisation)				
19 02 03	premixed wastes composed of waste types listed within this table, Table S2.2 only				
19 02 10	glycerol not designated as hazardous i.e. excludes EWC code 19 02 08				
19 05	wastes from aerobic treatment of waste				
19 05 01	non-composted fraction of municipal and similar wastes				
19 05 02	non-composted fraction of animal and vegetable waste				
19 05 03	off-specification compost from source segregated biodegradable waste				
19 06	wastes from anaerobic treatment of waste				
19 06 03	liquor from anaerobic treatment of municipal waste (from a process that accepts wastes which are listed in this table only) and made up of previously pasteurised and stabilised batches only				
19 06 04	digestate from anaerobic treatment of source segregated biodegradable waste (from a process that accepts wastes which are listed in this table only) and made up of previously pasteurised and stabilised batches only				
19 06 05	liquor from anaerobic treatment of animal and vegetable waste (from a process that accepts wastes which are listed in this table only) and made up of previously pasteurised and stabilised batches only				
19 06 06	digestate from anaerobic treatment of animal and vegetable waste (previously digested sewage sludge only)				
19 08	wastes from waste water treatment plants not otherwise specified				
19 08 09	grease and oil mixture from oil/water separation containing only edible oil and fats				
19 08 12	sludges from biological treatment of industrial waste water (from a process that treats wastes which are listed in this table only).				

20	Municipal wastes (household waste and similar commercial, industrial and institutional wastes) including separately collected fractions				
20 01	separately collected fractions (except 15 01)				
20 01 01	paper and cardboard (excluding veneers, plastic coatings or laminates) meeting EN 13432 or equivalent certified compostable or digestible packaging only				
20 01 08	biodegradable kitchen and canteen waste containing compostable plastics meeting EN 13432 or equivalent certified compostable or digestible packaging (Category 3 ABPR waste only)				
20 01 25	edible oil and fat				
20 02	garden and park wastes (including cemetery waste)				
20 02 01	biodegradable waste				
20 03	other municipal wastes				
20 03 01	mixed municipal waste – only separately collected biodegradable wastes of types listed within this table, Table S2.2				
20 03 02	waste from markets – allowed only if source segregated biodegradable fractions e.g. plant material, fruit and vegetables				

	d waste types and quantities for storage in covered trailer in external yard area reatment by anaerobic digestion			
Maximum quantity	The total annual throughput of waste in Table S2.2, S2.3 and S2.4 combined shall not exceed 40,000 tonnes.			
Exclusions	<ul> <li>Wastes having any of the following characteristics shall not be accepted:</li> <li>biodegradable wastes that are significantly contaminated with non-compostable or digestible contaminants, in particular plastic and litter shall be no more than 5% w/w and shall be as low as reasonably practicable by 31 December 2025.</li> <li>wastes containing wood-preserving agents or other biocides and post-consumer wood</li> <li>wastes containing persistent organic pollutants</li> <li>wastes containing Japanese Knotweed or other invasive plant species listed in the Invasive Species (Amendment etc.) (EU Exit) Regulations 2019</li> <li>manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> <li>pest infected waste</li> </ul>			
Waste code	Description			
02	Wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing, food preparation and processing			
02 03	wastes from fruit, vegetables, cereals, edible oils, cocoa, coffee, tea and			
	tobacco preparation and processing; conserve production; yeast and yeast extract production, molasses preparation and fermentation			
02 03 04				
02 03 04 <b>02 05</b>	extract production, molasses preparation and fermentation  materials unsuitable for consumption or processing – (out of date /specification ingredients, materials unsuitable for consumption or processing in drums, cartons,			
	extract production, molasses preparation and fermentation  materials unsuitable for consumption or processing – (out of date /specification ingredients, materials unsuitable for consumption or processing in drums, cartons, plastic bottles or tetrapaks)			
02 05	extract production, molasses preparation and fermentation  materials unsuitable for consumption or processing – (out of date /specification ingredients, materials unsuitable for consumption or processing in drums, cartons, plastic bottles or tetrapaks)  wastes from the dairy products industry  materials unsuitable for consumption or processing – (out of date /specification dairy			

Maximum quantity	The total annual throughput of waste in Table S2.2, S2.3 and S2.4 combined shall not exceed 40,000 tonnes.  Wastes having any of the following characteristics shall not be accepted:  • biodegradable wastes that is significantly contaminated with non-compostable or digestible contaminants, in particular plastic and litter shall be no more than 5% w/w and shall be as low as reasonably practicable by 31 December 2025.  • wastes containing wood-preserving agents or other biocides and post-consumer wood  • wastes containing persistent organic pollutants  • wastes containing Japanese Knotweed or other invasive plant species listed in the Invasive Species (Amendment etc.) (EU Exit) Regulations 2019  • manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.			
Exclusions				
Waste code	Description			
04	Wastes from the leather, fur and textile industries			
04 01	wastes from the leather and fur industry			
04 01 01	fleshings and lime split wastes			
04 01 05	tanning liquor free of chromium			
04 01 07	sludges, in particular from on-site effluent treatment free of chromium			
20	Municipal wastes (household waste and similar commercial, industrial and institutional wastes) including separately collected fractions			
20 01	separately collected fractions (except 15 01)			
20 01 38	wood other than that mentioned in 20 01 37			

# **Schedule 3 – Emissions and monitoring**

Emission point ref. & location	Source	Parameter	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
Point EP1 on site plan in Schedule 7	Channelled emissions such as odour abatement stack or vent(s)	Hydrogen sulphide	No limit set	Average over sample period	Once every 6 months	CEN TS 13649 for sampling
						NIOSH 6013 for analysis
		Ammonia	20 mg/m <sup>3</sup>	Average over sample period	Once every 6 months	EN ISO 21877
		Odour concentration	No limit set		Once every 6 months	BS EN 13725
Point EP2 on site plan in Schedule 7	CHP engine 1 stack [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	500 mg/m <sup>3</sup>	Average over sample period	Annual	BS EN 14792
		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791
		Sulphur dioxide	162 mg/m <sup>3</sup> [note 3]			or CEN TS 17021 or by calculation based on fuel sulphur
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			BS EN 12619
Point EP3 on site plan in schedule 7	Emergency flare stack [note 4]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	150 mg/m <sup>3</sup>	Average over sample period	[note 5]	BS EN 14792
		Carbon monoxide	50 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	10 mg/m <sup>3</sup>			BS EN 12619

Emission point ref. & location	Source	Parameter	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
Point EP4 on site plan in Schedule 7	Boiler 1 and 2 stack [burning biogas] [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	250 mg/m <sup>3</sup> [note 3]	Average over sample period	Annual	BS EN 14792
		Sulphur dioxide	200 mg/m³ [note 3]			BS EN 14791 or CEN TS 17021 or by calculation based on fuel sulphur
Point EP5 on site plan in Schedule 7	CHP engine 2 stack [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	500 mg/m <sup>3</sup>	Average over sample period	Annual	BS EN 14792
		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791
		Sulphur dioxide	162 mg/m³ [note 3]			or CEN TS 17021 or by calculation based on fuel sulphur
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			BS EN 12619
Point EP6 on site plan in Schedule 7	Emergency generator [note 1]	No parameter set	No limit set			
Point EP7 on site plan in Schedule 7	Biogas upgrading plant stack	VOCs including methane	No limit set	Leak detection and repair (LDAR) programme	In accordance with written management system	BS EN15446
Point EP9 on site plan in Schedule 7	NOMAD trial generator [note 1]	No parameter set	No limit set			

Table S3.1 Point source emissions to air – emission limits and monitoring requirements						
Emission point ref. & location	Source	Parameter	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
Pressure relief valves	Digester tanks /Digestate storage tank /Pasteurisation unit	Biogas release and operational events	No limit set	Recorded duration and frequency	Daily inspection	

Note 1 – These emission limits are based on normal operating conditions and load - temperature 0°C (273 K); pressure 101.3 kPa and oxygen 5% (for gas engines burning biogas) and oxygen 3% (for medium combustion plants other than engines and gas turbines burning biogas).

Note 2 – This emission limit applies until 31 December 2029, unless the gas engine is replaced.

Note 3 – This emission limit applies from 1 January 2030, unless otherwise advised by the Environment Agency.

Note 4 – These emission limits are based on normal operating conditions and load - temperature 0°C (273K); pressure 101.3 kPa and oxygen 3%.

Note 5 – Following commissioning, monitoring to be undertaken in the event the emergency flare has been operational for more than 10 per cent of a year (876 hours). Record of operating hours to be submitted annually to the Environment Agency.

Table S3.2 Point source emissions to water (other than sewer) and land – emission limits and monitoring requirements

Emission point ref. & location	Source	Parameter	Limit (incl. unit)	Reference Period	Monitoring frequency	Monitoring standard or method
EP8 on site plan in schedule 7 emission to soakaway via grid point ST 86736 43651	Site surface water /water from bunded areas / Treated effluent	Oil and grease	No visible oil and grease		Weekly	Visual assessment
		Total organic carbon (TOC) [Note 1]	60 mg/l	Spot sample or flow- proportional composite sample	Once every month	BS EN 1484
		Chemical oxygen demand (COD) [Note 1]	180 mg/l	Spot sample or flow- proportional composite sample	Once every month	BS EN ISO 15705
		Total nitrogen	25 mg/l	Spot sample or flow- proportional composite sample	Once every month	BS EN ISO 11905-1 or BS EN 12260
		Total phosphorus	2 mg/l	Spot sample or flow- proportional composite sample	Once every month	EN ISO 5681-1 and - 2 or EN ISO 6878 or EN ISO 11885
		Total suspended solids	60 mg/l	Spot sample or flow- proportional composite sample	Once every month	BS EN 872

Note 1 – Either TOC or COD can be monitored. TOC is the preferred option, because its monitoring does not rely on the use of very toxic compounds.

Table S3.3 Process monitoring requirements						
Emission point reference or source or description of point of measurement	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications		
Digester feed	рН	As described in	As described in site operating techniques	Process monitoring		
(digestion process)	Alkalinity	site operating techniques		to be recorded using a SCADA system where relevant.		
	Temperature					
	Hydraulic loading rate					
	Organic loading rate					
	Volatile fatty acids concentration					
	Ammonia					
	Liquid /foam level					
Biogas in digester	Flow	Continuous	In accordance with EU weights and measures Regulations	Process monitoring to be recorded using a SCADA system where relevant.		
	Methane	Continuous	None specified			
	CO <sub>2</sub>	Continuous	None specified	Gas monitors to be calibrated every 6		
	O <sub>2</sub>	Continuous	None specified	months or in		
	Hydrogen sulphide	Daily	None specified	accordance with the manufacturer's		
	Pressure	Continuous	None specified	recommendations.		
Digestate batch	Volatile fatty acids concentration	One sample at the end of each	As described in site operating			
	Ammonia	batch (hydraulic retention time) cycle.	techniques			
Digesters and storage tanks	Integrity checks	Weekly	Visual assessment	In accordance with design specification and tank integrity checks.		
Digesters	Agitation /mixing	Continuous	Systems controls	Records maintained in daily operational records.		
	Tank capacity and sediment assessment	Once every 5 years from date of commission	Non- destructive pressure testing integrity assessment every 5 years	In accordance with design specification and tank integrity checks.		

			or as specified by manufacturers technical specification.	
Waste reception building or area; Digesters and storage tanks	Odour	Daily	Olfactory monitoring	Odour detection at the site boundary.
Diffuse emissions from all sources identified in the Leak Detection and Repair (LDAR) programme	VOCs including methane	Every 6 months or otherwise agreed in accordance with the LDAR programme	BS EN 15446 In accordance with the LDAR programme	Monitoring points as specified in a DSEAR risk assessment and LDAR programme.
				Limit as agreed with the Environment Agency as a percentage of the overall gas production.
CHP engine stacks	VOCs including methane	Annually	BS EN 12619	Total annual VOCs emissions from the CHP engines to be calculated and submitted to the Environment Agency.
	Exhaust gas temperature		Traceable to National Standards	
	Exhaust gas pressure		Traceable to National Standards	
	Exhaust gas water vapour content		BS EN 14790- 1	Unless gas is dried before analysis of emissions.
	Exhaust gas oxygen		BS EN 14789	
	Exhaust gas flow		BS EN 16911- 1	
Meteorological conditions	Wind speed, air temperature, wind direction	Continuous	Method as specified in management system	Conditions to be recorded in operational diary and records.
				Equipment shall be calibrated on a 4 monthly basis, in accordance with

				manufacturer's recommendations or as agreed in writing by the Environment Agency.
Emergency flare	Operating hours	Continuous	Recorded duration and frequency. Recording using a	Date, time and duration of use of auxiliary flare shall be recorded.
	Quantity of gas sent to emergency flare		SCADA system or similar system	Quantity can be estimated from gas flow composition, heat content, ratio of assistance, velocity, purge gas flow rate, pollutant emissions.
Pressure relief valves and vacuum systems	Gas pressure	Continuous	Recording using a SCADA system	Continuous gas pressure shall be monitored.
	Re-seating	Weekly inspection	Visual	Operator must ensure that valves are re-seated after release in accordance with the manufacturer's design.
	Inspection, maintenance, calibration, repair and validation	Following foaming or overtopping or at 3 yearly intervals whichever is sooner	Written scheme of examination in accordance with condition 1.1.1	After a foaming event or sticking, build-up of debris, obstructions or damage, operator must ensure that pressure relief valve function remains within designed gas pressure in accordance with the manufacturer's design by suitably trained and qualified personnel.
	Inspection, calibration and validation report	In accordance with design and construction specifications or after over	Written scheme of examination in accordance with condition 1.1.1	Operator must ensure that valves are re-seated after release, after a foaming event or sticking, build-up of

		topping or foaming event		debris, obstructions or damage.
				Operator must ensure that PRV function remains within designed operation gas pressure in accordance with the manufacturer's design by suitably trained/qualified personnel.
				Inspection, calibration and validation report. In accordance with industry Approved Code of Practice
Storage tanks	Volume	Daily	Visual or flow metre measurement	Records of volume must be maintained.
Biotrickling filter	Gas temperature – inlet and outlet	Daily	Temperature probe / Traceable to national standards	Odour abatement plant shall be regularly checked and maintained to ensure appropriate temperature and
	Biofilter media moisture	Daily	Moisture meter, Grab test, oven drying or recognised industry method	moisture content.  Odour abatement plant shall be managed in accordance with permit condition
	Thatching /compaction	Weekly	Back pressure	3.3, the odour management plan and manufacturer's
	Gas flow rate – inlet and outlet	Continuous	Gas flow meter / EN 16911-1 and MID for EN 16911-1	recommendations.  Equipment shall be calibrated on a 4
	pH (biofilter drainage effluent)	Daily	pH metre or litmus paper	monthly basis, or as agreed in writing by the Environment
	Efficiency assessment	Annual	Media health, air-flow distribution and emission	Agency.

		removal efficiency (BS EN 13725 for odour removal)	
Hydrogen sulphide – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	CEN TS 13649 for sampling NIOSH 6013 for analysis	Action levels to be agreed on completion of IC4 as approved in writing by the Environment Agency.
			Action levels to be achieved in accordance with permit condition 3.2 and the odour management plan.
Ammonia – inlet	Every 6 months or as agreed in writing by the Environment Agency.	EN ISO 21877	Action levels to be agreed on completion of IC4 as approved in writing by the Environment Agency.
			Action levels to be achieved in accordance with permit condition 3.2 and the odour management plan.
Odour concentration  – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	BS EN 13725	Action levels to be agreed on completion of IC4 as approved in writing by the Environment Agency.
			Action levels to be achieved in accordance with permit condition 3.2 and the odour management plan.

			I	
Carbon filter (biogas upgrading plant)	Carbon bed temperature – inlet and outlet	Continuous	Temperature probe	Odour abatement plant shall be managed in accordance with
	Gas flow rate – inlet and outlet	Continuous	Gas flow meter	permit condition 3.3, the odour
	Moisture or humidity	Daily	Moisture meter	management plan and manufacturer's
	Back pressure	Weekly	Recognised industry method	Carbon filters to be
	Efficiency assessment	Annual	Emission removal efficiency (BS EN 13725 for odour removal)	replaced in accordance with manufacturer's recommendations.
			Gudai Temevaly	Equipment shall be calibrated on a 4 monthly basis, or as agreed in writing by the Environment Agency.
	Hydrogen sulphide – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	CEN TS 13649 for sampling NIOSH 6013 for analysis	Action levels to be agreed on completion of IC4 as approved in writing by the Environment Agency.
				Action levels to be achieved in accordance with permit condition 3.2 and the odour management plan.
	Ammonia – inlet	Every 6 months or as agreed in writing by the Environment Agency.	EN ISO 21877	Action levels to be agreed on completion of IC4 as approved in writing by the Environment Agency.
				Action levels to be achieved in accordance with permit condition 3.2

			and the odour management plan.
Odour concentration  – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	BS EN 13725	Action levels to be agreed on completion of IC4 as approved in writing by the Environment Agency.  Action levels to be achieved in accordance with permit condition 3.2 and the odour
			management plan.

Table S3.4 Bio	Table S3.4 Bioaerosols monitoring requirements – ambient monitoring				
Location or description of point of measurement	Parameter	Bioaerosols action levels (CFU m <sup>-3</sup> )	Monitoring frequency	Monitoring standard or method	Other specifications
Upwind of the operational area, as described in the Technical Guidance Note M9	Total bacteria	1000 <sup>Note 1</sup>	Twice a year, unless another frequency is agreed in writing by the Environment Agency Note 2	In accordance with Technical Guidance Note M9 – Environmental monitoring of bioaerosols at	As described in the Technical Guidance Note M9, including all the additional data
Downwind of the operational area, as described in the Technical Guidance Note M9	Aspergillus Fumigatus	500 <sup>Note 1</sup>		regulated facilities.	requirements specified therein.

Note 1- The bioaerosols action levels are only applicable at downwind sampling locations equivalent to the distance of the nearest sensitive receptor. Where these action levels are elevated, the operator must take action to mitigate the impact on sensitive receptors. Assessment of compliance will be based on risk and in line with guidance.

Note 2 – Where the bioaerosols action levels are exceeded, then monitoring shall be quarterly until such time that it is demonstrated that the site has adequate mitigation for a 12-month period.

# Schedule 4 – Reporting

Parameters, for which reports shall be made, in accordance with conditions of this permit, are listed below.

Table S4.1 Reporting of m	nonitoring data		
Parameter	Emission or monitoring point/reference	Reporting period	Period begins
Emissions to air from combustion plant Parameters as required by condition 3.5.1.	EP2, EP5, EP4	Every 12 months	1 January
Emissions to air from odour abatement plant Parameters as required by condition 3.5.1.	EP1	Every 6 months	1 January, 1 July
Emissions to water and land Parameters as required by condition 3.5.1	EP8	Every 6 months	1 January, 1 July
Process monitoring – digester tank integrity Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 5 years from the date of commissioning or as per the manufacturer's recommendation, whichever is sooner	1 January
Process monitoring – under and over pressure relief systems Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 12 months Yearly summary report of over-pressure and under-pressure events detailing mass balance release	1 January
Process monitoring – leak detection and repair (inspection, calibration and maintenance) Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 3 years	1 January
Process monitoring – use of emergency flare Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 12 months	1 January
Non-compostable contamination removal efficiency Parameters as required by conditions 2.3.4 and 2.3.7		Every 12 months Yearly report of detailing contamination removal efficiency and progress with plastic reduction contamination	

Total annual VOCs emissions from gas engines (calculated)	As specified in schedule 3 table S3.3	Every 12 months	1 January
Bioaerosols monitoring Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.4	Every 3 months or as agreed in writing by the Environment Agency	1 January, 1 April, 1 July, 1 October

Table S4.2 Annual production/treatment		
Parameter	Units	
Electricity generated	MWh	
Biomethane generated	tonnes or m <sup>3</sup>	
CO <sub>2</sub> generated	tonnes or m <sup>3</sup>	
Whole digestate	tonnes	
Liquid digestate	tonnes or m <sup>3</sup>	
Solid digestate	tonnes	
Recovered outputs	tonnes	

Table S4.3 Performance parameters			
Parameter	Frequency of assessment	Units	
Water usage	Annually	tonnes or m <sup>3</sup>	
Energy usage	Annually	MWh	
Raw material usage	Annually	tonnes or m <sup>3</sup>	
Emergency flare operation	Annually	hours	
Electricity exported	Annually	MWh	
Biomethane exported	Annually	tonnes or m <sup>3</sup>	
CHP engine usage	Annually	hours	
CHP engine efficiency	Annually	%	
Auxiliary boiler usage	Annually	hours	

Table S4.4 Reporting forms				
Media/parameter	Reporting format	Date of form		
Air	Form air 1 or other form as agreed in writing by the Environment Agency	version 1, 08/03/2021		
Bioaerosols	As specified in the Technical Guidance Note M9 or other form as agreed in writing by the Environment Agency			
Process monitoring	Form process 1 or other form as agreed in writing by the Environment Agency	version 1, 08/03/2021		
Water	Form water 1 or other form as agreed in writing by the Environment Agency	version 1, 08/03/2021		

Table S4.4 Reporting forms			
Media/parameter	Reporting format	Date of form	
Water usage	Form water usage 1 or other form as agreed in writing by the Environment Agency	version 1, 08/03/2021	
Energy usage	Form energy 1 or other form as agreed in writing by the Environment Agency	version 1, 08/03/2021	
Other performance indicators	Form performance 1 or other form as agreed in writing by the Environment Agency	version 1, 08/03/2021	
Waste returns	E-waste Return Form or other form as agreed in writing by the Environment Agency		

### Schedule 5 - Notification

These pages outline the information that the operator must provide.

Units of measurement used in information supplied under Part A and B requirements shall be appropriate to the circumstances of the emission. Where appropriate, a comparison should be made of actual emissions and authorised emission limits.

If any information is considered commercially confidential, it should be separated from non-confidential information, supplied on a separate sheet and accompanied by an application for commercial confidentiality under the provisions of the EP Regulations.

#### Part A

Permit Number	
Name of operator	
Location of Facility	
Time and date of the detection	
	any malfunction, breakdown or failure of equipment or techniques, ince not controlled by an emission limit which has caused, is pollution
To be notified within 24 hours of	detection
Date and time of the event	
Reference or description of the location of the event	
Description of where any release into the environment took place	
Substances(s) potentially released	
Best estimate of the quantity or rate of release of substances	
Measures taken, or intended to be taken, to stop any emission	
Description of the failure or accident.	
(b) Notification requirements for t	the breach of a limit
To be notified within 24 hours of	detection unless otherwise specified below
Emission point reference/ source	
Parameter(s)	
Limit	
Measured value and uncertainty	

Date and time of monitoring

(b) Notification requirements for the breach of	f a limit
To be notified within 24 hours of detection un	less otherwise specified below
Measures taken, or intended to be taken, to stop the emission	
Time periods for notification following detection	ion of a breach of a limit
Parameter	Notification period
(c) Notification requirements for the detection	of any significant adverse environmental effect
To be notified within 24 hours of detection	
Description of where the effect on the environment was detected	
Substances(s) detected	
Concentrations of substances detected	
Date of monitoring/sampling	
Part B – to be submitted as so	•
Any more accurate information on the matters for notification under Part A.	Г
Measures taken, or intended to be taken, to preve a recurrence of the incident	ent
Measures taken, or intended to be taken, to rectif limit or prevent any pollution of the environment which has been or may be caused by the emission	
The dates of any unauthorised emissions from the facility in the preceding 24 months.	ie l
Name*	
Post	
Signature	
Date	

<sup>\*</sup> authorised to sign on behalf of the operator

### Schedule 6 - Interpretation

"accident" means an accident that may result in pollution.

"ADQP" means Anaerobic Digestion Quality Protocol

"anaerobic digestion" means a process of controlled decomposition of biodegradable materials under managed conditions where free oxygen is absent, at temperatures suitable for naturally occurring mesophilic or thermophilic anaerobes and facultative anaerobe bacteria species, which convert the inputs to a methanerich biogas and whole digestate.

"animal waste" means any waste consisting of animal matter that has not been processed into food for human consumption.

"application" means the application for this permit, together with any additional information supplied by the operator as part of the application and any response to a notice served under Schedule 5 to the EP Regulations.

"authorised officer" means any person authorised by the Environment Agency under section 108(1) of The Environment Act 1995 to exercise, in accordance with the terms of any such authorisation, any power specified in section 108(4) of that Act.

"Best available techniques" means the most effective and advanced stage in the development of activities and their methods of operation which indicates the practical suitability of particular techniques for providing the basis for emission limit values and other permit conditions designed to prevent and, where that is not practicable, to reduce emissions and the impact on the environment as a whole:

- (a) 'techniques' includes both the technology used and the way in which the installation is designed, built, maintained, operated and decommissioned;
- (b) 'available techniques' means those developed on a scale which allows implementation in the relevant industrial sector, under economically and technically viable conditions, taking into consideration the costs and advantages, whether or not the techniques are used or produced inside the Member State in question, as long as they are reasonably accessible to the operator;
- (c) 'best' means most effective in achieving a high general level of protection of the environment as a whole.

"bioaerosols action levels" mean the acceptable bioaerosols concentrations at the nearest sensitive receptor, or at an equivalent distance downwind of the biowaste treatment operations, which are attributable to the biowaste treatment operations. The acceptable concentrations are respectively 1000 and 500 CFU m<sup>-3</sup> for total bacteria and Aspergillus fumigatus. Where these action levels are elevated, the operator must take action to mitigate the impact on sensitive receptors.

"Biodegradable" means a material is capable of undergoing biological anaerobic or aerobic degradation leading to the production of CO<sub>2</sub>, H<sub>2</sub>O, methane, biomass, and mineral salts, depending on the environmental conditions of the process.

"building" means a construction that has the objective of providing sheltering cover and minimising emissions of noise, particulate matter, odour and litter.

"Capacity" means the potential capacity and not historical or actual production levels or throughput. This means that the designed capacity is the maximum rate at which the site can operate. Biological treatment of waste usually takes place over more than one day, so the physical daily capacity can be calculated by dividing the maximum quantity of waste that could be subject to biological treatment at any one time by the minimum residence time. For in-vessel composting, the residence time for sanitisation should be calculated separately and then aggregated to the complete composting time. Further guidance 'RGN2: Understanding the meaning of regulated facility Definition of regulated facility' is available.

"channelled emissions" means the emissions of pollutants into the environment through any kind of duct, pipe, stack, etc. This also includes emissions from open top biofilters.

"combined heat and power" (CHP) or Cogeneration means the simultaneous generation in one process of thermal energy and electrical or mechanical energy.

"competent persons and resources" means that a technically competent person accredited to a relevant scheme must attend site and record their attendance, and that all roles and responsibilities are clearly stated in the management systems along with records of operatives' training. See the guidance on the <u>level of competence and duration of attendance</u>

"compost" means solid particulate material that is the result of composting, which has been sanitised and stabilised, and which confers beneficial effects when added to soil, used as a component of growing media or used in another way in conjunction with plants.

'compostable plastics' means waste containing packaging or non-packaging items (or both) with a valid certificate of conformity to EN 13432 or an equivalent standard for compostable and digestible items, the certificate issued by an independent certification body capable of fully biodegrading by a biological process to create compost or digest.

'direct discharge' means discharge to a receiving water body

"diffuse emissions" mean non-channelled emissions (e.g. of dust, organic compounds, odour) which can result in 'area' sources (e.g. tanks) or 'point' sources (e.g. pipe flanges). This also includes emissions from open-air windrow composting.

"digestate" means material resulting from an anaerobic digestion process.

"disposal" means any of the operations provided for in Annex I to Directive 2008/98/EC of the European Parliament and of the Council on waste.

"emissions of substances not controlled by emission limits" means emissions of substances to air, water or land from the activities, either from the emission points specified in schedule 3 or from other localised or diffuse sources, which are not controlled by an emission limit.

"emissions to land" includes emissions to groundwater.

"EP Regulations" means The Environmental Permitting (England and Wales) Regulations SI 2016 No.1154 and words and expressions used in this permit which are also used in the Regulations have the same meanings as in those Regulations.

"existing medium combustion plant" means an MCP which was put into operation before 20 December 2018.

"generator" means any combustion plant which is used to generate electricity, excluding mobile, unless it is connected to the national grid.

"groundwater" means all water, which is below the surface of the ground in the saturation zone and in direct contact with the ground or subsoil.

"impermeable surface" means a surface or pavement constructed and maintained to a standard sufficient to prevent the transmission of liquids beyond the pavement surface.

"Industrial Emissions Directive" means DIRECTIVE 2010/75/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 24 November 2010 on industrial emissions, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

"Leak detection and repair (LDAR) programme" means a structured approach to reduce fugitive emissions of organic compounds by detection and subsequent repair or replacement of leaking components. Currently, sniffing (described by EN 15446) and optical gas imaging methods are available for the identification of leaks as set out in BAT 14 and section 6.6.2 of the Waste Treatment BAT Conclusions.

"maturation" means optional period of treatment or storage of separated fibre digestate under predominantly aerobic conditions.

"MCERTS" means the Environment Agency's Monitoring Certification Scheme.

"medium combustion plant" or "MCP" means a combustion plant with a rated thermal input equal to or greater than 1 MW but less than 50 MW.

"Medium Combustion Plant Directive" or "MCPD" means Directive 2015/2193/EU of the European Parliament and of the Council on the limitation of emissions of certain pollutants into the air from medium combustion plants, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

"new medium combustion plant" means an MCP which was put into operation after 20 December 2018. This includes replacement MCP and Generators.

"NOMAD trial" means the NOMAD H2020 project which is a pan-European collaborative research and development project which aims to prove the technical and commercial feasibility of a mobile waste treatment unit. Specifically, NOMAD aims to demonstrate that anaerobic digestate waste can be treated in a mobile unit to produce fertiliser products for use in a range of sectors. The demonstration phase consists of 12 months of operational running, with the unit to spend time in Greece, Italy, Malta, and the UK at partner biogas sites. The demonstration phase aims to successfully treat digestate from an anaerobic digester and produce a viable crop nutrition product, with technology trials executed in accordance with an experimental methodology and trial plan at each site.

"operational area" means any part of a facility used for the handling, storing and treatment of waste.

"operator" means in relation to a regulated facility:

- a) the person who has control over the operation of the regulated facility,
- b) if the regulated facility has not yet been put into operation, the person who will have control over the regulated facility when it is put into operation, or
- c) if a regulated facility authorised by an environmental permit ceases to be in operation, the person who holds the environmental permit

"pests" means birds, vermin and insects.

"pollution" means emissions as a result of human activity which may—

- (a) be harmful to human health or the quality of the environment,
- (b) cause offence to a human sense,
- (c) result in damage to material property, or
- (d) impair or interfere with amenities and other legitimate uses of the environment.

"quarter" means a calendar year quarter commencing on 1 January, 1 April, 1 July or 1 October.

"recovery" means any of the operations provided for in Annex II to Directive 2008/98/EC of the European Parliament and of the Council on waste.

"Representative internal" means representative monitoring at a point internally of the windrows that will give a representative assessment of temperature. Note: Larger windrows will require more bespoke temperature equipment to adequate assess temperature profiles accurately.

"sealed drainage system" in relation to an impermeable surface, means a drainage system with impermeable components which does not leak and which will ensure that:

- a) no liquids will run off the surface otherwise than via the system
- b) all liquids entering the system are collected in a sealed sump, except where liquids may be lawfully discharged to foul sewer.

"treated wood" means any wood that has been chemically treated (e.g. to enhance or alter the performance of the original wood). Treatments may include penetrating oils, tar oil preservatives, water-borne preservatives, organic-based preservatives, boron and organo-metallic based preservatives, boron and halogenated flame retardants and surface treatments (including paint and venner).

"VOC" means Volatile organic compounds as defined in Article 3(45) of Directive 2010/75/EU – 'volatile organic compound' means any organic compound as well as the fraction of creosote, having at 293.15K a vapour pressure of 0.01 kPa or more, or having a corresponding volatility under the particular conditions of use.

"Waste code" means the six digit code referable to a type of waste in accordance with the List of Wastes (England)Regulations 2005, or List of Wastes (Wales) Regulations 2005, as appropriate, and in relation to hazardous waste, includes the asterisk.

"Waste Framework Directive" or "WFD" means Waste Framework Directive 2008/98/EC of the European Parliament and of the Council on waste, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.


Where a minimum limit is set for any emission parameter, for example pH, reference to exceeding the limit shall mean that the parameter shall not be less than that limit.

Unless otherwise stated, any references in this permit to concentrations of substances in emissions into air means:

- a) in relation to emissions from combustion processes, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 3% dry for liquid fuels and gaseous fuels, 6% dry for solid fuels; and/or
- b) in relation to emissions from non-combustion sources, the concentration at a temperature of 273K and at a pressure of 101.3 kPa, with no correction for water vapour content.

"year" means calendar year ending 31 December.

# Schedule 7 – Site plan

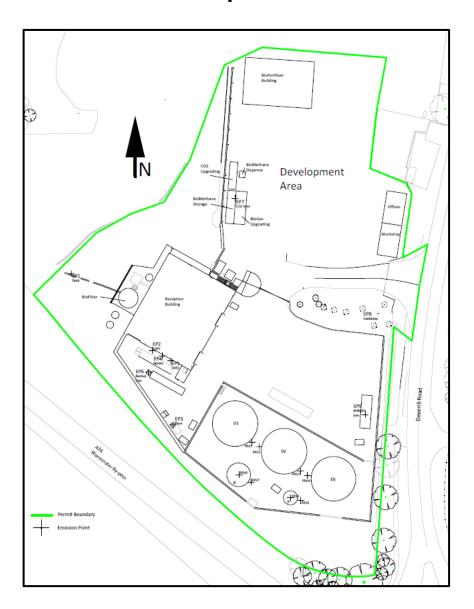

©Crown Copyright. All rights reserved. Environment Agency, 100026380, 2023.

## **Annex 1 of MCP**

Rated thermal input (MW) of the medium combustion plant.  2. Type of the medium combustion plant	CHP 1 – 1.19 MW CHP 2 – 1.32 MW Boiler 1 – 0.21 MW Boiler 2 – 0.21 MW Emergency generator – 0.03 MW NOMAD Trial generator – 0.01 MW  CHP 1 – combined heat & power CHP 2 – combined heat & power
(diesel engine, gas turbine, dual fuel engine, other engine or other medium combustion plant).	Boiler 1 – Boiler Boiler 2 – Boiler Emergency generator – diesel engine NOMAD Trial generator – diesel engine
3. Type and share of fuels used according to the fuel categories laid down in Annex II.	CHP 1 – Biogas (100%) CHP 2 – Biogas (100%) Boiler 1 – Biogas (100%) Boiler 2 – Biogas (100%) Emergency generator – Diesel (100%) NOMAD Trial generator – Diesel (100%)
4. Date of the start of the operation of the medium combustion plant or, where the exact date of the start of the operation is unknown, proof of the fact that the operation started before 20 December 2018.	CHP 1 – 05/07/2012 CHP 2 – 17/12/2013 Boiler 1 – 05/07/2012 Boiler 2 – 05/07/2012 Emergency generator – 18/02/2022 NOMAD Trial generator – 10/04/2023 (proposed)
5. Sector of activity of the medium combustion plant or the facility in which it is applied (NACE code.	CHP 1 – 35.11 Production of electricity CHP 2 – 35.11 Production of electricity Boiler 1 – 35.11 Production of electricity Boiler 2 – 35.11 Production of electricity Emergency generator – 35.11 Production of electricity NOMAD Trial generator – 35.11 Production of electricity
6. Expected number of annual operating hours of the medium combustion plant and average load in use.	CHP 1 – 8,600 hours (97.5% load) CHP 2 – 8,600 hours (90% load) Boiler 1 – 400 hours Boiler 2 – 400 hours Emergency generator – 124 hours NOMAD Trial generator – 250 hours
7. Where the option of exemption under Article 6(3) or Article 6(8) is used, a declaration signed by the operator that the medium combustion plant will not be operated more than the number of hours referred to in those paragraphs.	CHP 1 – N/A CHP 2 – N/A Boiler 1 – N/A Boiler 2 – N/A Emergency generator – N/A NOMAD Trial generator – N/A
8. Name and registered office of the operator and, in the case of stationary medium combustion plants, the address where the plant is located.	Malaby Biogas Limited Bore Hill Farm Biodigester Deverill Road Warminster BA12 8FB

**END OF PERMIT**