



Department
for Transport

TAG UNIT M2.1

Variable Demand Modelling

May 2024

Department for Transport

Transport Analysis Guidance (TAG)

<https://www.gov.uk/transport-analysis-guidance-tag>

This TAG Unit is guidance for the **Modelling Practitioner**

Technical queries and comments on this TAG Unit should be referred to:

Transport Appraisal and Strategic Modelling (TASM) Division

Department for Transport
Zone 2/25 Great Minster House
33 Horseferry Road
London
SW1P 4DR
tasm@dft.gov.uk



Contents

1. Introduction	5
1.1 Background to Variable Demand Modelling	5
1.2 This TAG Unit	6
1.3 Core Requirements	7
2. Scoping the Model and Initial Development	9
2.1 Background	9
2.2 Assessment of the Need for Variable Demand Modelling	10
2.3 Preliminary Scoping of the Variable Demand Model	13
2.4 Model Area and Zone Size	16
2.5 Matrix Development	17
2.6 Segmentation: Trip and Person Types	19
2.7 Division into Time Periods	22
3. Representation of Travel Costs	23
3.1 Generalised Cost Formulation	23
3.2 Composite Costs	27
3.3 Cost Damping	29
4. Model Form and Choice Responses	34
4.1 Background	34
4.2 Functional Form	35
4.3 Form of Models	36
4.4 Model Interfaces	38
4.5 Hierarchy of Choice Responses	40
4.6 Trip Frequency	43
4.7 Mode Choice	44
4.8 Time of Day Choice	47
4.9 Trip Distribution	50
4.10 Route Choice: Assignment Modelling	53
5. Demand Model Calibration	54
5.1 Local Calibration of Demand Models	54
5.2 Trip Frequency	54

5.3	Mode Choice	54
5.4	Time Period Choice	56
5.5	Distribution	56
5.6	Illustrative Parameter Values	57
6.	Convergence, Realism and Sensitivity	62
6.1	Background	62
6.2	Building the Model and Model Interfaces	62
6.3	Convergence	63
6.4	Realism Testing	66
6.5	Model Adjustment	74
6.6	Sensitivity Testing	78
6.7	Reporting	79
7.	References	80
8.	Document Provenance	82
	Appendix A: Elasticity Models	83
	A.1 Functional Forms and Parameter Values of Elasticity Models	83
	Appendix B: Values of Time for Use with Income Segmentation	87
	B.2 National Values of Time	87
	B.3 Local Values of Time	88
	Appendix C: Functional Forms for VDM	90
	C.1 Detailed Advice on Functional Forms of VDM	90
	C.2 Trip Frequency	92
	C.3 Mode Choice	93
	C.4 Time of day choice	93
	C.5 Trip Distribution	94
	Appendix D: Incremental Model Formulation	96
	D.2 Inputs	98
	D.3 Bottom level utilities	98
	D.4 Doubly-constrained distribution	98
	D.5 Composite Utilities	99
	D.6 Conditional Probabilities	100
	D.7 Updated Trip Matrix	100
	D.8 Application of Frequency Model	100
	Appendix E: Absolute Model Formulation	101
	E.2 Assumed Nesting	101

E.3	Notation	101
E.4	Composite Utilities:	101
E.5	Choice Probabilities:	102
Appendix F: Estimation of Transferred Mode Choice Models		104
Appendix G: Application of synthetic growth		109
Appendix H: Use of DIADEM		110
H.1	Introduction	110
H.2	DIADEM Procedures	110

1. Introduction

1.1 Background to Variable Demand Modelling

- 1.1.1 [Guidance for the Technical Project Manager](#) and [TAG unit M1.1 Principles of Modelling and Forecasting](#) explain why variable demand modelling needs to be considered in scheme appraisals. The technical project manager guidance explains how to establish whether there is a need for variable demand modelling in a particular application. Assuming that there is a need, it then goes on to give preliminary advice on the scope of the model, with a view to developing a model which is appropriate for the complexity of the interventions that it will be used to test.
- 1.1.2 Any change to transport conditions will, in principle, cause a change in demand, overall and its distribution. Relevant changes are not limited to specific scheme interventions but also relate to such matters as changes in demand and generalised cost values, so consideration of variable demand is expected in any forecast, including a Do Minimum against which interventions are compared. The purpose of variable demand modelling is to predict and quantify these changes.
- 1.1.3 It is of key importance in modelling to establish a realistic scenario in the absence of and with the inclusion of the proposed scheme or strategy. For schemes that may affect traveller behaviour such as choice of mode, realistic levels of demand across the modes needs to be established.
- 1.1.4 Although the modelling effort needs to be proportionate to the scale of a potential intervention, the need to consider variable demand is not simply a question of the size of the intervention. Since both demand changes and benefits tend to scale with the size of the scheme, changes in demand can have similar proportionate effects on benefits for both large and small schemes. Thus, changes in demand can have fundamental implications for the justification of a scheme of any size, in terms of economic, environmental and social impacts and should be represented appropriately and proportionately.
- 1.1.5 This unit provides advice on the implementation of a variable demand model (VDM) in the context of the standard model outlined in [TAG unit M1.1 Principles of Modelling and Forecasting](#). Any response in the demand for transport of **freight** is not considered here, and it is generally assumed that total freight traffic is fixed, but susceptible to re-routing.
- 1.1.6 This unit also touches on own-cost elasticity modelling for highway in two contexts. The first is for the assessment of whether a fixed matrix appraisal would be acceptable. The second is for rapid sifting of large numbers of options before moving on to using the standard model for any business case. Own cost

elasticity approaches for rail modelling are covered in [TAG unit A5-3 rail appraisal](#).

1.1.7 This unit **excludes** advice on processing traffic data for the development of demand matrices for transport models, which is set out in [TAG unit M2.2 - Base Year Demand Matrix Development](#).

1.1.8 This unit is complemented by TAG M5 advanced modelling techniques and [TAG supplementary guidance](#):

- [TAG unit M5.1 Modelling Parking and Park-and-Ride](#) provides advice on modelling park and ride
- [TAG unit M5.2 Modelling Smarter Choices](#) provides advice on incorporating the impacts of smarter choice initiatives in the standard model.
- [TAG unit M5.3 Supplementary Economic Modelling](#) explains methods to estimate the economic impact of transport schemes including: additionality models, reduced-form models, Land-Use Transport Interaction (LUTI) models and Spatial Computable General Equilibrium (S-GCE) models
- [NTEM sub-models](#) – this unit gives a detailed background to the national car ownership model (NATCOP) and the National Trip End Model (NTEM). These models contribute to generating trip end forecasts known as the NTEM data set, which users may access freely via the TEMPRO software.
- [Bespoke mode choice models](#) – this unit provides advice on modelling for the appraisal of new modes or characteristics, for modelling cases where traveller behaviour is very different to national norms, and for transferring an entire modelling system from one area to another.
- [Mixed logit models](#) – this unit provides advice on the use of mixed logit models, which can be used to model taste variation and to model complex substitution through cross nesting of alternatives.
- [Land use/transport interaction \(LUTI\) models](#) – this unit outlines general introductory principles behind LUTI models. LUTI models account for the impact of transport provision on changes to land-use patterns, which allows modellers to calculate Level 3 Benefits in the taxonomy set out in [TAG unit A2.1 Wider Economic Appraisal Impacts](#).

1.2 This TAG Unit

1.2.1 This TAG unit describes the considerations and processes required in variable demand modelling:

- Scoping out the requirements of the model, based on the objectives at hand and the requirements of a fit-for-purpose forecasting tool, including scoping the need for having a variable demand model (VDM) at all by testing how

important including demand responses might be and whether it is acceptable to exclude them (section 2)

- Formulation of how travel costs (disutilities) will be handled within the model (section 3)
- Development of the model and appreciation of the model form and choice responses that need to be represented (section 4)
- Ensuring that the model is appropriately calibrated using local data sources or illustrative model parameters (section 5)
- Ensuring that the model is valid and fit-for-purpose, by ensuring convergence, undertaking realism tests and running sensitivity tests around key parameters (section 6)

1.2.2 Throughout the advice there are a number of important recommendations shown highlighted and in bold: if these actions are not followed, analysts will need to provide rigorous justification for the course of action taken.

1.3 Core Requirements

1.3.1 The intention of this advice is to describe the basis of variable demand modelling as clearly and simply as possible and it is intended to represent generally accepted best practice. A summary of the main points to note regarding core requirements is as follows:

- Overall, there should be a presumption that the effects of variable demand on scheme benefits **will** be estimated quantitatively unless there is a compelling reason for not doing so. This may be justified by undertaking scoping tests as described in section 2.2. The justification for the approach adopted, including the results of these tests, where conducted, should be reported in an Appraisal Specification Report and also noted in the Forecasting Report. Even if induced traffic¹ does not alter the case for the scheme appreciably, the assessment may be criticised if it cannot **demonstrate that the case is robust** against possible changes in demand.
- The **amount of detail required** in demand modelling will depend upon the particular application, since the effort and cost involved should be commensurate with the investment being assessed and the scale of its effects.
- In modelling demand, some **segmentation by trip and traveller type** is essential: at minimum there should be categorisation by trip purpose (at least home-based work (commuting), employer's business, and 'other')

¹ Variable demand responses may lead to induced demand, if the amount of overall demand for travel increases, brought about if the model contains an elasticity for trip frequency in response to generalised cost reductions. Distributive model processes that reflect the choice between alternatives in response to generalised cost changes may lead to induced traffic: an increased demand (trips or mileage) for the mode that has been improved, for example through a mode or destination shift.

purposes); some form of distinction between travellers with and without a car available is also very desirable and is expected where mode-choice is to be considered. In many cases, modelling multi-car ownership is desirable, and should be practicable, if household survey data sets are available or sufficient data are available for its synthesis.

- **The sequence of the distribution and mode split stages in the calculation hierarchy depends upon the relative strengths of the sensitivity parameters**, but trip frequency should always be calculated first (highest) and micro time period choice (peak-spreading), if it is to be included, will generally be lowest in the demand model hierarchy, with route choice (within the assignment model) being the most sensitive. The sensitivity parameters must always increase (strictly never decrease) along this sequence from highest to lowest, and this may require different sequences for different segments of travel (e.g. purpose, etc.). **In the absence of strong evidence to the contrary, the model should adopt the default hierarchy of responses as recommended in section 4.5.**
- All transport models depend upon relating people's travel choices to estimates of their **generalised cost of travel** - a weighted sum of time and other costs of travel which can be measured in units of money or (preferably) time. These costs are estimated within both the demand model and assignment model.
- The Department's long-established preferred approach is to use **an incremental rather than an absolute model**, unless there are strong reasons for not doing so.
- **Convergence between the assignment and the demand model(s) is very important** and must be clearly reported.
- Variable demand mechanisms should be **calibrated on local data**, to reflect the local strengths of the choice mechanisms. Where this is not possible the **illustrative parameter values presented in this unit may be used**, obtained from a review of transport models in the UK. It is recommended that locally calibrated models compare their parameters to the illustrative parameters and explain differences.
- It is essential to apply **realism testing** to ensure that the model responds rationally and with acceptable elasticities.
- It is also necessary to apply **sensitivity testing** to determine the variation in the results of the assessment against the uncertainty in the input parameters.

2. Scoping the Model and Initial Development

2.1 Background

- 2.1.1 This section describes some of the early choices that need to be made when considering the development of a variable demand model. This includes preliminary tests for the need of such a model and, once a need is ascertained, defining the scope of the model in general. The following sections go into more detail regarding specific components of the demand model and the calibration process.
- 2.1.2 This guidance is based on cases where a full multi-modal model with appropriate segmentation and representation of demand responses is required. Less detail may be acceptable, though it will be expected that an appropriate case is made at an early stage for any simplifications adopted (see [Guidance for the Technical Project Manager](#) and the requirements for an Appraisal Specification Report). In particular, readers should consult section 2.3 regarding the need for a full representation of alternative modes.
- 2.1.3 A summary of the advice in this section is as follows:
- An initial assessment of the need for a variable demand model should be undertaken. This is discussed in section 2.2.
 - Once the need for a variable demand model has been established, initial decisions concerning the basic structure of the model are required. These should be based on the existing and expected transport problems and likely solutions being assessed. This is discussed in section 2.3.
 - The demand and supply processes need to allow for trip redistribution and when designing the zone system must provide a fine enough level of detail for the schemes and strategies being assessed. This is discussed in section 2.4.
 - Various stages of the demand modelling and forecasting process require travel movements to be described in terms of the factors that generate or attract trips - i.e. by productions and attractions (P/A). Section 2.5 discusses the conversion between P/A and origin-destination (O/D) forms for use in the multi-stage modelling process. It also discusses the requirement to construct a base year travel pattern and reference case growth forecasts.
 - The impacts of different policy measures on particular groups of people can only be represented realistically and forecast satisfactorily if the demand modelling process is suitably segmented. Modelling should use groups of travellers (segments) that may be expected to continue to behave in similar fashion over time. This is discussed in section 2.6.

- Travel demand and traffic levels vary throughout the day and this usually requires the modelling of different time periods. The need to divide the day into different periods, related to the daily profiles of road traffic, is no more onerous than is normally needed in assignment modelling, unless it is intended to model peak spreading, as described in section 2.7.

2.2 Assessment of the Need for Variable Demand Modelling

2.2.1 Variable demand modelling should be carried out to avoid introducing biases into the appraisal of schemes. For example, a fixed matrix approach will overstate journey times in the highway Do-Minimum case because it does not allow for changes of destination or mode to avoid congestion. Similarly, in the Do-Something case, a fixed highway matrix approach would overstate reductions in journey time by failing to account for additional delays generated by the additional highway demand generated by the improvement. Thus, variable demand modelling is needed in both the Do-Minimum and Do-Something cases to avoid exaggerating travel time-saving per vehicle in the appraisal.

2.2.2 **Proposed relaxations from this approach should be justified numerically in the Appraisal Specification Report.** The mathematical tests for this task are set out in the rest of this section.

2.2.3 It may be acceptable to limit the assessment of a scheme to a fixed demand assessment if the following criteria are satisfied:

- The scheme is quite modest either spatially or financially and is also quite modest in terms of its effect on travel costs. Schemes with a capital cost of less than £5 million can generally be considered as modest

or the following two points:

- There is no congestion or crowding on the network in the forecast year (for example 10 to 15 years after opening), in the absence of the scheme
- The scheme will have no appreciable effect on travel choices (e.g. mode choice or distribution) in the corridor(s) containing the scheme

Preliminary Assessments of Need for Variable Demand Model

2.2.4 **In order to establish a case for omitting variable demand in the model, preliminary quantitative estimates should be made of both traffic levels and benefits under fixed demand and variable demand approaches.**

2.2.5 Where an appropriately developed variable demand model of the area is available, it should be used to produce equivalent forecasts for the preliminary assessment. If none is available, an elastic assignment procedure can be used to produce the forecasts as follows:

- Select an appropriate functional form (see Appendix A).

- Adjust the parameter values in the elastic assignment so that the outturn car fuel cost elasticity falls within the appropriate range from the realism tests (see section 6.4).
- Produce reference case forecasts for the scheme opening year and a further forecast year following the guidance in [TAG unit M4 Forecasting and Uncertainty](#).
- Produce Without-Scheme and With-Scheme forecasts for the scheme opening year and a further forecast year following the guidance in [TAG unit M4 Forecasting and Uncertainty](#).

2.2.6 Fixed demand forecasts for the preliminary assessments should be created following the guidance in [TAG unit M4 Forecasting and Uncertainty](#):

- Produce reference case forecasts for the scheme opening year and a further forecast year (10-15 years after scheme opening).
- Apply fuel and income factors to the reference case forecasts (these can be found in the [TAG Data Book](#)).
- Produce Without-Scheme and With-Scheme forecasts (following guidance in [TAG unit M4 Forecasting and Uncertainty](#)) to support the preliminary assessment.

2.2.7 The forecast year generalised cost parameters in the elastic assignment should be adjusted using the information in the [TAG data book](#) to reflect the impacts of changes in the value of time and fuel costs.

2.2.8 Where preliminary calculations using an existing variable demand model are carried out, it will be acceptable in general to use a fixed demand assessment where the resulting difference in suppressed/induced traffic when using the demand model does not change benefits resulting from a scheme by more than **10% in the opening year and 15% in the forecast year** (10 to 15 years later) relative to a fixed demand case.

2.2.9 These calculations may provide strong enough evidence to conclude that the impact of variable demand will be negligible and thus provide a useful justification for restricting the assessment to fixed trip matrix. However, the possible superiority of alternative schemes that may have more significant impacts on demand, including potential improvements to public transport, also needs to be considered.

2.2.10 If it is decided that variable demand modelling is required, then the scope of the variable demand model must be established (see section 2.3).

2.2.11 The outcome of the assessment of the need for a variable demand model, as well as the series of tests outlined below, should be reported in the Appraisal Specification Report (see [Guidance for the Technical Project Manager](#)). Details of how each criterion has been considered and all the evidence that has been

compiled should be fully documented. In all cases, the analyst will need to provide a justification for any simplifications adopted.

The Status of Elasticity Methods

- 2.2.12 **"Own-cost" elasticity models** assume that the demand for travel between two points is purely a function of the change in costs on that mode between the two places. The strength of that function can vary for different trip lengths.
- 2.2.13 **It is recommended that own cost elasticity models are not used instead of full variable demand models².** An own cost elasticity model applied to all trips cannot recreate the change in pattern of travel nor all of the changes in trip lengths that are forecast by a trip distribution model, nor can it properly represent the transfer of trips from one mode to another when there are changes to the cost of several modes or the transfer from one time period to another. The Department's internal research has shown that elasticity models are unable to appropriately estimate the effect of variable demand responses, hence, their estimation of scheme benefits may be erroneous.
- 2.2.14 There may be a role for elasticity models in **option testing** to proxy full variable demand model results where it would be disproportionate to run the full model. This may be particularly useful if the model takes a long time to run or there are a large number of potential options. However, the analyst must note the caveats related to elasticity-based methods and be satisfied that the results do not mislead in order to avoid poor options being taken through to the full modelling stage. If an elasticity approach is to be applied in this way, then Appendix A sets out the different possible formulations.

Status of Tiered Models

- 2.2.15 Tiered models are discussed in [TAG unit M3.1 Highway Assignment Modelling](#). The unit refers to a form of tiered model in which a simplified representation of the highway model is used in an upper tier demand model. It sets out a requirement that the demand estimated by the higher tier model and supply estimated by the detailed model meets the guidelines for acceptable demand-supply convergence in section 6.3.
- 2.2.16 Generalised costs need to be consistent between tiers in any form of tiered model so that the Without-Scheme forecasts show approximately the same level of delays in the two models and the With-Scheme case show the same level of change in generalised costs in the two models. The difference between the benefits of a scheme forecast in the upper and lower tier models should be no more than 10% in the base year and 15% in the future year.

² A common exception is in rail appraisals, which often make use of elasticity-based demand forecasting methods (using elasticities from the Passenger Demand Forecasting Handbook (PDFH)). These models are often uni-modal rather than multi-modal, commonly lacking explicit representation of other modes.

2.3 Preliminary Scoping of the Variable Demand Model

- 2.3.1 Having concluded that a variable demand model is required, it is necessary to take a view on the scope of the modelling system. [TAG unit M1.1 Principles of Modelling and Forecasting](#) describes the stages required in a full model system, including the role of the demand model and its interaction with assignment.
- 2.3.2 The analyst should explore whether or not a potentially suitable model of the required area already exists in order to apply it to the transport problem and proposed solutions. Such a model may require adjustment to this particular case but may substantially save time in development. Where there is no existing model, the analyst must ensure that the effort in constructing a model to appraise an intervention is proportionate.
- 2.3.3 Typically, the demand model should address the responses of frequency, mode choice and destination choice, as well as, in some instances, time of day choice, and should be applied on a Production/Attraction (P/A) basis. However, while for large and complex schemes a full variable demand approach is likely to be required, not all schemes will require this, and it is important that the model is appropriate for the interventions that it will be used to test.
- 2.3.4 For the majority of cases, it will be essential to model AM peak, PM peak and inter-peak time periods. The modelling of off-peak periods (before the AM peak and after the PM peak) may be worthwhile where important scheme impacts occur in this period (e.g. noise or air quality issues). The model should represent an average weekday, though special handling may be needed for situations where seasonal traffic plays an important role.
- 2.3.5 The main possibility for simplification is in the treatment of mode, since much of the modelling effort can be attributed to reflecting the impact on alternative modes. If it is the case that the model is required to appraise policies relating to both highway and public transport modes, it likely that a multi-modal model including both highway and public transport modes will be needed. However, when policies relate only to or can be expected to affect only one mode, it may be possible to concentrate the modelling on that mode.
- 2.3.6 Where there is limited scope for transfer between modes, the demand model may not require a mode choice element nor the representation of the costs of alternative modes in any detail (and hence may not need an associated assignment model for those modes). Simplifications of this kind are likely to also impact on the level of detail required in the demand model. For example, in the case of a highway scheme where no shift to or from public transport is expected, the demand model segmentation may be restricted to car users only.
- 2.3.7 There may also be scope for simplification in the supply model where there are no significant routeing alternatives, or where the generalised costs of using public transport are not heavily dependent on route choice. In a public transport scheme where crowding is a possibility, the generalised costs are dependent on the level of demand and more detailed representation, most likely involving a public transport assignment model, is warranted. However, when crowding is

not present, and route choice is simple (because of restricted alternatives), the need for a public transport assignment model is greatly reduced. This applies even in the case of a policy relating to public transport.

Modal Shift Significance Test

2.3.8 In principle, any change in relative generalised cost between the modes will lead to some modal shift. However, this sensitivity is usually low, as implied by the mode choice parameters in section 5.6. A test can be formulated to make a preliminary estimate of the likely amount of modal diversion, as follows:

- For each zone-to-zone movement, using available data, estimate the approximate modal split between car and public transport, and the change in costs expected to arise from the scheme for each mode.
- The modal impact may be considered significant if, for any zone to zone movement where the car share is below 75%, the cost change between modes is more than one minute, or, where the car share is between 75% and 85%, the cost change is more than two minutes, or, where the car share is above 85%, the cost change is more than four minutes.
- If on this basis no zone-to-zone movement demonstrates significant modal impact, then this is prima facie evidence for not requiring a mode choice model.

Logical Tests for Provisional Model Scope

2.3.9 A set of logical tests has been defined to give a clear assessment of which modes need to be modelled:

- Test 1 - Do the set of schemes to be appraised relate to only one of the modes - public transport and highway? If NO, a multi-modal treatment will, in principle, be required.
- Test 2 - If the scheme is highway only, does the application of the mode shift test suggest that there will be a significant impact on public transport demand? If YES, a mode choice model will, in principle, be required.
- Test 3 - If the scheme is public transport only, does the application of the mode shift test suggest that there will be a significant impact on highway demand? If YES, a mode choice model will, in principle, be required.
- Test 4 - If the scheme is highway only, and a mode choice model is not required, then a public transport assignment model is not required.
- Test 5 - If the scheme is public transport only, and a mode choice model is not required, then a highway assignment model is not required. In addition, a public transport network model may not be necessary if the level of

crowding is not expected to be significant during the lifetime of the scheme, and routing is generally straightforward.

- Test 6 - If the scheme is public transport only, then, even if a mode choice model is required, it may be proportional to manage without a highway assignment model and use the techniques described in [TAG unit A5.4 Marginal External Costs](#) to measure decongestion benefits (through use of "Marginal External Costs of Congestion"). This will only be appropriate where there is no impact from the scheme on highway capacity, the analyst is satisfied that highway costs are adequately represented in the base and forecast years where a mode choice model is in use and there is a relatively small amount of mode shift (i.e. the highway costs are not anticipated to change significantly). In addition, as in Test (5), a public transport assignment model may not be necessary if the level of crowding is not expected to be significant during the lifetime of the scheme, and routing is generally straightforward.

Mode Choice Model: Bespoke or Transferred?

- 2.3.10 In practice, where a mode choice model is a requirement, the majority of model developers transfer the mode choice component from other similar model types and structures. Bespoke models may occasionally be required in cases where appropriate models to transfer do not exist or are of insufficient quality, or the scope of the model or scheme is sufficiently large and complex to warrant such an approach. An example of this is where a new mode is required to be modelled, for very large public transport schemes, or where traveller behaviour, e.g. in terms of values of time, is substantially different from national norms.
- 2.3.11 Many models may fall somewhere between pure 'bespoke' and 'transferred' types, depending on how the 'imported parameters' are obtained, and the extent to which local data is available to calibrate the model. As part of the calibration procedure, it is important that the model sensitivities are replicated (and in the case of absolute models, the observed mode shares).
- 2.3.12 Further information on construction of bespoke mode choice models can be found in the **Supplementary Guidance** section of TAG. Section 4.7 provides some guidance on how to estimate mode choice models in the context of transferred models.

Land Use and Transport Interactions

- 2.3.13 Undertaking a land use transport interaction (LUTI) model is costly, data-hungry and time-consuming. For some cases, however, the impact of the scheme on regeneration is expected to be substantial and therefore an important part of modelling and scheme appraisal. In these cases, a LUTI model approach should be carefully considered.
- 2.3.14 Where such expenditure is not defensible, an alternative approach is to extract measures of accessibility from the transport model and use these to inform expert judgement. In cases where an objective of the scheme is simply to

improve accessibility these measures are in principle sufficient in themselves, but they can also give sufficient information for an expert to assess what land use changes are likely.

2.4 Model Area and Zone Size

Model Area

- 2.4.1 The consideration of the spatial area to be represented by both demand and assignment models is a balance between the area being large enough to capture all the salient impacts of a scheme, whilst not being so large that model runtimes, convergence and noise become a problem ([TAG unit M1.1 Principles of Modelling and Forecasting](#) has more details). The overall maxim is that the model area should be fit for purpose in order to fully account for not only the route choice impacts, but the choices on the demand side as well.
- 2.4.2 [TAG unit M3.1 Highway Assignment Modelling](#) and [TAG unit M3.2 Public Transport Assignment Modelling](#), give guidance on defining an appropriate modelled area for assignment models. This will usually be composed of an **Area of Detailed Modelling**, in which both routing and demand responses are expected to occur and hence it is desirable to have the representation of the network and zoning system as detailed as possible. The rest of the fully modelled area may contain larger zones and less network detail. The external area will usually consist of very large zones and a skeletal network. The "study area" would generally equate to the fully modelled area.
- 2.4.3 Movements between the internal and external areas need to be represented at an appropriate level of detail, for five reasons:
- On the **demand side** if only internal movements are properly represented as trips, then zones near the border will have (apparently) lower levels of trip-making.
 - When modelling destination choice, travel opportunities to both internal and external zones need to be represented. Thus, although the external area can be represented at a coarse geographical level, it is important that it should contain sufficient close destinations, and appropriately attractive ones, to take a realistic share of demand from within the modelled area.
 - Similarly, zones just outside the fully modelled area need to provide a realistic demand into the area. Hence, the fully modelled area should be surrounded by a ring of 'buffer' zones a little larger than the internal zones, and outside these will be very large zones representing the rest of the external area.
 - And finally, to be able to model mode and destination choice well in the whole area, if the trip length needs to be represented, not just the part in the internal area

- On the **supply side**, movements from one external zone to another external zone may form 'through traffic' in the modelled area and this may respond to changes in congestion in the study area, possibly rerouting outside the study area, but also to factors beyond the scope of the model such as projects and developments in the external area.

Zone Size and Intrazonals

- 2.4.4 The size of internal zones will need to be carefully considered in relation to intrazonal trips in order to avoid any biases in the demand model. At the distribution stage it is important to be able to redistribute intrazonals to become interzonals, and interzonals to become intrazonals, if relative costs change. If the zone sizes are small this is less of a problem, but for large zones it is important that the average intrazonal costs are as realistic as possible.
- 2.4.5 Various approaches may be used to derive intrazonal costs:
- assume the average cost of an intrazonal trip is a fixed proportion of the costs of interzonal trips to the neighbouring zones, or
 - assume the mean distance of an intrazonal trip is a proportion of distance to the neighbours and costs generated accordingly.
- 2.4.6 Intrazonal costs should reflect the prevailing level of congestion via the mean journey speeds, and preferably its response to changing demand or local schemes. Basing costs on those of trips to the neighbouring zones will generally be sufficient.
- 2.4.7 As noted in [TAG unit M3.1 Highway Assignment Modelling](#), "cordon models" are not recommended, since they do not allow a full representation of end-to-end costs for journeys crossing the cordon. Truncating costs at the cordon boundary will render some forms of demand model inappropriate. The use of true end-to-end journey costs will allow the modeller greater freedom in the choice of demand model, and to reflect long-distance re-routing for through traffic.

2.5 Matrix Development

Matrix Form

- 2.5.1 Variable demand models usually operate on demand matrices in Production / Attraction (P/A) form or tours form, rather than Origin/Destination (O/D) form. In P/A form, the rows of the matrix represent the trip productions (the home-end) and the columns represent attractions (the non-home-end).
- 2.5.2 Variable demand models should use P/A matrices rather than O/D matrices because forecasts will be more accurate. The P/A form relates demand more closely to behaviour and the data available or forecasting. The productions generated in a zone are closely related to the population of the zone, for example the number of resident workers and whether or not they own cars. The

attractions generated in a zone are closely related to the land-use and the reasons for travelling to the zone, such as the numbers of jobs in the zone or the retail floorspace.

- 2.5.3 Model developers may choose whether to further segment P/A form matrices into tours form. The shortest, and most common, pattern for a tour has two trips – an outbound trip from home to an activity, and a return trip from the activity to home. In tours form, matrices are further segmented by time period of each trip and may include more trips than just the outbound and return home. In general, a tour-based approach should give higher quality representation of behaviour in several of the components of the model system³, but they are, at the present time, generally restricted to large scale strategic models. If available, they could be used to provide inputs to more local trip-based based models.
- 2.5.4 For the assignment stage of the model, it is necessary to convert the demand matrices into O/D form. This is discussed in section 4.4. For non-home-based trips, the matrices are already in O/D format, as there is no home end to identify.
- 2.5.5 There are a few circumstances, however, where it may be satisfactory to use O/D based demand matrices for forecasting, largely for reasons of practicality. This may be where the model is simple enough or used for a specific purpose for which the analyst can be confident that the forecasts will not be biased, such as where forecasts are based on a simple overall growth rate, or only the AM peak is being modelled, etc. This situation is expected to be very uncommon. **Advice should be sought from the Department before specifying the model if an O/D based demand modelling approach is being considered.**

Matrix Development

- 2.5.6 [TAG unit M1.2 Data Sources and Surveys](#) gives guidance on data sources that are appropriate to construct and calibrate demand models. The data required for the demand calculations depend upon the chosen level of segmentation (i.e. disaggregation) of travellers and travel characteristics, as discussed in section 2.6.
- 2.5.7 Advice on the preferred form of demand models is discussed in section 4.3. Unless there are reasons to the contrary, the use of an incremental approach, either through using a pivot-point model or based on incremental application of absolute estimates, would be expected. There are two separate processes that need to be considered when developing forecast matrices for use in demand models:
- The production of a base year travel pattern (replicating observed movements and behaviours in the base year). [TAG unit M2.2 Base Year Matrix Development](#) gives detailed advice on the development of demand matrices from suitable data sources.

³ Examples include use where parking or time-specific charging systems are a key consideration, and to ensure consistency in mode choice between outward and return trips.

- In the case of incremental demand models, the production of **reference cases** for future years (estimating future travel demand based on demographic changes, prior to consideration of changes in costs).

Production of Reference Cases for Future Years

- 2.5.8 Modelling of incremental changes from the base matrix is required for most assessments. For very large schemes or situations where there will be substantial land-use and demographic changes within the timescale of the assessment, however, it may be necessary to make a detailed absolute forecast of at least part of the future reference case, as the base matrix will not be a reliable starting point for forecasting (see section 4).
- 2.5.9 The construction of the reference case forecast requires reference case growth factors/assumptions and will involve the adjustment of the row and column totals of the base P/A matrix at an all-day all-modes level to reflect expected land-use and car ownership changes (taking no account of cost changes). As a default, these should be based on NTEM.

2.6 Segmentation: Trip and Person Types

- 2.6.1 "Segmentation" is the division of travel, traveller and transport attributes into different categories with different behaviours, to reflect different responses to interventions, and safeguarding that all travellers in the same category can be treated in the same way.
- 2.6.2 In general, assignment and demand models require different forms of segmentation. Demand modelling generally requires more categorisation, both in order to estimate how much demand, and of what type, a particular zone may produce or attract, and because different types of traveller respond differently to changes in travel conditions and costs.
- 2.6.3 To be accepted by the policy-makers, forecasting and assessment must be seen to deal realistically with the variety of external factors which will contribute to changes in travel demand. Moreover, policy makers may wish to know whether policies impact differently on different types of traveller, and if so, how. However, segmentation increases the size, complexity and run times of models, as does a more detailed spatial description using smaller zones, and judgements have to be made about how much detail is necessary in a particular application. The same degree of segmentation may not be necessary at all stages of the model, and each of the stages of the variable demand model is considered in turn in the detailed discussion below.
- 2.6.4 Ultimately the segmentation adopted in the modelling process must depend on the nature of the study area, the objectives of the study, the data available, the outputs required and the intended model structure. Table 1 suggests the minimum levels of segmentation for demand modelling. Note that these are guidelines on minimum segmentation, they are not necessarily adequate, and the degree of segmentation used should depend upon the particular application and the resources available.

Table 1 Minimum Segmentations for a Multi-Stage Demand Model

Attribute	Segmentation
Household type and traveller type	Two categories: travellers categorised into car-available/no-car-available or by household car ownership into car-owning/non-car-owning. Models that only need to deal with road traffic will include only those travellers who have a car available. If a local trip generation model is being developed, a more detailed segmentation into household structure, employed members, etc is desirable and if feasible, compatible with the segmentation used in NTEM, but this finer level of segmentation need not be carried through to the subsequent stages.
Value of time	Variation of values of time (VOT) across the population is important but can usually be addressed sufficiently through the trip purpose split. However, for schemes specifically involving charging, some additional segmentation by willingness-to-pay or income may be required. In this case 3 separate income ranges – high, medium and low (with different VOT) with demand distributed evenly across the groups - will be adequate (see Appendix B). Where there is a large range of trip distances, it is desirable to allow VOT to vary with trip distance (see section 3.3).
Trip purpose	3 categories: Commuting/ Employer’s business/ Other: these categories are likely to have different elasticities and different distributions in both time and space, and substantially different values of time.
Modes	2 categories: Car/public transport. It is usually necessary to have a base of trips that can transfer to and from car. If transfer to and from active modes is either an objective of the scheme, or an expected impact, these should also be reflected.
Road vehicle types	2 categories: Car/other, where the “other” may include freight and bus/coach as a fixed-flow matrix for assignment.

2.6.5 While it is undoubtedly useful to use a more elaborate segmentation of the population at the trip generation stage in order to facilitate forecasting, there is generally less requirement to carry such segmentation forward into subsequent stages of the model. A distinction between purposes is however essential and depends on the scheme to be assessed but also local circumstances. A suitable starting point would be - commuting, employer's business and others. Currently values of time used in appraisal are considered different for these purposes (see the [TAG Data Book](#)). Where mode choice is modelled, it will also be important to make a distinction between travellers who have a car available for a trip and those who do not and are therefore limited in their choice of modes.

2.6.6 Not all stages of the demand model require the same degree of segmentation. The guidance below gives more detail on what is needed for each stage and considers the associated value of time issues.

Trip Frequency

2.6.7 For most purposes it will be satisfactory to take the observed trip pattern and modify this pattern incrementally by making it respond to changes in travel times and costs. Categorisation by trip purpose (where the values of time are

assumed to differ) is usually more than sufficient. It is also possible to assume that only certain trip purposes will change their frequency in response to changing travel costs, for instance trip frequency changes may be modelled for leisure trips but not for commuting trips.

Trip Distribution

- 2.6.8 The distribution model estimates the number of trips between each pair of zones, and ideally includes intrazonal trips which begin and end in the same zone, as well as the interzonal trips. It may be necessary to apply area-specific constants or movement-specific deterrence functions within the distribution model to reflect the difference in the nature of travel to certain areas (e.g. longer distance trips to city centres). If this particular problem arises for the application being considered, some form of income or socio-economic group (SEG) segmentation may be appropriate to reflect how, for example, jobs in city-centres may be filled mainly by high SEGs such as professional and managerial posts in finance, banking and other business services, and workers may be drawn from further away producing higher average trip distances. A similar pattern may emerge for shopping trips to the city centre, and both may require a white collar / blue collar distinction, for example at a zonal trip attraction level. However, for most applications such a complication will be unnecessary.

Mode Choice

- 2.6.9 Since the choice of mode depends on whether a traveller has a car available for the journey it is desirable to categorise travellers according to car availability for the trip, but since this is hard to identify in practice the segmentation is often merely available or non-available with more detail being by the level of household car ownership such as 0, 1 or 2+ cars. The model must include all relevant modes between which to choose. It is standard practice to develop models with different parameter values for different purposes and different categories of car availability.

Time of Day Choice

- 2.6.10 Where time of day choice is modelled explicitly this choice mechanism can represent either **macro time period choice** (the broad choice between time periods, e.g. 2 to 3 hours in length) or **micro time period choice** (choice of travel time within a 'macro' period, e.g. between hourly or 15-minute slices). The definition of the modelled time periods should be consistent with the choices to be made, and with assignment model time periods. Segmentation by trip purpose is necessary, since obligatory travel such as work and education is likely to have less flexibility in adjusting its time of travel than travel for more optional purposes such as shopping or leisure.

Value of Time

- 2.6.11 Different user classes will have a different willingness to trade money for time in order to visit their destinations. The demand model should be suitably segmented in order to reflect the differences in the **values of time** between groups. See section 3 and Appendix B for details.

Public Transport Considerations

- 2.6.12 An important influence on the use of public transport by those with a car available is whether or not they also have access to a convenient parking space. Consideration should therefore be given to segmenting the home-based work demand by the availability of a parking space at the workplace. For further details on the requirements of modelling where parking is a key consideration, see [TAG unit M5.1 Modelling Parking and Park-and-Ride](#).
- 2.6.13 Segmentation of demand according to the type of ticket or fare concession may also offer a significant improvement in model accuracy. For instance, many senior citizens, children and students are able to take advantage of fare concessions and may travel more than they would if they did not have the concessions. Consideration should therefore be given to the extent to which demand should be segmented by these groups, generally segmentation by age is sufficient.
- 2.6.14 Travellers using a public transport link to an airport have special characteristics which need to be reflected in the model. First, the distinction must be made between air passengers and airport workers. The propensity of air passengers to use public transport to access the airport depends strongly on whether they are travelling on business or leisure and whether they are in the home area or away from home. The use that airport workers can make of a public transport service is limited by the availability of services which fit in with their shift patterns.

2.7 Division into Time Periods

- 2.7.1 Travel conditions vary considerably across the day, and across the days of the week and time of year. Models usually represent a weekday during a 'neutral' or representative month (see further discussion in [TAG unit M1.2 Data Sources and Surveys](#)). In order to capture the variation in conditions within the modelled day, and especially the fact that many schemes are aimed primarily at times of maximum travel demand and highway congestion, it is conventional practice to divide the day into different periods for modelling purposes. This can also deal with different public transport service levels during the day.
- 2.7.2 A judgement must be made as to how best to define the time periods so that, within each, travel conditions and travel demand are sufficiently constant to provide a realistic mean cost for the modelling purposes. A balance needs to be struck between the level of detail in the assignment model and the need for detail elsewhere in the modelling process (the number of time periods, the level

of detail in the various segmentations, the stages included in the demand model, etc).

- 2.7.3 In general, demand modelling uses relatively broad time periods. When examining times and places of high congestion, it may be desirable to introduce a higher level of time-dependent responsiveness into assignment, either by modelling a series of short time-periods, or by dynamic assignment which represents explicitly the variation of demand over time, in order to obtain a better estimate of these average costs.
- 2.7.4 **Demand modelling depends upon the time-divisions of the traffic assignment** because the relevant travel costs and journey times which are extracted from the assignment are averages across the assignment periods. Hence, it is important to ensure consistency between the time-periods used in the calculation of these averages and the key time periods for the main demand segments.
- 2.7.5 In general, the demand modelling takes place over different time-periods, such as 24-hour or 16-hour weekday. In theory, different demand responses can be modelled over different time-scales. A good deal of the survey data will be collected over a 12-hour or 16-hour period, and the background changes in total trips estimated from NTEM data are on a 24-hour basis. Many of the current large regional models estimate trip frequency, mode choice and distribution over a 24-hour period. Procedures need to be adopted to convert such 24-hour trip patterns by purpose to be compatible with the shorter time-scales generally required for assignment modelling (a peak hour or an average inter-peak period, for instance).
- 2.7.6 [TAG unit M3.1 Highway Assignment Modelling](#) discusses the development of appropriate time period models in detail. It is unlikely that inclusion of variable demand modelling will require any greater segmentation of time periods than is satisfactory for assignment, except where there is an interest in modelling time of day choice, as discussed in section 4.8. However, if modal transfer between private and public transport is important, and public transport offers different fares or frequencies at different times of day, it is advisable to consider this also in the division into time periods.

3. Representation of Travel Costs

3.1 Generalised Cost Formulation

- 3.1.1 All transport modelling should recognise that people's travel choices depend upon the cost, in both time and money. It is important to combine time and money into a single disincentive to travel ("disutility"), so that demand can be assumed to rise or fall with reductions or increases in either. To do so, it is necessary to apply appropriate weights to the time and money components of

this combined cost so that travellers can trade money for time, such as in choosing between a faster but more expensive mode or a slower but cheaper option.

Components of generalised cost

- 3.1.2 Two kinds of variable can enter into the function of generalised cost:
- variables which relate to the trip under consideration
 - variables which relate to the individual making the choice
- 3.1.3 Taking mode choice as an example, the cost function developed for the choice of, say, rail by an individual can be influenced both by variables relating to rail (e.g. travel time, fare) and by variables relating to the individual (e.g. income, gender, journey purpose). In principle the generalised cost structure permits a considerable level of variation in behaviour to be examined and allowed for in the forecasting process.
- 3.1.4 Different groups of people will trade off time and money in different ways: for example, company car owners may be less affected by rises in fuel prices, and holders of certain kinds of public transport tickets may receive free marginal, additional travel. There is likely to be further variation by trip purpose and time of day, which can be modelled using segmentation or disaggregation.
- 3.1.5 Each segment considered can have, in principle, different parameters in the generalised cost function. Central to this is the concept of **value of time (VOT)**, whereby money costs are converted into time units or vice-versa. Different values of time are appropriate to different segments of the travel market, particularly according to different journey purposes. It is usually sufficient to use the mean VOT across a user segment. Where some form of charging is central to the scenarios being tested, it will be important to include income group segmentation explicitly. In this case the analyst will be required to set the appropriate average value of time for each group, separated by purpose. Further information on this is given in Appendix B, with more on values of time in general in [TAG unit A1.1 Cost-benefit Analysis](#).
- 3.1.6 Generalised cost normally includes elements relating to, for **private car**:
- operating costs (including fuel costs)
 - in-vehicle time
 - parking costs
 - tolls or user charges
 - (sometimes) access time to and from the car

so that, for example, measured in units of time, a vehicle user's generalised cost would be:

$$G_{car} = t_{walk} * v_{walktime} + t_{ride} + \frac{d * VOC}{(occ * VOT)} + \frac{c_{park}}{(occ * VOT)}$$

where:

t_{walk} is the total walk time to and from the car

$v_{walktime}$ is the weight to be applied to walking time (see below)

t_{ride} is the journey time spent in the car

VOC is the vehicle operating cost per km for a journey of d km, dependent on purpose⁴

occ is the number of people in the car (who are assumed to share the cost)

VOT is the appropriate value of time

c_{park} is the parking cost

3.1.7 Although in this formulation the generalised cost is measured in time, it can just as easily be expressed in monetary units by multiplying the whole equation by VOT⁵.

3.1.8 **For public transport** modes generalised cost will include:

- fares
- in-vehicle time
- walking time to and from the service
- waiting times
- interchange penalty
- (sometimes) non-walked access, e.g. park and ride

So that, for example, in time units

$$G_{PT} = t_{walk} * v_{walktime} + t_{wait} * v_{waittime} + t_{ride} + \frac{c_{fare}}{VOT} + c_{interchange}$$

where:

⁴ Note the advice in TAG unit A1.4 is to assume that travellers in course of work (Employers' Business) take into account fuel cost and other operating costs of travel, whilst private travel only takes into account the cost of fuel.

⁵ To derive the vehicle cost in monetary units, multiply by (occ*VOT).

t_{walk} is the total walking time to and from the service

t_{wait} is the total waiting time for all services used on the journey

$V_{walktime}$ and $V_{waittime}$ are the weights to be applied to time spent walking and waiting

t_{ride} is the total in-vehicle time

C_{fare} is the fare

VOT is the appropriate value of time for the user segment

$C_{interchange}$ is the interchange penalty if the journey involves transferring from one service to another (it is normally calculated as a time penalty multiplied by the number of interchanges)

- 3.1.9 Values of walk and wait times and interchange penalties are usually related to the value of in-vehicle time by applying weights such as v_{wk} or v_{wt} above. For instance, waiting time is often valued at around double the in-vehicle time. Further guidance on these weightings can be found in the generalised cost section of [TAG unit M3.2 Public Transport Assignment Modelling](#).
- 3.1.10 It should be noted that there are other factors that affect travel choices. Probably the most important omission is that of **reliability**. These effects are potentially important, although mechanisms whereby reliability can be included in the generalised cost formulation are currently under development. An interim approach to estimating reliability benefits is given in the Reliability Impacts section in [TAG unit A1.3 User and Provider Impacts](#) as a post-model calculation. It should be noted that reliability is not included in the illustrative parameter values in section 5.6.
- 3.1.11 For **public transport schemes**, the effects of comfort may need to be represented. Stated Preference (SP) exercises have produced plausible results whereby time spent in crowded or standing conditions incurs a higher generalised cost than time spent seated in relative comfort (see [TAG unit M3.2 Public Transport Assignment Modelling](#)). In these circumstances the estimation of the generalised costs of using public transport has an additional cost related to the degree of overcrowding, which in turn depends upon the number of passengers and capacity of the service, in terms of seating and standing capacity. To be effective, models including an overcrowding feature need to be embedded in a feedback procedure so that they are demand-sensitive. In principle this is necessary if overcrowding changes significantly in either the base or forecast situations.
- 3.1.12 The example below, from a rail model, shows how the impact of seating and standing capacity can be modelled as influencing the perceived journey time by using a Crowding Factor F_c :

1 when $V \leq 0.6 * C_s$

$$F_c = 1 + 0.12 * (V - 0.6 * C_s) / 0.4 * C_s \quad \text{when } 0.6 * C_s \leq V \leq C_s$$

$$1 + \frac{1}{V} * [0.12 * C_s + (V - C_s) * (1.25 + 0.35 * \frac{(V - C_s)}{(C_t - C_s)})] \quad \text{when } V \geq C_s$$

where

V = volume

C_s = seating capacity

C_t = total capacity seating and standing

In this model, the Crowding Factor increases the cost of in-vehicle time by a factor which is zero when 60% of the seats are occupied, rising to 1.12 when all the seats are occupied and to 2 when all the standing room is full.

3.1.13 In general, because the generalised cost methodology is relatively robust, the inclusion of additional elements does not present major modelling problems for demand forecasting. If required, it should be possible to build models that extend the standard definition of generalised cost, and also allow for greater behavioural variation between person-types and purposes.

3.1.14 All the above discussion has related to a (dis)utility function where the generalised cost is made up of a weighted linear combination of quantities such as time, distance toll etc. It is however possible that the (dis)utility function may include these quantities in a non-linear form e.g. costs may be expressed logarithmically. In these situations, the concept of generalised cost, measured in time units with a constant relationship between time and cost quantities, does not hold.

3.2 Composite Costs

3.2.1 Unless mechanisms at two adjacent levels in the hierarchy are calculated simultaneously (which may be the case where levels have the same sensitivity), it is necessary to formulate a composite cost or utility across the more sensitive (or lower) choice to use as an "average" in the less sensitive (or higher) choice calculation. This cannot be an arithmetic average, since it is clear that where a choice has high costs and is unlikely to be chosen it should be given little weight in the composite cost. Various forms of composite cost have been used in the past - see for example Senior and Williams (1977) - but the following, known as a logsum, is the appropriate formulation where logit models are used to determine the choices in an absolute choice model. The general formulation of the composite cost to reflect the costs faced by travellers given their previous choices lower in the hierarchy is as follows:

$$G_{comp}^{y-1} = -\frac{1}{\lambda_y} \ln \left(\sum_x \exp(-\lambda_y G_x^y) \right)$$

Where:

G_{comp}^{y-1} is the composite cost or disutility summed over the choices x in stage y

G_x^y is the disutility or generalised cost of choice x given choice y

(for example, the stage y may refer to 'destination choice', while x varies over the destination zones)

λ_y is the choice sensitivity parameter for choice stage y .

3.2.2 For example, if mode split is less sensitive than (i.e. located above) distribution in the hierarchy, then the composite cost of car travel from zone i is obtained from the logsum of travel by car (choice y) to all the possible destination zones (choice x). There will be fewer trips to destinations with high travel costs, but the exponential weighting means that they will contribute little to the total composite cost. When calculating the composite cost for the lowest choice model in the hierarchy (i.e. the most sensitive), the composite cost of each option should be weighted by the proportion of attractions in each zone - this avoids the cost being biased towards accessible locations with few or no attractions. If distribution is less sensitive than (i.e. above) mode split, then the composite costs used for distribution will be the logsum costs across the available modes for each origin-destination pair.

3.2.3 As trip frequency is invariably the least sensitive response, for each origin the summation in the composite cost must be across all destinations, modes and time periods if those choices that are being represented in the model. If time-period choice is included, then the composite costs should include trip-weighted sums across the time periods.

3.2.4 Where the model is incremental, the mathematical form of the logit function requires that the logsum be weighted by the choice shares in the logarithmic summation. The formulation to be used is then:

$$\Delta G_{comp}^{y-1} = -\frac{1}{\lambda_y} \ln \left(\sum_x \frac{T_x^y}{T_{tot}^y} \exp(-\lambda_y \Delta G_x^y) \right)$$

Where:

T_x^y is the number of trips choosing x at stage y

T_{tot}^y is the total number of trips available at stage y .

3.2.5 If the same lambda value applies to both distribution and mode choice calculations, then both sequences of calculation, distribution-modal split or modal split-distribution, are mathematically equivalent to simultaneous calculation, where the logit split would be across all possible combinations of destination and mode, and it is not necessary to calculate composite costs from one choice set when considering the other choice set. However, if there were other responses above these two in the hierarchy, say trip frequency or time-of-day choice then the logsum of the combined mode-choice and distribution

choices would still need to be calculated to give the correct 'costs' or disutilities for these higher level responses.

3.3 Cost Damping

- 3.3.1 There is strong empirical evidence that the sensitivity of demand responses to changes in generalised cost reduces with increasing trip length (see, for example, Daly (2008, 2010)). In order to ensure that a model meets the requirements of the realism tests specified in section 6, it may be necessary to include this variation. The mechanisms by which this may be achieved are generally referred to as 'cost damping'.
- 3.3.2 Cost damping is part of our current best understanding of travel behaviour and would be expected to be incorporated into models. There are, however, some contexts where the range of travel distances that need to be represented in a transport model are limited. This might, for example, apply to some smaller interventions. In circumstances where this is not immediately clear, it would be prudent to review the range of travel distances that need to be modelled and justify the use of simpler functional forms (i.e. where values of time do not vary with distance).
- 3.3.3 It is not necessary for analysts to conduct tests using each of the forms specified below and to prove that one is better than the others. This is because the form of cost damping and the cost damping parameter values will interact with other aspects of the model, such as the demand model parameter values and values of time. While the cost damping parameter values, demand model parameter values and values of time should all be kept within certain limits specified below and in section 6, it is the performance of the combination of all these aspects of the model in yielding satisfactory realism test results that is important.
- 3.3.4 If cost damping is employed, it should apply to all person demand responses. The same cost damping function should be applied to both car (private) and public transport costs. While the starting position should be that the same cost damping parameter values are used for both modes, it may be necessary to vary the cost damping parameters between the modes in order to achieve satisfactory realism test results. It may also be necessary to vary cost damping parameters by trip purpose. However, these variations by mode and purpose should be avoided unless it is essential to achieve acceptable model performance (and always reported).
- 3.3.5 Cost damping functions of one of the forms specified above should generally be used. Should analysts wish to use other forms of cost damping than those listed above, they should consult the Department before doing so.

Varying Value of Time with Distance

- 3.3.6 Research undertaken for the Department has demonstrated that for all trip purposes there is a relationship between travel distance and the value of travel

time savings (DfT, 2015⁶). This evidence indicates that travellers' sensitivity to cost declines more rapidly with distance than their sensitivity to time. The implication is that this ideally should be expressed in the utility function.

3.3.7 The implementation of this form of cost damping, given the emergence of this evidence, is likely to be valuable in improving model estimation and calibration and hence it is recommended to investigate this functional form during this process.

3.3.8 Varying the value of time with distance may be achieved using the following formulation:

$$G''' = t + c/VOT_d$$

where

t, c are the trip time and money cost, respectively (see footnote to paragraph 3.3.11)

VOT_d is the value of time which varies with distance and is specified as follows:

$$VOT_d = VOT \cdot \left(\frac{d}{d_0}\right)^{n_c}$$

where:

d is the trip length

d_0 is the distance (in kilometres) underpinning the national average values of time

VOT is the average value of time⁷

n_c is the distance elasticity which must be non-negative and less than unity, (recommended values are 0.248 for commuting, 0.315 for other,⁸ 0.387 for car Employers' Business (EB) and 0.435 for rail EB)

G''' is the modified generalised cost

3.3.9 d should be calculated by skimming distances along minimum distance paths built between all origin-destination pairs using a base year network. In forecasting, there would only be a need to recalculate these distances if the

⁶ 'Provision of market research for value of travel time savings and reliability: Phase 2 Report' (DfT, 2015)

⁷ Appropriate assumptions for d_0 and the average VOT can be found in Appendix B of this guidance unit.

⁸ These elasticities have been taken from the DfT (2015) research.

structure of the network changed significantly between base and forecast years⁹.

- 3.3.10 For models in which the value of time varies with distance it has generally been necessary to apply a minimum distance cut-off, d_c , as follows:

$$VOT_d = VOT \cdot \left(\frac{\max(d, d_c)}{d_0} \right)^{n_c}$$

where

d_c is a calibrated parameter value designed to prevent short-distance trips, particularly intra-zonal trips, becoming unduly sensitive to cost changes.

Note that, if a cut-off is used, it needs to be applied before calibrating d_0 to correct the average value of time.

Damping Generalised Cost by a Function of Distance

- 3.3.11 Damping generalised cost by a function of distance may be achieved using the following formulation:

$$G' = (d/k)^{-\alpha} \cdot (t + c/VOT)$$

where

t, c are the trip time and monetary cost¹⁰, respectively

VOT is the value of time

$(t + c/VOT)$ is generalised cost

G' is the damped generalised cost

d is the trip length¹¹

α and k are parameters that need to be provided or calibrated

- 3.3.12 α must be positive and less than 1 and should be determined by experimentation in the course of adjusting a model so that it meets the requirements of realism tests, as advised in section 6. Also, if used in

⁹ The reason for this is that there may be significant changes in distance travelled between the same zone pairs in a future network, for example a new estuary crossing. Using the most appropriate distance should yield more suitable damping of costs and accuracy in the demand model. This is a separate issue from distance used in appraisal, which is discussed in TAG unit A1.3 – User and Provider Impacts.

¹⁰ Money costs include private car fuel, parking, tolls and charges and public transport fares.

¹¹ This should be calculated in the same way as discussed in paragraph 3.3.9.

conjunction with variation in the value of time with distance, a further restriction on the value of α would apply (as explained below).

3.3.13 k must also be positive and in the same units as d . The ways in which its value may be determined include:

- set to the mean trip length for the modelled area or
- set to the national mean trip length or
- experiment to find an appropriate distance such that the results of the realism tests and any necessary model adjustments accord with the advice in section 6

3.3.14 In models that have used this form of cost damping analysts have found it necessary to apply a minimum distance cut-off, below which the cost damping does not apply. The purpose of such a cut-off is to prevent short-distance trips, particularly intra-zonal trips, becoming unduly sensitive to cost changes. If a cut-off is used, it would be necessary to specify the distance below which generalised costs would not be reduced, that is the distance, d' , up to which $(t + c/VOT)$ would apply. When a cut-off d' is applied, k effectively needs to be set equal to d' , so that G' is a continuous function of d at the cut-off (i.e. if a cut-off is used, the analyst should ensure that there are no discontinuities in the function).

3.3.15 Commonly used parameter values are as follows:

$$\alpha = 0.5$$

$$k = 30 \text{ km}$$

$$d' = 30 \text{ km}$$

These values are provided merely to give an idea of the values that might be appropriate.

Power Function of Utility

3.3.16 Cost damping may also be implemented by using the following power function of utility:

$$G'' = \mu G^\beta,$$

where

t, c are the trip time and monetary⁹ cost, respectively

VOT is the value of time

G is generalised cost

G'' is the damped generalised cost

μ, β are coefficients, which must be positive

3.3.17 β must be greater than zero but must not exceed unity. Both β and μ should be determined by experimentation in the course of adjusting a model so that it meets the requirements of realism tests, as advised in section 6.

3.3.18 In some applications, β has been set at values ranging from 0.65 to 0.9 and then μ has been defined so as to set $g = (t + c/VOT)^\beta$ at a specified generalised cost, such as the mean generalised cost.

Combinations of Mechanisms

3.3.19 In some models, varying values of time with distance has been used in combination with damping generalised cost by a function of distance. If this combination is used, then $\alpha + n_c$ must be less than 1 (which is feasible if values α and n_c of the order of magnitude indicated above are used).

3.3.20 Varying values of time with distance may also be used in combination with the power function of utility form of cost damping. If this combination is used, then both β and n_c must satisfy the same limits as if the mechanisms had been used separately (i.e. both of them need to be between zero and unity).

Log Cost plus Linear Cost

3.3.21 Some models have used a log cost term in the utility function instead of the linear approach advised in the previous section. Recent research for the Department has shown that, in some cases, a better fit to the data may be obtained by a combination of log cost and linear cost, as follows:

$$\hat{G} = t + \varepsilon \log(c + \delta) + \gamma c$$

where

\hat{G} is generalised cost defined as a combination of log cost and linear cost

t, c are the trip time and monetary cost, respectively

δ is a small constant (e.g. 1 pence)

ε, γ are coefficients which must be positive and would be better determined by statistical estimation rather than by experimentation

3.3.22 When models of this type are used, the implied value of time can be obtained from the formula:

$$VOT = \frac{1}{\gamma + (\epsilon/c)}$$

These values of time need to be reported and acceptable over all appropriate values of c.

Application of Cost Damping in Composite Cost Calculations

- 3.3.23 If cost damping is employed, the generalised costs used at the bottom of the choice hierarchy should be those obtained by the application of cost damping. At each higher level in the choice hierarchy, the composite costs should be calculated in the standard manner, so that the cost damping effects are reflected automatically throughout the variable demand modelling process.

4. Model Form and Choice Responses

4.1 Background

- 4.1.1 This section provides detailed advice for those carrying out variable demand modelling after preliminary procedures have been undertaken and the scope of the model has been considered (section 2).
- 4.1.2 The key summary of this part of the advice is as follows:
- Most variable demand models use some form of "hierarchical logit" formulation (introduced in section 4.2), in which the choice between travel alternatives depends upon an exponential function of the generalised cost or disutility (discussed in section 4.5).
 - It is recommended that demand models are applied incrementally in most cases, although absolute modelling methods may be used, applied directly or in an incremental manner (section 4.3).
 - It is expected that distribution models will be included in all variable demand models. Details of the different model formulations are discussed, as is the representation of the fringes of a study area, which is particularly important when using trip distribution models (section 4.6).
 - The representation of different modes in the variable demand model is discussed, including how it may be necessary to model journey components in detail, including the effect of changing road conditions on bus travel, or whether it is acceptable to include alternative modes as a set of fixed costs (section 4.7).
 - The modelling of departure time choice as a demand response or in close association with assignment is discussed. It is recommended that large

"macro" adjustments only need to be modelled when considering differential pricing between time periods, or access restrictions (section 4.8).

- Where changes in highway costs are important, a variable demand model will need to include a highway assignment stage to provide cost information to the demand model (section 4.10).

4.2 Functional Form

4.2.1 Any model of the demand for travel relies on a mathematical mechanism that reflects how demand will change in response to a change in generalised cost. These are discussed in detail in Appendix C:.

4.2.2 Most variable demand models use some form of "hierarchical logit" formulation, in which the choice between travel alternatives (frequency, modes, destinations, time periods) is calculated consecutively for the choices under consideration and depends upon an exponential function of the generalised cost or disutility.

4.2.3 A single logit model may be applied to the entire range of choices available using a **multinomial logit model**. However, that would implicitly assume that the sensitivities of those choices were all the same. This is unlikely to be the case. This leads to a **hierarchical** system of logit formulations in which at each level a limited number of choices are considered. For example, a variable demand model might:

- first estimate the number of trips from any given origin
- possibly adjusts this number to reflect trip frequency changes - usually as an elasticity formulation)
- then estimate how many trips will choose each available mode (mode split)
- then estimate how these trips choose amongst the available destinations (trip distribution)

(Note: this example excludes any time of day choice mechanism.)

4.2.4 The sequence appropriate often varies between types of trips and does not necessarily represent the sequence of **thought** by individuals that make these decisions. All the choices are interconnected by iterating between levels in the hierarchy, so that in a model that is converged, choices made earlier in the sequence are consistent with choices later in the sequence as the calculation is repeated with updated input values.

4.2.5 Choices made higher in the hierarchy act as constraints on those made later. Hence, if the sensitivity of choice decreases down the sequence there is a danger of later choices being too strongly influenced by earlier choices. Further discussion of the hierarchy of responses can be found in section 4.5.

- 4.2.6 Within any of the steps (known as hierarchical levels), it may be desirable to also model some secondary choices, for example, because travellers seem not to discriminate between different public transport modes in the same way as they treat the choice between car and public transport. Consequently, it may be preferable to split mode choice into a "high-level" two-way choice between car and public transport, with a "lower level" split into the different public transport modes. This is often referred to as **nested** logit. It avoids the common problem with forecasting trips across three modes, car, bus and rail, of making the choice over-sensitive to changes in what travellers perceive mainly as competing services within a single public transport mode option.

4.3 Form of Models

- 4.3.1 An important issue that needs to be decided is the form of the demand model used for particular applications. There are a number of model forms that can be employed and these can generally be placed into three categories:

- absolute models, that use a direct estimate of the number of trips in future demand, which is independent of an observed base year matrix
- absolute models applied incrementally (AMAI), that use absolute model estimates to apply changes (between the absolute model results of base and future years) to an observed base year matrix
- 'true' incremental models, that use cost changes to estimate the changes in the number of trips from an observed base year matrix

The choice of which form of model would depend on the compatibility of the base demand matrix if in P/A format (see section 2.5) and the assignment matrix used.

- 4.3.2 The latter two methods in the above list retain all the detail of the observations, but generally face difficulties where too many (or key) cells in the observed matrices are empty because of the limited amount of surveying possible. This section explains the differences and the preferred approaches.

Absolute Models

- 4.3.3 Absolute demand models generate estimates of trip numbers, based on a model that is calibrated to fit as closely as possible to the known observed movements and the resulting model is used to directly forecast future trips. Base year and forecast trip patterns are produced independently of each other, using common model parameters. The sensitivity parameters used in absolute models should be calibrated from local data. In addition to the calibrated sensitivity parameters, however, mode-specific and movement-specific constants that adjust modelled base year values will usually be required to achieve an acceptable fit to the observed data.

- 4.3.4 The fit of these models to the observed base year data can often be quite poor, or particularly challenging and time consuming to calibrate satisfactorily, even

where calibration constants disaggregated by area type are used. These constants may sometimes be difficult to explain.

Absolute Models Applied Incrementally

- 4.3.5 In more recent practice, forecasting approaches have attempted to make use not only of the absolute model but also the 'observed' base trip matrices on which it was calibrated. This could be by factoring the forecast trip matrices by the ratio of the base year synthesised matrix to that of the base year observed matrix, so that:

Future year matrix = (Base year observed matrix / Model absolute base year matrix) * Model absolute future forecast

- 4.3.6 However, this could lead to odd results where the cells of the observed trip matrix are zero. A way around this problem that has been used by some multi-stage models is to employ an additive approach so that:

Future year matrix = (Model absolute future forecast - Model absolute base year matrix) + Base year observed matrix

- 4.3.7 Thus, the future forecast by the model is increased by the difference between the base year observed trip matrices and those produced in the base year by the model. The danger with this approach is that negative cell values could result.
- 4.3.8 In either of these two approaches the important differences between the observed matrices and the base year model that were not picked up in the calibration process are reflected in the forecasts.

'True' Incremental Models

- 4.3.9 Similar to AMAI explained above, these models estimate changes in trip patterns relative to a base matrix in which, normally, observed movements are used as much as possible. Such model applications are often described as 'incremental' or 'marginal'. The predicted relative changes are applied to the base matrix, so that the complexities of the base matrix are preserved. Where it would be difficult to calibrate a demand model to reproduce the observed pattern of travel these incremental models can be used to predict from (pivot off) this base matrix and associated costs. The matrix can also be updated in whole or in part without altering the forecasting model since the parameters controlling the mechanisms can be independent of the calibration of the base model.
- 4.3.10 With true incremental models the base year conditions (costs) and the reference trip pattern (derived from the base year trip matrix assuming no changes in travel costs) are direct inputs to the forecasting process. Such an approach can use existing data relatively easily, and the parameters used in the model can reflect known sensitivities to changes in input variables without

having to perform the additional and time-consuming task of fitting to an observed pattern. The parameters will generally need to be calibrated using external data sources, or imported from other demand models (see Appendix F that discusses transferring mode choice model systems and section 5.6 that discusses illustrative parameter values). Models that use this approach to forecasting are described further in section 6.

- 4.3.11 The principles of the recommended incremental approach to forecasting, i.e. the way that the forecasts pivot off the base year costs, are explained in more detail in [TAG unit M4 Forecasting and Uncertainty](#).

Choice of Model Form

- 4.3.12 **The Department's recommendation for scheme appraisal is to use an incremental form of model, whether true incremental or based on incremental application of absolute estimates, unless there are strong reasons for not doing so.** Such reasons could include situations where there are large changes in land use between the base and forecast years, which will significantly change the distributions of origins and destinations. However, this can still be solved by using absolute models applied incrementally.
- 4.3.13 Absolute forecasting models use observed data for calibration purposes. In practice, often a large number of calibration factors need to be used with most absolute models to provide a reasonable fit to these data, often in a rather arbitrary way, especially in the case of distribution models. In addition, the parameter values obtained may underestimate or exaggerate the true sensitivity of travellers to changes because the zonal or mode specific constants may hide observed differences (for example, distance-related effects). Consequently, the apparent advantage of local calibration is often not fulfilled in practice except in large-scale transport studies, where the data collection and calibration can be sufficiently comprehensive.
- 4.3.14 Incremental approaches are attractive, but the main problem with using these models occurs when the base matrix contains few or no trips for a set of movements, but the forecasts expect large changes in these movements to occur. This often arises when a zone is re-developed or has no trips to or from it in the base situation. In these situations, the forecast will have to be synthesised exogenously for these movements. The recommended approach for applying synthetic growth is the eight-case method created by Daly et al (2001), see Appendix G.

4.4 Model Interfaces

- 4.4.1 It is essential that the demand and assignment models are correctly connected, with consistent cost definitions and appropriate conversions between the P/A demand model matrices and the assignment O/D matrices.

Matrix Conversion

- 4.4.2 The conversion from P/A to O/D matrices (all or most of the day to specific time periods) is usually done after time of day choice, distribution and mode choice and before assignment. P/A based trips are converted into O/D based trips by using conversion factors disaggregated by time of day and trip purpose (distinguishing between from and to home, home-based trips). Outbound (from home) trips within the P/A matrix can be converted directly to O/D using these conversion factors. For return (to home) trips the P/A matrix must be transposed before conversion to O/D format. Although these factors may change over time in reality, it is usually acceptable practice to assume constancy before any time-period choice is applied in forecasting. If not established while developing the base year trip matrices, such factors can be obtained by using NTS data tables (this is how NTEM produces O/D based forecasts from P/A forecasts). Indeed, this conversion is available in the [TEMPro](#) software and may be used as a default way to achieve this conversion.
- 4.4.3 Demand changes to the base P/A matrix may then be modelled either absolutely or incrementally. Where modelling incrementally, the base values are incorporated explicitly in the demand formulation. In the case where the adjustments to the P/A matrix do not provide a "compatible" O/D matrix, only the implied change in demand after converting to O/D form is used to adjust the base assignment matrices.
- 4.4.4 Whilst highway assignment modelling is concerned with vehicle movement, demand modelling is concerned with individual traveller decisions. Before the highway assignment stage is reached, car occupancy factors need to be applied to the private travel demand matrices to convert them to vehicles. [TAG Data Book](#) gives default values by trip purpose and time period, as well as assumptions about how these factors are expected to change through time. Local factors can be calculated from RSI data to see if there are other local factors affecting car occupancy, such as direction of travel or type of flow. These local factors should be used if there are significant differences from the national ones and if there is confidence that the RSI-based factors are an unbiased estimate of all vehicle travel in the area.

Feeding Back Costs from Assignment to Demand Model

- 4.4.5 The assignment model provides the travel times and costs required by the demand model, and generally both assignment and demand models will use costs averaged across the defined time periods into which the model has been divided. In principle, models should calculate trip-weighted cost averages across the time periods according to the number of trips in each period (which is the approach adopted in DIADEM, see Appendix H:). Note that in the demand model these average costs for particular types of trips may be averaged again across different modes, or different destinations, to obtain the "composite" costs on which the demand mechanisms operate.
- 4.4.6 The trip-weighted average approach requires an adequate level of detail in the model. Where this is not the case, some models relate all demand in a given

purpose category to the costs in the period where most of these trips are made. Depending on which trip purposes are categorised in the model, the cost bases may be approximated as follows:

Table 2 Approximate Cost Bases for Each Trip Purpose

Trip Purpose	Cost base
home-based journey to/from work	peak period costs
home-based education	peak period costs
home-based shopping	off-peak ¹² or interpeak period costs
home-based leisure/recreation	off-peak or interpeak period costs
home-based social/personal business	off-peak or interpeak period costs
home-based employer's business	peak period costs
home-based other	off-peak or interpeak period costs
non-home-based other	off-peak or interpeak period costs

4.4.7 Few models have as detailed a disaggregation of trip purposes as listed in Table 2 and it is usual to aggregate them into fewer categories (home-based shopping, leisure and social are often combined into the "other" category, for example). For each category, the mean generalised costs of travel in the appropriate period, or in a combination of periods (or sub-periods) weighted according to the proportions of trips in each, are calculated and fed back to the demand model. Where the assignment model used is dynamic, or quasi-dynamic, mean costs can be obtained on a flow-weighted basis taking proper account of the variation over time, but the mean across the broader time periods should still form the basis of the demand modelling.

4.5 Hierarchy of Choice Responses

4.5.1 As described in previous sections, the main choice response mechanisms that are considered in variable demand models are as follows:


- Trip Frequency
- Mode Choice
- Time of Day Choice (Macro and/or Micro Time Period Choice)
- Destination Choice (Trip Distribution)
- Route Choice (Assignment)

¹² It should be noted that off peak costs (the period outside of the AM peak, inter-peak and PM peaks) can have sufficiently different costs from the inter-peak period. The analyst should of course choose the most representative costs for each purpose in order to minimise bias in the demand model.

These choice responses are described in more detail in sections 4.6 to 4.10. These choices are not exclusive and others may be included, such as micro time period choice or other subsidiary choices, e.g. parking models.

- 4.5.2 Once decisions have been made on which responses to include in the model, the hierarchy in which those responses are considered must follow certain rules. This is not simply a question of mathematical or computational convenience. The sequence of the mechanisms is important to the overall outcome, and the resultant elasticities of demand and the predicted travel pattern will be affected by it. This section describes how the hierarchy should be determined.
- 4.5.3 The appropriate hierarchy or sequence of choice mechanisms must be determined by the relative sensitivities (the lambdas of a logit model) of the choices to the generalised costs or disutilities of travel. Different sequences for different purposes and/or segments of the travel market are often appropriate.
- 4.5.4 A mechanism placed higher in the hierarchy of demand mechanisms should reflect the composite cost of choices lower in the hierarchy and allow for how a choice with high costs is unlikely to be chosen. A logsum of costs has that property, but requires higher demand mechanisms to have a smaller sensitivity, to avoid a plausible change in generalised cost producing an implausible shift in demand.
- 4.5.5 The sequence of calculations is that, during each cycle, the composite costs must be calculated for each level in the hierarchy, since each level refers to different combinations of choice lower in the hierarchy (see section 3.2 for further detail on composite cost calculations).

Figure 1 A Typical Choice Hierarchy with Associated Cost Transfers

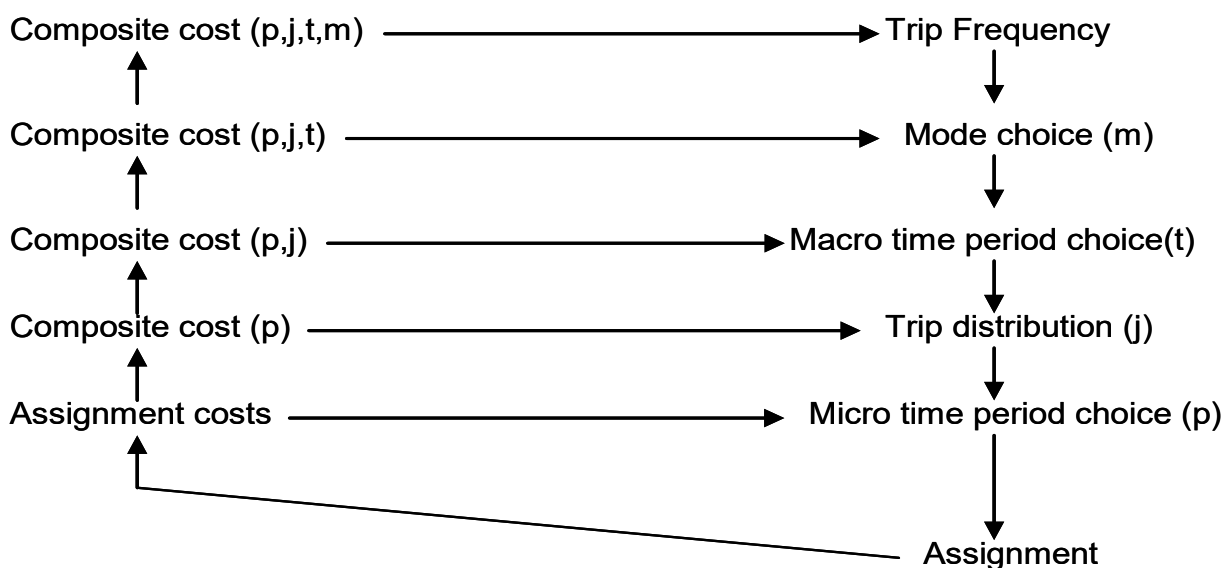

- 4.5.6 Thus the composite cost calculation starts at the bottom of the hierarchy and works its way up the levels, adding one more choice into the composite cost at

each level. The choice calculations are then made down the hierarchy and the whole cycle is recalculated in the next iteration until an acceptable degree of convergence is achieved (see section 6.3).

- 4.5.7 Depending on their relative sensitivities, the mechanisms may need to be positioned at different places in the hierarchy, and these positions may differ between demand segments and purposes. Available evidence suggests that the sensitivity of trip frequency is very much smaller than for the other mechanisms, and it is justifiable to always treat this choice as first in the hierarchy.
- 4.5.8 **Route choice** is invariably modelled as the most sensitive response below the other demand mechanisms, and modelled using quite distinct tools, compared to other demand choices. Under user equilibrium assumptions, there is little or no difference in utility or generalised cost between the routes which are likely to be used for any given origin-to-destination journey. If costs change, a new equilibrium involving some change of route between the minimum cost alternatives is quickly established. Thus, the route assignment part of the modelling can be considered separately (see TAG units M3.1 and M3.2 in the [Guidance for the Modelling Practitioner](#)), though of course demand and assignment must be executed iteratively to obtain an equilibrium solution for the whole of the variable demand model.
- 4.5.9 Public transport sub-mode choice may be handled within the public transport assignment model (see [TAG unit M3.2 Public Transport Assignment Modelling](#)) or as an additional nest in the variable demand model.
- 4.5.10 Where macro time period choice between distinct time periods is thought applicable (where there are expected to be differential changes in the costs or capacity in different time-periods) evidence suggests that the position of this mechanism is at a similar level to main mode choice for most purposes.
- 4.5.11 Where micro time period choice within time periods (mainly peak spreading) is being modelled, this should be placed above assignment but otherwise at the lowest level (most sensitive) of the hierarchy.
- 4.5.12 The main decision centres on the relative positions of distribution (destination choice) and mode split (choice).
- 4.5.13 **Where sufficient local data of suitable quality exist, and the skilled resources required are available, lambda values should be estimated (calibrated) from that data and the hierarchy selected so that the less sensitive of the two responses is positioned above the more sensitive.**
- 4.5.14 **Where this is not the case, then it may be possible to select the hierarchy on the basis of local evidence about the relative sensitivities of destination and modal choice from existing local models where the lambda values have been estimated and the adopted choice hierarchy has been justified. If estimated parameters for mode and destination choice are very similar, there may be a case for simultaneous calculation using a single lambda value for each traveller segment but note that the number**

of alternative choices will be large (number of modes x number of destinations).

- 4.5.15** **If there is insufficient local data or resources for estimation, and no suitable local model from which the parameters can be transferred, it will be necessary to consider the illustrative values provided from section 5.6 as the basis for the choice hierarchy. All the models used to derive the illustrative parameter values were rigorously calibrated against local data and all showed that main mode choice was less sensitive than destination choice. In the absence of any information to the contrary, this is therefore the hierarchy which should be adopted.**
- 4.5.16 However, if for example, destination choice has a larger sensitivity parameter than mode choice, yet mode split was mistakenly calculated after distribution, an increase in the cost of, say, car travel might increase the mean (composite) cost of travel on which distribution is based. In extreme cases that could shorten all trips to such an extent that not only is car use decreased, as required, but also travel on the competing modes, which is implausible. Such an effect is often described as a perverse cross-elasticity.
- 4.5.17 In a multinomial logit formulation, a given level of the main choice hierarchy may split the choice into separate sub-levels. Such "nesting" is most often done in mode choice, where the split between competing public transport modes is made at a lower level than the primary split between car and public transport (and possibly the active modes also). This avoids the "red bus/blue bus problem" where separating the bus mode into two without nesting apparently affects the predicted total bus share. Nested logit can also be applied to other demand mechanisms, as for example in a time-period split between broad peak and off-peak periods, and then subsequently between narrower periods within the peak. Nesting can also use high-level large zones in distribution, and subsequently a further distribution within the larger zone to finer zones, but this is likely to be relevant only to more specialised models than the ones addressed by this advice.
- 4.5.18** **Whichever approach is adopted, it is essential to apply "realism testing" to a broad range of transport changes (see section 6) to ensure that the model responds rationally and with acceptable elasticities.**

4.6 Trip Frequency

- 4.6.1 **Trip frequency** models represent the response of trips to changes in generalised costs. This is distinct from **trip generation**, which estimates trips based on the demographic and socio-economic characteristics of an area. If the population or car ownership or built development of the area is changing appreciably over the time period of interest, an explicit trip generation mechanism should be considered, i.e. a trip end model. This can be locally estimated or the [National Trip End Model \(NTEM\)](#) can be applied to local projections of housing and population growth. Where this is not a requirement, NTEM provides growth forecasts of trip productions and attractions.

- 4.6.2 The inclusion of a trip frequency response requires the incorporation of the elasticity mechanism to represent trip frequency as described in Appendix C.
- 4.6.3 Where the active modes of walk and cycle are not explicitly included in the demand model, trip frequency may be thought of as, mainly, the transfer between the not explicitly modelled active modes and the explicitly modelled mechanised modes. Otherwise, overall trip rates will be fairly stable and there will often be no need to model the response of trip frequency to changes in travel cost since the effect of trip frequency is likely to be small. It may therefore be proportional to omit this response, particularly since the frequency effect is markedly less important than the other choices and there is little evidence to justify the scale of frequency parameters and elasticities by purpose.
- 4.6.4 It is unlikely that data will be available to enable trip frequency lambdas to be estimated locally. In general, trip frequency lambdas should be imported rather than estimated.
- 4.6.5 The trip frequency sub-model, when used, should apply at the total motorised mode level, and separately by trip purpose. A single frequency lambda parameter should initially be adopted for each purpose without distinction by car ownership or availability. As with other choice parameters, adjustments may be required and variations by car availability introduced to ensure the demand elasticities generated by the realism tests accord with established values.
- 4.6.6 There will not normally be a requirement to model trip frequency for doubly-constrained trips such as commuting, since the constraints on total travel are usually assumed to be binding, since employment is assumed to be fixed. This implication does not hold if active modes have been omitted and they are likely to form a significant percentage of commuting trips, and/or the planned intervention will result in a significant impact on the number of active mode users. Where it has been considered that including a mode choice response for active modes is of disproportionate effort, a trip frequency response should be included if the potential impact is judged to be sufficiently large. If so, care needs to be taken that the response is not simply affecting long distance trips rather than the short distance trips the response is acting as a surrogate for, for example by comparing trip length distributions by mode with and without the intervention.

4.7 Mode Choice

Which Modes at What Detail?

- 4.7.1 Usually, the main alternative mode to car will be public transport in its various forms and vice versa. Depending on the nature of scheme and its expected impacts, it may also be desirable to represent competition from walk and cycle.
- 4.7.2 It is almost always desirable to include some representation of modal choice in variable demand modelling, but the level of detail depends upon the importance attached to it. It may be acceptable to include the alternative mode(s) merely as a set of fixed costs, but for more complex urban situations it may be necessary

to model the journey components in detail, including for example the effect of changing road conditions on bus travel times.

4.7.3 A few models omit the mode choice mechanism altogether because modal transfer is not considered to be important. This is not recommended in most cases (see section 2.3), but if that approach is used it will be important to include a trip frequency elasticity at a greater strength than usual, since this will act as proxy for trips transferred to the car mode from other modes and vice versa.

4.7.4 If there is little real competition between private and public transport and public transport is not a key focus of the intervention being tested (and the future role of public transport in the locality will not become increasingly important through other intervention), the public transport generalised cost estimates can be made with limited precision. The level of competition can best be judged from local knowledge of modal split for car-available travellers. This can be obtained by travel surveys which set out to identify car availability: in most cases it will have to be proxied by household car ownership, but as this ignores within-household competition, this will generally overestimate true availability. Approximate values for an area can be obtained from the Census.

4.7.5 As a general guide, if public transport is chosen by less than 5% of travellers, use of fixed public transport costs will suffice, unless public transport alternatives need to be assessed as part of the scheme appraisal.

4.7.6 For rail, access to stations is likely to be by car for some trips, and a mean generalised cost of access across all relevant modes (walk, cycle, bus, and car including parking charges) should be estimated. Large changes in demand for either rail or bus might result in changes in service frequency. These effects should be examined using a specialised public transport assignment model (see [TAG unit M3.2 Public Transport Assignment Modelling](#)), from which the generalised costs for each OD can be extracted directly. Where a highway assignment model is also included, the generalised costs of the highway and public transport assignment models need to be consistent with one another.

Active Modes

4.7.7 For many scheme appraisal models, it will be sufficient not to include active modes in the demand model, particularly in the case of major highway schemes. Their mode shares tend to be small but increasing, there may be special reasons for examining the role of active modes in the modelling (for instance for schemes on radial routes in urban areas with high cycle usage) and their inclusion may well affect predictions of short trips on a road scheme.

4.7.8 When active modes are omitted trip frequency elasticities should be stronger, since then they have to represent the effect of active modal transfer. If active modes are to be included, then a cost-responsive trip frequency mechanism can be omitted altogether. If they are treated as a separate mode, as opposed to them being included in a general non-car mode, it will normally be adequate to treat their generalised costs as linearly dependent on OD distance travelled,

via an average speed that is conventionally 4 km/h for walking and 12 km/h for cycling. Walking speeds in particular are a function of the number of roads crossed, and the amount of traffic on these roads, but this aspect is rarely captured in modelling.

- 4.7.9 Active modes may be included in mode choice at either level of the hierarchy, as part of a higher level car/public transport/active mode split with perhaps a sub-modal split between walk and cycle, or, more usually, the higher level split may be kept binary between car and public transport plus active mode, and the latter split at a further nested sub-modal level.

Detail of the Model

- 4.7.10 In the case that more than one public transport mode may offer a competitive alternative to car, the demand model should include a higher level private/public transport modal split mechanism, with a separate nest between the available public transport modes below this in the hierarchy (see section 4.5). The choice sensitivity lambda parameters should be larger at these lower levels than at the higher level. A separate public transport assignment model is recommended where the scheme is expected to have a significant impact on public transport and/or public transport alternatives are to be tested, which can also be used instead of a nest to assign overall public transport demand to sub-modes (see [TAG unit M3.2 Public Transport Assignment Modelling](#)).
- 4.7.11 The detail of the mode choice sub-model may not only depend on the nature of the existing public transport system and the type of scheme, but also on the nature of the passengers being served. For example, air passengers respond differently from the average traveller. People's propensity to use public transport to and from an airport varies according to whether they are travelling on business or leisure and whether they are away from their home area. For a mode choice sub-model designed to appraise a link to an airport, therefore, the demand needs to be segmented in a different way to that used for the modelling of general travel in an urban area. Similar considerations apply to, for example, travel to major sports venues or recreational facilities.

Sub-mode Choice

- 4.7.12 Within the public transport system there may be a range of 'sub-modes':
- different public transport modes, i.e. bus, light rail, heavy rail
 - different access modes to public transport, i.e. walk, cycle, taxi, car (park-and-ride or 'kiss-and-ride')
- 4.7.13 Further there will be many trip options that involve combinations of public transport modes. Choices within these sub-modes can be modelled either by choice models of the form used for the main mode choice or they can be handled in the assignment procedure. This is an important decision for the design of a model and requires careful consideration.

- 4.7.14 A logit-based approach to choice modelling is more stable and transparent, and therefore capable of inspiring greater confidence, than an assignment-based approach. A choice model approach can also be supported by empirical evidence more easily. However, in instances where there are predicted to be significant numbers of mixed mode trips using a significant number of mode combinations, a logit-based approach can be cumbersome.
- 4.7.15 A logit-based approach is also preferable for situations:
- where travellers who are indistinguishable with respect to measured variables are likely to choose different alternatives in significant numbers, i.e. the split is not close to zero-one
 - where sub-mode split can only be explained by the incorporation of a constant representing the net effect of unmeasured variables in influencing the choice between sub-modes
 - where there are serious difficulties in calculating fares for trips using a mixture of sub-modes - as these can be directly incorporated in a choice model
 - where the model includes representation of car access to public transport, because there are many household-related reasons for using or not using a car that are not clearly represented in current models. Further, assignment packages generally have difficulty with the processing needed to deal with mixed car and public transport journeys. Where commercial packages allow this, the car access component should of course be assigned to the car network.
- 4.7.16 For the choice among 'pure' public transport alternatives (i.e. not mixed modes such as park and ride), however, the issue is not so clear and local circumstances, including software capability, will be decisive. A key issue for consideration is deriving appropriate composite cost measures for use in the main mode choice model.
- 4.7.17 The analyst should be aware that, even if the sub-mode choices are modelled through a choice model, the public transport assignment must produce the required skimmed time and cost values for each of the alternatives, for example by bus and train separately. Particular care must be taken that, for the sake of consistency, the assignment should reproduce the (sub)-modal splits calculated in the choice model, which may require manipulation of networks and linkages - so-called biased networks. This is discussed further in [TAG unit M3.2 Public Transport Assignment Modelling](#).

4.8 Time of Day Choice

- 4.8.1 It is unlikely that a variable demand model for a scheme will need to look at time of day choice over all 24 hours in a day but there will be circumstances where the choice of time of travel in certain parts of the day could be expected to be influenced by changing travel costs.

4.8.2 There are two distinctly different aspects of time of day choice. These are termed **macro time period choice** and **micro time period choice**. Macro time period choice represents the choice **between** broad modelled time periods, whereas micro time period choice represents choices **within** a modelled time period. Variable demand models only usually include macro time period choice if at all, to represent transfer of traffic between broad time periods, although micro time period choice has more recently been facilitated by some software packages and notably in the Department's DIADEM software (see Appendix H).

Macro Time Period Choice

4.8.3 Macro time period choice, involving the transfer of trips between broad time periods, can be modelled as a logit choice in a similar way to the choice mechanisms described for the other stages of demand modelling. However, if the demand modelling uses the typical division of time into two peak periods and an inter-peak, the freedom of most trips to transfer between them will be severely constrained: few work trips, for example, could move outside the three-hour peak periods entirely, and such a mechanism might be applied predominantly for shopping as opposed to the journey to work.

4.8.4 To model macro choices, it is necessary to know what proportion of each type of trip takes place in each period. At a macro level trips must be allocated to a discrete time period, even those which start and finish in different periods. An incremental logit model can then be used to modify the total number of trips of **each type of trip** in each time period according to the changes in the mean generalised costs in each period.

4.8.5 **Macro time period choice should be considered when strong cost differentials between time periods are expected to develop or change.** This is obviously the case where different charges are introduced for use of a road, rail or bus service in the peak and inter peak or off-peak, or where different levels of access to road capacity are being contemplated, or perhaps where peak surcharges are introduced for parking in a way which affects a large proportion of traffic. In these cases it is obviously important to choose the modelled time periods to facilitate the modelling of the differential costs and their impacts on choice. If this mechanism is included then sensitivity testing (see section 6) of the strength of the parameters should be used to examine the possible range of responses. It is probably important to apply different sensitivity parameters to different trip purposes.

4.8.6 Less evidence is available about the sensitivity of the macro-time period choice compared to either main mode or destination choice. Research conducted for the Department suggests that the sensitivity of the choice between relatively long time periods, such as three hours or so, should be about the same as that of main mode choice. The research also suggests that, as the time periods are reduced, the sensitivity increases. Thus, when long time periods, of the order of three hours, are being modelled, macro-time period choice should be positioned either just above or just below main mode choice, with parameter values similar in magnitude to the main mode choice parameter values.

Peak Spreading (Micro Time Period Choice)

- 4.8.7 It is common experience that when demand grows in a congested network the peak in demand tends to occupy a longer time. The peak is unable to grow higher for lack of capacity, so additional demand is accommodated in the shoulders of the peak. This effect is known as "peak spreading", but it occurs because of a mixture of responses, both involuntary and voluntary.
- 4.8.8 If modelling predicts unrealistically severe congestion in the peak hour, micro time period choice modelling to reallocate trips between the peak hour and the shoulders may be used to achieve a more realistic estimate. The HADES model functionality imbedded within the [DIADEM software](#) has been developed in order to assist with this (see Appendix H). It represents a continuous range of departure times and interfaces with a range of assignment software which use a small number of time periods.
- 4.8.9 **The length of the peaks will spread as congestion grows**, because lower speeds mean that any given journey will take longer to complete and will occupy a longer period. The traveller has little influence in this, and the delays caused by this effect are often represented within the assignment modelling itself.
- 4.8.10 **Travellers can deliberately change their time of travel, departing and arriving earlier, or later, than their preferred time.** It is common experience in congested conditions that a quarter hour change in departure time can change the expected mean travel time significantly. Some travellers will find such a change acceptable, because the saving in journey time outweighs the benefit they attach to arriving at a preferred time. The response is clearly more available for travellers who have some flexibility in precisely when they must arrive and is applicable to those work trips that have some degree of flexibility for earlier or later arrival. This may influence the appropriate demand segmentation in the model.
- 4.8.11 In the face of increasing congestion, some travellers will adjust their departure times or arrival times to gain a reduction in travel time. In principle, this can be represented as a choice mechanism reflecting the generalised cost of travel to which has been added the cost of not arriving at the preferred time: this is a "schedule disutility term", essentially an extra component to the generalised cost which measures how far the actual arrival time is before or after the preferred time.
- 4.8.12 When a micro time period choice response (that will include a schedule disutility term) is included in a variable demand model, evidence suggests that this is likely to be more sensitive than other responses except route choice.
- 4.8.13 Other techniques may be used to represent peak spreading between the peak hour and shoulders, such as multinomial logit, although there are theoretical reasons why this form of model may not be a reliable predictor of choice between shorter time periods. The reasons behind such alternative choices of techniques and parameters should always be reported.

4.9 Trip Distribution

- 4.9.1** When modelling individual variable demand responses, it is expected that a distribution or destination choice mechanism will be included. This can have a substantial effect on the trip pattern and the amount of traffic using the scheme.
- 4.9.2 Distribution models should be applied in terms of zonal productions and attractions. The creation of distribution models in origin-destination format should be avoided due to the difficulty in correlating planning data with trip origins and destinations.
- 4.9.3 It is common to use doubly-constrained models for forecasting commuting and education trips, so that each zone attracts and generates a fixed total of work trip ends, and singly-constrained models for other purposes, where only the total number of trips generated in each zone is fixed.
- 4.9.4 In addition to cost, distribution also depends on some measure of the attraction of a zone, estimated in terms of the numbers of "opportunities" such as jobs or retail floorspace in the zone. These reflect the likelihood that the zone will be chosen as a destination, other things being equal.
- 4.9.5 The main stumbling block in the use of distribution models lies in estimating the trip attraction factors for each zone in a robust and reliable way, and in determining parameters which have real predictive values. This is difficult, since the distribution parameters are normally calibrated to recreate the (cross-sectional) data observed at a given point in time, which depend on a wide range of historic and socio-economic factors, which cannot be captured fully in the modelled transport and land use factors. Those historic factors can be large enough sometimes to mask the true choice process amongst closely competing destinations in an equilibrium model.
- 4.9.6** Consequently, the model's ability to predict choices and changes in trip patterns due to changing transport factors is generally unproven. For this reason it is recommended that trip distribution models normally have an incremental form, building on a largely observed base. Local parameter values should be calibrated for use in the model. However, if there is insufficient observed data for satisfactory calibration, externally derived parameter values should be used, although some adjustment may be needed to deal with any under-representation of competing destinations and situations where major changes to land-use are expected to occur.
- 4.9.7 Predictions of trip distribution are usually "Production Constrained" to a total based on forecasts of trip-ends. Similarly, the trip matrix can be constrained to match a required number of total trip attractions. In general, the trip matrix and productions will be disaggregated by trip/traveller segments, and will have to satisfy the constraints within each individual segment, such as each trip purpose or traveller type.

4.9.8 There are five main decisions that have to be made about the use of trip distribution models within a variable demand model:

i) Production/Attraction or Origin-Destination Modelling

4.9.9 The implications for this are discussed section 2.5 and the choice is likely to be made based on the availability of data, what other demand responses are being modelled, and what form of demand/assignment model is being used. However, when building a new model, or substantially updating one, the presumption should be that any new matrices are assembled and used as P/A defined trip matrices.

ii) Doubly or Singly Constrained

4.9.10 In general, doubly constrained models should be used for commuting and education. This reflects the relative confidence in the measures of attraction (employment and student numbers) for commuting and education trips, as well as the relatively fixed nature of the relationship between population (production) and trip numbers attracted for these purposes.

4.9.11 Other purposes such as shopping, social and leisure trips are typically modelled as singly production-end constrained. For these purposes, the trip end factors reflect the attraction of destinations, not the actual numbers of trips attracted and ideally the availability of other similar destinations between the origin zone and the zone in question, or perhaps further away but more attractive. For some of these purposes it may be logical to consider a trip frequency effect on top of the distribution effect; that is decreasing costs leading to greater numbers of trips of that purpose as well as change the destinations. Examples of this are leisure or holiday trips, but shopping trips are also likely to be elastic, especially if the model does not include active modes, since walk trips to the local shop may become mechanised trips to more distant shopping centres if travel costs fall.

4.9.12 In practice the required estimates need be only relative and usually depend on a weighted combination of quantities like shopping floorspace or employment, with the weights obtained from fitting regression models, or they may be obtained from trip-end models such as NTEM.

iii) Incremental or Absolute (based on wholly synthetic models) Forecasting Models

4.9.13 Where possible incremental models should be used, since these have the benefits of a more directly observed trip matrix (see section 4.3). Absolute methods require the calculation of a multitude of area-specific fitting constants ("K factors"), which is often not straightforward¹³.

iv) Model Form

¹³ K factors represent that part of the interaction between zones that does not conform to the general synthetic model expectations. In calculating those factors it is advisable to first identify calibration areas and then vary the distribution parameter by calibration area as well as traveller type before resorting to such zone-to-zone factors.

- 4.9.14 It is expected that the model form will generally be logit. However, a number of different deterrence functions are possible. These are discussed more fully in Appendix C. Discussion on incremental distribution models can be found in Appendix D.
- 4.9.15 Different values of the distribution parameters can be used for different cells, or over different cost bounds, or a completely empirical relationship between deterrence and cost can be used. However, since most of the evidence on suitable parameter values relates to the logit form, this should be the first choice. Where alternative parameters are justified by a study of the base situation, the logit parameter value may vary by origin or destination zone. However, any logit or exponential distribution model implies that the sensitivity to a given absolute change has the same effect on travel between zones far apart as on those close together, and this sometimes leads to large percentage changes in long-distance trips. This can be mitigated by careful choice of calibration areas or the testing the introduction of cost damping. It should not be a problem for local models, but could give rise to unusual forecast changes for models with very long and very short trips (though trip-end constraints will mitigate the effect somewhat for doubly-constrained models). Where locally derived parameters have been produced by calibration area, then the trip matrix may need to be split into categories based on these calibration areas (for instance trips to an urban centre) before forecasting is undertaken.

v) Considerations about hierarchy

- 4.9.16 The detailed form of the distribution sub-model depends on its position in the sub-model hierarchy. If the distribution sub-model is less sensitive than mode choice, it should distribute trip generations (by car ownership or car availability where mode choice is modelled) to a combined set of trip attractions. If the distribution sub-model is more sensitive than mode choice, it should distribute trip generations by mode to a combined set of trip attractions. Whatever its position, the distribution sub-model should be applied separately by trip purpose.
- 4.9.17 For models in which the distribution sub-model is more sensitive than mode choice, it may be necessary to adjust some model parameters to ensure that the demand elasticities implied by the overall model accord with established values, potentially starting from a basis of using the same lambdas for both car and public transport. If adjustments of this kind are necessary, one option which could be considered is to differentiate the destination choice model parameters by calibration area and/or mode. The modeller may opt to conduct tests of the sensitivity of the forecasts to alternative lambda values which vary by mode.
- 4.9.18 In the event that insufficient locally-collected data are available for estimation of the model lambda (spread, sensitivity or scaling) parameters, values may be imported from other models. If so, the modeller should ensure that the chosen values are consistent with those provided in section 5.6. If the imported values differ significantly from these values, the Department will expect to see a convincing justification for the preferred values.

Spatial Issues

- 4.9.19 Trip distribution models are likely to be the demand response most sensitive to the spatial extent of the model area but the degree of sensitivity will also depend on the form of the distribution model chosen. Three issues are worth highlighting with respect to trip distribution models.
- Where possible, all likely destinations for zones within the main area of interest should be modelled. This is particularly important for trip distribution models since trip increases in one area, say, within a corridor of interest after improvements, should lead to decreases to other destinations. This will have implications for traffic quantities and benefits (overall, and within given areas).
 - Average intrazonal trip costs should be calculated as accurately as possible to remove bias against shorter trips in the distribution model. Power function models are particularly sensitive to very low intrazonal costs, and where mode choice is undertaken lower down the hierarchy than distribution the distribution of car trips using a power function could lead to an excess of very short distance car trips.
 - If destinations outside the central area of focus of the model (often referred to as the 'fully modelled area') are potential alternative destinations then the costs to these destinations should be calculated reasonably accurately, even if the network, and the zoning system outside of this area, is of a coarse nature.

4.10 Route Choice: Assignment Modelling

- 4.10.1 A variable demand model includes an assignment stage to provide travel cost information to the demand model, often called the supply model. Route choice in assignment can be considered separately from the other choice mechanisms, but it is essential that an equilibrium solution between demand and supply is obtained, generally by iterating between the two processes until a level of convergence is achieved. The assignment stage must itself be adequately converged, since this is necessary to achieve a good level of convergence between the assignment model and the demand model..
- 4.10.2 [TAG unit M3.1 Highway Assignment Modelling](#) provides detailed guidance on highway assignment modelling. This includes guidance on selecting the most appropriate assignment model form, particularly when considering the importance of time periods that need to be modelled. For example, the use of short time periods in a dynamic assignment will be valuable in modelling micro time period choice as part of the assignment stage. [TAG unit M3.2 Public Transport Assignment Modelling](#) gives advice specific to route choice and assignment on public transport networks.

5. Demand Model Calibration

5.1 Local Calibration of Demand Models

5.1.1 This section provides advice on using local data to calibrate the parameters of the demand model. If, after considering the issues below, it is impractical to calibrate local values, then consideration should be given either to importing values from existing locally calibrated models or to using the illustrative values given in section 5.5.

Using Local Data to Calibrate Parameter Values

5.1.2 Calibration of the parameters in the demand response mechanisms can be a very time-consuming and expensive phase, and for smaller schemes or where it is proportionate to do so, the alternatives of using other local model parameters and/or standard illustrative values should be considered.

5.1.3 Calibration of the different demand responses varies in both the amount of data required and the ease of the calibration itself. In some cases the surveys used for calibration of the model can be used for other purposes (such as eliciting behaviour in response to tolling or parking restraint), making the necessary survey work more cost-efficient.

5.2 Trip Frequency

5.2.1 If a trip frequency response is included, the parameters which govern the response to cost changes will be dependent on what other responses are in the model. These composite costs are derived from responses lower in the hierarchy and will depend upon the trip distribution and mode-split mechanisms (see section 4.6). To disentangle these complex interactions unambiguously, comprehensive data (which is not usually available) is required to explain responses to large changes in travel costs.

5.3 Mode Choice

5.3.1 Detailed advice on model estimation is given in Appendix F for the case where a mode choice model is being transferred from another source.

5.3.2 The practicality of local calibration of the mode choice mechanism depends on the quality of the data available and the ability to distinguish between public transport travellers with and without a car available, since these two categories of traveller will have very different choice-sets. It will also depend on the extent to which choice of mode is exercised by car available travellers. Coupled with estimates of times and costs by the various modes using standard values of time, this can enable mode-choice parameters to be estimated.

- 5.3.3 The quality of data about trip purpose will determine how disaggregate a model can be estimated. That is likely to be most problematic for public transport data. Irrespective of the approach used, a check should be made that the model reproduces the modal-split correctly for the important movements. Similar considerations apply when using parameters from other local studies such as a regional multi-modal study.
- 5.3.4 Relatively simple mode-choice calibration can be undertaken where the number of car trips and public transport trips for which a car is available are known for a large number of important flows, together with estimates of times and costs by the various modes and appropriate values of time. Car availability data can only be obtained by personal survey, either in the household or on public transport, though even then the travellers' claim to have a car available often ignores competition for the car within the household. As always, the quality of data on trip purpose will determine the disaggregation possible.
- 5.3.5 An alternative mechanism would be to use Stated Preference (SP) surveys to estimate the important determinants of mode choice. SP survey work provides a useful approach when considering the introduction of states that are not present in the current situation, such as tolling or parking restraints, or where new modes (to the area) are being considered. In these cases, the surveys are more likely to be geared towards estimating the relative impact of items that make up the definition of generalised cost than to provide evidence of the parameters controlling the mode choice. Specialist advice should be used to establish the mode specific constants of the relative attractiveness of the new modes. Where household surveys are being undertaken to collect other data for modelling purposes, it may be possible to attach an SP study at marginal cost. The software available to calibrate models using SP (and other data) can handle a variety of forms of hierarchy of travel responses. The output statistics can help to shed light on the most likely choice structure. This is particularly important for mode choice, where nested choice structures are often required.
- 5.3.6 One of the characteristics of calibration using SP methods is that the results tend only to give the relative importance of different modes and their attributes, and may not reproduce current market shares, without using a "scaling factor". To do this, observed data on the actual choices made are normally required: this is known as Revealed Preference (RP). The observed data and the reasons behind the current decisions made are more complex than the clearer-cut comparisons of data obtained from Stated Preference surveys, making it more difficult to identify the exact relationships between costs and choice.
- 5.3.7 Calibration to reproduce the cross-sectional details of the base case is less of an issue when using incremental or pivot-point modelling (the recommended approach), since the observed OD matrices are used directly and only changes from the base or pivoted reference case are to be forecast. In general, SP methods alone cannot be relied on for estimating the scales of the responses accurately, as they tend to overestimate the response to change.
- 5.3.8 In absolute models, adjustment (K) factors may be needed to achieve an acceptable level of fit to observed modal shares (see Appendix C). It is desirable to keep the number of adjustments of this type to a minimum, even if

this means that the modelled base case departs from the observations in some respects.

Estimation of Transferred Mode Choice Models

- 5.3.9 [Supplementary Guidance on Bespoke Mode Choice Models](#) describes how a mode choice model may be developed as a bespoke tool or transferred from another source. Appendix F discusses the more common approach of transferring mode choice models in more technical detail. In some cases, a transferable mode choice model may be embedded in a complete transferable model system and advice for these cases is also presented.

5.4 Time Period Choice

- 5.4.1 Advice on calibrating time-period choice models is likely to develop over time. SP techniques can be used to estimate travellers' broad time-period switching in response to travel cost changes, and this may be especially appropriate if one of the policy options aims to encourage time period switching, for example through charging. Otherwise, at present, the analyst should follow the advice given in section 5.6.

5.5 Distribution

- 5.5.1 Calibration of a trip distribution model can be difficult and to fit the observed data sufficiently well the calibration may need to be done separately for different spatial sectors in the model. Even if this is done, the estimated parameters are not necessarily the correct values for estimating the responses to changes in costs, since the observed trip patterns occur for a range of historical and land-use reasons not necessarily closely linked to travel costs. To provide a satisfactory local calibration the data available must be of sufficient quality and quantity. This will require that either the range of trip lengths in the observed part of the trip matrix on which the distribution parameter(s) are being calibrated is representative of the whole trip matrix or account is taken of the variations in sampling rate over the full range of trips, to ensure that the synthesised trip length distribution is correctly representative of the full range of trips.
- 5.5.2 Given observed or part-observed/part-synthesised trip matrices, it is possible to estimate parameter values based on the present-day distribution of trips provided a simple form of distribution model formulation is chosen. Single parameter models (i.e. the lambda of a logit model or the elasticity of a power function) are calibrated by adjusting the parameter iteratively for each calibration area until the average cost (for an exponential or logit function) or the weighted average of the logarithmic costs (for a power function) equals that observed. The theoretical background to the method of calibrating a demand function with a single parameter is available in standard texts such as that by Ortuzar and Willumsen (2001), and in the references for matrix manipulation programs in most commercial transportation modelling suites.

- 5.5.3 A similar approach can be adopted whether a singly or doubly constrained model form is assumed. In practice, the simple demand function may not fit the trip pattern well, and the expected trip-length distribution should be checked against the observed distribution, even where the mean values are well estimated. In addition, the observed trip pattern is likely to contain particular movements that are not properly represented by the modelled function, and additional constants will be needed to reproduce the observed base. Use of an incremental model rather than an absolute one avoids most of this complication.

5.6 Illustrative Parameter Values

- 5.6.1 This section suggests illustrative values obtained from a review of a number of UK transport models for situations and responses where either local calibration or derivation from existing models and/or local knowledge is not possible. The values should be compared with local values or modified in the light of local circumstances and accompanied by realism tests. The illustrative values can provide an acceptable approach to including variable demand modelling in transport appraisals where it is deemed too difficult to establish local values.
- 5.6.2 No matter how carefully the model has been constructed and coded, if the parameter values it contains are wrong the appraisal will be wrong. The base year demand matrix and travel costs will be based on measured local data. It should present a reasonably accurate account of the prevailing situation, but the mechanisms which model travellers' behaviour, and the choices they make, must be calibrated against appropriate evidence of that behaviour. That should ideally include evidence of how choices change as costs change rather than the observed cross-sectional variations.
- 5.6.3 Although locally calibrated parameters should be used wherever possible, some of the sensitivity parameters may have to be obtained from generalisations of other modelling work. The illustrative values given in the tables below are values obtained from transport models which have been developed by means of rigorous estimation processes. They are not necessarily appropriate for all circumstances and need to be assessed and modified where necessary but, in the absence of a specific local calibration, they may be the best available estimates. **Whatever values are selected, whether from local knowledge or based on the illustrative values, it is essential to conduct "realism" tests (see section 6.4) to ensure that the actual behaviour of the model against variation in travel times and costs accords with experience.**
- 5.6.4 The illustrative parameter values in this guidance are based on the standard model form using a hierarchy with main mode choice less sensitive than destination choice (see Appendix D for the model formulation). If an alternative hierarchy is used, then most of the illustrative parameters would no longer be directly applicable.
- 5.6.5 The parameter values for main mode and destination choice have been derived from "Multi-Modal Model Data Provision", by MVA and the Denvil Coombe

Practice, dated May 2005¹⁴ augmented by more recent information from RAND Europe on the PRISM¹⁵ model of the West Midlands and the MoTiON¹⁶ model of London. The trip frequency parameter values in the report were derived in part from TRL (2001), which has now been largely superseded by the MVA report but may still offer some useful insights. These illustrative parameter values represented the "best estimates" at their time but are inevitably uncertain. Since the illustrative parameters apply to costs specified in generalised minutes, changes to values of time (and other variables) over time should not affect them. Under the assumption, used by default in forecasting and modelling generally, that the sensitivity of response to generalised time is largely fixed (within appropriate segments), the estimated pre-2005 model values should still be applicable.

- 5.6.6 The seven models in the MVA report were the only ones of a generally acceptable form that were available at the time for which parameters had been estimated, in some cases rigorously but in other cases not so rigorously. All the models were trip-based, all based on linear generalised cost (time) formulations, and none used cost damping in any form.
- 5.6.7 More recent information has been obtained from RAND Europe on the mode-destination model estimation of the 2011-based PRISM model of the West Midlands¹⁷, and the 2016-based MoTiON model of London¹⁸. Both of these models employ cost damping in the form of mixed linear and logarithmic cost formulations for most purposes and operate on a tours basis with a wider range of demographic and purpose segments than the earlier models in the MVA report. It has not been possible to include destination choice sensitivity parameters from PRISM and MoTiON in Table 3, as their non-linear cost term makes the structure too complex. This should not in any way preclude the use of such innovative cost formulations in new models, but they would not be able to draw directly from the illustrative destination choice parameters in Table 3 and would instead require local estimation or a bespoke approach to parameter calibration to meet realism targets.
- 5.6.8 The structural tests in PRISM and MoTiON for most journey purposes concur with the standard model form with main mode choice less sensitive than destination choice (see Appendix D). Thus, the main mode scaling parameters (theta values) they produce were generally appropriate to include in the illustrative main mode choice parameters (Table 4).
- 5.6.9 The illustrative parameter values relate to trip-based models. If home-based tours are modelled, the total costs for all legs of the tour taken together need to be used rather than the costs of each leg separately. In these instances, the

¹⁴ Archived by the Department for Transport at <https://webarchive.nationalarchives.gov.uk/ukgwa/20090606073536/http://www.dft.gov.uk/pgr/economics/dg/vdmc/mmdp/>

¹⁵ Policy Responsive Integrated Strategy Model (PRISM) is Transport for West Midlands' strategic transport model that helps inform transport policy and related decisions in the West Midlands

¹⁶ Model of Travel in London (MoTiON) is [Transport for London's multi-modal strategic transport model](#)

¹⁷ PRISM 2011 Base Mode-Destination Model Estimation https://www.rand.org/pubs/research_reports/RR186.html

¹⁸ Model of Travel in London Phase 3 Mode and destination choice model estimation https://www.rand.org/pubs/research_reports/RRA1217-1.html

lambda values which govern the destination choice process should be halved. The theta values which govern the mode choice process are scaling parameters and do not need to be halved.

- 5.6.10 The Department is keen to obtain further evidence on illustrative values and would welcome information on parameter values from models that have been rigorously calibrated.
- 5.6.11 All the illustrative parameter values provided in this section relate to generalised costs in minutes for an O/D trip, as derived using the Department's standard formulations of generalised cost (see section 3) and standard values of time (see [TAG unit A1.3 User and Provider Impacts](#)).
- 5.6.12 If other units or some functional form other than logit were to be used, it is always possible to ensure that the model sensitivity, measured for the local circumstances, is equivalent to that of a logit formulation using the default values as follows:
- estimate "typical" values of the relevant generalised costs
 - apply a modest change to a time or cost component (10% is commonly used)
 - calculate the appropriate change in demand using both the logit formulation and the alternative functional form of the model
 - adjust the parameters of the model mechanism to obtain a similar change in demand to that given by the logit form

Trip Frequency

- 5.6.13 In modelling trip frequency, we are concerned solely with the response of the total number of trips from each zone changing as travel costs change, dependence on the demographics and land use of the zone is a different issue.
- 5.6.14 Some models include trip frequency but the evidence on the appropriate sensitivity parameter value is limited and no explicit values can be recommended. Some indicative short-term car trip (only) elasticities to car journey time, however, are presented in Appendix A.

Destination Choice (Distribution)

- 5.6.15 Illustrative destination choice or distribution parameter values are shown in Table 3 below. On the presumption that destination choice will follow main mode choice in the model hierarchy (see section 4.5), parameter values are provided separately for car trips and public transport trips. No illustrative parameters are available for active modes (walk / cycle). See Appendix D for the model formulation to which these parameter values apply.

5.6.16 The values in Table 3 are all derived from the sample of seven models in the 2005 MVA report since it was not possible to derive compatible values from the more recent PRISM and MoTiON models.

Table 3 Illustrative Destination Choice Lambda Parameters

Trip Purpose and Mode	Minimum	Median	Maximum	Sample
Car				
Home-based work	0.054	0.065	0.113	7
Home-based employers' business	0.038	0.067	0.106	5
Home-based other	0.074	0.090	0.160	4
Non-home-based employers' business	0.069	0.081	0.107	3
Non-home-based other	0.073	0.077	0.105	3
Public Transport				
Home-based work	0.023	0.033	0.043	7
Home-based employers' business	0.030	0.036	0.044	4
Home-based other	0.033	0.036	0.062	4
Non-home-based employers' business	0.038	0.042	0.045	2
Non-home-based other	0.032	0.033	0.035	3

5.6.17 The parameter values shown above for public transport trips strictly apply to trips from car-available households. They may also be used for trips from non-car available households without significant loss of accuracy.

5.6.18 It is difficult to generalise about when low values should be used and when high values would be more appropriate. Note that the ranges shown above are not targets within which parameter values must lie. They are simply the minimum and maximum values from the sample available. However, as discussed in section 6.5, it is expected during calibration that parameters outside +/- 25% of the median value would be further examined. The MVA report¹⁹ provides parameter values for a variety of models, of London, a large region in Scotland, and a number of smaller urban areas. This report should be consulted in deducing parameter values (or their indicative relative variation based on urban context or movement type) for models of more complex areas where the use of the single mean or median values may be considered too simplistic. The TRL report may also provide some guidance on variations in parameters under different circumstances, although it should be borne in mind that this report contains limited information about the extent to which model parameters were derived by rigorous calibration procedures and validated by realism tests.

5.6.19 It should also be noted that the introduction of cost damping (widely used in current models) would tend to imply that sensitivity parameters should typically

¹⁹ Archived by the Department for Transport at <https://webarchive.nationalarchives.gov.uk/ukgwa/20090606073536/http://www.dft.gov.uk/pgr/economics/r dg/vdmc/mmdp/>

be larger than those advised in Table 3 in order to achieve desired realism responses. Thus, destination choice parameters for cost-damped models may reasonably exceed the median values shown by more than the indicative range of 25% (discussed in the previous paragraph) during local calibration and realism testing.

Main Mode Choice

- 5.6.20 Main mode choice (that is, the choice between car and public transport and possibly active modes) parameters are specified as scaling parameters (see Appendix D for further details). These scaling parameters show the sensitivity of main mode choice relative to destination choice. Thus, to be consistent with the default hierarchy recommended in section 4.5, of destination choice following main mode choice, the main mode choice scaling parameters are all less than or equal to one, as shown in the table below.
- 5.6.21 The sample of models used in Table 4 is largely derived from the seven models in the MVA report but also includes more recent main mode choice scaling parameters from PRISM and MoTiON for compatible purposes. This excludes the home-based other purpose from MoTiON which did not result in valid estimated parameters but includes a value for home-based other from PRISM based on a sample-weighted average of the estimated “home-based shopping” and “home-based other” values.

Table 4 Illustrative Main Mode Choice Theta Scaling Parameters

Trip Purpose and Mode	Minimum	Median	Maximum	Sample
Home-based work	0.51	0.70	0.83	8
Home-based employers' business	0.19	0.46	0.78	4
Home-based other	0.27	0.47	1.00	5
Non-home-based employers' business	0.73	0.73	0.73	2
Non-home-based other	0.43	0.62	1.00	3

- 5.6.22 Again, it is difficult to generalise about when low values should be used and when high values would be more appropriate. The ranges shown above are not targets within which parameter values must lie. They are simply the minimum and maximum values from the sample available. The MVA report should be consulted in deducing parameter values for models of more complex areas where the use of the single mean or median values may be considered too simplistic. The TRL report may again be of some use, noting the caveat in paragraph 5.6.2.

Time of Day Choice

- 5.6.23 Section 4.8 discusses that limited evidence broadly suggests that the sensitivity of macro time period choice at relatively long periods (e.g. 3 hours) should be

about the same as main mode choice and hence comparable to the values in Table 4. Micro time period choice will clearly be more sensitive.

6. Convergence, Realism and Sensitivity

6.1 Background

6.1.1 Once the model has been scoped and developed, it is important to ensure that the model converges, is realistic and that sufficient sensitivity tests have been undertaken in order to further validate its fitness for purpose and to understand the operation of the model before applying it directly to scheme appraisal or testing strategies.

6.2 Building the Model and Model Interfaces

6.2.1 Practitioners should use their judgment to decide on a modelling approach that best suits their needs and the scope of the model that is to be developed. Various commercial software packages are available, along with required interfaces between assignment and demand models. Increasingly, open source alternatives are being developed and used – it is advised to contact the Department when considering their application.

6.2.2 The Department's [DIADEM software](#) (Dynamic Integrated Assignment and DEmand Modelling) has been developed to provide simple multi-stage demand models and an interface direct with some commercially available assignment modelling packages, although the interface is flexible enough that it has been used with other packages. DIADEM contains procedures that apply a range of convergence improving techniques, guided by a number of convergence measures and desired stop criteria. For further information, see Appendix H.

6.2.3 There are a number of different approaches that can be adopted in developing assignment and demand models and their interfaces that are crucial when considering general performance and convergence issues:

Combined Assignment-Demand Models

6.2.4 Some software packages can handle demand-supply responses as a combined assignment-demand model. This is the preferred solution in most cases since the software will be constructed to ensure, as far as possible, that the model is properly integrated, computationally efficient and can converge to a correct solution. At present the main drawback is that the demand responses that can be modelled may be limited, either in number or in the sequence order; or the embedded assignment model does not provide all the functionality required for the area, e.g. detailed junction modelling. Where combined assignment-demand

model software exists it also tends to operate on an O/D rather than P/A basis, whereas the latter is preferred by the Department.

- 6.2.5 With some models, more exact measures of convergence can be defined than the % relative gap measure recommended in section 6.3. This may arise from the nature of the combined demand-supply formulation. The approach to improve convergence should be given in the Validation Report and in addition to these more exact measures, the % relative gap should also be reported. The TUBA tests outlined in section 6.3 can be done to ensure that convergence is to the level required by the scale of the scheme.

Combining Separate Demand and Assignment Models

- 6.2.6 The next best alternative is to make use of a transportation software suite's matrix manipulation tools to construct an interface and iterate between the assignment program and the demand model. This will ensure that the supply and demand data are in compatible format and that different demand segments are transferred properly between the sub-models (aggregation and disaggregation). Various transportation software packages are available that cover both demand and assignment functions. The use of different software for assignment and demand modelling, and/or for different modes needs to be handled carefully to ensure data is successfully, correctly and transparently transferred. For any iterative model application, this will usually require a separate programming solution.
- 6.2.7 The user will need to ensure that the final solution meets the convergence criteria set out in section 6.3. This requires the demand model and assignment model to be run alternately, usually with the cost matrix being passed directly from the assignment model to the demand model. The trip matrix may be passed directly from the demand model to the assignment model, but this approach may require a large number of iterations, a potentially unacceptable amount of time to run, and often struggles to converge. Other algorithms (e.g. the Method of Successive Averages (MSA)) combine a proportion of the demand matrix with demand matrices from earlier iterations and should reach the convergence criteria more quickly.
- 6.2.8 It is difficult to provide a single ready-made solution for all software and all schemes, and it may be necessary to seek advice from the software developers. For these models the iteration between assignment model and demand models should give statistics from which to calculate the % gap statistic, as recommended in section 6.3. The approach to iterating between the supply and demand models, and the monitoring of the convergence progress should be detailed in the Validation Report. Evidence should be provided that the models meet the convergence requirements set out in paragraph 6.3.15.

6.3 Convergence

- 6.3.1 **It is of crucial importance to demonstrate that the whole model system converges to a satisfactory degree, in order to have confidence that the model results are as free from 'noise' as possible.**

- 6.3.2 Variable demand models iterate between demand and supply, or in other words between the demand response components and assignments. Convergence of the full model system to a stable solution close to equilibrium may be monitored using the guidelines developed for DIADEM. If necessary, the convergence algorithms designed in DIADEM, or indeed any other appropriate software, could be incorporated in the model system to aid in achieving required levels of convergence.
- 6.3.3 Tests have shown that improved demand convergence can reduce the convergence errors to less than 10% of the economic benefit derived from the intervention. Demand modelling software may provide a number of measures of convergence, both relating to proximity (how close to the true equilibrium), and stability (how much the results are changing each iteration). For the purposes of this unit, the proximity measures are the more important, and the above value of 10% of the economic benefits is considered achievable.
- 6.3.4 The recommended criterion for measuring convergence between demand and supply models is the demand/supply % gap.
- 6.3.5 The % gap formula depends on whether the demand model uses demand averaging or cost averaging to speed its convergence. Using the wrong formula risks overstating the level of convergence of the model. A model that does not use averaging may use either formula.
- 6.3.6 For a model that uses cost averaging, the % gap is a demand weighted average of the % change in costs between iterations of the model. For a model that uses demand averaging, the % gap is the cost weighted % change in demand between iterations of the model.
- 6.3.7 For a variable demand model (VDM) that uses cost-averaging, the % gap is defined by

$$\frac{\sum_a D_a^n |C_a^n - C'_a{}^{n-1}|}{\sum_a D_a^n C'_a{}^{n-1}}$$

Where:

$C'_a{}^{n-1}$ is cell a of the cost matrix, averaged across previous iterations

D_a^n is cell a of the assignment demand matrix output from the variable demand model

C_a^n is cell a of the cost matrix from assigning D_a^n

a represents every combination of origin, destination, demand segment/user class, time period and mode

- 6.3.8 This formula calculates the difference between costs skimmed on the current iteration before any averaging and the costs averaged across all the previous

iterations. Using the raw unaveraged costs for the current iteration is important because comparing two sets of averaged costs would overstate the level of convergence. If no averaging is used, the difference simply compares the skims from the two iterations.

6.3.9 Although the formula above sums over demand segment/user classes, time periods and modes, a segment-specific analysis may identify model components that have converged well and less well.

6.3.10 For a model that uses demand-averaging, the % gap is a cost-weighted average of the % changes in demands between iterations, defined by:

$$\frac{\sum_a C_a^{n-1} |D_a^n - D_a^{n-1}|}{\sum_a C_a^{n-1} D_a^{n-1}}$$

Where:

D_a^{n-1} is a cell of the averaged demand matrix used in the assignment that produced costs for the latest VDM run

C_a^{n-1} is cell a of the cost matrix that went into the VDM to produce the latest demand matrix D_a^n

D_a^n is a cell of the demand matrix output from the VDM

a represents every combination of origin, destination, demand segment/user class, time period and mode

6.3.11 The demand/supply model used may report other measures of convergence. Some of these may be stability statistics that indicate how much the solution is changing from one iteration to the next. An example of this could be the maximum change in absolute trips in the demand matrices or flows at link level in assignment. It is often assumed that a stable solution implies convergence. However, it can also be an artefact of the particular algorithm being used so stability statistics are, in general, not a good indicator of how close the solution is to equilibrium.

6.3.12 It is beneficial to monitor and report the % gap for not only the last iteration of demand and supply, but for several iterations in order to understand the stability of the model.

6.3.13 Tests indicate that gap values of less than 0.1% can be achieved in many cases, although in more problematic systems this may be nearer to 0.2%. Where the convergence level, as measured by the % gap, is over 0.2% remedial steps should be taken to improve the convergence, by increasing the level of convergence in the assignment step.

6.3.14 To optimise processing time and help reach converged solutions the travel cost formulations used in both assignment and demand models should contain a ratio of weights of journey time relative to journey distance that are as

consistent as possible. Where possible, it will be beneficial to have available an integrated and automated demand and assignment process.

Convergence and scheme benefits

- 6.3.15 The required level of convergence needs to be linked to the scale of the benefits of the scheme being appraised, relative to the network size. For instance, the calculation of benefits from small schemes in large networks will be much more sensitive to convergence than large schemes in small networks. On the basis of testing, it has been discovered that the following rule of thumb is a useful indicator of the suitability of the convergence of the model: **ideally the user benefits, as a percentage of network costs, should be at least 10 times the % gap achieved in the Without-Scheme and With-Scheme scenarios.**
- 6.3.16 User benefits can be derived through use of DfT's TUBA software. It may also be done manually by using matrix manipulation of the with and without scheme trip and skimmed generalised cost matrices to produce an estimate of the consumer surplus by the rule of a half.

6.4 Realism Testing

- 6.4.1 Once a variable demand model has been constructed, it is essential to ensure that it behaves 'realistically', by changing the various components of travel costs and times and checking that the overall demand response accords with general experience. If it does not, then the values of the parameters controlling the response of demand to costs should be adjusted until an acceptable response (within ranges shown in Table 6) is achieved. Any changes to the original parameters, and the impact on elasticities, should be reported. There will be more scope for adjustments to model parameters where they have been imported and where the model form is incremental, and less scope where the model parameters have been estimated from local data and/or where the model form is absolute. Ways of adjusting models to improve the outcome of the realism tests are discussed in section 6.5.
- 6.4.2 In this section, the calculations required for the realism tests are defined. Advice is also provided on how the acceptability of the test results may be judged.
- 6.4.3 Many of the parameters controlling the behaviour of a model ought to reflect where possible local circumstances. However, even if there are adequate local data for an acceptable estimation or calibration of a model, the fact that a model replicates the travel patterns in base year cross-sectional data satisfactorily does not guarantee that the model is a good predictor of the demand responses to changes in travel costs over time and responses to changes in travel costs brought about by schemes in the forecast year. Also, in cases where a local estimation or calibration is not possible and parameter values are imported from other models or from the illustrative values provided in section 5.6, it will be important to check that the behaviour resulting from these parameter values is plausible in their new context.

- 6.4.4 If the model does not behave in accordance with general experience, it should not be used to appraise a transport scheme, unless a convincing case can be made to explain the differences in terms of special local circumstances. Instead, the model parameters should be modified until its responses are plausible (as advised in section 6.5).

Demand Elasticities

- 6.4.5 The acceptability of the model's responses is determined by its demand elasticities. These demand elasticities are calculated by changing a cost or time component by a small global proportionate amount and calculating the proportionate change in travel made. These changes may be implemented on either a link basis and skimmed to yield the interzonal changes or directly at the matrix cell level. The elasticity recommended is:

$$e = \frac{\log(T^1) - \log(T^0)}{\log(C^1) - \log(C^0)}$$

where the superscripts 0 and 1 indicate values of estimated demand, T, and cost, C, before and after the change in cost, respectively. For example, if car fuel costs increase by 10% and trips by car fall by 2%, then the elasticity of car trips with respect to fuel cost would be $\log(0.98)/\log(1.10)=-0.212$. For the purposes of these realism tests, demand would be in terms of vehicle-kms²⁰ (for private modes) or person trips (for public transport). Elasticities would normally represent long-term responses unless indicated otherwise, given that these long-term responses are more suitable for assessing major infrastructure investments and benefits estimations.

The Tests Required

- 6.4.6 Any component of cost or travel time can be used to calculate demand elasticities. However, they are not all independent so that there may be little point in checking all of them separately. The different components of generalised cost for any particular journey are interlinked by the weights applied in calculating the generalised cost (see section 3). Thus, if one weighted component always accounts for twice as much as another in the total cost, the elasticity of demand relative to it will always be twice as much. Nevertheless, it is desirable to test the more important components in this way to ensure that the formulation of generalised cost in the model is correct.
- 6.4.7 The primary realism tests require that **car fuel cost** and **public transport fare** elasticities lie within specified bands (as set out below – good time series data are available for these). Car fuel cost elasticity tests are required in all cases where a highway model is used. Public transport fare elasticity tests are required in all cases where changes in public transport generalised costs, including changes in fares, are modelled. **Car journey time** elasticity tests are also required (as a potentially useful diagnostic). Other realism tests - for example, of a model's ability to reproduce elasticities of demand with respect to

²⁰ An exception to this is car journey time, which uses trips.

other charges, such as parking charges and tolls - may be appropriate where empirical elasticities are available. These should be described in the Model Validation Report.

- 6.4.8 All elasticities should be calculated using the **base year** model.
- 6.4.9 In order to achieve acceptable results from these realism tests, it may be necessary to modify or damp the generalised cost changes used in the demand model for longer trips. The mechanisms by which **cost damping** may be implemented are specified in section 3.3. In models where the parameter values are estimated or calibrated from local data, cost damping, if it is to be employed, should be built in to the model at the estimation or calibration stage. In these cases, the realism tests should always include the cost damping. In models where parameter values are imported, initial realism tests may be undertaken without cost damping to gain an understanding of the impact of cost damping if and when it is introduced²¹. Advice on the introduction of cost damping is provided in section 6.5.
- 6.4.10 The elasticities should be calculated from a **converged** run of the demand/supply loop. This requirement arises from the fact that these observed elasticities, against which the modelled elasticities are to be compared, are the result of the real world interaction of demand responses, congestion and crowding. Running a model to full equilibrium may be time-consuming and it may be more practical to explore the sensitivity of the demand elasticities to changes in the model parameter values using fewer iterations. If this approach is adopted, the extent to which the elasticities resulting from the smaller number of iterations are changed by further iteration to convergence should be established and reported.
- 6.4.11 A demand weighted average of these elasticities by time period and demand segment or user class should be taken so that the result **ideally** represents the average elasticity for the whole year. This is because the target elasticity specified below relates to all periods of the year. The annualisation factors used for the Transport Economic Efficiency appraisal may be used for this purpose (see [TAG unit A1.3 User and Provider Impacts](#)). Where the annualisation factors do not account for all periods of the year, the available factors should be used but their limitations should be noted in the realism test reporting.

Deriving the elasticities used in this unit

- 6.4.12 Acceptable ranges for elasticities in realism testing have been derived from the meta-models of cost and time elasticities reported in Wardman 2022a and 2022b. Earlier versions of these meta-models have been used in the development of recommended rail elasticities for PDFH.

²¹ This will be the case where the illustrative parameters in section 5.6 are used, or if the model from which the parameters are imported has no cost damping. Where parameters have been imported from a model that employed cost damping, that function should be imported also and tested to see if realism tests are met. If this fails, the model will need to be re-estimated or calibrated by adjusting the behavioural parameters, ASCs and/or the cost damping function (see section 6.5).

- 6.4.13 The price elasticity meta-model contains 2023 observations drawn from 204 British studies published between 1968 and 2020. The time elasticity meta-model contains 386 observations obtained from 47 British studies over the same period.
- 6.4.14 The target ranges for realism testing have been set at one standard deviation around the mean of the sample of relevant elasticity studies in the meta-model. Practitioners must investigate and justify any exceedance of the target range.
- 6.4.15 For modelling, long-run elasticities are needed both for overall elasticities and elasticities by journey purpose. However, long-run elasticities by journey purpose are not available in the literature because of the lack data from which they can be estimated. Long-run elasticities are available, but not by journey purpose. Journey purpose elasticities are available, but only as static elasticities (i.e. not separated into short-run and long-run elasticities).
- 6.4.16 The long-run elasticities by journey purpose presented in this unit have been estimated from the elasticities meta-model by scaling the static journey purpose elasticities. The scaling makes the weighted average of the journey purpose elasticities match the overall long-run elasticities. The weighting uses the journey purpose proportions observed in the National Transport Survey (NTS) for the mode in question.

Car Fuel Cost Elasticity

- 6.4.17 The **car fuel cost elasticity** required is the percentage change in car **vehicle-kms** with respect to the percentage change in fuel cost. The calculations should be carried out for a 10% or a 20% fuel cost **increase**. (A 10% increase is preferred but, in some cases, a larger increase, such as 20% has proved necessary for plausible results to be obtained.) Care should be taken not to increase non-fuel operating costs in this process.
- 6.4.18 Car fuel cost elasticities should be calculated in both of the following ways.
- **Matrix-based**
 - The change in car vehicle-kms should be calculated from the car trip matrices and skimmed distance matrices which relate to the before and after fuel cost change model runs. The movements included in this calculation should relate only to the movements to which the full range of demand responses apply in the demand model.
 - For example, if external to external trips are treated as fixed, then it could be argued that the responses of external to internal trips would not be fully responsive as the model would not allow change of destination so that external to internal trips became external to external and vice versa. In this case, the matrix-based calculations should use only the internal to external and internal to internal trips.
 - Even if external to external trips are not fixed, they will very often be modelled in a very approximate manner using very simplified networks and speed/flow relationships and approximate estimates of demand. In all

such cases, external to external movements should be excluded from the elasticity calculations.

- Complete trips, from real origin to real destination, should be used for these elasticity calculations. This can often require a zoning system and network which covers a large area. These calculations should be carried out by time period and car trip purpose, and also aggregated over time periods and trip purposes to produce an overall average elasticity.
- The calculations can be carried out on either an O/D or P/A basis, although the former is likely to be the more convenient.

- **Network-based**

- Car vehicle-kms should be accumulated over a specified network from the before and after fuel cost change runs and the difference taken. The network used for this calculation should extend to cover the area over which the highway assignment model has been validated but should exclude external areas where the model is more approximate.
- This calculation is likely to underestimate the fuel cost elasticity if the change in car-kms includes fixed elements, such as external to external trips (unless the external to external car-kms can be excluded from the calculations). These calculations should be carried out by time period and car user class, and also aggregated over time periods and trip purposes to produce an overall average elasticity.

6.4.19 The price meta model includes various UK studies using time-series data on car travel and fuel prices and costs. The model estimates an average elasticity of car use with respect to fuel cost of about -0.25. Taking account of this research, unless analysts can provide a good reason otherwise, the Department's view is that:

- the annual average fuel cost elasticity should lie within the range **-0.15 to -0.35** (overall, across all purposes)
- the annual average fuel cost elasticity should lie on the right side of **-0.25**, taking account of the levels of income and average trip lengths prevailing in the modelled area - see below for advice on what is the 'right' side of -0.25

6.4.20 Fuel cost elasticities would be expected to be weaker than -0.25 (i.e. closer to zero) where trip lengths are shorter than average, car driver mode shares are higher than average, and where proportions of low elasticity demand segments, such as employers' business, are higher than average, and stronger (i.e. further from zero) where the opposite applies. Higher than average income levels may also be consistent with a weaker elasticity. However, it is generally difficult to estimate the magnitude of the effects of these factors and therefore the extent to which the true elasticity for the area being modelled may vary from the figure of -0.25. It is for this reason that an acceptable range, from -0.15 to -0.35, is specified.

6.4.21 Note that, if local variations in values of time are used to argue for a particular target fuel cost elasticity, local values of time should be used in the model. In this case, evidence for the local values of time will be required.

6.4.22 Elasticities may also be regarded as more plausible if:

- The pattern of annual average elasticities shows values for employers' business trips near to -0.1 , for long-distance discretionary trips near to -0.4 , and for short-distance discretionary trips and commuting and education somewhere near the average.
- the pattern of all-purpose elasticities shows peak period elasticities which are lower than inter-peak elasticities which are lower than off-peak elasticities

6.4.23 While there is little or no empirical evidence to support the variation in elasticities by purpose and time period, most models show the pattern suggested above, although a few models which are otherwise acceptable have been created which show morning peak elasticities which are higher than inter-peak elasticities which are higher than evening peak elasticities. In the case of models which show different variations in elasticities by purpose and time period, an explanation for the differences will need to be provided.

Public Transport Main Mode Fare Elasticities

6.4.24 The **public transport fare elasticity** required is the percentage change in public transport **trips** by all public transport modes with respect to the percentage change in public transport fares. The calculations should be carried out for a 10% or a 20% public transport fare **increase**, applied to all public transport modes equally.

6.4.25 Public transport fare elasticities should be calculated on a matrix basis, by time period and trip purpose. The movements included in this calculation should relate only to the movements to which the full range of demand responses apply in the demand model and should generally exclude external to external movements in any event. Complete trips, from real origin to real destination, should be used for these elasticity calculations.

6.4.26 Elasticities of public transport trips with respect to public transport fares have been found to lie typically in the range -0.2 to -0.9 for changes over a period longer than a year (TRL, 2004). Values close to -0.2 are unlikely for the whole public transport market unless this includes a high proportion of concessionary fare trips with a significant number made free of charge.

6.4.27 The elasticities **may** also be regarded as more plausible if:

- the pattern of annual average public transport fare elasticities shows values for non-discretionary purposes which are lower than those for discretionary trips
- the pattern of all-purpose public transport fare elasticities shows peak period elasticities which are lower than inter-peak elasticities which are lower than off-peak elasticities

- the elasticities for car-available segments are greater than the non-car-available segments since the former have greater choice than the latter, although there are arguments to suggest that non-car-available fare elasticities may be higher where incomes are lower

However, there is little or no empirical evidence available to support these patterns and other patterns may be acceptable, if supported by reported arguments.

Public Transport Sub-modes

- 6.4.28 Separate elasticities should be calculated for all public transport sub-modes which carry significant shares, where the model structure allows such calculations to be undertaken in an appropriate manner. In order for valid fare elasticities for individual public transport sub-modes to be calculated, the fares applicable to the sub-mode would need to be explicitly included in the generalised costs used in the model. In the case of models where the split between the public transport sub-models is handled in the public transport assignment model, fares for each sub-mode would need to be included in both the demand model and the public transport assignment model. Where this is handled in the demand model, fares by each sub-mode would need to be included in the costs used in that choice process (but would not be needed in the assignments which would be restricted in each case to a single sub-mode).
- 6.4.29 Analysis of the elasticities in the price meta-model produced a target range of -0.35 to -0.9 for bus **trips** with respect to bus fares for **full fare paying** passengers.
- 6.4.30 It should be noted that up to a third of bus trips made in the off-peak and some in the morning peak are made by concessionary passengers free of charge. Their demand will be unaffected by changes in fares and will have an elasticity of zero. The elasticity for the whole market will be somewhat lower.
- 6.4.31 For a model that does not segment the market into fare paying/non-fare paying passengers, a revised target elasticity range for the whole market can be estimated by taking a demand weighted average of the two elasticities.
- 6.4.32 There is no evidence in the meta-model on how child fare elasticities may differ from adult fares elasticities. In the weighted average elasticity calculation, child fare passengers should count as fare paying passengers.
- 6.4.33 The meta model analysis produced a target range of -0.70 to -1.5 for **rail trips** with respect to rail fares.
- 6.4.34 The meta model analysis produced a target range of -0.2 to -0.6 for **London Underground** with respect to London Underground fares.
- 6.4.35 The meta-model did not include any examples of elasticities on Light Rapid Transit (LRT). Using the bus fare realism target ranges may be acceptable for LRT, if no locally calculated elasticities are available.

Short and Long-Term Trip Kilometre Elasticities

- 6.4.36 A new scheme may take a few years to ramp up to its steady state usage. The elasticities used in realism testing are deliberately long-run elasticities to estimate demand once that process is complete.
- 6.4.37 In principle, the ramp-up of demand should be included as part of the economic appraisal. However, this may not be proportionate in most circumstances where this may form a small proportion of the costs and benefits of a scheme over the entire appraisal period.
- 6.4.38 The price meta models can provide insight into the ramp-up of demand over time. The analysis suggest that it takes around 6 years to complete the ramp-up, as can be seen in in Table 5. The meta-model found no significant difference between modes, but the evidence is dominated by rail elasticities.

Table 5 Time in years to achieve various proportions of the long-run elasticity

Years	Trips shorter than 20 miles	Trips 20 miles or longer
1	59%	64%
2	83%	87%
3	93%	95%
4	97%	98%
5	99%	99%
6	100%	100%

- 6.4.39 Where available, local evidence may be used in assessing the potential ramp-up applicable to a new scheme. For example, a comparable example of a similar scheme built previously in the locality may provide this evidence.

Car Journey Time Elasticity

- 6.4.40 The **car journey time elasticity** required is the change in car **trips** with respect to the change in journey time (calculated using the formulation given in 6.4.5).
- 6.4.41 Previously the advice for the car journey time elasticity was to run the demand model for a single loop because the target came from a stated preference exercise. The benchmark evidence has changed to be long-run elasticities scaled from the meta model. Realism tests using the revised target should run the model to full convergence. Accordingly, the method explained for car fuel elasticities should be applied.
- 6.4.42 The output elasticities should be checked to ensure that the model does not produce very high output elasticities (stronger than -0.75).

Summary of Recommended Elasticities

6.4.43 Table 6 below summarises the recommended elasticities that should be achieved by the realism tests outlined in this section.

Table 6 Summary of Recommended Elasticity Ranges

	High	Low
Average fuel cost (kms)	-0.35	-0.15
PT main mode fare (trips)	-0.9	-0.2
Bus fare (trips)	-0.9	-0.35
Rail fare (trips)	-1.5	-0.7
Light rapid transit fare (trips)	Use bus	
London Underground fare (trips)	-0.6	-0.2
Car journey time (trips)	Not stronger than -0.75	

6.5 Model Adjustment

6.5.1 This section explains what should be done if a model fails to yield elasticities in the specified ranges and adjustment to the model is deemed necessary.

6.5.2 The model is required to satisfy expected car fuel cost, car journey time and public transport fare elasticities and trip lengths for each mode. Where it does not, the following main model features may be adjusted in order to do so:

- the model sensitivity parameters
- the values of time
- the cost damping function

6.5.3 These features are considered in turn, for each of two kinds of model:

- first, models which have been developed by importing sensitivity parameter values from an existing model whose parameters have been estimated²² statistically reliably
- secondly, models for which parameter values, and possibly values of time also, have been estimated statistically from local data

²² In this context, 'estimation' is a statistical process and 'calibration' is a process of adjustment, often by trial and error. Thus, demand model parameters are often 'estimated' while assignment models are often 'calibrated'.

Models Developed by Importing Initial Parameter Values

- 6.5.4 **Elasticities.** As noted in section 6.4, for models with imported parameters, initial realism tests may be undertaken without cost damping to gain an understanding of the impact of cost damping if and when it is introduced²³.
- 6.5.5 **Sensitivity Parameters.** The data base used to derive the illustrative lambda and theta demand parameter is described in section 5.6. Notwithstanding the associated caveats, the Department considers that analysts should start with the median lambdas and thetas and adopt a cautious, simple and systematic process for modifying these. In general, care should be taken to avoid over-complicating the adjustments to the median lambdas and thetas.
- 6.5.6 A record of all the changes made and their results should be kept and made available if requested. The aim should be to reduce the chances of peculiar combinations being selected for no good reason. Consistency in matters like this helps the Department interpret appraisals and check results for plausibility. Typically, revised lambdas and thetas which were within +25% of the median illustrative values would be regarded as acceptable and values outside this range would merit investigation.
- 6.5.7 **Values of Time.** Varying the value of time with distance is one of the recommended forms of cost damping and is considered separately, below. The advice here is concerned with the notion of changes to the average values of time, irrespective of distance.
- 6.5.8 It is strongly advised that the generalised costs used in both assignment and demand models are compatible and that values of time and vehicle operating costs given in [TAG Data Book](#) should be used.
- 6.5.9 If values of time are changed in order to achieve better elasticities, a revalidation, and possibly a recalibration also, of the assignment model would also be required. If the values in the assignment model were left unchanged and were only changed in the demand model, an inconsistency would arise between the values used in the demand and assignment models. Consistency must be assured, except to the extent that certain elements of generalised cost may be relevant to only one of the models and that the costs should relate to vehicles in the assignment model and persons in the demand model.
- 6.5.10 Given these considerations, analysts should:
- **start with** TAG values of time unless they can put forward good reasons for doing otherwise and
 - **start with** compatible generalised cost coefficients (vehicle operating costs and values of time) in the assignment and demand models.

²³ Assuming that the model parameters being imported from itself does not have cost damping, as discussed in section 6.4.

- 6.5.11 That said, it is allowable to **estimate** values of time which differ from the TAG values (see [TAG unit M4 Forecasting and Uncertainty](#), for example). Thus, analysts may adjust the starting TAG values of time to achieve better elasticities, but **only** if they have good evidence from **estimation** using either revealed or stated preference data that show local values of time that are different from the equity values presented in the [TAG Data Book](#). A strong justification must be made for changes to the TAG average values of time in excess of +20%.
- 6.5.12 **Cost Damping Function.** If cost damping is to be employed, the following forms or functions are recommended:
- variation in the value of time with distance and/or,
 - damping of generalised cost by either a function of distance or a power function of utility and/or,
 - use of a log cost term in addition to the conventional linear cost term in the generalised cost function
- 6.5.13 For the damping of generalised cost by either a function of distance or a power function, there are parameters that can be adjusted by the analyst. The cost damping functions given in section 3.3 effectively scale the generalised costs. In principle, therefore, the functions and suggested parameter values apply equally to trip-based and tour-based models, although, in practice, parameter values may need to vary according to local characteristics.
- 6.5.14 **Trip Lengths.** If the model is a true incremental model and has been set up by initially importing parameter values, checks on how well the final parameter values reproduce observed trip lengths are not required. However, if the model is an absolute model, whether used in absolute form or applied incrementally, then checks should be made to assess how well the model parameters reproduce observed trip lengths.
- 6.5.15 **In summary:** in the case of models which have been developed by **importing** sensitivity parameter values, there is scope to achieve more acceptable elasticities by:
- adjusting the sensitivity parameters within a defined range
 - using a form of cost damping and adjusting the parameters which define that function

Models for Which Parameter Values, and Possibly Values of Time, Have Been Calibrated

- 6.5.16 **Elasticities.** The target elasticities and their ranges are not affected by how the model has been developed and therefore apply to this category of models too.

- 6.5.17 **Sensitivity Parameters.** In this category of models, sensitivity parameters and Alternative-Specific Constants (ASCs) will have been estimated to reproduce observed trip lengths for each demand segment (as well as observed trip patterns and volumes). In some cases, it may be possible to adjust the sensitivity parameters to yield more appropriate elasticities while maintaining the fit to the observed trip length distributions by means of adjustments to the ASCs. However, in most cases, this could be a complicated and arguably impractical process. Therefore, the scope for adjusting estimated sensitivity parameters is probably quite limited (although revised parameters may arise from some of the other adjustments below).
- 6.5.18 **Values of Time.** If values of time have been taken from TAG initially, they may be adjusted only if an estimation using local revealed or stated preference data supports the change. If changes to the initial values of time are made on these grounds, the sensitivity parameters and ASCs would need to be re-estimated.
- 6.5.19 In some cases, values of time are estimated as part of the model estimation process. Once these have been accepted as plausible, it would be very hard to find good reason to adjust them in order to achieve more acceptable elasticities.
- 6.5.20 **Cost Damping.** In principle, the same range of cost damping forms is available for use in this category of models as in the models which started with imported parameters. However, in this case, these functions must be employed at the stage before sensitivity parameters and ASCs, and values of time, are estimated. Cost damping cannot be retro-fitted without re-estimation.
- 6.5.21 It is open to the analyst to adjust the parameters which define the cost damping function, with the same scope for adjustment being available as for the models which start with imported sensitivity parameters. These adjustments may be carried out initially without re-estimating the model but, once a favoured set of cost damping parameters has emerged, the sensitivity parameters, ASCs and values of time, must be re-estimated.
- 6.5.22 It is possible that there will be a number of combinations of cost damping parameters, choice model sensitivity parameters, and ASCs that would yield an acceptable model. Calibration should focus on achieving the most suitable sensitivity parameters and ASCs before attempting to adjust the cost damping function to achieve a better model fit.
- 6.5.23 **Trip Lengths.** Statistical model estimation is designed to identify sensitivity parameters, ASCs and values of time which mean that the model should replicate observed trip lengths. It may be necessary to allow some flexibility in the estimation in order that the requirements of the realism tests may be met. It may be that the fit of the model to the data may require relaxation, for example by altering the values of the sensitivity parameters and the ASCs, for the realism test requirements to be satisfied.
- 6.5.24 **In summary:** in the case of models for which parameter values, and possibly values of time also, have been **estimated** from local data, there should still be scope to achieve more acceptable elasticities by:

- adjusting the sensitivity parameters and ASCs
- using a form of cost damping and adjusting the parameters that define that function

6.5.25 The practicality of adjusting the sensitivity parameters and ASCs may be restricted, as may be the scale of any elasticity changes that could be achieved by these means. If it is decided that cost damping should be introduced (not having been included in the initial estimation), the model would have to be re-estimated with the chosen cost damping function and parameters.

6.6 Sensitivity Testing

6.6.1 Sensitivity testing, as distinct from realism testing, is aimed at identifying the relative effects of the various parameters on the outcome of a scheme appraisal, rather than in checking the model responses against experience. **Especially where the model parameter values are uncertain, it is important to know how sensitive the appraisal results are to these uncertainties, so that confidence can be invested in the conclusions.**

6.6.2 Sensitivity testing should be undertaken of the model's behaviour against variation in those parameters that are judged to:

- have a substantial effect on the model's prediction of changes when forecasting, and
- be uncertain in their calibration.

6.6.3 The most obvious values are the sensitivity parameters that govern the individual demand mechanisms (i.e. the lambda values). If they have been calibrated on local data, the extent of possible error in their calibration should be examined from the statistics calculated during the fitting, which is usually substantial. If they have been imported, the uncertainty may be even greater since they are being used in a context different from their original application. The illustrative values given in section 5.6 were obtained from a review of models of a generally acceptable form available at the time for which parameters had been estimated. Typically, the range of values was twice the mean value. This indicates the degree of uncertainty in values imported from other studies.

6.6.4 If the lambda values have been calibrated on local data, whether for the variable demand model itself or for an existing local model, then check the overall result of the scheme appraisal against runs of the model with the lambdas set at +25% of the mean, or +1 s.d., whichever is larger. Behaviour of the model will not necessarily be symmetrical against increases and decreases in the parameter, but the increase will indicate the strength of the response, and if it is an important factor the result can also be tested against a decrease. If the values have been imported then test the result against +50% of the mean. This range is to reflect the greater uncertainty that occurs with imported values. Unless there are convincing reasons for not doing so, the changes are to be

made to all parameters in the same direction at the same time so that the gradation of parameter values is still consistent with the hierarchy. Sensitivity tests should be reported in the model validation report.

- 6.6.5 Given the acknowledged uncertainty of distribution parameters obtained from cross-sectional fitting, this larger +50% margin could be applied even to locally calibrated distribution lambdas. It is the stronger variable demand mechanisms which will have most effect on the assessment, so there may be no point in testing the result against a small trip frequency response, for example, when distribution or mode choice are dominant.
- 6.6.6 Where the model includes time of day choice it will be essential to test variation of the assumed sensitivity. Evidence for these values is more uncertain and wide sensitivity factors say: +50% and -50% of the mean are suggested. This range will be limited by the need to ensure that any changes in the lambda values are still consistent with the hierarchy.
- 6.6.7 Sensitivity testing should not be limited to the response parameters, however. Any parameter that is likely to have a substantial effect on the net benefit, and where appreciable uncertainty is expected to affect the assessment substantially, should also be tested. An example of this may be the assumed distribution of willingness-to-pay bands in road-tolling exercises.
- 6.6.8 Although sensitivity testing is important, there is a danger in using it to obtain such a wide range of values that any prediction is mistrusted. In interpreting the results it is important to understand (and to emphasise in presentation) that the central values are still the best available prediction of the likely outcome and additional forecasts obtained by sensitivity testing are purely to establish the effects of uncertainty around this central forecast. The aim is for the modeller to make clear the extent of and reasons for the possible uncertainty, while providing clear central predictions to support policy making and assessment.
- 6.6.9 There are other sensitivity tests that should be undertaken for forecast years to test the sensitivity of the appraisal to variations in other inputs such as changes in the build-up of demand, values of time, or differing economic forecasts. These tests are described in more detail in [TAG unit M4 Forecasting and Uncertainty](#).

6.7 Reporting

- 6.7.1 The results of the realism tests should be documented. Particularly related to forecasting, realism and sensitivity, the reporting should include at least the following items:
- The background to the decision on the particular demand responses included in the model. This will include a statement on any demand tests.
 - A description of how all generalised cost data are derived. Generalised cost data derived from assignment models should be adequately described in reporting the development of the assignment models. However, the demand

modelling may draw on additional data sources and will in most cases require estimates of intra-zonal costs that cannot be sourced directly from the assignment models.

- A description of the reasoning behind the choice of lambda parameter values and cost damping functions applied. Where these are derived from local calibration, the data source(s) used and the statistical estimation of model parameters should be explained. Where the values have been derived from the illustrative values set out in this unit, the reasoning for any calibration changes made should be given. The parameter values should be explicitly shown together with details of the elements of generalised cost and their values used in route-choice.
- Details should be given of any realism tests, which should, at least, include the estimation of the elasticity of car travel (vehicle kilometres) to changes in car fuel cost and, if possible, the elasticity of car trips to car journey time. Where mode-choice has been included the realism checks should also include the sensitivity to changing bus/rail fares. The reporting should also include details of any changes to the model parameters arising from these tests.
- Details should be given of any base year sensitivity tests undertaken and their potential implications for forecasting.
- The level of convergence should be explained and quantified for both the demand supply loop and for the assignment component.

7. References

Batley R, T Fowkes, G Whelan and A Daly.(2001) Models for choice of departure time. European Transport Conference, Seminar on methodological innovations Homerton College, Cambridge Sept 2001

<https://aetransport.org/past-etc-papers/conference-papers-pre-2012/conference-papers-2001?abstractId=1226&state=b>

Bradburn, P and Hyman, G (2002). An econometric investigation of car use in the National Transport Model for Great Britain. European Transport Conference, September 2002, Seminar on Applied Transport Methods, Homerton College Cambridge 2002 <https://aetransport.org/past-etc-papers/conference-papers-pre-2012/conference-papers-2002?abstractId=1350&state=b>

Daly, A (2008), The Relationship of Cost Sensitivity and Trip Length, European Transport Conference, Transport Modelling Seminar, Leeuwenhorst, The Netherlands. <https://aetransport.org/past-etc-papers/conference-papers-pre-2012/conference-papers-2008?abstractId=3028&state=b>

Daly, A (2010), Cost Damping in Travel Demand Models Report of a study for the Department for Transport.

http://www.rand.org/pubs/technical_reports/TR717.html

Daly, A., Fox, J., Patrui, B. and Milthorpe, F. (2012), Pivoting in travel demand models, presented at ATRF, Perth, Western Australia.

https://australasiantransportresearchforum.org.au/wp-content/uploads/2022/03/2012_Daly_Fox_Patrui_Milthorpe.pdf

Dargay J.M. & Hanley M. (1999), Bus Fare Elasticities.

Department for Transport (2015), 'Provision of market research for value of travel time savings and reliability: Phase 2 Report'.

https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/470231/vtts-phase-2-report-issue-august-2015.pdf

Graham D & S Glaister (2002) Review of income and price elasticities of demand for road traffic. Final report to the DTLR. July 2002.

Hanly M, J Dargay & P Goodwin (2002) Review of Income and Price Elasticities in the Demand for Road traffic. Final Report to DTLR. March 2002.

Institution of Highways and Transportation (1996) Guidelines on Developing Urban Transport Strategies.

Institute of Transport Studies, University of Leeds, in association with John Bates Services (2003), Values of travel time savings in the UK.

[MVA \(2005\), Multi-Modal Model Data Provision.](#)

Ortuzar, J de D and Willumsen, L G (2001). Modelling Transport (Third Edition). Wiley, Chichester

P.J. Mackie, A.S. Fowkes, M. Wardman, G. Whelan and J. Nellthorp (Institute for Transport Studies, University of Leeds) and J. Bates (John Bates Services) (2003) Value of travel time savings in the UK: summary report. ITS Leeds, January 2003 (also available on DfT web site)

Rand (2014), [PRISM 2011 Base Mode-Destination Model Estimation](#)

Rand (2021) [Model of Travel in London Phase 3 Mode and destination choice model estimation](#)

Senior M L and H C W L Williams (1977) Model-based transport policy assessment. Traffic Engineering and Control, Vol 18 (9/10).

TRL (2001), User-friendly multi-stage modelling advice, Phase 2: Modelling parameters, calibration and validation.

TRL (2004) The demand for public transport: a practical guide. TRL Report TRL593. Crowthorne UK.

Wardman, M. (2022a) Meta-Analysis of Price Elasticities of Travel Demand in Great Britain: Update and Extension. *Transportation Research A*, 158, pp. 1-18.

Wardman, M. (2022b) Meta-Analysis of British Time-Related Demand Elasticity Evidence: An Update. *Transportation Research A*, 157, pp. 198-214.

8. Document Provenance

This unit is based on the previous version of TAG unit M2.1 published in May 2020.

In this version, edits were made to include updates to the Illustrative parameters to account for results from two newer studies undertaken after those reported in MVA 2005. The elasticities for realism testing were updated to incorporate evidence from the time and cost elasticity meta-models reported in Wardman 2022a and 2022b. A new equation was added for performing the gap calculation to assess convergence in models that use cost averaging rather than demand averaging.

Appendix A: Elasticity Models

A.1 Functional Forms and Parameter Values of Elasticity Models

A.1.1 Where an elasticity model is appropriate the functional form and parameter values need to be selected. The simplest functional form – an ‘own-cost’ elasticity model - assumes that changes in the demand for travel between two points can be adequately estimated purely by a function of the change in costs between the two places.

If costs do indeed change, the relationship between change in demand and change in costs can take a number of forms, but only exponential and power formulations, and a composite of the two forms (called a Tanner function), will be considered here. With a power formulation the proportionate change in trips is related to the proportionate change in costs, as shown in the equation below. With an exponential formulation, on the other hand, the proportionate change in trips is a function of the absolute change in costs.

A.1.2 For most applications the power relationship below which is a simple own cost elasticity model due to its constant elasticity value is recommended:

$$T_{ij} = g_{ij} * {}_0T_{ij} * \left(\frac{G_{ij}}{{}_0G_{ij}} \right)^A$$

Where:

T_{ij} is the forecast number of trips between zones i and j

G_{ij} is the forecast disutility or generalised cost

g_{ij} is the forecast growth rate relative to an earlier or base year

${}_0T_{ij}$ is the number of trips in the earlier or base year

${}_0G_{ij}$ is the disutility or generalised cost in the earlier or base year

A is the elasticity, which should be negative and is the same for all trips in the same user class.

A.1.3 This is a well-behaved formulation that is simple to apply, and is base independent: that is, it is guaranteed to give the same results if forecasts are produced from one year to another directly or via an intermediate year. It assumes that a proportionate change in trips is related to a proportionate change in costs. As the parameter A is constant the implied elasticity is the same for all lengths of trip within the same user class (i.e. it is “distance neutral”).

- A.1.4 This formulation can easily be set up using the matrix manipulation facilities available in modern transportation modelling suites, or in some modelling suites combined directly with the assignment process. The facility is also available within the DIADEM modelling framework.
- A.1.5 An alternative formulation is the “Exponential” relationship. In this case the effective elasticity increases with increasing trip cost, and hence for study areas where there are a wide variety of trip lengths the effective elasticities could vary markedly. Thus the exponential approach should only be considered in the case where the study area is small and urban, and where a general elasticity approach is being combined with a logit choice mechanism to jointly represent the individual demand mechanisms. Most logit mechanisms in the variable demand hierarchy share this exponential function characteristic, but some have a more benign effect since trip re-distribution, for example, can be constrained to avoid changing the overall number of trips. In that case trip re-distribution in the face of changing travel costs effectively adjusts the proportions of trips of different length to compensate for the changes. Similarly, mode-choice models estimate shares rather than absolute numbers.
- A.1.6 The “Exponential” formulation assumes that the proportional change in trips is a function of the absolute change in costs:
- $$T_{ij} = g_{ij} * {}_0T_{ij} * \exp\{B * (G_{ij} - {}_0G_{ij})\}$$
- Where the elasticity of demand with respect to generalised cost is $B * G_{ij}$ with B negative. This is an own cost elasticity that is not simple due to the elasticity not being constant.
- A.1.7 These equations can be used in two ways. They can be based or pivoted on a base year, where base trips and costs are known from empirical data, and the product $g_{ij} * {}_0T_{ij}$ represents what is referred to as the Reference Case Matrix. Alternatively, the equations can be formulated to compare costs between alternatives for the same year, where the ‘earlier’ year costs and trips are derived from the other scenario.
- A.1.8 Both these formulations are closely incremental in nature, allowing the number of trips in the system to change up or down. This is in contrast to most of the individual demand-response mechanisms that are set out as share formulations where the total number of trips is fixed (say by NTEM all-mode forecasts) and merely allocated to one choice or another (e.g. to different modes or destinations).
- A.1.9 Whilst the formulation is relatively easy to set up, there are some issues that must be dealt with when considering the parameter values to assign to a demand segment.
- A.1.10 If ‘own cost’ elastic assignment modelling is carried out in congested urban areas, it should be undertaken at a peak hour unless there are significant variations in demand, or congestion levels are high in which case the modelling should cover linked time-periods, sub-divided into time slices and sub-periods.

A.1.11 Elasticities might be expected to vary according to the level of modal competition in the area covered by the model. The meta-models (Wardman 2022a and 2022b) do not provide empirical evidence to support this expectation, but it is possible to make an estimate using the assumption from the logit modelling that the elasticity for an option should vary with one minus its share of the market. Applying this relationship to the elasticities derived from the meta model using car mode shares from NTS produces the elasticities in Table A1.

Table A1 Car journey time elasticities estimated for different area types

Area type	Car Share	Scaling Factor	Scaled elasticity
London Boroughs	41%	1.66	-0.41
Metropolitan built-up areas	63%	1.04	-0.26
Large urban (over 250k population)	65%	0.97	-0.24
Medium urban (25k to 250k population)	68%	0.90	-0.22
Small/medium urban (10k to 25k population)	68%	0.90	-0.22
Small urban (3k to 10k population)	70%	0.85	-0.21
Rural	76%	0.68	-0.17
All area types combined	64%		-0.25
Target overall car trip to journey time elasticity			-0.25

A.1.12 Applying the same approach by the journey purposes produces the elasticities in Table A2.

Table A2 Car journey time elasticities by journey purpose

Area type	Business	Commute	Other
London Boroughs	-0.72	-0.54	-0.39
Metropolitan built-up areas	-0.23	-0.25	-0.27
Large urban (over 250k population)	-0.23	-0.24	-0.25
Medium urban (25k to 250k population)	-0.19	-0.20	-0.23
Small/medium urban (10k to 25k population)	-0.15	-0.19	-0.23
Small urban (3k to 10k population)	-0.14	-0.16	-0.22
Rural	-0.10	-0.12	-0.18
Target overall car trip to journey time elasticity	-0.27	-0.26	-0.25

- A.1.13 Equivalent generalised cost elasticities can be calculated from the above table by multiplying the journey time elasticities by ratio of generalised cost to journey time. The ratio can be calculated as a demand weighted average of the ratios in each cell of the skim matrices.
- A.1.14 [TAG Data Book](#) provides the factors needed for calculating generalised cost skims from time and distance skims. In practice, the generalised cost elasticities will be between 10% and 50% higher than the values shown in the table above with values at the lower end for Employer's Business trips, urban areas and later forecast years.
- A.1.15 If an exponential formulation is used then the above values will need to be subsequently divided by the mean generalised cost to give the equivalent parameter value.
- A.1.16 The estimated generalised cost elasticities (and associated parameter values if an exponential model is used) may need to be adjusted so that the fuel cost elasticity estimate from the model reflects the national overall estimate of -0.25 (see section 6.4).
- A.1.17 Where possible, the trips should be split by trip purpose (and any other known major variation such as willingness to pay or movement type). If this is not possible, for instance where only a single private vehicle user class is available, then they should be split by time-period. Using the national car driver journey purpose mix for each period of the day (from NTS), the above elasticities can be converted to elasticities for all trips by time period. If local data suggests a significantly different mix of purposes by time-period, then the local proportions can be substituted for the national ones.
- A.1.18 Care should be taken when dealing with intra-zonal trips. Because most assignment models do not output intra-zonal costs (since intra-zonal trips are not assigned) there may be problems with using incremental models where there are observed intra-zonal trips in the base year trip matrix. It is desirable that robust estimates of intra-zonal costs should be made in these instances. These could be some function of the inter-zonal costs, for example half the minimum inter-zonal costs for that zone (of course factors such as the nature of juxtaposition of other zones and the size of the zone itself are considerations, as is the need to be able to change intra-zonal costs to reflect any scheme or policy effects). Power function elasticity models will be particularly sensitive to very small intra-zonal costs, and this is one reason why they should be avoided when this is the case.

Appendix B: Values of Time for Use with Income Segmentation

- B.1.1 This Appendix presents the values of time for each segment, most commonly for use when tolling or charging options are included in the model. It hence provides a greater level of detail for this purpose than the values of time in the [TAG Data Book](#). If information is available on the distribution by income and/or distance of trips in the study area, then this may be used to establish local segmentations and local values of time may be estimated.
- B.1.2 Data should be collected to inform how the trip matrices should be segmented into income groups, relative to the proportion of households within those bands. These can be collected locally or more aggregate data sources such as the National Travel Survey may be used. The relative accuracy of the allocation of households to income bands will depend on the purpose of the model. For example, it may suffice to use aggregate segmentations to model the impact of a major tolled road on the strategic network, but it may be more appropriate to use more detailed data when undertaking more detailed analysis of, say, an urban congestion charging scheme.

B.2 National Values of Time

Values for Time for Non-Work Trips

- B.2.1 [Data Book Table M2.1](#) presents the values of time for commuting, other and all non-work purposes segmented by income. The values presented are perceived costs in market prices. See [TAG unit A1.1](#) for further details on the unit of account. The values were taken from a study that presented values for household income bands in the categories of below £17K, £17K-£35K and over £35K. These have subsequently been updated to 2010 values, which explains the income bands used in the table.

M2.1: Values of Time for Non-Work Purposes (£/hr)

- B.2.2 Note that the average values of time differ from those discussed in [TAG unit A1.3](#). This is due to differences in uprating the values in line with GDP. To ensure consistency, the values given here should be used when comparing appraisal results based on segmented values with those based on aggregate values.
- B.2.3 Growth in income are assumed to be the same across all income bands. This implies that the boundaries of the income bands will increase, but the proportion of trips in each income band will be unaffected. The growth in the values of time for each band should be estimated by applying the forecast growth in the real value of non-working time, given in the [Data Book General Parameters table](#).

Values of Time for Working Trips

- B.2.4 Data Book Table M2.2 provides values of time for work trips segmented by income and mode. The table presents the perceived costs and as businesses perceive costs in the factor cost unit of account these values are also the resource costs. Market price values can be derived by multiplying the perceived cost values by the indirect tax correction factor as discussed in [TAG unit A1.3](#).

M2.2: Values of Time for Work Trips (£/hr)

- B.2.5 As for the non-work purposes the average values of time differ from those discussed in [TAG unit A1.3](#). Again, to ensure consistency, the values given here should be used when comparing appraisal results based on segmented values with those based on aggregate values.
- B.2.6 As growth in income may be assumed to be the same across all income bands, the annual growth rates for work values of time as given in the [Data Book General Parameters table](#) should be applied to the values in the table above.

B.3 Local Values of Time

- B.3.1 If information is available on the distribution by income and distance of trips in the study area, then, in cases where willingness-to-pay based values are used, local values of time can be estimated using the model below. This is taken from Provision of market research for value of travel time savings and reliability: Phase 2 Report (DfT, 2015).
- B.3.2 Data on household income and mileage travelled is required. These data should be collected in the segments that are to be adopted (these need not be the same as those discussed above), or preferably at a finer level of detail if possible. An average household income and an average mileage must be calculated for each of the chosen income segments as well as for the overall sample. (Note that it is important to calculate the average mileage for each segment, as well as the average income. Average mileage is likely to increase with income, so assuming the same average mileage for all segments will result in a biased result. The values derived using national studies and presented in the [TAG Data Book](#) take account of the national distribution of average mileage with income.)

$$VTT S_{2010}^{D,I} = VTT S_{2014}^{D_0,I_0} \left(\frac{GDP\ deflator_{2010}}{GDP\ deflator_{2014}} \right) \left(\frac{GDP/capita_{2010}}{GDP/capita_{2014}} \right) \left(\frac{D}{D_0} \right)^{\epsilon_d} \left(\frac{I}{I_0} \right)^{\epsilon_I}$$

- B.3.3 The parameter values for each journey purpose/mode are presented in Table B1 below. $VTT S_{2014}^{D_0,I_0}$ represents the national average value of time from the latest research (in 2014 perceived costs). I_0 and D_0 represent, respectively, the average income (in 2014 prices) and distance (in kilometres) underpinning the national average. These are both trip-weighted averages. I and D represent the average (trip-weighted) income and distance based on local data. For employer's business trips, personal income must be used, whereas for all other

journey purposes household income must be used. It is important to ensure that locally derived income data is adjusted to 2014 prices using the GDP deflator. ε_d and ε_I represent, respectively, the elasticities of the value of time with respect to distance and income. The latest GDP deflator and GDP per capita forecasts can be found in 'Annual Parameters' table of the TAG data book.

Table B1 Value of Time Parameters

Parameter	Commuting	Other non-work	Employers' business - car	Employers' business - rail	Employers' business – bus & other PT
$VTT S_{2014}^{D_0, I_0}$	£8.44	£2.80	£9.15	£17.25	£8.39
I_0	£57,852	£47,438	£35,070	£55,319	£45,019
D_0	16.40	13.13	31.89	88.32	11.73
ε_d	0.183	0.291	0.339	0.378	-
ε_I	0.512	0.473	0.319	0.420	0.337

- B.3.4 The model and the parameters given in the table above will calculate the values of time for non-work purposes in the year specified. The values are trip weighted and will be expressed in pounds per hour in 2010 prices. The business values are expressed at factor cost, while the commute and other non-work values are expressed in market prices.
- B.3.5 Growth in the values should be treated in the same way as the nationally based values (see above). The [Data Book General Parameters table](#) provides the required growth figures.
- B.3.6 Local values of time for freight modelling purposes (i.e. employer's business trips for professional drivers of HGVs and LGVs) are based on a cost-saving approach²⁴. If deriving local values for these is to be an explicit modelling consideration, advice should be sought from the Department.


²⁴ Promoters are advised to use the non-wage labour uplift of 1.26 found in Unit A4.1 to calculate the full labour cost

Appendix C: Functional Forms for VDM

C.1 Detailed Advice on Functional Forms of VDM

C.1.1 Any model of the demand for travel relies on a mathematical mechanism which reflects how demand will change in response to a change in generalised cost. For example, the "own cost" elasticity mechanisms, described in Appendix A, modify an earlier estimate of demand using a curve which is as illustrated in Figure C.1: the demand approaches (and is asymptotic to) zero, but never actually falls to zero even at very high costs.

Figure C.1 "Own Cost" Elasticity Model Figure C.2 Choice Model

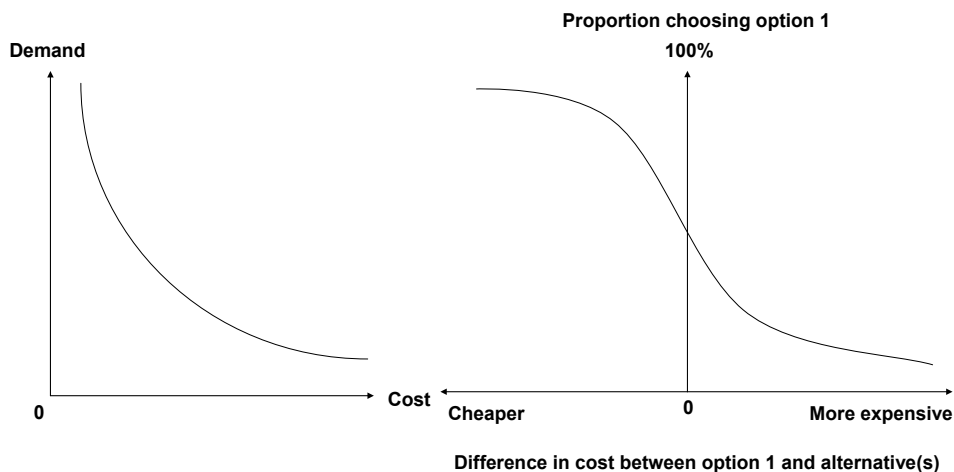

C.1.2 In a variable demand model, a different mechanism is normally used to apportion the total demand in a particular travel category between two or more available choices, as for example between car and public transport, or between many different destinations (see Figure C.2). In this case, when the generalised cost of the specified choice is very much lower than the alternative choices almost all travellers will choose it, and if it is very much greater then very few will. Again, the function used is asymptotic to 100% or zero, as illustrated in Figure C.2, since in any large population of travellers there will be a small but finite number who will take the apparently expensive choice. This in general reflects how individual circumstances or choice preferences may be very different from the average.

C.1.3 The choice is unlikely to be based purely on simple formulations of generalised cost of travel: it will also depend upon appropriate zone or mode specific constants estimated in model calibration or implied by incremental models (see section 4.3). They represent any reduction in disutility by making that choice (in other words, any gain of utility). Some modes will be inherently more attractive than others. Models assume that these hidden differences in the utility of travelling to any particular destination or using any particular mode remain unchanged through time, and most therefore only need to reflect changes in the specific terms included in the generalised cost.

- C.1.4 There are various mathematical functions that can provide a suitable relationship between travel demand and the disutility or generalised cost of a trip. These all offer broadly similar behaviour, but have subtly different mathematical properties. Appendix A: discusses the equivalent subtle differences of power functions and exponential functions for own cost elasticity models, both of which can provide a convenient downward sloping relationship as shown in Figure C.1 and the parameters can be adjusted to give an elasticity of any required strength. For choice models a range of mathematical functions, most based on powers or exponentials, or both, can recreate the desired relationship. Ortuzar and Willumsen (2001) discusses the detailed functional forms of VDM models and the derivation of many of the forms in more detail.

Logit Formulation

- C.1.5 Logit is a commonly used mathematical function to represent the behaviour shown in Figure C.2 because it is easy to manipulate mathematically. In general, it is formulated as:

$$P_p = \frac{\exp(-\lambda U_p)}{\sum q \exp(-\lambda U_q)} \text{ for an absolute model formulation}$$

$$P_p = \frac{\exp(-\lambda \Delta U_p)}{\sum q \exp(-\lambda \Delta U_q)} \text{ for an incremental model formulation}$$

Where:

P_p is the proportion of travellers choosing alternative p out of q possibilities, U_p is the disutility of option p (based on composite costs at lower levels in the hierarchy) and ΔU_p is the change in disutility of option p . The summation in the denominator is over all q alternatives, including p . If there are only two choices this is called a binary logit model with the simple formulation $P_1 = \exp(-\lambda U_1) / [\exp(-\lambda U_1) + \exp(-\lambda U_2)]$. For more choices it is referred to as a multinomial logit model.

- C.1.6 The mechanism should be applied separately to different segments of travel, such as trip purposes, as the sensitivity of the model is likely to be different in each category. For different trip purposes, for example, the logit sensitivity parameter (lambda) is likely to be numerically larger where there is more freedom to choose. **Thus more optional travel, such as shopping trips, tends to be more elastic and have a numerically larger lambda value than, say, travel to work.**
- C.1.7 The multinomial logit choice function is one of a number of possible formulations of "random utility" models in which a random component is added to the deterministic disutility²⁵ of choice p as follows:

$$U_p = \sum n \beta_n x_n + \varepsilon_p$$

²⁵ For transport modelling the utility is generally the negative of the value of generalised cost (or disutility).

Where the disutility U_p of choice p is calculated as the sum of:

- the generalised cost $G_p = \sum_n \beta_n x_n$ of choice p , with the set of cost components x_n weighted by coefficients β_n , summed over all components relevant to choice p as explained in section 3.1. (For example, if G is measured in units of time, x might be the money cost of a journey and β the inverse of value of time), and
- a random component ε_p used to represent variations in the situation or tastes of individual travellers, or modelling errors, or unobserved elements of the alternative choices. (In the most general case this random component can depend on both the traveller and on the choice alternative).

C.1.8 A choice-specific calibration constant (i.e. constant specific to the mode or areas used in calibration) could be added to the generalised cost function to adjust the calculated choice to the observed value.

C.1.9 A random utility model assumes that the alternative with the minimum disutility is chosen, so that a probabilistic model results.

C.1.10 The assumed statistical distribution of the error terms or residuals ε_p determines the exact mathematical formulation. For example, assuming one particular distribution for the random components, that they are Independent and Identically Distributed (IID) extreme value variables, leads to the widely-used multinomial logit model:

$$T_p = \frac{T_{tot} \exp(-\lambda U_p)}{\sum_q \exp(-\lambda U_q)}$$

Where λ is the positive sensitivity parameter and U_p is the disutility / generalised cost.

C.1.11 The elasticity of demand in this formulation is $-\lambda U_p(1-T_p/T_{tot})$, so that the elasticity scales with U , and tends to be larger for longer trips for a given value of λ and larger for choices with a small share of the total. If those implications are inappropriate for the model area a different functional form or a series of calibration areas should be used to produce a model with suitable implications.

C.1.12 Other forms such as the power function or the Tanner function, which have been described in relation to 'own cost' elasticity models, or formulations assuming a normal distribution of error terms (Probit models) are possible but little used in modelling for scheme appraisal. Different formulations of the logit model which have less restrictive statistical assumptions are also possible.

C.2 Trip Frequency

C.2.1 The elasticity function could be a power function or an exponential function. However, if logit is used for the other mechanisms, a similar exponential function is generally used to adjust trip frequency. In this case, the function operates simply as an elasticity with respect to disutility or generalised cost,

since the relevant choice is to travel or not to travel, and the disutility of not travelling remains constant:

$$T_i = \frac{0T_i \exp(-\lambda_{freq} G_{i0comp})}{\exp(-\lambda_{freq} \cdot 0G_{i0comp})}$$

- C.2.2 Where T_i is the number of trips from origin zone i , prefix 0 denotes the base values, λ_{freq} is the choice sensitivity parameter for the trip frequency stage and the generalised cost G_{i0comp} is the **composite cost** or disutility calculated across the trip origins. The compound cost of travel for trips from a given zone must be calculated across all available choices lower in the hierarchy (i.e. destination, mode and time period choices where available). See section 3.2 for details.

C.3 Mode Choice

- C.3.1 For mode choice, trips between each origin-destination pair of zones are allocated to the available modes according to the composite disutility or generalised cost of travel by that mode:

$$T_{ijn} = \frac{T_{ij} \exp(-\lambda_{mode} G_{ijn})}{\sum m \exp(-\lambda_{mode} G_{ijm})}$$

if mode choice is the only demand response and

$$T_{ijn} = \frac{T_{ij} \exp(-\lambda_{mode} G_{ijncomp})}{\sum m \exp(-\lambda_{mode} G_{ijmcomp})}$$

if mode choice is a more sensitive response than distribution. T_{ijn} is the number of trips choosing mode n from a set of modes m and λ_{mode} is the choice sensitivity parameter for the trip mode stage. The composite cost $G_{ijncomp}$ is calculated across the time periods in a way that weights the average according to the probability of choosing that period. The summation is across all available modes m , including n . However, if mode choice is less sensitive than distribution, the composite cost G_{imcomp} must be calculated to forecast an overall modal split for each origin zone. If there is more than one public transport mode it is usual to use a nested or hierarchical model, with a higher level split between car and public transport (and possibly active modes also). The allocation to the different public transport modes (and between walk and cycle if modelled) is then made at a lower level (see section 4.5) or possibly in assignment.

C.4 Time of day choice

- C.4.1 **Macro time period choice** (or the allocation of trips between broad time periods) assuming this is the most sensitive response takes the form:

$$T_{ijms} = \frac{T_{ijm} \exp(-\lambda_{time} G_{ijms})}{\sum t \exp(-\lambda_{time} G_{ijmt})}$$

Where T_{ijms} is the number of trips between zones i and j by mode m in time period s . G_{ijmt} is the disutility or generalised cost of travel between zones i and j by mode m in time period t , which may typically be peak and inter-peak and λ_{time} is the choice sensitivity parameter for the time period stage. However, if it is above mode choice and distribution, it would take the form:

$$T_{is} = \frac{T_i \exp(-\lambda_{time} G_{is})}{\sum t \exp(-\lambda_{time} G_{it})}$$

Where T_{is} is the number of trips in zone i in time period s and G_{is} is the disutility or generalised cost of travel in zone i in time period s .

C.5 Trip Distribution

C.5.1 The general form for a doubly-constrained distribution model is:

$$T_{ij} = a_i b_j O_i D_j f(G_{ij})$$

Where:

T_{ij} is the number of trips from zone i to zone j ,

O_i is the total number of trips originating in zone i

D_j is the total number of trips ending in zone j

T_{ij} depends on the travel disutility or cost via the deterrence function as $f(G_{ij})$,

Which in most models is a logit function

$$\frac{\exp(-\lambda_{dist} G_{ijcomp})}{\sum k \exp(-\lambda_{dist} G_{ikcomp})}$$

Where:

G_{ijcomp} is a composite cost calculated across the available modes and time periods, if these choices are to be calculated **after** distribution

a_i and b_j are balancing factors which are used when the model is singly or doubly constrained to ensure that $\sum_j T_{ij} = O_i$ (ie there are O_i trips originating in zone i), and $\sum_i T_{ij} = D_j$ (ie there are D_j trips ending in zone j), and are calculated at each iteration of the constraining routine as $a_i = 1/\sum_j b_j D_j f(G_{ij})$ or $b_j = 1/\sum_i a_i O_i f(G_{ij})$

C.5.2 In the above equation, T_{ij} is proportional to O_i , the total number of trips originating in zone i , T_{ij} is also proportional to D_j , the total number of trips ending in zone j , or alternatively in a singly-constrained model the facilities available in zone j (numbers of jobs, retail floorspace, etc) so that the number of trips ending in j depends also on the competing attractiveness of other zones.

C.5.3 If the distribution model is singly (origin)-constrained the equivalent destination choice model is:

$$T_{ij} = \frac{O_i D_j f(G_{ij})}{\sum_k D_k f(G_{ik})}$$

which satisfies the origin constraint:

$$\sum_j T_{ij} = O_i$$

If the distribution model is doubly-constrained, the destination choice model is:

$$T_{ij} = \frac{O_i b_j D_j f(G_{ij})}{\sum_k b_k D_k f(G_{ik})}$$

where the b_j 's are calculated iteratively to satisfy the destination constraint:

$$\sum_i T_{ij} = D_j$$

In the case of origin constrained trip distribution D_j is some function of the attractiveness of destination zone j , and in the case of a doubly-constrained trip distribution model O_i and D_j represent total origin and total destination trip ends respectively. G_{ij} represents the generalised costs of travel between i and j and $f(G_{ij})$ the deterrence function which may or may not contain (multiplicative or additive) K_{ij} factors.

C.5.4 In the above equation there are a number of different deterrence function forms that can be adopted for $f(G_{ij})$. In a true gravity model the deterrence functions are power functions $f(G_{ij}) = G_{ij}^a$ (and originally zone pair distance was used instead of G), but it is standard now to use an exponential form:

$$f(G_{ij}) = \exp(-\lambda_{dist} G_{ij})$$

or with multiplicative K_{ij} factors:

$$f(G_{ij}) = K_{ij} \exp(-\lambda_{dist} G_{ij})$$

or with additive K_{ij} factors:

$$f(G_{ij}) = \exp(-\lambda_{dist}(G_{ij} + K_{ij}))$$

C.5.5 The calculation of costs should use composite cost $G_{ij\text{comp}}$ (see section 4.5) calculated only across the stages lower in the hierarchy of choice mechanisms.

Appendix D: Incremental Model Formulation

D.1.1 When specifying an incremental hierarchical logit model, scaling parameters as provided in section 5.6 could be used. These parameters (thetas) refer to the probability of nests of alternatives or composite alternatives. They reflect the ratios of the lambdas for different response mechanisms as one moves up the model structure. The scaling parameters are applied to the logsums of the composite or nested alternatives. They should have a value between 0 and 1 if the responses have been included in the correct order in the model, such that the sensitivity of the responses changes down the hierarchy from lower to higher.

D.1.2 The standard incremental multinomial logit model is given as

$$p_p = \frac{p_p^0 \exp(\theta \Delta U_p)}{\sum_q p_q^0 \exp(\theta \Delta U_q)}$$

where

p_p is the forecast probability of choosing alternative p

p_p^0 is the reference case probability of choosing alternative p (calculated from the input reference demand)

θ is the scaling parameter (always =1 for the bottom level of the hierarchy)

ΔU_p is the change in the utility of alternative p

For the choice at the bottom level of the hierarchy the change in utility is given by

$$\Delta U_p = -\lambda(C_p - C_{pi}^0)$$

Where

C_{pi}^0 is the reference generalised cost and

C_p is the forecast generalised cost, skimmed from the latest assignment

λ is the spread or dispersion parameter (defined by the user) - it should be positive

For choices above the bottom level of the hierarchy the change in utility is the composite change over the alternatives in the level below:

$$\Delta U^* = \ln \sum_n p_p^0 \exp(\Delta U_p)$$

This model formulation can be used for mode choice, time period choice and singly constrained distribution

D.1.3 A modified version of the logit model is used for doubly-constrained distribution as follows:

$$T_{ij} = O_i \frac{B_j T_{ij}^0 \exp(\theta \Delta U_{ij})}{\sum_{k=1}^N B_k T_{ik}^0 \exp(\theta \Delta U_{ik})}$$

Where

T_{ij} is the forecast number of trips travelling from zone i to zone j

T_{ij}^0 is the reference case number of trips travelling from zone i to zone j

O_i is the number of trips travelling from zone i

B_j are destination-based constants, normalised so that $\sum_j B_j$ is equal to the number of zones

Note that destination constraints are summed over all person types within a purpose, and across all modes and time periods, if those choices have been modelled.

The change in composite utility for origin zone a is calculated using:

$$\Delta U_a^* = \ln \sum_b B_b \frac{T_{ab}^0}{O_a^0} \exp(\theta \Delta U_{ab})$$

Where

O_a^0 is the reference case number of trips travelling from zone a j

The illustrative parameter values currently provided in section 5.6 can be used in an incremental model structure as follows:

Suppose we assume the follow choices available

- Single trip purpose (say commuting) split into:
- Two person types (say car available and car not available)
- Mode choice - between car and public transport (all sub modes), no active modes
- Car available hierarchy (from top to bottom): frequency, mode choice, macro time period choice, distribution (doubly constrained)

- Car not available hierarchy (from top to bottom): frequency, time period choice, distribution (doubly constrained)

D.2 Inputs

D.2.1 Inputs to the demand model are:

C_{ijmtpc}^0 reference generalised cost from zone i to zone j by mode m in time period t, trip purpose p, person type c

C_{ijmtpc} corresponding forecast generalised cost, skimmed from latest assignment

T_{ijmtpc}^0 corresponding reference demand, defined via the user interface

In all the above, there is no data for the highway mode for the no-car person type

D.3 Bottom level utilities

D.3.1 The first step is to calculate the change in utility for the lowest level of the hierarchy:

$$\Delta U_{ijmtpc} = \lambda_{dist,mc} (C_{ijmtpc} - C_{ijmtpc}^0)$$

Where $\lambda_{dist,mc}$ is the mode m- and person type c specific distribution λ parameter

D.4 Doubly-constrained distribution

D.4.1 If the lowest level is a doubly constrained distribution model there is a need to find the balancing factors B_{jp} . This requires solving the set of equations given by:

$$T_{ijmtpc} = O_{imtpc} \frac{B_{jp} T_{ijmtpc}^0 \exp(\Delta U_{ijmtpc})}{\sum_{k=1}^N B_{kp} T_{ikmtpc}^0 \exp(\Delta U_{ikmtpc})}$$

such that the destination trip end constraints are met:

$$\sum_{imtc} T_{ijmtpc} = D_{jp}$$

The destination constraints are calculated from the reference demand matrix:

$$O_{imtpc} = \sum_j T_{ijmtpc}^0$$

Note that the destination trip end constraints depend on destination and trip purpose only.

The balancing factors are normalised so that

$$\sum_j B_{jp} = N$$

where N is the number of destination zones.

On the first iteration only of the demand model, the origin trip ends are calculated from the reference demand matrix:

$$O_{imtpc} = \sum_j T_{ijmtpc}^0$$

For subsequent iterations they are obtained from the application of the conditional probabilities described below.

D.5 Composite Utilities

D.5.1 The change in the composite utility from the distribution, time period choice and mode choice stages is then calculated:

$$\Delta U_{imtpc}^* = \ln \sum_j B_{jp} \frac{T_{ijmtpc}^0}{O_{imtpc}^0} \exp(\Delta U_{ijmtpc})$$

$$\Delta U_{impc}^* = \ln \sum_t p_{t|imcp}^0 \exp(\theta_c^{time} \Delta U_{imtpc}^*)$$

$$\Delta U_{ipc}^* = \ln \sum_m p_{m|icp}^0 \exp(\theta_c^{mode} \Delta U_{impc}^*) \quad (\text{car available person type})$$

$$\Delta U_{ipc}^* = \Delta U_{impc}^* \quad (\text{car not available person type, } m=PT)$$

The reference case probabilities are calculated from the input reference demand as follows:

$$p_{m|icp}^0 = \frac{\sum_j T_{ijmtpc}^0}{\sum_{jtk} T_{ijktpc}^0}$$

$$p_{t|imcp}^0 = \frac{\sum_j T_{ijmtpc}^0}{\sum_k T_{ijmkpc}^0}$$

D.6 Conditional Probabilities

D.6.1 Having calculated the change in the composite utilities it is possible to calculate the conditional utilities for each level of the model

Mode choice:

$$p_{m|ipc} = \frac{p_{m|ipc}^0 \exp(\theta_c^{mode} \Delta U_{impc}^*)}{\sum_k p_{k|ipc}^0 \exp(\theta_c^{mode} \Delta U_{ikpc}^*)} \quad (\text{car available person type})$$

$$p_{m|ipc} = \begin{cases} 1 & \text{if } m = \text{public transport} \\ 0 & \text{otherwise} \end{cases} \quad (\text{car not available person type})$$

Time period choice:

$$p_{t|impc} = \frac{p_{t|impc}^0 \exp(\theta_c^{time} \Delta U_{imtpc}^*)}{\sum_k p_{k|impc}^0 \exp(\theta_c^{time} \Delta U_{imkpc}^*)}$$

Distribution (destination choice):

$$p_{j|imtpc} = \frac{B_{jp} T_{ijmtpc}^0 \exp(\Delta U_{ijmtpc})}{\sum_{k=1}^N B_{kp} T_{ikmtpc}^0 \exp(\Delta U_{ikmtpc})}$$

D.7 Updated Trip Matrix

D.7.1 The application of the conditional probabilities gives an updated trip matrix

$$T_{ijmtpc} = T_{ipc}^0 p_{m|ipc} p_{t|impc} p_{j|imtpc}$$

and updated origin totals:

$$O_{imtpc} = T_{ipc}^0 p_{m|ipc} p_{t|impc}$$

D.8 Application of Frequency Model

D.8.1 The frequency model is only applied after the above process has converged. This gives the final trip matrix from the demand model:

$$T_{ijmtpc} = \exp(\theta_c^{freq} \Delta U_{ipc}^*) T_{ipc}^0 p_{m|ipc} p_{t|impc} p_{j|imtpc}$$

Appendix E: Absolute Model Formulation

E.1.1 The illustrative parameter values currently provided in section 5.6 can be used in an absolute model structure as follows:

E.2 Assumed Nesting

Layer 1 (Highest):	Frequency
Layer 2:	Main Mode
Layer 3:	Macro Time Period
Layer 4 (Lowest):	Destination

Note that local data may suggest a different nesting structure; the same principles apply, however.

E.3 Notation

Trip origin	i	Trip destination	j, k
Macro time period	t, s	Main mode	m, r
Trips	T	Generalised cost	G
Distribution parameter	λ_{dist}	Attraction factor	B
Composite utility	U	Tree or scaling parameters	$\theta_{time}, \theta_{mode}, \theta_{freq}$
Pivot (reference) trips	${}_0T$	Pivot (reference) utilities	${}_0U$

E.4 Composite Utilities:

E.4.1 The incremental composite utilities summed over the choices in the destination layer are given by:

$$U_{imt} = \ln \sum_j B_j \exp(-\lambda_{dist} G_{ijmt}) - \ln \sum_j B_j$$

E.4.2 Initial values for the attraction factors B_j are needed (see notes given later about the destination choice probabilities).

E.4.3 The composite utilities summed over choices in the time period layer are given by

$$U_{im} = \ln \sum_t \exp(\theta_{time} U_{imt})$$

This uses the scaling parameter θ_{time} which reflects the ratio of the lambda for macro time period to the lambda for distribution.

E.4.4 The incremental composite utilities summed over the main mode layer are given by

$$U_i = \ln \sum_m \exp(\theta_{mode} U_{im})$$

These composite utilities are used to calculate the choice probabilities in the various layers as follows. Where required, base utilities can also be calculated from the same composite utility formulae given above, but using base values for the generalised costs and balancing factors.

E.5 Choice Probabilities:

E.5.1 Layer 1, Frequency:

$$T_i = \frac{\theta T_i \exp(\theta_{freq} U_i)}{\exp(\theta_{freq_0} U_i)}$$

Note that this calculation makes use of a reference utility value

E.5.2 Layer 2, Main Mode Choice (m):

$$T_{im} = \frac{T_i \exp(\theta_{mode} U_{im})}{\sum_r \exp(\theta_{mode} U_{ir})}$$

$T_{im} = T_i \exp(\theta_{mode} U_{im}) / \sum_r \exp(\theta_{mode} U_{ir})$

E.5.3 Layer 3, Macro Time Period Choice (t):

$$T_{imt} = \frac{T_{im} \exp(\theta_{time} U_{imt})}{\sum_s \exp(\theta_{time} U_{ims})}$$

E.5.4 Layer 4, Destination Choice (j):

$$T_{ijmt} = \frac{T_{imt} B_j \exp(-\lambda_{dist} G_{ijmt})}{\sum_k B_k \exp(-\lambda_{dist} G_{ikmt})}$$

Notes

E.5.5 All distribution models satisfy the constraint: $\sum_j T_{ijmt} = T_{imt}$

E.5.6 For doubly constrained destination choice models B_j needs to be calculated to satisfy the additional constraint: $\sum_{imt} T_{ijmt} = T_j$

- E.5.7 Some models employ area specific, mode specific, and time period specific constants and/or sensitivity parameters which vary by zone or zone pairs. Advice on these matters can be found in Appendix C.

Appendix F: Estimation of Transferred Mode Choice Models

Importing Mode Choice Model Parameters

F.1.1 The foundation of a mode choice model using imported model parameters is the utility formulation describing the choice alternatives, i.e.:

$$V_{ni} = \sum_k \beta_k x_{nik}$$

where V_{ni} is the deterministic component of utility derived from alternative i by user n , x_{nik} are the relevant attribute values (k) relating to alternative i for user n and β_k are the model parameters indicating the relative importance of each attribute.

F.1.2 The specific attribute values, for each choice observation, will usually be derived from networks or other databases, e.g. fares. In bespoke models, the β s will be estimated such that the observed choices are best represented. For transferred models, these parameters are **inputs** to the modelling. Specific **local calibration** will require data from either Stated Preference (SP) or Revealed Preference (RP) studies. Where these are impractical or unnecessary, several national indicative sources may be used:

- Values in the [TAG Data Book](#)
- TRL Report TRL593, The demand for public transport: a practical guide, for information on the relative valuations of public transport journey components
- Passenger Demand Forecasting Handbook (PDFH), in cases where access to this source is possible
- a mixture of the above (including some SP or RP where available)

F.1.3 It is essential that the β s are measured in consistent units. Two units of measure are generally used: Generalised Costs (GC) and Generalised Times (GT).

F.1.4 In the generalised cost formulation, all in-vehicle and out-of-vehicle time components (x) are multiplied by appropriate values, by purpose and journey component (β), to convert them into monetary values. For example, if a typical generalised cost formulation for a rail journey were to be considered, it may include in-vehicle time, out-of-vehicle time and other components, for example:

$$V_{RailGC} = \beta_{VOTrailtime} x_{railtime} + \beta_{VOTacctime} x_{acctime} + \beta_{VOTwaittime} x_{waittime} + \beta_{VOTxtime} x_{xtime} + \beta_{xfers} x_{xfers} + x_{fare}$$

where

$\beta_{VOTrailltime}$	value of time for travel by rail, for specific purpose of travel
$\beta_{VOTacctime}$	value of time for access and egress to rail
$\beta_{VOTwaittime}$	value of time for (first) wait time
$\beta_{VOTxtime}$	value of time for interchange time
β_{xfers}	monetary penalty value of an interchange

- F.1.5 When using generalised times, all in-vehicle and out-of-vehicle time components (x) must be multiplied by appropriate values, by purpose and journey component (β), to convert the component into units of time. The same example rail journey specified above would now be specified as follows:

$$V_{RailGT} = x_{railltime} + \beta_{acctime}x_{acctime} + \beta_{waittime}x_{waittime} + \beta_{xtime}x_{xtime} + \beta_{xfers}x_{xfers} + \beta_{1/VOT}x_{fare}$$

where

$\beta_{acctime}$	value of access and egress time, relative to rail in-vehicle time
$\beta_{waittime}$	value of (first) wait time, relative to rail in-vehicle time
β_{xtime}	value of interchange time, relative to rail in-vehicle time
β_{xfers}	time penalty value (in terms of rail in-vehicle time) of an interchange
$\beta_{1/VOT}$	value of money, in terms of rail time (1 / VOT)

- F.1.6 [TAG Data Book](#) has assumptions that should be made for changes in value of time into the future, and though these recommendations relate strictly to their use in appraisal, they may be taken as representing reasonable practice for modelling as well.
- F.1.7 It is not recommended to change the model alternative-specific constants (ASCs) as a result of forecast changes in income and/or values of time, on the basis that the unmeasured component of utility, as measured by the alternative-specific constants, has no expected relationship with income.
- F.1.8 For models using imported parameters, it is recommended to use local RP data to calibrate both the model scale and ASCs.

Recalibration of Transferred Mode Choice Models

- F.1.9 The advantage of using **disaggregate or semi-aggregate RP data** for recalibration of transferred models is that these data allow the direct estimation of the model scale and ASCs through Maximum Likelihood estimation of a logit model, with the accompanying tests of coefficient accuracy and significance that can be undertaken (see **Supplementary Guidance on Bespoke Mode Choice**

Models) and model fit. Specifically, the model results will indicate the accuracy of the scale coefficient and provide evidence of its validity, i.e. whether it is significantly different from zero. The methodology for identification of the model scale and alternative specific constants is set out below.

- F.1.10 First, for each observation, the generalised cost or time term is calculated, e.g. V_{Rail} , V_{Bus} and V_{Car} below. The utility equation for each alternative is then defined by the generalised cost or time term, multiplied by a scale (β_{scale}) and a constant (added to all but one alternative).

$$V_{RailAdj} = \beta_{scale}V_{Rail} + \beta_{Railconst}$$

$$V_{BusAdj} = \beta_{scale}V_{Bus} + \beta_{Busconst}$$

$$V_{CarAdj} = \beta_{scale}V_{Car}$$

- F.1.11 The scale parameter and ASCs are then estimated directly using standard software for estimating logit models. In the specification of the utilities it does not matter whether the ASCs are multiplied by the scale or not, because in a logit model it is the differences between utility equations for different alternatives which are important. It is important, however, that the definition of the constants in the forecasting model is consistent with that used for model estimation, i.e. scaled or unscaled.

- F.1.12 If disaggregate RP data are used for the model calibration, then there is further scope for identifying socio-economic terms, reflecting for example preferences for specific modes. These terms would be included directly in the utility equation. For example if a term for high-income travellers was to be tested for rail, the following term would be included in the rail utility as follows:

$$V_{RailAdj} = \beta_{scale}V_{Rail} + \beta_{Railconst} + \beta_{HighIncome}(income = high)$$

- F.1.13 Nested model structures can also be tested using the scaled utilities. Separate scales, constants and model structures should be calculated for each travel purpose. It is important that the scaled model is used for any scenario tests.

- F.1.14 In the simplest case, **aggregate** information on mode shares may be used to recalibrate ASCs and information on mode shares by trip length could be used to calibrate the model scale. Semi-aggregate and disaggregate data provide much better information for calibration of the model scale and therefore the use of aggregate information is only recommended for the recalibration of models for small schemes.

- F.1.15 Adjustments to the ASCs can be made iteratively, by running the mode choice model using the generalised cost or time equations for utility and by then examining how closely the mode shares are replicated. Adjustments equal to $\ln(\text{observed share}/\text{predicted share})$ are added to the utility for each mode, until the predicted shares closely reproduce the observed shares.

- F.1.16 Adjustments to the scale also have to be made iteratively, by running the model and examining how closely the mode shares by trip length category are

replicated. Adjustments to the model scale must be made until the mode shares are approximately correct.

- F.1.17 The scale and constants are inter-related and any amendment to the scale will impact the mode shares and vice versa. There are also implications for realism tests.
- F.1.18 An alternative validation procedure to obtain a model scale is to adjust the scale until known or desired elasticities are reproduced. Again, adjustments to the constants will also be required to reproduce the observed overall mode shares.
- F.1.19 Separate scales and constants should be calculated for each travel purpose.

Transfer of Model Systems

- F.1.20 In this case, an entire model system is available which applies to one area and is to be transferred to the area in which a proposed scheme is to be appraised.
- F.1.21 The transfer can be approached either component by component or for the system as a whole. In any case, models for separate travel purposes should be transferred separately.
- F.1.22 When separate components of a model system are transferred, the procedure is that the transferred model is used to specify the utility functions of the alternatives in each component (destination choice, mode choice etc.) and that ASCs and scale factors are then estimated to calibrate the model to local conditions.
- F.1.23 This procedure closely follows that described in the previous section, except that an existing model is used to define the utility functions, rather than the analyst defining the functions and then looking to find suitable coefficients for the variables they thought should be included.
- F.1.24 Data, for example from networks, are required to describe the explanatory variables in the model utility equations for the area of interest.
- F.1.25 In the transfer of a disaggregate mode choice model, or disaggregate model system, scale parameters are estimated for a limited number of functional subgroups of explanatory variables such as level-of-service attributes, personal characteristics, other local effects, etc. The idea is that each subgroup has a similar functionality, and different groupings may be tested as part of the estimation procedure.
- F.1.26 Because the scales of the component models are changed by this process, care must be taken to maintain the validity of the model structure. That is, if the mode choice model is more sensitive than the destination choice model, so that an appropriate hierarchical structure is used in the original model, then the scales applied to calibrate these models to the new situation must be checked to ensure that the relative sensitivities remain consistent with the hierarchy in the model. If this is not the case, then the model may need to be restructured.

F.1.27 An alternative approach is to transfer the entire model system and to preserve the structural coefficients that are used in that model. Essentially this means that a single scale is applied to the entire model. The advantages of this approach are that less data is required in the fully modelled area and that the structural problems mentioned above cannot arise. The disadvantage is that a model transferred in this way will fit the local circumstances less well. In any case, ASCs should be calibrated to match the overall mode shares in the new area.

Transferred Mode Choice Model Validation

F.1.28 It should be verified that the relative value of the model coefficients, e.g. implied values of time, will be reasonable for transferred models..

F.1.29 In the cases where the model scale and constants are estimated directly as part of the model transfer recalibration procedure, the model results will indicate the accuracy of the scale coefficient and can provide evidence of its validity, i.e. whether it is significantly different from zero.

F.1.30 The presence of disaggregate RP data allows examination of model predictions and observed choices to be examined across socio-economic and possibly geographical sub-segments.

Appendix G: Application of synthetic growth

G.1.1 When using incremental models, growth factors are calculated by the models and applied to observed base year travel patterns. This Appendix sets out the eight cases method for applying such synthetic growth based on a paper by Daly et al (2012). As can be seen, the cases depend on testing the various quantities against zero, and the authors suggest that in practice a test value of 10-3 could be used. The idea of the test of extreme growth in cases 4 and 8 is that beyond a defined cut-off point, the predicted absolute growth is applied, so that there are in fact notionally 10 cases.

Table G1: Eight cases method for applying synthetic growth (from Daly et al, 2012)

Case	“Validated base” B_{ij}^0	Synthetic base (O-D) A_{ij}^0	Synthetic test (O-D) A_{ij}	Output B_{ij}	
1	= 0	= 0	= 0	0	
2	= 0	= 0	> 0	A_{ij}	
3	= 0	> 0	= 0	0	
4	= 0	> 0	> 0	Normal growth ($A_{ij} \leq X_1$)	0
				Extreme growth ($A_{ij} > X_1$)	$A_{ij} - X_1$
5	> 0	= 0	= 0	B_{ij}^0	
6	> 0	= 0	> 0	$B_{ij}^0 + A_{ij}$	
7	> 0	> 0	= 0	0	
8	> 0	> 0	> 0	Normal Growth ($A_{ij} \leq X_2$)	$B_{ij}^0 \cdot (A_{ij} / A_{ij}^0)$
				Extreme Growth ($A_{ij} > X_2$)	$B_{ij}^0 \cdot (X_2 / A_{ij}^0) + (A_{ij} - X_2)$

G.1.2 The cut-off values X_1 and X_2 for cases 4 and 8 are defined as follows:

$$X_1 = k_2 A_{ij}^0 \text{ and } X_2 = k_1 A_{ij}^0 + k_2 A_{ij}^0 \cdot \max \left[\left(\frac{A_{ij}}{B_{ij}^0} \right), \left(\frac{k_1}{k_2} \right) \right]$$

G.1.3 where the authors state that, "Common values for the parameters k_1 and k_2 are $k_1 = 0.5$, $k_2 = 5$ ". However, the most recent recommendation is that X_2 should have the same value as X_1 .

Appendix H: Use of DIADEM

H.1 Introduction

H.1.1 The DIADEM procedures provide an adjustable hierarchical structure of trip frequency, mode choice, distribution, and time of day choice (macro and micro), and an interface to assignment. It is also possible to use DIADEM for a simple "own-cost" elasticity calculation where applicable. The DIADEM framework controls iteration within assignment, and between demand and assignment, to ensure that the calculation reaches an acceptable equilibrium.

H.1.2 At present, DIADEM has been developed with an interface to the SATURN assignment package. It is expected, however, that the suppliers of other assignment packages will provide equivalent functionality or suitable interfaces with DIADEM so that it can be used with whatever assignment model is available for the scheme to be assessed. As ever, there is no monopoly on the most convenient way to achieve best practice: as with choice of assignment package, which one to adopt is a matter of individual preferences and priorities. If a decision is made to use DIADEM then section H.2 provides a summary of the approach. If other software is to be used then section 6.2 gives guidance on how alternative software should be used.

H.2 DIADEM Procedures

H.2.1 The DIADEM procedures cover all the demand-side issues that must be considered when applying multi-stage models and provides the user with the necessary choice between alternative formulations and full control over each aspect.

Model Type

H.2.2 Demand responses: DIADEM allows the following responses to be included:

- the **elasticity model** has a 2-parameter Tanner form, which is intended to be used in its extremes, setting one of the parameters to 0 to return either a power or an exponential form, as discussed in section 4. The use of both parameters together in the Tanner form is not recommended.
- the **trip frequency model** is an exponential elasticity function, but unlike general elasticity models (which operate at the OD level), the trip frequency model applies to the zone level, using composite zone (accessibility) costs as discussed in section 4.
- the **mode choice model** is a binomial logit formulation, generally reflecting the choice between car and public transport only. The model does not automate the hierarchical modelling of public transport modes i.e. sub mode choice. Any lower-level split between different public transport modes would

have to be estimated independently or at assignment as discussed in section 4. However, this sub-mode choice will rarely be needed in a road-based scheme appraisal. As the mode choice model does not allow for active mode alternatives, a shift to or from active modes must be captured by the trip frequency component.

- the **trip distribution model** can be singly-origin constrained or singly-destination constrained (to approximate to Production /Attraction constraints) or doubly-constrained as discussed in section 4.
- a **macro time period choice model** in logit form is currently available.
- a **micro time period choice model** using HADES is also available.

H.2.3 For a discussion on alternative model forms of departure-time choice, see Batley et al (2001).

Model hierarchy

H.2.4 DIADEM allows a different range of responses, a different model form and a different hierarchy to be applied to each individual purpose and traveller type combination.

Model parameters

H.2.5 Each modelled response is driven by a single user-defined lambda parameter, per purpose and traveller type combination, apart from the elasticity models which as Tanner formulations are driven by two parameters (though normally one of these should be set to zero, returning the Tanner function to either a power or an exponential function).

Generalised costs

H.2.6 Generalised cost coefficients are defined for each purpose and traveller type combination, allowing for time, distance and monetary components. Any weighting of in-vehicle, waiting or walking time must be done within the assignment stage or outside the DIADEM environment, and a similar argument applies to PT crowding effects. The analyst is provided with a flexible tool in DIADEM to arrange the sequence of demand responses and warned if the proposed sequence does not reflect demand sensitivities. However, the analyst will still need to ensure that the definitions of generalised cost in the demand and assignment phases include all the necessary terms and are sufficiently compatible.

Model running

H.2.7 Guidance on how to run the DIADEM software is given in the user guide to the software. It should be noted that the solution closest to equilibrium may not

necessarily be the one produced by the last iteration of the DIADEM demand/assignment modelling system. In such cases, steps should be taken to try and improve the convergence behaviour of the demand/assignment loop. In all cases, the solution from the iteration with the lowest gap value should be used for appraisal purposes. This may require an additional run of the assignment package using this 'best' trip matrix to obtain a final solution.