

# Notice of variation and consolidation with introductory note

**The Environmental Permitting (England & Wales) Regulations 2016**

---

Southern Water Services Limited  
Goddards Green Sludge Treatment Centre  
Cuckfield Road  
Goddards Green  
West Sussex  
RH17 5AL

**Variation application number**

EPR/WP3695HW/V006

**Permit number**

EPR/WP3695HW

# **Goddards Green Sludge Treatment Centre**

## **Permit number EPR/WP3695HW**

### **Introductory note**

#### **This introductory note does not form a part of the notice**

The Industrial Emissions Directive (IED) came into force on 7 January 2014 with the requirement to implement all relevant Best Available Techniques (BAT) Conclusions as described in the Commission Implementing Decision. The schedule of waste management activities includes the recovery of non-hazardous waste with a capacity exceeding 75 tonnes per day (or 100 tonnes per day if the only waste treatment activity is anaerobic digestion) involving biological treatment, but excludes activities covered by the Urban Waste Water Treatment Regulations (UWWTR). However, UK environmental regulators concluded that the biological treatment of waste sewage sludge is not an activity covered by the UWWTR and is therefore within the scope of the IED. The BAT Conclusions for Waste Treatment (the BREF) was published on 17 August 2018 following a European Union wide review of BAT, implementing decision (EU) 2018/1147 of 10 August 2018. BAT applies to new waste sewage sludge treatment not covered by the UWWTR. The waste operations at Goddards Green Sludge Treatment Centre (STC) are existing (carried out under waste exemptions) but the site will now be permitted as an installation and will be required to operate using BAT.

Under the Environmental Permitting (England & Wales) Regulations 2016 (schedule 5, part 1, paragraph 19) a variation may comprise a consolidated permit reflecting the variations and a notice specifying the variations included in that consolidated permit.

Schedule 1 of the notice specifies the conditions that have been varied and schedule 2 comprises a consolidated permit which reflects the variations being made. All the conditions of the permit have been varied and are subject to the right of appeal.

#### **Changes introduced by this variation**

This variation amends the permit to add a Section 5.4 A(1) (b) (i) scheduled activity - recovery or a mix of recovery and disposal of non-hazardous waste with a capacity exceeding 100 tonnes per day (anaerobic digestion) involving biological treatment. It updates the existing waste activity to modern conditions to become a multi regime permit.

The combustion of biogas in one combined heat and power plant (CHP) engine and one boiler will be permitted as a Directly Associated Activity (DAA).

The site has a liquor treatment plant (LTP) which will now also be permitted as an installations activity:

- S5.4 A(1) (a) (i) Disposal of non-hazardous waste with a capacity exceeding 50 tonnes per day involving biological treatment

A waste management activity (AR12 in Table S1.1) has been included for the acceptance of waste at the head of works prior to discharge to the adjacent Goddards Green Waste Water Treatment Works (WwTW). The WwTW does not form part of the installation.

#### **Brief description of the process**

Goddards Green Sludge Treatment Centre is located within the curtilage of Goddards Green WwTW. The site is located to the north of the A2300, off Cuckfield Road, and lies in a semi-rural location approximately 3km north-west of Burgess Hill. The site is surrounded by agricultural land to the north, east and west of the site, and an industrial estate beyond the A2300 to the south of the site. The central point of the site is NGR TQ 28947 20659. The biological treatment of sludge at the facility covers treatment of indigenous sewage sludges from the wider Goddards Green WwTW as well as sludges imported from other Southern Water sewage treatment works.

The imported and indigenous sludge is screened by two strain presses and then thickened by two drum thickeners. A thermal hydrolysis plant (THP) receives sludge from post screened sludge tanks via a feed silo connected to an odour control unit (OCU) to thicken the sludge to 16.5% dry solids (DS). It then passes through the cambi reactors and is fed to two conventional mesospheric anaerobic digesters operating at around 37 degrees Celsius. The hydraulic retention time in the digesters is approximately 14 days. Digested sludge is stored in two digested sludge storage tanks before being dewatered by two centrifuges. Dewatered digestate is stored on site in a large, covered cake bay before being recycled to farmland.

Biogas produced by the digesters is stored in a double skinned gas holder and is combusted by the 1.79 MWth input CHP to generate electricity. Waste combustion gases are emitted to air via stack at emission point A02. The site also has an auxiliary boiler and one auxiliary flare required only during periods of breakdown or maintenance of the CHP engine and/or auxiliary boiler.

All sludge treatment processes are covered or enclosed. Odorous air is extracted by three separate OCU's, which serve the STC area and associated assets.

The CASS (Cyclic Activated Sludge System) LTP treats centrate and decant liquor from the drum thickeners and centrifuges. The LTP is a sequence batch reactor treating liquors from the STC. Treated liquor from the LTP is sent to the WwTW. This is regarded as an indirect discharge to the River Arun via the works.

### Head of works waste operation (activity AR12 in Table S1.1)

This permit also allows a waste operation relating to the import of waste to the head of works. Effluents and waste waters in the form of sludge and liquid only, will be delivered by tanker to the head of the works for discharge directly into the head of the works for treatment under the UWWTR. This activity involves the storage of liquid wastes and discharges to the main WwTW. The discharge is classed as an indirect emission to water - in this case, the River Arun. We have imposed an improvement condition in the permit (IC6) to determine the impact on the River Arun from the tankered wastes imported and subsequently discharged to the WwTW via sampling point S5.

There are no Special Areas of Conservation (SAC), Special Protection Areas (SPA), Ramsar or Sites of Special Scientific Interest (SSSI) within a relevant screening distance of the facility. The site is not located within an Air Quality Management Area (AQMA).

The site has an Environment Management System, accredited to ISO14001.

The status log of a permit sets out the permitting history, including any changes to the permit reference number.

Status log of the permit		
Description	Date	Comments
Waste management licence issued EAWML 10152	17/08/2007	Licence for a biological treatment facility issued to Southern Water Services Limited.
Variation notice issued EPR/WP3695HW/V003 (EAWML 10152)	03/08/2009	Variation notice to increase operational hours and annual throughput.
Variation determined EPR/WP3695HW/V004	17/10/2016	Varied and consolidated permit issued in modern condition format.
Part surrender application EPR/WP3695HW/S005	Duly made 14/03/2019	Application to part surrender an area within the site boundary where operations have not commenced
Part surrender determined EPR/WP3695HW/S005	11/04/2019	Part surrender complete.
Application EPR/WP3695HW/V006	Duly made 04/12/2024	Application for an anaerobic digestion facility with combustion of biogas at a waste sewage sludge treatment site

<b>Status log of the permit</b>		
<b>Description</b>	<b>Date</b>	<b>Comments</b>
Variation determined and consolidation issued EPR/WP3695HW/V006	17/03/2025	Variation and consolidation issued to Southern Water Services Limited.

End of introductory note

# Notice of variation and consolidation

## The Environmental Permitting (England and Wales) Regulations 2016

The Environment Agency in exercise of its powers under regulation 20 of the Environmental Permitting (England and Wales) Regulations 2016 varies and consolidates

### Permit number

**EPR/WP3695HW**

### Issued to

**Southern Water Services Limited** (“the operator”)

whose registered office is

**Southern House**

**Yeoman Road**

**Worthing**

**West Sussex**

**BN13 3NX**

company registration number **02366670**

to operate a regulated facility at

**Goddards Green Sludge Treatment Centre**

**Cuckfield Road**

**Goddards Green**

**West Sussex**

**RH17 5AL**

to the extent set out in the schedules.

The notice shall take effect from 17/03/2025.

<b>Name</b>	<b>Date</b>
<b>Maxine Evans</b>	<b>17/03/2025</b>

Authorised on behalf of the Environment Agency

## **Schedule 1**

All conditions have been varied by the consolidated permit as a result of the application made by the operator.

## **Schedule 2 – consolidated permit**

Consolidated permit issued as a separate document.

# Permit

## The Environmental Permitting (England and Wales) Regulations 2016

### Permit number

**EPR/WP3695HW**

The Environment Agency hereby authorises, under regulation 13 of the Environmental Permitting (England and Wales) Regulations 2016

**Southern Water Services Limited** (“the operator”),

whose registered office is

**Southern House**

**Yeoman Road**

**Worthing**

**West Sussex**

**BN13 3NX**

company registration number **02366670**

to operate an installation and waste operations

**Goddards Green Sludge Treatment Centre**

**Cuckfield Road**

**Goddards Green**

**West Sussex**

**RH17 5AL**

to the extent authorised by and subject to the conditions of this permit.

<b>Name</b>	<b>Date</b>
<b>Maxine Evans</b>	<b>17/03/2025</b>

Authorised on behalf of the Environment Agency

# Conditions

## 1 Management

### 1.1 General management

- 1.1.1 The operator shall manage and operate the activities:
- (a) in accordance with a written management system that identifies and minimises risks of pollution, including those arising from operations, maintenance, accidents, incidents, non-conformances, closure and those drawn to the attention of the operator as a result of complaints; and
  - (b) using sufficient competent persons and resources.
- 1.1.2 Records demonstrating compliance with condition 1.1.1 shall be maintained.
- 1.1.3 Any person having duties that are or may be affected by the matters set out in this permit shall have convenient access to a copy of it kept at or near the place where those duties are carried out.
- 1.1.4 The operator shall comply with the requirements of an approved competence scheme.

### 1.2 Energy efficiency

- 1.2.1 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR11), the operator shall:
- (a) take appropriate measures to ensure that energy is used efficiently in the activities;
  - (b) review and record at least every four years whether there are suitable opportunities to improve the energy efficiency of the activities; and
  - (c) take any further appropriate measures identified by a review.

### 1.3 Efficient use of raw materials

- 1.3.1 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR11), the operator shall:
- (a) take appropriate measures to ensure that raw materials and water are used efficiently in the activities;
  - (b) maintain records of raw materials and water used in the activities;
  - (c) review and record at least every four years whether there are suitable alternative materials that could reduce environmental impact or opportunities to improve the efficiency of raw material and water use; and
  - (d) take any further appropriate measures identified by a review.

### 1.4 Avoidance, recovery and disposal of wastes produced by the activities

- 1.4.1 The operator shall take appropriate measures to ensure that:
- (a) the waste hierarchy referred to in Article 4 of the Waste Framework Directive is applied to the generation of waste by the activities; and
  - (b) any waste generated by the activities is treated in accordance with the waste hierarchy referred to in Article 4 of the Waste Framework Directive; and
  - (c) where disposal is necessary, this is undertaken in a manner which minimises its impact on the environment.

- 1.4.2 The operator shall review and record at least every four years whether changes to those measures should be made and take any further appropriate measures identified by a review.

## **2 Operations**

### **2.1 Permitted activities**

- 2.1.1 The operator is only authorised to carry out the activities specified in schedule 1 table S1.1 (the “activities”).
- 2.1.2 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR11), the activities shall be undertaken in accordance with best available techniques.
- 2.1.3 All process plant and equipment shall be commissioned, operated and maintained and shall be fully documented and recorded in accordance with the manufacturer’s recommendations.
- 2.1.4 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR11), waste authorised by this permit shall be clearly distinguished from any other waste on the site.

### **2.2 The site**

- 2.2.1 The activities shall not extend beyond the site, being the land shown edged in green on the site plans at schedule 7 to this permit.

### **2.3 Operating techniques**

- 2.3.1 The activities shall, subject to the conditions of this permit, be operated using the techniques and in the manner described in the documentation specified in schedule 1, table S1.2, unless otherwise agreed in writing by the Environment Agency.
- 2.3.2 If notified by the Environment Agency that the activities are giving rise to pollution, the operator shall submit to the Environment Agency for approval within the period specified, a revision of any plan or other documentation (“plan”) specified in schedule 1, table S1.2 or otherwise required under this permit which identifies and minimises the risks of pollution relevant to that plan, and shall implement the approved revised plan in place of the original from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 2.3.3 Any raw materials or fuels listed in schedule 2, table S2.1 shall conform to the specifications set out in that table.
- 2.3.4 Waste shall only be accepted if:
- (a) it is of a type and quantity listed in schedule 2, tables S2.2 and S2.3; and
  - (b) it conforms to the description in the documentation supplied by the producer and holder.
  - (c) the facility has sufficient free capacity to store and treat the waste.
- 2.3.5 The operator shall ensure that where waste produced by the activities is sent to a relevant waste operation, that operation is provided with the following information, prior to the receipt of the waste:
- (a) the nature of the process producing the waste;
  - (b) the composition of the waste;
  - (c) the handling requirements of the waste;
  - (d) the hazardous property associated with the waste, if applicable; and
  - (e) the waste code of the waste.

- 2.3.6 The operator shall ensure that where waste produced by the activities is sent to a landfill site, it meets the waste acceptance criteria for that landfill.
- 2.3.7 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR11), waste pre-acceptance and acceptance procedures shall be undertaken in accordance with best available techniques.
- 2.3.8 For the following activities referenced in schedule 1, table S1.1 (AR5):
- (a) each MCP must be operated in accordance with the manufacturer's instructions and records must be made and retained to demonstrate this.
  - (b) the operator must keep periods of start-up and shut-down of each MCP as short as possible.
  - (c) there must be no persistent emission of 'dark smoke' as defined in section 3(1) of the Clean Air Act 1993.

## **2.4 Improvement programme**

- 2.4.1 The operator shall complete the improvements specified in schedule 1, table S1.3 by the date specified in that table unless otherwise agreed in writing by the Environment Agency.
- 2.4.2 Except in the case of an improvement which consists only of a submission to the Environment Agency, the operator shall notify the Environment Agency within 14 days of completion of each improvement.

## **2.5 Pre-operational conditions**

- 2.5.1 The operations specified in schedule 1, table S1.4 shall not commence until the measures specified in that table have been completed.

# **3 Emissions and monitoring**

## **3.1 Emissions to water, air or land**

- 3.1.1 There shall be no point source emissions to water, air or land except from the sources and emission points listed in schedule 3, tables S3.1 and S3.2.
- 3.1.2 The limits given in schedule 3 shall not be exceeded.
- 3.1.3 Periodic monitoring shall be carried out at least once every 5 years for groundwater and 10 years for soil, unless such monitoring is based on a systematic appraisal of the risk of contamination.

## **3.2 Emissions of substances not controlled by emission limits**

- 3.2.1 Emissions of substances not controlled by emission limits (excluding odour, but including ammonia) shall not cause pollution. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved emissions management plan, have been taken to prevent or where that is not practicable, to minimise, those emissions.
- 3.2.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution, submit to the Environment Agency for approval within the period specified, an emissions management plan which identifies and minimises the risks of pollution from emissions of substances not controlled by emission limits;
  - (b) implement the approved emissions management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

- 3.2.3 Subject to condition 3.2.4, below, all liquids in containers, whose emission to water or land could cause pollution, shall be provided with adequate secondary containment, unless other appropriate measures to prevent or where that is not practicable, to minimise, leakage and spillage from the primary container have been agreed in writing with the Environment Agency.
- 3.2.4 Condition 3.2.3, above, shall apply unless the operator strictly complies in full with IC1 below.
- 3.2.5 The operator shall implement a leak detection and repair (LDAR) programme to detect and mitigate the release of volatile organic compounds, including methane from diffuse sources.

### **3.3 Odour**

- 3.3.1 Emissions from the activities shall be free from odour at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved odour management plan, to prevent or where that is not practicable to minimise the odour.

### **3.4 Noise and vibration**

- 3.4.1 Emissions from the activities shall be free from noise and vibration at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved noise and vibration management plan to prevent or where that is not practicable to minimise the noise and vibration.
- 3.4.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to noise and vibration, submit to the Environment Agency for approval within the period specified, a noise and vibration management plan which identifies and minimises the risks of pollution from noise and vibration;
  - (b) implement the approved noise and vibration management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

### **3.5 Monitoring**

- 3.5.1 The operator shall, unless otherwise agreed in writing by the Environment Agency, undertake the monitoring specified in the following tables in schedule 3 to this permit:
- (a) point source emissions specified in tables S3.1 and S3.2;
  - (b) process monitoring specified in tables S3.3 and S3.4;
  - (c) bioaerosols monitoring specified in table S3.5.
- 3.5.2 The operator shall maintain records of all monitoring required by this permit including records of the taking and analysis of samples, instrument measurements (periodic and continual), calibrations, examinations, tests and surveys and any assessment or evaluation made on the basis of such data.
- 3.5.3 Monitoring equipment, techniques, personnel and organisations employed for the emissions monitoring programme and the environmental or other monitoring specified in condition 3.5.1 shall have either MCERTS certification or MCERTS accreditation (as appropriate), where available, unless otherwise agreed in writing by the Environment Agency.
- 3.5.4 Permanent means of access shall be provided to enable sampling/monitoring to be carried out in relation to the emission points specified in schedule 3 tables S3.1, S3.2, S3.3, S3.4, S3.5 and S3.6 unless otherwise agreed in writing by the Environment Agency.

- 3.5.5 For the following activities referenced in schedule 1, table S1.1 (AR5): for existing MCP, monitoring measurements shall be carried out before the relevant compliance date or within four months of the issue date of the permit whichever is the later.
- 3.5.6 Monitoring shall not take place during periods of start up or shut down.

### **3.6 Bioaerosols**

- 3.6.1 The operator shall take all appropriate measures, to prevent or where that is not practicable to minimise the release of bioaerosols. Emissions of bioaerosols from the operational activities shall not exceed the emission action levels specified in table S3.5.
- 3.6.2 The operator shall where the emission action levels are exceeded:
- (a) notify the Environment Agency and investigate and take remedial action;
  - (b) submit to the Environment Agency for approval within the period specified, a bioaerosols management plan which identifies and minimises the risks of pollution from bioaerosols; and
  - (c) implement the bioaerosols management plan from the date of approval and revise the plan periodically, unless otherwise agreed in writing by the Environment Agency.

### **3.7 Pests**

- 3.7.1 The activities shall not give rise to the presence of pests which are likely to cause pollution, hazard or annoyance outside the boundary of the site. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved pests management plan, have been taken to prevent or where that is not practicable, to minimise the presence of pests on the site.
- 3.7.2 The operator shall:
- (a) only use approved products for pest control;
  - (b) treat pest infestations promptly;
  - (c) reject pest-infected incoming waste;
  - (d) if notified by the Environment Agency, submit to the Environment Agency for approval within the period specified, a pests management plan which identifies and minimises risks of pollution from pests;
  - (e) implement the pests management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

### **3.8 Fire prevention**

- 3.8.1 The operator shall take all appropriate measures to prevent fires on site and minimise the risk of pollution from them including, but not limited to, those specified in any approved fire prevention plan.
- 3.8.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to a risk of fire, submit to the Environment Agency for approval within the period specified, a fire prevention plan which prevents fires and minimises the risk of pollution from fires;
  - (b) implement the fire prevention plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 3.8.3 The operator shall undertake a DSEAR assessment and maintain an accident management plan.

## **4 Information**

## 4.1 Records

4.1.1 All records required to be made by this permit shall:

- (a) be legible;
- (b) be made as soon as reasonably practicable;
- (c) if amended, be amended in such a way that the original and any subsequent amendments remain legible, or are capable of retrieval; and
- (d) be retained, unless otherwise agreed in writing by the Environment Agency, for at least 6 years from the date when the records were made, or in the case of the following records until permit surrender:
  - (i) off-site environmental effects; and
  - (ii) matters which affect the condition of the land and groundwater.

4.1.2 The operator shall keep on site all records, plans and the management system required to be maintained by this permit, unless otherwise agreed in writing by the Environment Agency.

4.1.3 The operator shall maintain a record of the type and quantity of fuel used and the total annual hours of operation of each MCP.

## 4.2 Reporting

4.2.1 The operator shall send all reports and notifications required by the permit to the Environment Agency using the contact details supplied in writing by the Environment Agency.

4.2.2 For the following activities referenced in schedule 1, table S1.1 (AR1 to AR11), a report or reports on the performance of the activities over the previous year shall be submitted to the Environment Agency by 31 January (or other date agreed in writing by the Environment Agency) each year. The report(s) shall include as a minimum:

- (a) a review of the results of the monitoring and assessment carried out in accordance with the permit including an interpretive review of that data;
- (b) the annual production/treatment data set out in schedule 4, table S4.2; and
- (c) the performance parameters set out in schedule 4, table S4.3 using the forms specified in table S4.4 of that schedule.

4.2.3 Within 28 days of the end of the reporting period the operator shall, unless otherwise agreed in writing by the Environment Agency, submit reports of the monitoring and assessment carried out in accordance with the conditions of this permit, as follows:

- (a) in respect of the parameters and emission points specified in schedule 4, table S4.1;
- (b) for the reporting periods specified in schedule 4 table S4.1 and using the forms specified in schedule 4, table S4.4; and
- (c) giving the information from such results and assessments as may be required by the forms specified in those tables.

4.2.4 The operator shall, unless notice under this condition has been served within the preceding four years, submit to the Environment Agency, within six months of receipt of a written notice, a report assessing whether there are other appropriate measures that could be taken to prevent, or where that is not practicable, to minimise pollution.

4.2.5 Within 1 month of the end of each quarter, the operator shall submit to the Environment Agency using the form made available for the purpose, the information specified on the form relating to the site and the waste accepted and removed from it during the previous quarter.

- 4.2.6 The operator shall keep records of non-waste materials leaving the site, including the type of material, the batch number, the date of export off-site and the tonnage exported on that date. These records shall be maintained for at least 2 years.
- 4.2.7 The operator shall submit an annual report detailing the efficiency of removal of non-digestible materials from feedstock prior to processing and the level of contamination in the final recovered digestate.

### 4.3 Notifications

#### 4.3.1 In the event:

- (a) that the operation of the activities gives rise to an incident or accident which significantly affects or may significantly affect the environment, the operator must immediately—
  - (i) inform the Environment Agency,
  - (ii) take the measures necessary to limit the environmental consequences of such an incident or accident, and
  - (iii) take the measures necessary to prevent further possible incidents or accidents;
- (b) of a breach of any permit condition the operator must immediately—
  - (i) inform the Environment Agency, and
  - (ii) take the measures necessary to ensure that compliance is restored within the shortest possible time;
- (c) of a breach of permit condition which poses an immediate danger to human health or threatens to cause an immediate significant adverse effect on the environment, the operator must immediately suspend the operation of the activities or the relevant part of it until compliance with the permit conditions has been restored.

4.3.2 Any information provided under condition 4.3.1 (a)(i), or 4.3.1 (b)(i) where the information relates to the breach of a limit specified in the permit, shall be confirmed by sending the information listed in schedule 5 to this permit within the time period specified in that schedule.

4.3.3 Following the detection of an issue listed in condition 4.3.1, the operator shall review and revise the management system and implement any changes as necessary to minimise the risk of re-occurrence of the issue.

4.3.4 Where the Environment Agency has requested in writing that it shall be notified when the operator is to undertake monitoring and/or spot sampling, the operator shall inform the Environment Agency when the relevant monitoring and/or spot sampling is to take place. The operator shall provide this information to the Environment Agency at least 14 days before the date the monitoring is to be undertaken.

4.3.5 The Environment Agency shall be notified within 14 days of the occurrence of the following matters, except where such disclosure is prohibited by Stock Exchange rules:

Where the operator is a registered company:

- (a) any change in the operator's trading name, registered name or registered office address; and
- (b) any steps taken with a view to the operator going into administration, entering into a company voluntary arrangement or being wound up.

Where the operator is a corporate body other than a registered company:

- (a) any change in the operator's name or address; and
- (b) any steps taken with a view to the dissolution of the operator.

In any other case:

- (a) the death of any of the named operators (where the operator consists of more than one named individual);
- (b) any change in the operator's name(s) or address(es); and
- (c) any steps taken with a view to the operator, or any one of them, going into bankruptcy, entering into a composition or arrangement with creditors, or, in the case of them being in a partnership, dissolving the partnership.

4.3.6 Where the operator proposes to make a change in the nature or functioning, or an extension of the activities, which may have consequences for the environment and the change is not otherwise the subject of an application for approval under the Regulations or this permit:

- (a) the Environment Agency shall be notified at least 14 days before making the change; and
- (b) the notification shall contain a description of the proposed change in operation.

4.3.7 The Environment Agency shall be given at least 14 days' notice before implementation of any part of the site closure plan.

4.3.8 The operator shall notify the Environment Agency as soon as is practicable, in writing of any change of medium combustion plant.

## **4.4 Interpretation**

4.4.1 In this permit the expressions listed in schedule 6 shall have the meaning given in that schedule.

4.4.2 In this permit references to reports and notifications mean written reports and notifications, except where reference is made to notification being made "immediately", in which case it may be provided by telephone.

# Schedule 1 – Operations

<b>Table S1.1 activities</b>			
<b>Activity reference</b>	<b>Activity listed in Schedule 1 of the EP Regulations</b>	<b>Description of specified activity and WFD Annex I and II operations</b>	<b>Limits of specified activity and waste types</b>
AR1	S5.4 A(1) (b) (i) Recovery or a mix of recovery and disposal of non-hazardous waste with a capacity exceeding 75 tonnes per day (or 100 tonnes per day if the only waste treatment activity is anaerobic digestion) involving biological treatment	R3: Recycling/reclamation of organic substances which are not used as solvents	From receipt of waste through to digestion and recovery of by-products (waste treated by anaerobic digestion).  Anaerobic digestion of waste in two anaerobic digesters followed by burning of biogas produced from the process. Anaerobic digestion shall be limited to 276m <sup>3</sup> /day.  Waste types suitable for acceptance are limited to those specified in Table S2.2.
AR2	S5.4 A(1)(a)(i) Disposal of non-hazardous waste with a capacity exceeding 50 tonnes per day involving biological treatment	D8: Biological treatment resulting in final compounds or mixtures which are discarded by any of the operations numbered D1 to D12	From the receipt of waste waters generated only from the site sludge treatment activities through to biological treatment via a liquor treatment plant which involves aeration before discharge of waste waters to the waste water treatment works.  Liquor treatment plant (LTP) consisting of four aeration blowers and two concentric storage tanks.
<b>Directly Associated Activity</b>			
AR3	Storage of waste pending recovery or disposal	R13: Storage of waste pending the operations numbered R1 and R3 (excluding temporary storage, pending collection, on the site where it is produced)	Undertaken in relation to Activity AR1.  From the receipt of permitted waste to pre-treatment and despatch for anaerobic digestion on site.  Storage of residual wastes from pre-treatment to despatch off-site for recovery.  Storage of waste in enclosed equipment and tanks fitted with appropriate odour abatement and on an impermeable surface with a sealed drainage system.  Waste types suitable for acceptance are limited to those specified in Table S2.2.
AR4	Physical treatment for the purpose of recycling	R3: Recycling/reclamation of organic substances	Undertaken in relation to Activity AR1.

<b>Table S1.1 activities</b>			
<b>Activity reference</b>	<b>Activity listed in Schedule 1 of the EP Regulations</b>	<b>Description of specified activity and WFD Annex I and II operations</b>	<b>Limits of specified activity and waste types</b>
		which are not used as solvents	<p>From the receipt of waste to despatch for anaerobic digestion or despatch off site for recovery.</p> <p>Dilution of incoming wastes using final waste waters from the wastewater treatment works to aid pre-treatment and digestion only.</p> <p>Pre-treatment of waste in enclosed equipment and tanks fitted with appropriate odour abatement and on an impermeable surface with a sealed drainage system, including shredding, sorting, screening, compaction, baling, mixing and maceration.</p> <p>Post-treatment of digestate in enclosed equipment and tanks fitted with appropriate odour abatement and on an impermeable surface with a sealed drainage system, including separation, screening to remove contraries, centrifuge or pressing and addition of thickening agents (polymers) or drying for use as a fertiliser or soil conditioner (drying for the purpose of use as a fuel is not permitted).</p> <p>Gas cleaning by biological or physical (carbon filtration) or chemical scrubbing.</p> <p>Waste types suitable for acceptance are limited to those specified in Table S2.2.</p>
AR5	Steam and electrical power supply	R1: Use principally as a fuel to generate energy	<p>Undertaken in relation to Activity AR1.</p> <p>From the receipt of biogas produced at the on-site anaerobic digestion process to combustion with the release of combustion gases.</p> <p>Combustion of biogas in one combined heat and power (CHP) engine with a thermal input of 1.79 MWth.</p> <p>Combustion of biogas or gas oil in one auxiliary boiler with a thermal input of 1.11 MWth.</p> <p>Operation of 0.64 MWth emergency generator fuelled on diesel. Operation of the emergency generator shall be limited to less</p>

<b>Table S1.1 activities</b>			
<b>Activity reference</b>	<b>Activity listed in Schedule 1 of the EP Regulations</b>	<b>Description of specified activity and WFD Annex I and II operations</b>	<b>Limits of specified activity and waste types</b>
			than 50 hours per annum for testing purposes only.
AR6	Emergency flare operation	D10: Incineration on land	<p>Undertaken in relation to Activity AR1.</p> <p>From the receipt of biogas produced at the on-site anaerobic digestion process to incineration with the release of combustion gases.</p> <p>There shall be no venting or flaring of gas for disposal.</p> <p>Use of one auxiliary flare required only during periods of breakdown or maintenance of the CHP engine and/or auxiliary boilers.</p>
AR7	Raw material storage	Storage of raw materials including lubrication oil, antifreeze, propane, ferric chloride, activated carbon, diesel.	From the receipt of raw materials to despatch for use within the facility.
AR8	Gas storage	R13: Storage of waste pending any of the operations numbered R1 to R12 (excluding temporary storage, pending collection, on the site where it is produced)	<p>Undertaken in relation to Activity AR1.</p> <p>Storage of biogas produced from on-site anaerobic digestion of permitted waste in one biogas holder or roof space of digesters.</p> <p>From the receipt of biogas produced at the on-site anaerobic digestion process to despatch for use within the facility.</p> <p>Emissions of unburnt biogas shall be minimised.</p>
AR9	Digestate storage	R13: Storage of waste pending any of the operations numbered R1 to R12 (excluding temporary storage, pending collection, on the site where it is produced)	<p>Undertaken in relation to Activity AR1.</p> <p>From the receipt of processed digestate produced from the on-site anaerobic digestion process to despatch for use off-site.</p> <p>Storage of processed liquid digestate in two post digestion storage tanks on an impermeable surface with a sealed drainage system.</p>

<b>Table S1.1 activities</b>			
<b>Activity reference</b>	<b>Activity listed in Schedule 1 of the EP Regulations</b>	<b>Description of specified activity and WFD Annex I and II operations</b>	<b>Limits of specified activity and waste types</b>
			Storage of processed solid digestate in uncovered bays or skips and on an impermeable surface with a sealed drainage system.
AR10	Surface water collection and storage	Collection and storage of uncontaminated roof and site surface water	From the collection of uncontaminated roof and site surface water from non-operational areas only to re-use within the facility or discharge off-site.
AR11	Air abatement	Collection and treatment of air from the buildings or plant using abatement system – [two combined biofilters/carbon filters and a carbon filter] prior to release to atmosphere.	From the collection of air from site processes to treatment and release of treated air to atmosphere.  Collection and treatment of air from the buildings, tanks or plant using abatement system – two combined biofilters/carbon filters and a carbon filter.
<b>Activity reference</b>	<b>Description of activities for waste operations</b>		<b>Limits of activities</b>
AR12 – Blending of waste for discharge to the WwTW	D13: Blending or mixing prior to submission to any of the operations numbered D1 to D12		From the receipt of waste sludges and waste liquids via tanker at the <i>head of the works</i> for storage and treatment. Treatment operations shall be limited to the blending and mixing of waste. This treatment is limited to blending and mixing without significantly altering the nature of the waste.  Blending and mixing shall not be undertaken to achieve a reaction or a dilution of contaminants.  Subject to any other requirements of this permit wastes shall be stored for no longer than 1 year prior to disposal.  Storage of waste in an enclosed tank fitted with appropriate odour abatement and on an impermeable surface with a sealed drainage system.  Waste types as specified in Table S2.3.

Table S1.2 Operating techniques		
Description	Parts	Date Received
Application EPR/WP3695HW/V006	<ul style="list-style-type: none"> <li>• Best available techniques as described in the BAT Reference Document for Waste Treatment (the BREF) and BAT conclusions.</li> <li>• Goddards Green STC, Leak Detection &amp; Repair Plan, dated March 2024</li> <li>• Goddards Green Sludge Treatment Centre Environmental Permit Application, Bioaerosol risk assessment, 790101_ERA_BioRA_GOD dated March 2024.</li> <li>• SW IED Site Condition Report – Goddards Green, 790101_MSD_SCR_GOD, dated March 2024</li> </ul>	02/04/2024
Response to a request for information dated 05/11/2024	<ul style="list-style-type: none"> <li>• 790101_NDM Response_GOD_November 2024</li> <li>• Goddards Green Sludge Waste Acceptance Procedures, Version 01, dated November 2024.</li> <li>• Goddards Green Sludge Treatment Centre Residue Management Plan, dated March 2024.</li> <li>• Process flow, 790101_MSD_Schematics_GOD, dated November 2024</li> <li>• Goddards Green Sludge Treatment Centre Accident Management Plan, dated November 2024.</li> </ul>	26/11/2024
Response to a request for information dated 27/11/2024	<ul style="list-style-type: none"> <li>• 790101_NDM Response_GOD_November 2024 v2</li> <li>• Section 6 of <i>Goddards Green Sludge Treatment Centre Environmental Permit Application, Main Supporting Document, 790101_MSD_Main_GOD</i>, dated December 2024 – in response to section 3a – technical standards, Part C3 of the application form.</li> <li>• Goddards Green Sludge Treatment Centre Environmental Permit Application, Environmental Risk Assessment, dated December 2024.</li> <li>• Goddards Green STC Odour Management Plan, 790101_ERA_OdourMP_GOD, V5, dated December 2024.</li> <li>• Site containment report 790101-MMD-IED-GOD-CA-C-001-IED ABDA tool PO4 IED Risk Register- Goddards Green, dated 28/11/2024.</li> </ul>	04/12/2024
Additional information	<ul style="list-style-type: none"> <li>• Goddards Green, Air quality assessment to accompany permit application, dated 20 December 2024</li> </ul>	20/12/2024

Table S1.3 Improvement programme requirements		
Reference	Requirement	Date
<b>Improvement condition for secondary containment design</b>		
IC1	The operator shall submit a written 'secondary containment implementation plan' and shall obtain the Environment Agency's written approval to it. The plan shall contain the finalised designs and an implementation schedule for the identified secondary containment systems proposed in the document 790101-MMD-IED-GOD-CA-C-001-IED ABDA tool PO4 IED Risk Register – Goddards Green, dated	31/03/2025  Implementation of all required and approved containment

<b>Table S1.3 Improvement programme requirements</b>		
<b>Reference</b>	<b>Requirement</b>	<b>Date</b>
	<p>28/11/2024. The finalised design(s) and specifications shall be produced by appropriate competent individuals (qualified civil or structural engineer), in accordance with the risk assessment methodology detailed within CIRIA C736 (2014) guidance. The plan shall include but not be limited to the following components:</p> <ul style="list-style-type: none"> <li>• An updated BAT assessment with specific regard to BAT 19 of the Waste Treatment BREF to demonstrate how the finalised designs based on the proposed secondary containment in the document <i>790101-MMD-IED-GOD-CA-C-001-IED ABDA tool PO4 IED Risk Register – Goddards Green</i>, dated 28/11/2024 meets BAT 19.</li> <li>• An assessment of the suitability for providing containment when subjected to the dynamic and static loads caused by catastrophic tank failure.</li> <li>• Finalised designs and specifications of the proposed secondary containment proposal completed by appropriate competent individuals.</li> <li>• A program of works with timescales for the commissioning of the secondary containment systems to comply with CIRIA C736 (2014) guidance, or equivalent.</li> <li>• An updated site and infrastructure plan.</li> <li>• A preventative maintenance and inspection regime.</li> </ul> <p>The plan shall be implemented in accordance with the Environment Agency's prior written approval.</p>	improvements must be completed by 31/03/2025.
<b>Improvement conditions for primary containment tanks</b>		
IC2	<p>The operator shall submit a written 'primary containment plan' and shall obtain the Environment Agency's written approval to it. The plan shall contain the results of an inspection and program of works undertaken by an appropriately qualified engineer and shall assess the extent, design specification and condition of primary containment systems (including associated pipework) where polluting liquids and solids are being stored, treated, and/or handled.</p> <p>The plan shall include, but not be limited to:</p> <ul style="list-style-type: none"> <li>• An assessment of the physical condition of all primary containment systems (storage and treatment vessels and associated pipework) using a Written Scheme of Examination and their suitability for providing primary containment when subjected to dynamic and static loads.</li> <li>• A program of works with timescales for the implementation of individual improvement measures necessary to demonstrate that the primary containment is fit for purpose or alternative appropriate measures to ensure all polluting materials will be contained on site.</li> <li>• A preventative maintenance and inspection regime.</li> </ul> <p>The plan shall be implemented in accordance with the Environment Agency's written approval.</p>	Within 12 months of permit issue or such other date as agreed in writing with the Environment Agency.
<b>Improvement conditions for establishing an inventory of liquid waste water discharged from anaerobic digestion and associated activities (AR1 – AR11)</b>		

<b>Table S1.3 Improvement programme requirements</b>		
<b>Reference</b>	<b>Requirement</b>	<b>Date</b>
IC3a	<p>The operator shall submit a sampling programme in relation to waste water streams and shall obtain the Environment Agency's written approval to it. The sampling programme shall be designed to fully characterise the waste waters discharged to Goddards Green wastewater treatment works (WwTW) from emission points S1, S2, S3, S4, S6, S7, S8, S9, S10, S11, S12, and S13 in table S3.2 of this permit.</p> <p>The programme shall include but not be limited to a methodology for a minimum of one 24-hour flow proportional sample a month, for each emission point, for a period of 12 months. The programme shall detail the sampling methods/standards used. Sampling methods shall be in accordance with BAT conclusion 20 of the Waste Treatment BREF. The programme shall include the National Grid Reference (NGR) of the sampling point(s) location(s).</p> <p>The programme shall establish the characteristics of the liquid waste water streams and shall include as a minimum for each emission point:</p> <ul style="list-style-type: none"> <li>• Average values and variability of flow, pH, temperature and conductivity.</li> <li>• Average concentration and load values of all relevant substances and their variability.</li> <li>• Data on bioeliminability.</li> </ul> <p>The programme shall sample for all relevant substances and must include:</p> <ul style="list-style-type: none"> <li>• Hydrocarbon oil index (HOI) (mg/l)</li> <li>• Free cyanide (CN<sup>-</sup>) (mg/l)</li> <li>• Adsorbable organically bound halogens (AOX) (mg/l)</li> <li>• Metals and metalloids; arsenic (expressed as As), cadmium (expressed as Cd), chromium (expressed as Cr), hexavalent chromium (expressed as Cr(VI)), copper (expressed as Cu), lead (expressed as Pb), nickel (expressed as Ni), mercury (expressed as Hg), zinc (expressed as Zn) (µg/l)</li> </ul> <p>The operator shall submit the collected monitoring data in writing to the Environment Agency according to agreed reporting periods.</p> <p>The sampling programme shall be produced in accordance with Environment Agency guidance:</p> <ul style="list-style-type: none"> <li>• Specific substances and priority hazardous substances – <i>Surface water pollution risk for your environmental permit</i> <u>Surface water pollution risk assessment for your environmental permit - GOV.UK (www.gov.uk)</u>.</li> <li>• <i>Monitoring discharges to water: guidance on selecting a monitoring approach</i> <u>Monitoring discharges to water: guidance on selecting a monitoring approach - GOV.UK (www.gov.uk)</u></li> </ul> <p>The monitoring programme shall be carried out and the monitoring data submitted in accordance with the Environment Agency's written approval.</p>	<p>Within 2 months of issue of this permit or such other date as agreed in writing with the Environment Agency.</p>
<p><b>Improvement conditions for indirect discharges to water discharged from anaerobic digestion and associated activities (AR1 – AR11)</b></p>		

<b>Table S1.3 Improvement programme requirements</b>		
<b>Reference</b>	<b>Requirement</b>	<b>Date</b>
IC3b	<p>The operator shall submit a report for approval by the Environment Agency, following completion of the sampling programme approved under IC3a. The report shall include but not be limited to a summary of the sample results, a completed H1 risk assessment(s) and modelling outputs where appropriate.</p> <p>The operator shall provide conclusions on whether the waste waters discharged from S1, S2, S3, S4, S6, S7, S8, S9, S10, S11, S12, and S13 will have any adverse impact on the receiving waters once discharged from Goddards Green WwTW. An assessment shall be made against the parameters specified in the relevant environmental standards as specified within Environment Agency guidance as follows:</p> <ul style="list-style-type: none"> <li>• Specific substances and priority hazardous substances – <i>Surface water pollution risk for your environmental permit</i> <a href="#">Surface water pollution risk assessment for your environmental permit - GOV.UK (www.gov.uk)</a>.</li> <li>• Sanitary substances – <i>H1 annex D2: assessment of sanitary and other pollutants in surface water discharges 1076_14 H1 Annex D2 - Assessment of sanitary and other pollutants within Surface Water Discharges</i> (<a href="#">publishing.service.gov.uk</a>)</li> </ul> <p>The report shall include any proposals and/or additional measures required to prevent or minimise any significant emissions from the installation along with timescales for implementation.</p>	<p>Within 15 months of the Environment Agency's written approval of the sampling programme submitted under IC3a or such other date as agreed in writing with the Environment Agency.</p>
IC3c	<p>The operator shall implement any improvements identified within the report approved under IC3b in accordance with the Environment Agency's written approval and provide written confirmation to the Environment Agency that the improvements have been completed.</p> <p>(Note that approval of reports under this improvement condition does not preclude the need for permit variation application(s) to operate the improvements identified in the report and/or include any necessary emission limit values).</p>	<p>Within 6 months of the report in relation to IC3b being approved by the Environment Agency or such other date as agreed in writing with the Environment Agency.</p>
<b>Improvement condition to address methane slip emissions from gas engines burning biogas</b>		
IC4	<p>The operator shall submit a written plan for approval by the Environment Agency which establishes the methane emissions in the exhaust gas from engines burning biogas and or biomethane and compare these to the manufacturer's specification and benchmark levels.</p> <p>The plan shall develop proposals to assess the potential for methane slip and take corrective actions where emissions of methane above the manufacturer's specification are identified.</p> <p>The operator shall establish methane emissions in the exhaust gas and methane slip using the following standards:</p> <ul style="list-style-type: none"> <li>• EN ISO 25139</li> <li>• EN ISO 25140</li> </ul>	<p>Within 6 months of permit issue or such other date as agreed in writing with the Environment Agency.</p>

<b>Table S1.3 Improvement programme requirements</b>		
<b>Reference</b>	<b>Requirement</b>	<b>Date</b>
<b>Improvement condition for review of effectiveness of abatement plant</b>		
IC5	<p>The operator shall carry out a review of the abatement plant (the combined carbon filter/biofilter at emission point A05, the carbon filter at emission point A06 and the combined carbon filter/biofilter at emission point A07) on site, to determine whether the measures have been effective and adequate to prevent or where this is not possible, minimise emissions released to air (including but not limited to Hydrogen Chloride (HCl), Total Volatile Organic compounds (TVOC's), odour and ammonia.</p> <p>The operator shall submit a written report to the Environment Agency following this review for assessment and approval.</p> <p>The report shall include but not be limited to the following aspects:</p> <ul style="list-style-type: none"> <li>• Full investigation and characterisation of the waste gas streams.</li> <li>• Evidence that the emission of pollutants in the waste gas stream is being prevented or where this is not possible minimised by the abatement plant.</li> <li>• Abatement stack monitoring (including but not limited to Hydrogen Chloride (HCl), Total Volatile Organic compounds (TVOC's), odour and ammonia.</li> <li>• Abatement process monitoring results (including but not limited to Hydrogen Chloride (HCl), Total Volatile Organic compounds (TVOC's), odour and ammonia.</li> <li>• Details of air quality quantitative impact assessment including modelling and a proposal for site-specific "action levels" (including but not limited to odour concentration, hydrogen sulphide, ammonia, Hydrogen chloride (HCl), and TVOC's).</li> <li>• Odour monitoring results at the site boundary.</li> <li>• Records of odour complaints and odour related incidents.</li> <li>• Recommendations for improvement including the replacement or upgrading of the abatement plant.</li> <li>• Timescales for implementation of improvements to the abatement plant.</li> </ul> <p>The operator shall implement the improvements in line with the timescales as approved by the Environment Agency.</p> <p>(Note that approval of reports under this improvement condition does not preclude the need for permit variation applications to implement the improvements identified in the report. Any variation may include the insertion of necessary emission limit values).</p>	<p>Within 6 months of permit issue or such other date as agreed in writing with the Environment Agency.</p>
<b>Improvement condition for establishing an inventory of liquid waste water discharged from the Head of works waste operation activity (AR12)</b>		
IC6a	<p>The operator shall submit a sampling programme in relation to liquid/sludge waste streams that are to be discharged to emission point S5 and shall obtain the Environment Agency's written approval to it. The sampling programme shall be designed to fully characterise the liquid/sludge waste discharged to Goddards Green WwTW from emission point S5 in table S3.2 of the permit.</p>	<p><b>Submission of sampling programme</b></p> <p>Within 3 months from the issue of this permit or such other</p>

Table S1.3 Improvement programme requirements		
Reference	Requirement	Date
	<p>The programme shall include but not be limited to a methodology for gathering a representative chemical pollutant suite of analysis of all incoming wastes that will be discharged to, emission point S5, for a period of 12 months.</p> <p>A minimum of 12 spot samples from each waste producer shall be taken provided the liquid/sludge waste is appropriately mixed, homogeneous, and is representative of the specific waste stream being discharged.</p> <p>The programme shall detail the sampling methods/standards and limits of detection (LOD)/minimum reporting values (MRV) used. Waste Characterisation sampling methods shall be in accordance with guidance, <i>Non-hazardous and inert waste: appropriate measures for permitted facilities</i> and <i>Biological waste treatment: appropriate measures for permitted facilities</i>, and shall fully characterise the liquid/sludge waste streams, including as a minimum for each waste stream the:</p> <ul style="list-style-type: none"> <li>• Maximum, minimum and average values and variability of flow, pH, temperature and conductivity. Flow rates shall be based upon the capability of the discharging tanker.</li> <li>• Chemical names, the units of measurement, maximum, minimum and average concentration and load values of all substances that have an environmental quality standard (EQS) or ecotoxic properties, and their variability.</li> <li>• Total and dissolved metals data</li> <li>• Data on bioeliminability.</li> <li>• Information on the liquid/sludge waste stream source</li> <li>• National Grid Reference (NGR) of the sampling point</li> </ul> <p>The sampling programme shall be produced in accordance with the following Environment Agency guidance:</p> <ul style="list-style-type: none"> <li>• Section 3 (Waste pre-acceptance, acceptance and tracking) of guidance <i>Non-hazardous and inert waste: appropriate measures for permitted facilities</i></li> <li>• Section 6 (Waste pre-acceptance, acceptance and tracking) of guidance <i>Biological waste treatment: appropriate measures for permitted facilities</i></li> <li>• Specific substances and priority hazardous substances – <i>Surface water pollution risk for your environmental permit Surface water pollution risk assessment for your environmental permit - GOV.UK (www.gov.uk)</i>.</li> <li>• <i>Monitoring discharges to water: guidance on selecting a monitoring approach Monitoring discharges to water: guidance on selecting a monitoring approach - GOV.UK (www.gov.uk)</i></li> <li>• <i>Monitoring discharges to water: CEN and ISO monitoring methods Monitoring discharges to water: CEN and ISO monitoring methods - GOV.UK (www.gov.uk)</i></li> </ul>	<p>date as may be agreed in writing with the Environment Agency.</p> <p><b>Quarterly sampling data results at three monthly intervals</b></p> <p>Quarter 1 Initial sampling data results submitted 3 months from the date the Environment Agency approves the sampling programme, or other such date as may be agreed in writing with the Environment Agency.</p> <p>Quarter 2 Sampling data results submitted 6 months from the date the Environment Agency approves the sampling programme, or other such date as may be agreed in writing with the Environment Agency.</p> <p>Quarter 3</p>

<b>Table S1.3 Improvement programme requirements</b>		
<b>Reference</b>	<b>Requirement</b>	<b>Date</b>
	The sampling programme shall be carried out as approved by the Environment Agency and the sampling data shall be submitted in accordance with the Environment Agency's written approval.	<p>Sampling data results submitted 9 months from the date the Environment Agency approves the sampling programme, or other such date as may be agreed in writing with the Environment Agency.</p> <p>Quarter 4 Final sampling data results submitted 12 months from the date the Environment Agency approves the sampling programme, or other such date as may be agreed in writing with the Environment Agency.</p>
<b>Improvement conditions for indirect discharges to water discharged from the Head of works waste operation activity (AR12)</b>		
IC6b	<p>The operator shall submit a report for audit and approval by the Environment Agency, following completion of the sampling programme referred to in IC6a. The report shall include but not be limited to:</p> <ul style="list-style-type: none"> <li>• the raw data used to undertake the screening,</li> <li>• a summary of the sample results,</li> <li>• a completed H1 risk assessment or equivalent risk assessments and</li> <li>• modelling outputs where appropriate,</li> </ul> <p>in order to assess the impact from each individual liquid/sludge waste stream discharged to point S5.</p> <p>The operator shall provide conclusions on whether the liquid/sludge wastes discharged to emission point S5 will have any adverse impact on the receiving waters once discharged from Goddards Green WwTW. An assessment shall be made against the parameters identified in IC6a and against the relevant environmental quality standards (EQS – or Predicted No Effect Concentrations (PNECs) for substances that have</p>	<p>Within 6 months of the submission of the final sampling data results submitted under IC6a or such other date as may be agreed in writing with the Environment Agency.</p>

<b>Table S1.3 Improvement programme requirements</b>		
<b>Reference</b>	<b>Requirement</b>	<b>Date</b>
	<p>ecotoxic properties but no established EQS) as specified within Environment Agency guidance as follows:</p> <ul style="list-style-type: none"> <li>• Specific substances and priority hazardous substances – <i>Surface water pollution risk for your environmental permit</i> <a href="#">Surface water pollution risk assessment for your environmental permit - GOV.UK (www.gov.uk)</a>.</li> <li>• Sanitary substances – <i>H1 annex D2: assessment of sanitary and other pollutants in surface water discharges 1076_14 H1 Annex D2 - Assessment of sanitary and other pollutants within Surface Water Discharges</i> (<a href="#">publishing.service.gov.uk</a>).</li> <li>• H1 risk assessment tool ADMLC <a href="https://admlc.com/h1-tool/">https://admlc.com/h1-tool/</a></li> </ul> <p>The report shall include proposals for any additional measures/abatement required to prevent or minimise any significant emissions from the waste operation.</p> <p>The operator shall implement the proposals in the report in accordance with the timescales as approved in writing by the Environment Agency.</p>	
IC6c	<p>The operator shall submit a report that provides written confirmation to the Environment Agency that the proposed improvements identified within the report approved under IC6b have been implemented and completed in accordance with the Environment Agency's written approval.</p> <p>(Note that approval of reports under this improvement condition does not preclude the need for permit variation application(s) to operate the improvements identified in the report and/or include any necessary emission limit values.)</p>	<p>Within 6 months of the report in relation to IC6b being submitted to the Environment Agency or such other date as agreed in writing with the Environment Agency.</p>
<b>Improvement condition for monitoring digestate stability</b>		
IC7	<p>The operator shall submit a written report, with supporting evidence, on the stability of whole digestate, (i.e. prior to dewatering), and obtain the Environment Agency's written approval to it.</p> <p>The report shall assess whether biogas emissions from post digestion storage or treatment of digestate is likely to have been minimised. The report shall include but not be limited to:</p> <ul style="list-style-type: none"> <li>• An assessment of residual biogas potential in accordance with the OFW004-005 [N6] methodology specified by <i>BSI PAS 110: Producing Quality Anaerobic Digestate</i> or an equivalent methodology for assessing residual biogas potential of the digestate.</li> </ul>	<p>Within 6 months of permit issue or such other date as agreed in writing with the Environment Agency.</p>
<b>Improvement condition for review of pressure release valves</b>		
IC8	<p>The operator shall submit a written 'pressure release valve review' report and shall obtain the Environment Agency's written approval to it. The report shall contain the results of an inspection and program of works undertaken by an appropriately qualified engineer and shall assess the design specification, condition and suitability of pressure</p>	<p>Within 6 months of permit issue or other date as agreed in</p>

Table S1.3 Improvement programme requirements		
Reference	Requirement	Date
	<p>release valves and associated pipework on tanks where there is a risk of over or under pressurisation.</p> <p>The report shall review the pressure relief and vacuum release valves (PVRV) in line with the criteria set out in section 8.11 (Pressure and vacuum relief control – AD and TAD plants) of Environment Agency guidance, <i>Biological waste treatment: appropriate measures for permitted facilities</i>.</p> <p>The report shall also include, but not be limited to:</p> <ul style="list-style-type: none"> <li>• A program of works with timescales for the implementation of identified individual improvement measures necessary to demonstrate that the PVRVs are fit for purpose.</li> <li>• A preventative maintenance and inspection regime.</li> </ul> <p>The report shall be implemented in accordance with the Environment Agency's written approval.</p>	<p>writing with the Environment Agency.</p>

Table S1.4 Pre-operational measures		
Reference	Operation	Pre-operational measures
<p><b>Pre-operational condition to submit an assessment of the fate and impact of new waste streams not previously accepted, and that change the risk of the waste stream to be discharged under existing waste codes as specified in Table S2.3</b></p>		
PO1	AR12	<p>Prior to accepting new waste streams under activity AR12 for existing permitted waste codes identified in table S2.3 for discharge into the head of works (emission point S5), the operator shall undertake an assessment of the fate and impact on the receiving waters by updating the environmental risk assessment established in IC6b, the additional measures/abatement implementation plan as approved under IC6b and in accordance with the sampling plan as approved under IC6a.</p> <p>Acceptance of the new liquid/sludge waste streams under existing waste codes shall only commence following submission of the above risk assessment and any recommendations for additional measure/abatement considered to be required, written approval from the Environment Agency and the submission of written confirmation to the Environment Agency that any additional measures/abatement considered to be required have been implemented and completed as approved.</p>

## Schedule 2 – Waste types, raw materials and fuels

Raw materials and fuel description	Specification
--	--

Maximum quantity	Annual throughput shall not exceed 328,233 tonnes
<b>Exclusions</b>	<p>Wastes having any of the following characteristics shall not be accepted:</p> <ul style="list-style-type: none"> <li>• Biodegradable wastes that is significantly contaminated with non-compostable or digestible contaminants, in particular plastic and litter shall be no more than 5% w/w and shall be as low as reasonably practicable by 31 December 2025.</li> <li>• Wastes containing wood-preserving agents or other biocides and post-consumer wood.</li> <li>• Wastes containing persistent organic pollutants.</li> <li>• Wastes containing Japanese Knotweed or other invasive plant species listed in the Invasive Species (Amendment etc.) (EU Exit) Regulations 2019.</li> <li>• Manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> <li>• Pest infested waste.</li> </ul>
Waste code	Description
<b>19</b>	<b>Wastes from waste management facilities, off-site waste water treatment plants and the preparation of water intended for human consumption and water for industrial use</b>
<b>19 02</b>	<b>wastes from physico/chemical treatments of waste (including dechromatation, decyanidation, neutralisation)</b>
19 02 06	sludges from physico/chemical treatment other than those mentioned in 19 02 05 (sewage sludge only)
<b>19 08</b>	<b>wastes from waste water treatment plants not otherwise specified</b>
19 08 05	sludges from the treatment of urban waste water

<b>Table S2.3 Permitted waste types and quantities for non-hazardous waste storage and treatment (Head of Works) (AR12)</b>	
<b>Maximum quantity</b>	<b>Annual throughput shall not exceed 150,000 tonnes</b>
<b>Exclusions</b>	<p>Wastes having any of the following characteristics shall not be accepted:</p> <ul style="list-style-type: none"> <li>• Wastes containing persistent organic pollutants.</li> <li>• Wastes containing Japanese Knotweed or other invasive plant species listed in the Invasive Species (Amendment etc.) (EU Exit) Regulations 2019.</li> <li>• Manures, slurries and spoiled bedding and straw from farms where animals have notifiable diseases as stipulated in the Animal By-Products (Enforcement) (England) Regulations 2013.</li> <li>• Pest infested waste.</li> <li>• Hazardous waste.</li> <li>• Solid wastes (only wastes of liquid free flowing form shall be accepted).</li> </ul>
<b>Waste code</b>	<b>Description</b>
<b>16</b>	<b>wastes not otherwise specified in the list</b>
<b>16 10</b>	aqueous liquid wastes destined for off-site treatment
16 10 02	aqueous liquid wastes other than those mentioned in 16 10 01

## Schedule 3 – Emissions and monitoring

Table S3.1 Point source emissions to air – emission limits and monitoring requirements						
Emission point ref. & location	Source	Parameter	Limit (including unit)	Reference period	Monitoring frequency	Monitoring standard or method
<b>Existing medium combustion plant which are engines fuelled on biogas (1MW to 5 MW)</b>						
A02 on site plan A in Schedule 7	CHP engine (1.79 MWth) [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	500 mg/m <sup>3</sup>	Average over sample period	Annual	BS EN 14792
		Sulphur dioxide	350 mg/m <sup>3</sup> [note 2]			BS EN 14791 or CEN TS 17021 or by calculation based on fuel sulphur
		Sulphur dioxide	162 mg/m <sup>3</sup> [note 3]			
		Carbon monoxide	1400 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	No limit set			--
<b>New medium combustion plant other than engines and gas turbines fuelled on biogas (1 MW to 5 MW)</b>						
A14 on site plan A in schedule 7	THP Boiler (1.11 MWth) (when fuelled on biogas)	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	200mg/m <sup>3</sup>	Average over sample period	Annual	BS EN 14792
		Sulphur dioxide	100 mg/m <sup>3</sup>			BS EN 14791 or CEN TS 17021 or by calculation based on fuel sulphur
		Carbon monoxide	No Limit set			BS EN 15058
<b>New medium combustion plant other than engines and gas turbines fuelled on gas oil (1 MW to 5 MW)</b>						
	THP Boiler (1.11 MWth)	Oxides of Nitrogen	200 mg/m <sup>3</sup>	Average over	Annual	BS EN 14792

**Table S3.1 Point source emissions to air – emission limits and monitoring requirements**

<b>Emission point ref. &amp; location</b>	<b>Source</b>	<b>Parameter</b>	<b>Limit (including unit)</b>	<b>Reference period</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>
A14 on site plan A in schedule 7	(when fuelled on gas oil)	(NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )		sample period		BS EN 15058
		Carbon monoxide	No limit set			
A04 on site plan A in schedule 7	Backup diesel generator (0.64 MWth)	--	--	--	--	--
A03 on site plan A in schedule 7	Emergency flare stack [note 1]	Oxides of Nitrogen (NO and NO <sub>2</sub> expressed as NO <sub>2</sub> )	150 mg/m <sup>3</sup>	Average over sample period	[note 4]	BS EN 14792
		Carbon monoxide	50 mg/m <sup>3</sup>			BS EN 15058
		Total VOCs	10 mg/m <sup>3</sup>			BS EN 12619
A10 – A11 on site plan A in schedule 7	Digesters 1- 2 pressure relief valves	Biogas release and operational events	No limit set	Recorded duration and frequency	Daily inspection	--
A08-A09 on site plan A in schedule 7	Post digestion storage tanks 1- 2 pressure relief valves	Waste gas release	No limit set	Recorded duration and frequency	Daily inspection	--
A12 on site plan A in Schedule 7	Biogas holder pressure relief valve	Biogas release and operational events	No limit set	Recorded duration and frequency	Daily inspection	--
A15 on site plan A in Schedule 7	Thermal hydrolysis plant pressure relief valves	Biogas release and operational events	No limit set	Recorded duration and frequency	Daily inspection	--
A05 on site plan A in Schedule 7	Channelled emissions to air from OCU1 – the combined biofilter/carbon filter serving the centrifuge building and thickened sludge tank [note 5]	Hydrogen sulphide	No limit set	Average over sample period	Once every 6 months	CEN TS 13649 for sampling  NIOSH 6013 for analysis
		Odour concentration	No limit set	--	Once every 6 months	BS EN 13725
		Ammonia	20 mg/m <sup>3</sup>	Average over sample period	Once every 6 months	EN ISO 21877

**Table S3.1 Point source emissions to air – emission limits and monitoring requirements**

<b>Emission point ref. &amp; location</b>	<b>Source</b>	<b>Parameter</b>	<b>Limit (including unit)</b>	<b>Reference period</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>
A05 on site plan A in Schedule 7	Channelled emissions to air from treatment of water-based liquid waste	Hydrogen chloride (HCl)	5 mg/m <sup>3</sup> [note 6]	Average over sample period	Once every 6 months	EN 1911
		TVOC	20 mg/m <sup>3</sup> [note 6]	Average over sample period	Once every 6 months	EN 12619
A06 on site plan A in Schedule 7	Channelled emissions to air from OCU2 - the carbon filter serving the cess reception point [note 5]	Hydrogen sulphide	No limit set	Average over sample period	Once every 6 months	CEN TS 13649 for sampling  NIOSH 6013 for analysis
		Odour concentration	No limit set	--	Once every 6 months	BS EN 13725
		Ammonia	20 mg/m <sup>3</sup>	Average over sample period	Once every 6 months	EN ISO 21877
A06 on site plan A in Schedule 7	Channelled emissions to air from treatment of water-based liquid waste	Hydrogen chloride (HCl)	5 mg/m <sup>3</sup> [note 6]	Average over sample period	Once every 6 months	EN 1911
		TVOC	20 mg/m <sup>3</sup> [note 6]	Average over sample period	Once every 6 months	EN 12619
A07 on site plan A in Schedule 7	Channelled emissions to air from OCU3 – the combined biofilter/carbon filter serving the THP silo and sludge storage tanks [note 5]	Hydrogen sulphide	No limit set	Average over sample period	Once every 6 months	CEN TS 13649 for sampling  NIOSH 6013 for analysis
		Odour concentration	No limit set	--	Once every 6 months	BS EN 13725
		Ammonia	20 mg/m <sup>3</sup>	Average over sample period	Once every 6 months	EN ISO 21877
A07 on site plan A in Schedule 7	Channelled emissions to air from treatment of water-based liquid waste	Hydrogen chloride (HCl)	5 mg/m <sup>3</sup> [note 6]	Average over sample period	Once every 6 months	EN 1911
		TVOC	20 mg/m <sup>3</sup> [note 6]	Average over sample period	Once every 6 months	EN 12619

<b>Table S3.1 Point source emissions to air – emission limits and monitoring requirements</b>						
<b>Emission point ref. &amp; location</b>	<b>Source</b>	<b>Parameter</b>	<b>Limit (including unit)</b>	<b>Reference period</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>
Vents from tanks	Oil/Fuel Storage tank(s)	No parameter set	No limit set	--	--	--

Note 1 – These emission limits are based on normal operating conditions and load - temperature 0°C (273 K); pressure 101.3 kPa and oxygen 5% (for gas engines burning biogas) and oxygen 3% (for emergency flares and medium combustion plants other than engines and gas turbines burning biogas such as boilers).

Note 2 – This emission limit applies until 31 December 2029, unless the gas engine is replaced.

Note 3 – This emission limit applies from 1 January 2030, unless otherwise advised by the Environment Agency.

Note 4– Monitoring to be undertaken in the event the emergency flare has been operational for more than 10 per cent of a year (876 hours). Record of operating hours to be submitted annually to the Environment Agency.

Note 5 - The monitoring of NH<sub>3</sub> and H<sub>2</sub>S can be used as an alternative to the monitoring of the odour concentration subject to the outcome of IC5.

Note 6 – Monitoring and limits only apply where the substance concerned is identified as relevant to the waste gas inventory IC5.

<b>Table S3.2 Point source emissions to sewer, effluent treatment plant or other transfers off-site – emission limits and monitoring requirements</b>						
<b>Emission point ref. &amp; location</b>	<b>Source</b>	<b>Parameter [Note 1]</b>	<b>Limit (incl. unit) [Note 1]</b>	<b>Reference Period</b>	<b>Monitoring frequency [Note 2]</b>	<b>Monitoring standard or method</b>
S13 on site plan B in schedule 7. Emission to The River Arun via Goddards Green WwTW	Liquor Treatment Plant effluent (consisting of all site process liquors and surface water – from emission points S1-S4 and S6-S12 on site plan B in schedule 7)	Oil and grease	No visible oil or grease	--	Weekly	Visual assessment
		Benzene, toluene, ethylbenzene, xylene (BTEX)	--	Spot sample or flow-proportional composite sample	Once every month	EN ISO 15680
		Hydrocarbon oil index (HOI)	10 mg/l		Once every day	EN ISO 9377-2
		Free cyanide (CN <sup>-</sup> )	0.1 mg/l			EN ISO 14403-1 or EN ISO 14403-2
		Adsorbable organically bound halogens (AOX)	1 mg/l			EN ISO 9562
		Arsenic (As)	0.1 mg/l	Spot sample or flow-proportional	Once every day	EN ISO 11885, EN ISO 17294-2 or
		Cadmium (Cd)	0.1 mg/l			
		Chromium (Cr)	0.3 mg/l			

**Table S3.2 Point source emissions to sewer, effluent treatment plant or other transfers off-site – emission limits and monitoring requirements**

Emission point ref. & location	Source	Parameter [Note 1]	Limit (incl. unit) [Note 1]	Reference Period	Monitoring frequency [Note 2]	Monitoring standard or method
		Copper (Cu)	0.5 mg/l	composite sample		EN ISO 15586
		Lead (Pb)	0.3 mg/l			
		Nickel (Ni)	1 mg/l			
		Zinc (Zn)	2 mg/l			
		Mercury (Hg)	10 µg/l	Spot sample or flow-proportional composite sample	Once every day	EN ISO 17852 or EN ISO 12846
		Manganese (Mn)	--			EN ISO 11885, EN ISO 17294-2 or EN ISO 15586
		Hexavalent chromium (Cr(VI))	0.1 mg/l			EN ISO 10304-3 or EN ISO 23913
	PFOA and PFOS	--		Once every six months	--	
S5 on site plan B in schedule 7. Emission to The River Arun via Goddards Green WwTW	Discharge of tankered waste waters to the head of works	-- [Note 3]	-- [Note 3]	-- [Note 3]	-- [Note 3]	-- [Note 3]

Note 1 – Monitoring and limits only apply where the substance concerned is identified as relevant in the waste water inventory as determined by improvement condition IC3a and IC3b.

Note 2 – Monitoring frequency as specified unless the Environment Agency has agreed in writing other alternative appropriate monitoring frequencies.

Note 3 – Emission limits and monitoring requirements to be set following completion of IC6a, IC6b.

<b>Table S3.3 Process monitoring requirements</b>				
<b>Emission point reference or source or description of point of measurement</b>	<b>Parameter</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
Digester feed (digestion process)	pH	As described in site operating techniques	As described in site operating techniques	Process monitoring to be recorded using a SCADA system where relevant.
	Alkalinity			
	Temperature			
	Hydraulic loading rate			
	Organic loading rate			
	Volatile fatty acids concentration			
	Ammonia			
Liquid /foam level				
Biogas in digester [& biogas storage holders]	Flow	Continuous	In accordance with EU weights and measures Regulations	Process monitoring to be recorded using a SCADA system where relevant.  Gas monitors to be calibrated every 6 months or in accordance with the manufacturer's recommendations.
	Methane	Continuous	None specified	
	CO <sub>2</sub>	Continuous	None specified	
	O <sub>2</sub>	Continuous	None specified	
	Hydrogen sulphide	Daily	None specified	
	Pressure	Continuous	None specified	
Digestate batch	Volatile fatty acids concentration	One sample at the end of each batch (hydraulic retention time) cycle.	As described in site operating techniques	--
	Ammonia			
Digesters and storage tanks	Integrity checks	Weekly	Visual assessment	In accordance with design specification and tank integrity checks.
Digesters	Agitation /mixing	Continuous	Systems controls	Records maintained in daily operational records.
	Tank capacity and sediment assessment	Once every 5 years from date of commission	Non-destructive pressure testing integrity assessment every 5 years or as specified	In accordance with design specification and tank integrity checks.

<b>Table S3.3 Process monitoring requirements</b>				
<b>Emission point reference or source or description of point of measurement</b>	<b>Parameter</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
			by manufacturers technical specification.	
Waste reception building or area; Digesters and storage tanks	Odour	Daily	Olfactory monitoring	Odour detection at the site boundary.
Diffuse emissions from all sources identified in the Leak Detection and Repair (LDAR) programme	VOCs including methane	Every 6 months or otherwise agreed in accordance with the LDAR programme	'Sniffing' and/or Optical Gas Imaging techniques in accordance with BS EN 15446 & BS EN 17628	Monitoring points as specified in a DSEAR risk assessment and LDAR programme.  Limit as agreed with the Environment Agency as a percentage of the overall gas production.
CHP engine stack(s)	VOCs including methane	Annually	BS EN 12619	Total annual VOCs emissions from the CHP engine(s) to be calculated and submitted to the Environment Agency.
	Exhaust gas temperature		Traceable to National Standards	--
	Exhaust gas pressure		Traceable to National Standards	--
	Exhaust gas water vapour content		BS EN 14790-1	Unless gas is dried before analysis of emissions.
	Exhaust gas oxygen		BS EN 14789	--
	Exhaust gas flow		BS EN 16911-1	--
Meteorological conditions	Wind speed, air temperature, wind direction	Continuous	Method as specified in management system	Conditions to be recorded in operational diary and records.  Equipment shall be calibrated on a 4 monthly basis,

<b>Table S3.3 Process monitoring requirements</b>				
<b>Emission point reference or source or description of point of measurement</b>	<b>Parameter</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
				in accordance with manufacturer's recommendations or as agreed in writing by the Environment Agency.
Emergency flare	Operating hours	Continuous	Recorded duration and frequency. Recording using a SCADA system or similar system	Date, time and duration of use of auxiliary flare shall be recorded.
	Quantity of gas sent to emergency flare			Quantity can be estimated from gas flow composition, heat content, ratio of assistance, velocity, purge gas flow rate, pollutant emissions.
Pressure relief valves and vacuum systems	Gas pressure	Continuous	Recording using a SCADA system	Continuous gas pressure shall be monitored.
	Re-seating	Weekly inspection	Visual	Operator must ensure that valves are re-seated after release in accordance with the manufacturer's design.
	Inspection, maintenance, calibration, repair and validation	Following foaming or overtopping or at 3 yearly intervals whichever is sooner	Written scheme of examination in accordance with condition 1.1.1	After a foaming event or sticking, build-up of debris, obstructions or damage, operator must ensure that pressure relief valve function remains within designed gas pressure in accordance with the manufacturer's design by suitably trained and qualified personnel.

<b>Emission point reference or source or description of point of measurement</b>	<b>Parameter</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
	Inspection, calibration and validation report	In accordance with design and construction specifications or after over topping or foaming event	Written scheme of examination in accordance with condition 1.1.1	Operator must ensure that valves are re-seated after release, after a foaming event or sticking, build-up of debris, obstructions or damage.  Operator must ensure that PRV function remains within designed operation gas pressure in accordance with the manufacturer's design by suitably trained/qualified personnel.  Inspection, calibration and validation report. In accordance with industry Approved Code of Practice
Storage tanks	Volume	Daily	Visual or flow meter measurement	Records of volume must be maintained.

<b>Emission point reference or source or description of point of measurement</b>	<b>Parameter</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
<b>Odour abatement plant</b>				
<b>Closed biofilters</b>				
<b>Biofilter at emission point A05 on site plan A in schedule 7</b>	Gas temperature – inlet and outlet	Daily	Temperature probe / Traceable to national standards	Odour abatement plant shall be regularly checked and maintained to ensure appropriate temperature and moisture content.
<b>Biofilter at emission point A07 on site plan A in schedule 7</b>	Biofilter media moisture	Daily	Moisture meter, Grab test, oven drying or	

<b>Table S3.4 Process monitoring requirements – odour abatement</b>				
<b>Emission point reference or source or description of point of measurement</b>	<b>Parameter</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
			recognised industry method	Odour abatement plant shall be managed in accordance with permit condition 3.3, the odour management plan and manufacturer's recommendations.  Equipment shall be calibrated on a 4 monthly basis, or as agreed in writing by the Environment Agency.  Action levels to be agreed on completion of IC5 as approved in writing by the Environment Agency.  Action levels to be achieved in accordance with permit condition 3.2 and the odour management plan.
	Thatching /compaction)	Weekly	Back pressure	
	Gas flow rate – inlet and outlet	Continuous	Gas flow meter / EN 16911-1 and MID for EN 16911-1	
	pH (biofilter drainage effluent)	Daily	pH metre or litmus paper	
	Efficiency assessment	Annual	Media health, air-flow distribution and emission removal efficiency (BS EN 13725 for odour removal)	
	Hydrogen sulphide – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	CEN TS 13649 for sampling  NIOSH 6013 for analysis	
	Ammonia – inlet	Every 6 months or as agreed in writing by the Environment Agency.	EN ISO 21877	
	Odour concentration – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	BS EN 13725	
<b>Carbon filters</b>				
<b>Carbon filter at emission point A05 on site plan A in schedule 7</b> <b>Carbon filter at emission point A06 on site plan A in schedule 7</b> <b>Carbon filter at emission point A07 on</b>	Carbon bed temperature – inlet and outlet	Continuous	Temperature probe	Odour abatement plant shall be managed in accordance with permit condition 3.3, the odour management plan and manufacturer's recommendations.
	Gas flow rate – inlet and outlet	Continuous	Gas flow meter	
	Moisture or humidity	Daily	Moisture meter	
	Back pressure	Weekly	Recognised industry method	

<b>Table S3.4 Process monitoring requirements – odour abatement</b>				
<b>Emission point reference or source or description of point of measurement</b>	<b>Parameter</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
	Hydrogen sulphide – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	CEN TS 13649 for sampling  NIOSH 6013 for analysis	Action levels to be agreed on completion of IC5 as approved in writing by the Environment Agency.
	Ammonia – inlet	Every 6 months or as agreed in writing by the Environment Agency.	EN ISO 21877	Action levels to be achieved in accordance with permit condition 3.2 and the odour management plan.
	Odour concentration – inlet and outlet gas stream	Every 6 months or as agreed in writing by the Environment Agency.	BS EN 13725	
<b>site plan A in schedule 7</b>	Efficiency assessment	Annual	Emission removal efficiency (BS EN 13725 for odour removal)	Carbon filter(s) to be replaced in accordance with manufacturer's recommendations.  Equipment shall be calibrated on a 4 monthly basis, or as agreed in writing by the Environment Agency.

<b>Table S3.5 Bioaerosols monitoring requirements – ambient monitoring</b>					
<b>Location or description of point of measurement</b>	<b>Parameter</b>	<b>Bioaerosols action levels (CFU m<sup>-3</sup>)</b>	<b>Monitoring frequency</b>	<b>Monitoring standard or method</b>	<b>Other specifications</b>
Upwind of the operational area, as described in the Technical Guidance Note M9	Total bacteria	1000 <sup>Note 1</sup>	Quarterly for the first year of operation and twice a year thereafter, unless another frequency is agreed in writing by the Environment Agency <sup>Note 2</sup>	In accordance with Technical Guidance Note M9 – Environmental monitoring of bioaerosols at regulated facilities.	As described in the Technical Guidance Note M9, including all the additional data requirements specified therein.
Downwind of the operational area, as described in the Technical Guidance Note M9	Aspergillus Fumigatus	500 <sup>Note 1</sup>			
<p>Note 1 – The bioaerosols action levels are only applicable at downwind sampling locations equivalent to the distance of the nearest sensitive receptor. Where these action levels are elevated, the operator must take action to mitigate the impact on sensitive receptors. Assessment of compliance will be based on risk and in line with guidance.</p> <p>Note 2. Where the bioaerosols action levels are exceeded, then monitoring remain quarterly until such time that it is demonstrated that the site has adequate mitigation for a 12 month period.</p>					

<b>Table S3.6 Emissions to sewer, effluent treatment plant or other transfers off-site – Monitoring points</b>			
<b>Effluent(s) and discharge point(s)</b>	<b>Monitoring type</b>	<b>Monitoring point NGR</b>	<b>Monitoring point reference</b>
S1 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW. Centrifuge liquor from THP centrifuges	Effluent monitoring	TQ 28953 20772	Point M1 [Discharge to WwTW via LTP] on site plan B in schedule 7
S2 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW. Liquors from cake strain presses	Effluent monitoring	TQ 28955 20687	Point M2 [Discharge to WwTW via LTP] on site plan B in schedule 7

<b>Table S3.6 Emissions to sewer, effluent treatment plant or other transfers off-site – Monitoring points</b>			
<b>Effluent(s) and discharge point(s)</b>	<b>Monitoring type</b>	<b>Monitoring point NGR</b>	<b>Monitoring point reference</b>
S3 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.  Cake strain presses liquors	Effluent monitoring	TQ 28931 20685	Point M3 [Discharge to WwTW via LTP] on site plan B in schedule 7
S4 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.  Auxiliary sludge reception liquors	Effluent monitoring	TQ 28868 20683	Point M4 [Discharge to WwTW via LTP] on site plan B in schedule 7
S6 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.  Condensate from CHP	Effluent monitoring	TQ 29011 20653	Point M6 [Discharge to WwTW via LTP] on site plan B in schedule 7
S7 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.  Condensate from the gas pipelines and gas storage bag	Effluent monitoring	TQ 28962 20648	Point M7 [Discharge to WwTW via LTP] on site plan B in schedule 7
S8 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.  Condensate from both digesters	Effluent monitoring	TQ 28996 20669	Point M8 [Discharge to WwTW via LTP] on site plan B in schedule 7
S9 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.  Rainwater run-off from impervious surfaces (bund 1)	Effluent monitoring	TQ 28862 20666	Point M9 [Discharge to WwTW via LTP] on site plan B in schedule 7

<b>Table S3.6 Emissions to sewer, effluent treatment plant or other transfers off-site – Monitoring points</b>			
<b>Effluent(s) and discharge point(s)</b>	<b>Monitoring type</b>	<b>Monitoring point NGR</b>	<b>Monitoring point reference</b>
<p>S10 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.</p> <p>Rainwater run-off from impervious surfaces (bund 2)</p>	Effluent monitoring	TQ 28932 20653	Point M10 [Discharge to WwTW via LTP] on site plan B in schedule 7
<p>S11 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.</p> <p>Centrifuge liquors</p>	Effluent monitoring	TQ 28997 20713	Point M11 [Discharge to WwTW via LTP] on site plan B in schedule 7
<p>S12 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.</p> <p>Drum thickener liquors</p>	Effluent monitoring	TQ 28989 20713	Point M12 [Discharge to WwTW via LTP] on site plan B in schedule 7
<p>S13 on site plan B in schedule 7. Emission to the River Arun via LTP and Goddards Green WwTW.</p> <p>LTP effluent consisting of all site process liquors and surface water – from emission points S1-S4 and S6-S12</p>	Effluent monitoring	TQ 28829 20678	Point M13 [Discharge to WwTW] on site plan B in schedule 7
<p>S5 on site plan B in schedule 7 Emission to the River Arun and Goddards Green WwTW.</p> <p>Head of works discharge point</p>	Effluent monitoring	TQ 29008 20581	Point M5 [Discharge to WwTW] on site plan B in schedule 7

## Schedule 4 – Reporting

Parameters, for which reports shall be made, in accordance with conditions of this permit, are listed below.

<b>Table S4.1 Reporting of monitoring data</b>			
<b>Parameter</b>	<b>Emission or monitoring point/reference</b>	<b>Reporting period</b>	<b>Period begins</b>
Emissions to air from CHP engines and boilers Parameters as required by condition 3.5.1.	A02, A14	Every 12 months	1 January
Emissions to air from odour abatement plant Parameters as required by condition 3.5.1.	A05, A06, A07	Every 6 months	1 January, 1 July
Emissions to air from abatement systems for waste gas treatment plant Reporting only applies where the substance concerned is identified as relevant in the waste gas inventory (IC5) Parameters as required by condition 3.5.1.	A05, A06, A07	Every 6 months	1 January, 1 July
Emissions to sewer Parameters as required by condition 3.5.1	S1 – S13	Upon completion of IC3a, IC3b, IC6a and IC6b	Upon completion of IC3a, IC3b, IC6a and IC6b
Process monitoring – digester tank integrity Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 5 years from the date of commissioning or as per the manufacturer's recommendation, whichever is sooner	1 January
Process monitoring – under and over pressure relief systems Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 12 months Yearly summary report of over-pressure and under-pressure events detailing mass balance release	1 January
Process monitoring – pressure relief systems - leak detection and repair (inspection, calibration and maintenance) Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 3 years	1 January
Process monitoring – leak detection and repair surveys Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 12 months LDAR report to be submitted annually	1 January

<b>Table S4.1 Reporting of monitoring data</b>			
<b>Parameter</b>	<b>Emission or monitoring point/reference</b>	<b>Reporting period</b>	<b>Period begins</b>
Process monitoring – use of emergency flare Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.3	Every 12 months	1 January
Non-compostable contamination removal efficiency Parameters as required by conditions 2.3.4 and 2.3.7	--	Every 12 months Yearly report of detailing contamination removal efficiency and progress with plastic reduction contamination	1 January
Total annual VOCs emissions from gas engines (calculated)	As specified in schedule 3 table S3.3	Every 12 months	1 January
Bioaerosols monitoring Parameters as required by condition 3.5.1	As specified in schedule 3 table S3.5	Every 3 months or as agreed in writing by the Environment Agency	1 January, 1 April, 1 July, 1 October

<b>Table S4.2 Annual production/treatment</b>	
<b>Parameter</b>	<b>Units</b>
Electricity generated	MWh
Liquid digestate	m <sup>3</sup>
Solid digestate	tonnes
Recovered outputs	tonnes or m <sup>3</sup>

<b>Table S4.3 Performance parameters</b>		
<b>Parameter</b>	<b>Frequency of assessment</b>	<b>Units</b>
Water usage	Annually	tonnes or m <sup>3</sup>
Energy usage	Annually	MWh
Raw material usage	Annually	tonnes or m <sup>3</sup>
Emergency flare operation	Annually	hours
Electricity exported	Annually	MWh
CHP engine usage	Annually	hours
CHP engine efficiency	Annually	%
Auxiliary boiler usage	Annually	hours

<b>Table S4.4 Reporting forms</b>		
<b>Media/parameter</b>	<b>Reporting format</b>	<b>Date of form</b>
Air	Form air 1 or other form as agreed in writing by the Environment Agency	17/03/2025
Bioaerosols	As specified in the Technical Guidance Note M9 or other form as agreed in writing by the Environment Agency	--
Process monitoring	Form process 1 or other form as agreed in writing by the Environment Agency	17/03/2025
Sewer	Form sewer 1 or other form as agreed in writing by the Environment Agency	17/03/2025
Water usage	Form water usage 1 or other form as agreed in writing by the Environment Agency	17/03/2025
Energy usage	Form energy 1 or other form as agreed in writing by the Environment Agency	17/03/2025
Other performance indicators	Form performance 1 or other form as agreed in writing by the Environment Agency	17/03/2025
Waste returns	E-waste Return Form or other form as agreed in writing by the Environment Agency	--

# Schedule 5 – Notification

These pages outline the information that the operator must provide.

Units of measurement used in information supplied under Part A and B requirements shall be appropriate to the circumstances of the emission. Where appropriate, a comparison should be made of actual emissions and authorised emission limits.

If any information is considered commercially confidential, it should be separated from non-confidential information, supplied on a separate sheet and accompanied by an application for commercial confidentiality under the provisions of the EP Regulations.

## Part A

Permit Number	
Name of operator	
Location of Facility	
Time and date of the detection	

<b>(a) Notification requirements for any malfunction, breakdown or failure of equipment or techniques, accident, or emission of a substance not controlled by an emission limit which has caused, is causing or may cause significant pollution</b>	
<b>To be notified within 24 hours of detection</b>	
Date and time of the event	
Reference or description of the location of the event	
Description of where any release into the environment took place	
Substances(s) potentially released	
Best estimate of the quantity or rate of release of substances	
Measures taken, or intended to be taken, to stop any emission	
Description of the failure or accident.	

<b>(b) Notification requirements for the breach of a limit</b>	
<b>To be notified within 24 hours of detection unless otherwise specified below</b>	
Emission point reference/ source	
Parameter(s)	
Limit	
Measured value and uncertainty	
Date and time of monitoring	

<b>(b) Notification requirements for the breach of a limit</b>	
<b>To be notified within 24 hours of detection unless otherwise specified below</b>	
Measures taken, or intended to be taken, to stop the emission	

<b>Time periods for notification following detection of a breach of a limit</b>	
<b>Parameter</b>	<b>Notification period</b>

<b>(c) Notification requirements for the detection of any significant adverse environmental effect</b>	
<b>To be notified within 24 hours of detection</b>	
Description of where the effect on the environment was detected	
Substances(s) detected	
Concentrations of substances detected	
Date of monitoring/sampling	

## Part B – to be submitted as soon as practicable

Any more accurate information on the matters for notification under Part A.	
Measures taken, or intended to be taken, to prevent a recurrence of the incident	
Measures taken, or intended to be taken, to rectify, limit or prevent any pollution of the environment which has been or may be caused by the emission	
The dates of any unauthorised emissions from the facility in the preceding 24 months.	

Name*	
Post	
Signature	
Date	

\* authorised to sign on behalf of the operator

## Schedule 6 – Interpretation

“accident” means an accident that may result in pollution.

“anaerobic digestion” means a process of controlled decomposition of biodegradable materials under managed conditions where free oxygen is absent, at temperatures suitable for naturally occurring mesophilic or thermophilic anaerobes and facultative anaerobe bacteria species, which convert the inputs to a methane-rich biogas and whole digestate.

“animal waste” means any waste consisting of animal matter that has not been processed into food for human consumption.

“application” means the application for this permit, together with any additional information supplied by the operator as part of the application and any response to a notice served under Schedule 5 to the EP Regulations.

“appropriate abatement system” means the appropriate treatment technique for channelled emissions to air defined in 6.6.1 ‘Channelled emissions to air’ from the ‘Best Available Techniques (BAT) Reference Document for Waste Treatment’.

“authorised officer” means any person authorised by the Environment Agency under section 108(1) of The Environment Act 1995 to exercise, in accordance with the terms of any such authorisation, any power specified in section 108(4) of that Act.

“Best available techniques” means the most effective and advanced stage in the development of activities and their methods of operation which indicates the practical suitability of particular techniques for providing the basis for emission limit values and other permit conditions designed to prevent and, where that is not practicable, to reduce emissions and the impact on the environment as a whole:

(a) ‘techniques’ includes both the technology used and the way in which the installation is designed, built, maintained, operated and decommissioned;

(b) ‘available techniques’ means those developed on a scale which allows implementation in the relevant industrial sector, under economically and technically viable conditions, taking into consideration the costs and advantages, whether or not the techniques are used or produced inside the Member State in question, as long as they are reasonably accessible to the operator;

(c) ‘best’ means most effective in achieving a high general level of protection of the environment as a whole.

“bioaerosols action levels” mean the acceptable bioaerosols concentrations at the nearest sensitive receptor, or at an equivalent distance downwind of the biowaste treatment operations, which are attributable to the biowaste treatment operations. The acceptable concentrations are respectively 1000 and 500 CFU m<sup>-3</sup> for total bacteria and *Aspergillus fumigatus*. Where these action levels are elevated, the operator must take action to mitigate the impact on sensitive receptors.

“Biodegradable” means a material is capable of undergoing biological anaerobic or aerobic degradation leading to the production of CO<sub>2</sub>, H<sub>2</sub>O, methane, biomass, and mineral salts, depending on the environmental conditions of the process.

“building” means a construction that has the objective of providing sheltering cover and minimising emissions of noise, particulate matter, odour and litter.

“BREF” means Best Available Techniques (BAT) Reference Document.

“Capacity” means the potential capacity and not historical or actual production levels or throughput. This means that the designed capacity is the maximum rate at which the site can operate. Biological treatment of waste usually takes place over more than one day, so the physical daily capacity can be calculated by dividing the maximum quantity of waste that could be subject to biological treatment at any one time by the minimum residence time. For in-vessel composting, the residence time for sanitisation should be calculated separately and then aggregated to the complete composting time. Further guidance [‘RGN2: Understanding the meaning of regulated facility Definition of regulated facility’](#) is available.

“channelled emissions” means the emissions of pollutants into the environment through any kind of duct, pipe, stack, etc. This also includes emissions from open top biofilters.

“combined heat and power” (CHP) or Cogeneration means the simultaneous generation in one process of thermal energy and electrical or mechanical energy.

“competent persons and resources” means that a technically competent person accredited to a relevant scheme must attend site and record their attendance, and that all roles and responsibilities are clearly stated in the management systems along with records of operatives’ training. See the guidance on the [level of competence and duration of attendance](#)

“compliance date” means 01/01/2025 for existing MCPs with net rated thermal input of greater than 5MWth or 01/01/2030 for existing MCPs with a net rated thermal input of less than or equal to 5MWth.

“compost” means solid particulate material that is the result of composting, which has been sanitised and stabilised, and which confers beneficial effects when added to soil, used as a component of growing media or used in another way in conjunction with plants.

“composting” means the managed biological decomposition of biodegradable waste organic materials, under conditions that are predominantly aerobic and that allow the development of thermophilic temperatures as a result of biologically produced heat and that result in compost.

“composting batch” means an identifiable quantity of material that progresses through the composting system and when fully processed has similar characteristics throughout. For composting systems that operate on a continuous- or plug-flow basis, batches will be taken to mean a series of “portions of production”.

“direct discharge” means discharge to a receiving water body.

“diffuse emissions” mean non-channelled emissions (e.g. of dust, organic compounds, odour) which can result in ‘area’ sources (e.g. tanks) or ‘point’ sources (e.g. pipe flanges). This also includes emissions from open-air windrow composting.

“digestate” means material resulting from an anaerobic digestion process.

“disposal” means any of the operations provided for in Annex I to Directive 2008/98/EC of the European Parliament and of the Council on waste.

“DSEAR” means the Dangerous Substances and Explosive Atmospheres Regulations 2002.

“emissions of substances not controlled by emission limits” means emissions of substances to air, water or land from the activities, either from the emission points specified in schedule 3 or from other localised or diffuse sources, which are not controlled by an emission limit.

“emissions to land” includes emissions to groundwater.

“EP Regulations” means The Environmental Permitting (England and Wales) Regulations SI 2016 No.1154 and words and expressions used in this permit which are also used in the Regulations have the same meanings as in those Regulations.

“existing medium combustion plant” means an MCP which was put into operation before 20 December 2018.

“generator” means any combustion plant which is used to generate electricity, excluding mobile, unless it is connected to the national grid.

“groundwater” means all water, which is below the surface of the ground in the saturation zone and in direct contact with the ground or subsoil.

“head of works” means the discharge location where imported wastes are discharged into the WwTW. The waste operations associated with the head of works is either via the direct discharge of tankered waste into the WwTW or the temporary storage of waste in a storage tank before discharge of waste into the WwTW. The waste water treatment works are operated under the requirements of the Urban Waste Water Treatment Directive.

“impermeable surface” means a surface or pavement constructed and maintained to a standard sufficient to prevent the transmission of liquids beyond the pavement surface.

“Indirect discharge” means a discharge to a sewer or off-site waste water treatment plant.

“Industrial Emissions Directive” and/or “IED” means DIRECTIVE 2010/75/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 24 November 2010 on industrial emissions, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

“Leak detection and repair (LDAR) programme” means a structured approach to reduce fugitive emissions of organic compounds by detection and subsequent repair or replacement of leaking components. Currently, sniffing (described by EN 15446) and optical gas imaging methods are available for the identification of leaks as set out in BAT 14 and section 6.6.2 of the Waste Treatment BAT Conclusions.

“MCERTS” means the Environment Agency’s Monitoring Certification Scheme.

“medium combustion plant” or “MCP” means a combustion plant with a rated thermal input equal to or greater than 1 MW but less than 50 MW.

“Medium Combustion Plant Directive” or “MCPD” means Directive 2015/2193/EU of the European Parliament and of the Council on the limitation of emissions of certain pollutants into the air from medium combustion plants, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

“new medium combustion plant” means an MCP which was put into operation after 20 December 2018. This includes replacement MCP and Generators.

“operating hours” means the time, expressed in hours, during which a combustion plant is operating and discharging emissions into the air, excluding start-up and shut-down periods

“operational area” means any part of a facility used for the handling, storing and treatment of waste.

“operator” means in relation to a regulated facility:

- (a) the person who has control over the operation of the regulated facility,
- (b) if the regulated facility has not yet been put into operation, the person who will have control over the regulated facility when it is put into operation, or
- (c) if a regulated facility authorised by an environmental permit ceases to be in operation, the person who holds the environmental permit

“pests” means Birds, Vermin and Insects.

“PFOA” means Perfluorooctanoic acid.

“PFOS” means Perfluorooctanesulphonic acid.

“pollution” means emissions as a result of human activity which may—

- (a) be harmful to human health or the quality of the environment,
- (b) cause offence to a human sense,
- (c) result in damage to material property, or
- (d) impair or interfere with amenities and other legitimate uses of the environment.

“quarter” means a calendar year quarter commencing on 1 January, 1 April, 1 July or 1 October.

“recovery” means any of the operations provided for in Annex II to Directive 2008/98/EC of the European Parliament and of the Council on waste.

“sanitisation” means the actively managed and intensive stage of composting, lasting for at least 5 days, characterised by high oxygen demand and temperatures of over 55°C, during which biological processes, together with conditions in the composting mass, eradicate human and animal pathogens or reduce them to acceptably low levels. The operator also needs to meet ABPR requirements.

“sealed drainage system” in relation to an impermeable surface, means a drainage system with impermeable components which does not leak and which will ensure that:

- no liquids will run off the surface otherwise than via the system
- all liquids entering the system are collected in a sealed sump, except where liquids may be lawfully discharged to foul sewer.

“specified generator” means a group of generators other than excluded between 1 and 50 megawatts or less than 50 megawatts as defined in Schedule 25B(2) of SI 2018 No.110 of the EPR.

“stable” and/or “stabilised” means the degree of processing and biodegradation at which the rate of biological activity has slowed to an acceptably low and consistent level and will not significantly increase under favourable, altered conditions.

“VOC” means Volatile organic compounds as defined in Article 3(45) of Directive 2010/75/EU – ‘volatile organic compound’ means any organic compound as well as the fraction of creosote, having at 293.15K a vapour pressure of 0.01 kPa or more, or having a corresponding volatility under the particular conditions of use.

“Waste code” means the six-digit code referable to a type of waste in accordance with the List of Wastes (England) Regulations 2005, or List of Wastes (Wales) Regulations 2005, as appropriate, and in relation to hazardous waste, includes the asterisk.

“Waste Framework Directive” and/or “WFD” means Waste Framework Directive 2008/98/EC of the European Parliament and of the Council on waste, as read in accordance with Schedule 1A to the Environmental Permitting (England and Wales) Regulations 2016.

Where a minimum limit is set for any emission parameter, for example pH, reference to exceeding the limit shall mean that the parameter shall not be less than that limit.

Unless otherwise stated, any references in this permit to concentrations of substances in emissions into air means:

- in relation to emissions from combustion processes, the concentration in dry air at a temperature of 273K, at a pressure of 101.3 kPa and with an oxygen content of 3% dry for liquid fuels and gaseous fuels, 6% dry for solid fuels; and/or
- in relation to emissions from non-combustion sources, the concentration at a temperature of 273K and at a pressure of 101.3 kPa, with no correction for water vapour content.

“year” means a calendar year ending on 31 December.

# Schedule 7 – Site plan

## Site plan A – Point source emissions to air



Emissions Ref	Emissions Points	Assets Ref	Assets	X	Y
A02	CHP Exhaust Stack	1	Centrifuges	528952	120778
A03	Flare	2	CHP	529015	120647
A04	Generator Exhaust	3	Flare	528950	120640
A05	OCU Stack 1	4	Generator	528987	120753
A06	OCU Stack 2	5	OCU 1	529011	120692
A07	OCU Stack 3	6	OCU 2	528936	120662
A08	Whessoe Valve x2	7	OCU 3	528932	120556
A09	Whessoe Valve x2	8	Post Digestion Storage Tank 1	528977	120673
A10	Whessoe Valve x2	9	Post Digestion Storage Tank 2	528988	120672
A11	Whessoe Valve x2	10	Primary Digester 1	528975	120659
A12	Whessoe Valve x2	11	Primary Digester 2	528993	120659
A14	Boiler Exhaust Stack	12	Gas Bag	528965	120642
A15	Polymer Dosing Unit	14	Boiler	529014	120678
		15	Polymer Dosing Storage	528981	120715
		16	Liquor Treatment Plant	528818	120693
		17	Sludge Strain Press	528933	120685
		18	Drum Thickeners	528990	120715
		19	Centrifuge Building	528995	120716
		20	Cake Reception	528944	120682
		21	Post Screening Storage Tank 1	528976	120689
		22	Post Screening Storage Tank 2	528991	120689
		23	Sludge Reception Tank	528988	120668
		24	Thickened Sludge Storage Tank	529012	120716
		25	Ferric Kiosk	528888	120583
		26	Cake barn	528955	120794
		27	Liquor Storage Tank	528824	120691
		28	Cake Strain Press	528957	120688
		29	Auxiliary Sludge Storage Tank 1	528855	120722
		30	Auxiliary Sludge Storage Tank 2	528855	120693
		31	Auxiliary Sludge Reception	528970	120662
		32	Cake Blending Tank	528947	120670
		33	Cess Reception	529008	120580
		34	THP Silo	528958	120727
		35	THP Vessels	528966	120739
		36	Poly Storage and Dosing	528963	120763
W1	Inlet Works			528966	120586



© Crown copyright and database rights 2021 Ordnance Survey 100011878


IGN, Esri UK, Esri, HERE, Garmin, INCREMENT P, USGS

© 2018 Mott MacDonald  
This document is issued to the party which commissioned it and for specific purposes connected with the approved project only. It should not be relied upon by any other party or used for any other purpose. We accept no responsibility for the consequences of this document being relied upon by any other party or being used for any other purpose, or containing any error or omission which is due to our error or contains no data published to us by third parties.

Title			Mott MacDonald House 8-10 Sydenham Road Croydon T. +44 (0)20 8774 2000 W mottmac.com
Goddards Green STC Site Layout Plan			

Date	Drawn	Checked	Approved	Scale at A4	Drawing Number	Status	Rev
26/11/24	D Evans	A Manns	A Manns	1:2,000	790101_MSD_SitelayoutPlan_GOD	INF	03

# Site plan B - Point source emissions to sewer, effluent treatment plant or transfers off-site

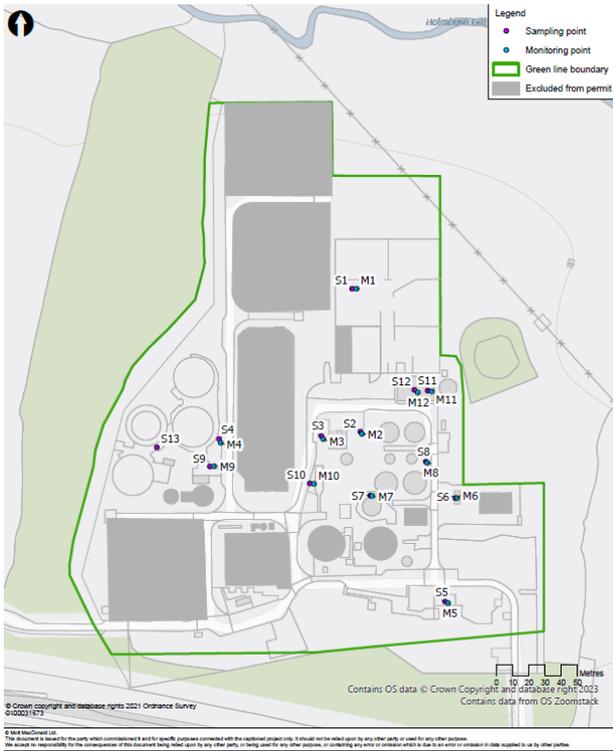

Emissions Ref	Emissions Points	Assets Ref	Assets	X	Y
S1	Centrifuge liquors	528953		120772	
M1	Centrifuge liquors	528956		120772	
S2	Cake Strain	528955		120687	
M2	Cake Strain	528956		120686	
S3	Cake Blending	528931		120685	
M3	Cake Blending	528932		120683	
S4	Auxiliary Sludge Reception	528988		120683	
M4	Auxiliary Sludge Reception	528989		120680	
S5	Cess Reception	520008		120581	
M5	Cess Reception	520010		120580	
S6	Gas Condensate 1	520014		120648	
M6	Gas Condensate 1	520015		120646	
S7	Gas Condensate 2	528962		120648	
M7	Gas Condensate 2	528963		120647	
S8	Gas Condensate 3	528960		120669	
M8	Gas Condensate 3	528967		120668	
S9	Surface Water 1	528982		120666	
M9	Surface Water 1	528865		120666	
S10	Surface Water 2	528924		120655	
M10	Surface Water 2	528927		120655	
S11	Centrifuges	528907		120713	
M11	Centrifuges	529000		120713	
S12	Drum Thickener	528989		120713	
M12	Drum Thickener	528991		120712	
S13	Treated Liquor	528829		120678	



© Crown copyright and database rights 2021 Ordnance Survey 010021873

Contains OS data © Crown Copyright and database right 2023

Contains data from OS Zoomstack

© Mott MacDonald Ltd  
This document is issued for the party which commissioned it and for specific purposes connected with the defined project only. It should not be relied upon by any other party or used for any other purpose.  
We accept no responsibility for the consequences of this document being relied upon by any other party or being used for any other purpose, or including any error or omission which is due to an error or omission in data supplied to us by our parties.

Title			Mott MacDonald House 8-10 Sydenham Road Croydon T: +44 (0)20 8774 2000 W: mottmac.com				
Goddards Green STC S&M Layout Plan							
Date	Drawn	Checked	Approved	Scale at A4	Drawing Number	Status	Rev
26/11/24	D Evans	A Manns	A Manns	1:2,000	790101_MSD_SitelayoutPlan_GOD	INF	01

© Crown Copyright and Database Rights 2025 OS AC000807064

# Annex 1 of MCP

<p><b>1. Rated thermal input (MW) of the medium combustion plant.</b></p>	<p>CHP engine – 1.79 MWth THP boiler - 1.11 MWth</p>
<p><b>2. Type of the medium combustion plant (diesel engine, gas turbine, dual fuel engine, other engine or other medium combustion plant).</b></p>	<p>CHP engine - fuelled on biogas. THP boiler – dual fuel boiler</p>
<p><b>3. Type and share of fuels used according to the fuel categories laid down in Annex II.</b></p>	<p>CHP engine - biogas THP boiler – biogas/gas oil.</p>
<p><b>4. Date of the start of the operation of the medium combustion plant or, where the exact date of the start of the operation is unknown, proof of the fact that the operation started before 20 December 2018.</b></p>	<p>CHP engine - 2017 THP boiler – 2023.</p>
<p><b>5. Sector of activity of the medium combustion plant or the facility in which it is applied (NACE code).</b></p>	<p>37.00</p>
<p><b>6. Expected number of annual operating hours of the medium combustion plant and average load in use.</b></p>	<p>CHP engine - 8760 THP boiler - 8760</p>
<p><b>7. Where the option of exemption under Article 6(3) or Article 6(8) is used, a declaration signed by the operator that the medium combustion plant will not be operated more than the number of hours referred to in those paragraphs.</b></p>	<p>n/a</p>
<p><b>8. Name and registered office of the operator and, in the case of stationary medium combustion plants, the address where the plant is located.</b></p>	<p><b>Company name and registered office:</b> Southern Water Services Limited, Southern House Yeoman Road Worthing West Sussex BN13 3NX</p> <p><b>Address where the plant is located:</b> Goddards Green Sludge Treatment Centre, Cuckfield Road, Goddards Green, West Sussex, RH17 5AL</p>

END OF PERMIT