

# **Ensign Pipelines Decommissioning Programme**



**FINAL VERSION – 30 July 2021**

## DOCUMENT CONTROL

<b>Document ID:</b>		SPT-DCM-SNS0104-REP-0005	
<b>Document Classification:</b>		PUBLIC	
<b>Document Ownership:</b>		Decommissioning	
<b>Date of Document:</b>	30/08/18	Signature	Date
<b>Prepared by:</b>	S. Axon	<i>S. Axon</i>	30/07/21
<b>Reviewed by:</b>	S. Mackenzie	<i>S. Mackenzie</i>	30/07/21
<b>Approved by:</b>	M. Fotheringham	<i>M. Fotheringham</i>	30/07/21

## REVISION RECORD

Revision No.	Date of Revision	Reason for Issue
A1	15/03/19	Combined DP issued for Review and Comment
A2	24/04/19	Issued to OPRED for Review and Comment
A3	08/10/19	Issued for Statutory Consultation
C1	30/07/21	FINAL Version

## DISTRIBUTION LIST

Company	No. of copies
Offshore Petroleum Regulator for Environment and Decommissioning	1 electronic
GMG, NFFO, NIFPO, SFF	1 electronic
Hull Central Library	1 hardcopy

<b><u>TABLE OF CONTENTS</u></b>		<b><u>INST</u></b>	<b><u>P/L</u></b>
<b>1. Executive Summary</b>	<b>7</b>		√
1.1 Decommissioning Programme	7		√
1.2 Requirement for Decommissioning Programme	7		√
1.3 Introduction	7		√
1.4 Overview of Pipelines Being Decommissioned	8		√
1.5 Summary of Proposed Decommissioning Programme	8		√
1.6 Field Location in UKCS	9		√
1.7 Industrial Implications	17		√
<b>2. Description of Items to be decommissioned</b>	<b>18</b>		√
2.1 Pipelines including stabilisation features	18		√
2.2 Inventory Estimates	22		√
<b>3. Removal and Disposal Methods</b>	<b>22</b>		√
3.1 Pipelines	23		√
3.2 Pipeline Stabilisation Features	25		√
3.3 Waste Streams	25		√
<b>4. Environmental Impact Assessment</b>	<b>27</b>		√
4.1 Potential Environmental Impacts and their Management	27		√
<b>5. Interested Party Consultations</b>	<b>29</b>		√
5.1 Consultations Summary	29		√
5.2 Stakeholder Consultations & Feedback	29		√
<b>6. Programme Management</b>	<b>31</b>		√
6.1 Project Management and Verification	31		√
6.2 Post-Decommissioning Debris Clearance and Verification	31		√
6.3 Schedule	31		√
6.4 Costs	33		√
6.5 Close Out	33		√
6.6 Post-Decommissioning Liability, Monitoring and Evaluation	33		√
<b>7. Supporting Documents</b>	<b>34</b>		√
<b>Appendix A Burial Profiles</b>	<b>35</b>		√
Appendix A.1 PL2838 & PL2839 Burial Profile	35		√
Appendix A.2 PLU2840 & PL2841 Burial Profile	36		√
<b>Appendix B PUBLIC NOTICE &amp; CONSULTEE CORRESPONDENCE</b>	<b>37</b>		√
Appendix B.1 Public Notices	37		√
Appendix B.2 NFFO – Mr Ian Rowe, via email	38		√
Appendix B.3 SFF – Mr Steven Alexander & Mr Andrew Third	40		√
Appendix B.4 NIFPO – Mr Wayne Sloan	41		√
Appendix B.5 GMG – Mr John Wrottesley	42		√

## **FIGURES AND TABLES**

Figure 1.6.1: Field Location in UKCS.....	9
Figure 1.6.2: Ensign Prior to Decommissioning .....	10
Figure 1.6.3: Overview of Ensign Approaches.....	11
Figure 1.6.4: Ensign Suspended Well Approaches (~KP1.9).....	12
Figure 1.6.5: Carrack QA to Clipper PR Pipeline Crossing (~KP3.5) .....	13
Figure 1.6.6: Overview of Weybourne to ACMI Cable Crossing (~KP11.8).....	14
Figure 1.6.7: Overview of Approaches to Audrey A (WD) .....	15
Figure 2.1.1: Overview of Ensign decommissioning proposals .....	21
Figure 2.2.1: Pie chart of estimated pipeline inventory .....	22
Figure 6.3.1: Gantt Chart of Project Plan .....	32
Figure A.1.1: PL2838 (& PL2839) Burial Profile.....	35
Figure A.2.1: PL2841 Burial Profile .....	36
Figure A.2.2: PLU2840 Burial Profile .....	36
Table 1.4.1: Pipelines Being Decommissioned.....	8
Table 1.4.2: Pipelines Section 29 Notice Holders Details .....	8
Table 1.5.1: Summary of Decommissioning Programme .....	8
Table 1.6.1: Adjacent Facilities.....	16
Table 2.1.1: Pipeline/Flowline/Umbilical Information .....	18
Table 2.1.2: Subsea Pipeline Stabilisation Features .....	19
Table 3.1.1: Pipeline or Pipeline Groups Decommissioning Options.....	23
Table 3.1.2: Outcomes of Comparative Assessment .....	23
Table 3.2.1: Pipeline Stabilisation Features.....	25
Table 3.3.1: Waste Stream Management Method.....	25
Table 3.3.2: Inventory Disposition .....	26
Table 3.3.3: Re-use, Recycle & Disposal Aspirations for Recovered Material .....	26
Table 4.1.1: Environmental Impact Management [2].....	27
Table 5.2.1: Summary of Stakeholder Comments .....	29
Table 1.4.1: Pipelines Being Decommissioned.....	8
Table 1.4.2: Pipelines Section 29 Notice Holders Details .....	8
Table 1.5.1: Summary of Decommissioning Programme .....	8
Table 1.6.1: Adjacent Facilities.....	16
Table 2.1.1: Pipeline/Flowline/Umbilical Information .....	18
Table 2.1.2: Subsea Pipeline Stabilisation Features .....	19
Table 3.1.1: Pipeline or Pipeline Groups Decommissioning Options.....	23
Table 3.1.2: Outcomes of Comparative Assessment .....	23
Table 3.2.1: Pipeline Stabilisation Features.....	25
Table 3.3.1: Waste Stream Management Method.....	25
Table 3.3.2: Inventory Disposition .....	26
Table 3.3.3: Re-use, Recycle & Disposal Aspirations for Recovered Material .....	26
Table 4.1.1: Environmental Impact Management [2].....	27
Table 5.2.1: Summary of Stakeholder Comments .....	29
Table B.1.1: Public Notices: Hull Daily Mail & The London Gazette (published 08 Oct 2019) .....	37

## **TERMS AND ABBREVIATIONS**

<b>ABBREVIATION</b>	<b>EXPLANATION</b>
3-LPP	Layer Polypropylene
BT	British Telecommunications plc
CPUK	Conoco Phillips UK Limited
CSV	Construction Support Vessel
DOC	The blue line on the burial profiles shows the profile of cover. The area between the blue line (DOB) and maroon line (DOL) shows the backfill
DOL	Pipeline trench profile; depth of lowering (to top of pipe)
DSV	Diving Support Vessel
Ensign	Installation comprising small topsides and jacket held in location using 4x piles
ESDV	Emergency Shutdown Valve
GMG	Global Marine Group
HD	High Density concrete mattress (6m x 3m x 0.3m, average density 1.9kg/m <sup>3</sup> )
HT	Half-thickness concrete mattress (6m x 3m x 0.15m). Although this type of concrete mattress might be standard in some parts of the North Sea, the term is used to differentiate the different types of concrete mattresses used for Ensign
Installation	Installation as defined by the Section 29 Notice, comprising topsides and jacket
"	Inch; 25.4 millimetres
JNCC	Joint Nature Conservation Committee
km	Kilometre
KP	Kilometre Post (Distance along pipeline from point of origin, base of riser at Ensign)
LOGGS	Lincolnshire Offshore Gas Gathering System
m	Metre(s)
MAT, SAT	Master Application Template, Supplementary Application Template
MD	Mixed Density concrete mattress (6m x 3m x 0.3m average density 1.6kg/m <sup>3</sup> )
MEG	Mono-ethylene Glycol
MSV	Multipurpose Support Vessel
N,S,E,W, ESE	North, South, East, West, East-South-East
n/a	Not Applicable
NFFO	National Federation of Fishermen's Organisations
NIFPO	Northern Ireland Fish Producers Organisation
NORM	Naturally Occurring Radioactive Material
NPAI	Not Permanently Attended Installation
NUI	Normally Unattended Installation
OPRED	Offshore Petroleum Regulator for Environment and Decommissioning
Piggybacked	Smaller pipeline is adjacent and clamped to a larger pipeline throughout its length
Pipeline	Pipeline or umbilical
PL	Pipeline Identification numbers

ABBREVIATION	EXPLANATION
PLA	Pipeline Operations as defined in MAT Operation Types
Platform	Installation, typically comprising topsides and jacket
PWA	Pipeline Works Authorisation
ROVSV	Remotely Operated Vehicle Support Vessel
SD	Standard Density concrete mattress (6m x 3m x 0.3m, average density 1.5kg/m <sup>3</sup> )
SFF	Scottish Fishermen's Federation
Spirit Energy	Spirit Energy North Sea Limited
TUTU	Topsides Umbilical Termination Unit
UHB	Upheaval Buckling
UK	United Kingdom
UKCS	United Kingdom Continental Shelf

## 1. EXECUTIVE SUMMARY

### 1.1 Decommissioning Programme

This document contains one Decommissioning Programme for the set of notices under Section 29 of the Petroleum Act 1998. The Decommissioning Programme is concerned with:

- The four pipelines associated with Ensign: **PL2838**, **PL2839**, **PLU2840** and **PL2841**.

Although decommissioning of the pipelines is being treated in this document as a standalone project, Spirit Energy will also continue to explore cost saving synergies with other projects.

A separate Decommissioning Programme will be prepared for the Ensign installation.

### 1.2 Requirement for Decommissioning Programme

**Pipelines:** In accordance with the Petroleum Act 1998, Spirit Energy North Sea Limited as operator of the Ensign pipelines, and on behalf of the Section 29 notice holders (Table 1.4.2), is applying to OPRED to obtain approval for decommissioning the pipelines detailed in Section 2 of this document. Partner letters of support will be provided separately to OPRED following statutory consultation.

In conjunction with public, stakeholder and regulatory consultation, this Decommissioning Programme is submitted in compliance with national and international regulations and OPRED guidance notes. The schedule outlined in this document is for a seven-year period due to begin mid-2020 with well decommissioning. This allows flexibility for exploring synergistic decommissioning opportunities in the area.

### 1.3 Introduction

The Ensign field lies within the main Southern North Sea (SNS) Gas Province in UK Block 48/14a. The field lies ~109km west of Easington on the coast of Norfolk in water depths of ~25m.

The Ensign gas field was developed using a single platform. The field achieved first production in 2011. The Ensign installation and pipelines are wholly owned by Spirit Energy North Sea Limited. The installation itself is a Not Permanently Attended Installation (NPAI) supported by four-legged conventional piled steel jacket. Until May 2017, gas from Ensign used to be exported to Audrey A using 10" pipeline (**PL2838**, ~22.3km long) and on to LOGGS using the 20" gas export line **PL496**. LOGGS used to supply methanol to Audrey A using 3" methanol pipeline **PL497** and on to Ensign using 2" pipeline **PL2839** (~22.2km long), the difference in length between the piggybacked pipelines being accounted for by the layout of the pipelines as they approach Audrey A. **PL2839** is piggybacked onto **PL2838**. Decommissioning of PL496 and piggybacked PL497 pipelines are dealt with in the Audrey and Annabel Decommissioning Programmes; these were approved early 2018. LOGGS is no longer operational.

A 10" pipeline (**PL2841**) ~2.1km long and an umbilical pipeline (**PLU2840**) ~2.2km long, were also installed for Ensign but never used; these are covered by a Disused Pipeline Notification. The Cessation of Production justification for Ensign was accepted by the Oil and Gas Authority 05 March 2020.

Following public, stakeholder and regulatory consultation, the Decommissioning Programme will be submitted without derogation and in full compliance with the OPRED guidance notes. The Decommissioning Programme explains the principles of the removal activities and is supported by an environmental impact assessment documented in the environmental appraisal. The Decommissioning Programme for the pipelines is also supported by a comparative assessment.

## 1.4 Overview of Pipelines Being Decommissioned

### 1.4.1 Pipelines

**Table 1.4.1: Pipelines Being Decommissioned**

<b>Number of Pipelines</b>	4	See Table 2.1.1
----------------------------	---	-----------------

**Table 1.4.2: Pipelines Section 29 Notice Holders Details**

Section 29 Notice Holder	Registration Number	Equity Interest
Spirit North Sea Gas Limited	SC182822	0%
Spirit Energy North Sea Limited	04594558	100%
Centrica Resources UK Limited	06791610	0%
GB Gas Holdings Limited	03186121	0%
NSGP (Ensign) Limited	92236	0%

## 1.5 Summary of Proposed Decommissioning Programme

**Table 1.5.1: Summary of Decommissioning Programme**

Proposed Decommissioning Solution	Reason for Selection
<b>1. Pipelines</b>	
<p>Most of PL2838, PL2839, PLU2840 and PL2841 will be flushed and left buried <i>in situ</i>.</p> <p>On approach to the Ensign Platform, the Audrey A platform and the suspended subsea well, the pipeline ends will be cut as they exit the deposited rock to ensure that the ends remain buried. As a contingency measure, small deposits of rock may need to be added to existing rock to ensure that the pipeline ends remain buried.</p> <p>Surveys indicate that all pipelines will remain buried. Degradation will occur over a long period within the deposited rock and seabed sediment; it is not expected to represent a hazard to other users of the sea.</p> <p>Any permit applications required for work associated with pipeline pigging, flushing, cutting and removal (PLA MAT) will be submitted.</p>	<p>Outside the 500m safety zones the pipelines are already exposed to fishing activity.</p> <p>The pipelines are sufficiently buried and stable - with latest survey data indicating that no spans are present, posing no hazard to marine users. Minimal seabed disturbance, lower energy usage, reduced risk to personnel engaged in the activity.</p>
<b>2. Interdependencies</b>	
<p>For PL2838 and piggybacked PL2839 there is one third party pipeline crossing and one third party cable crossing. These are both outside 500m safety zone and will not be disturbed because of these decommissioning proposals.</p> <p>Pipeline stabilisation features such as concrete mattresses and any grout bags found that are exposed will be removed as part of the pipeline decommissioning activities, but deposited rock and any buried stabilisation features will remain <i>in situ</i>.</p>	

## 1.6 Field Location in UKCS

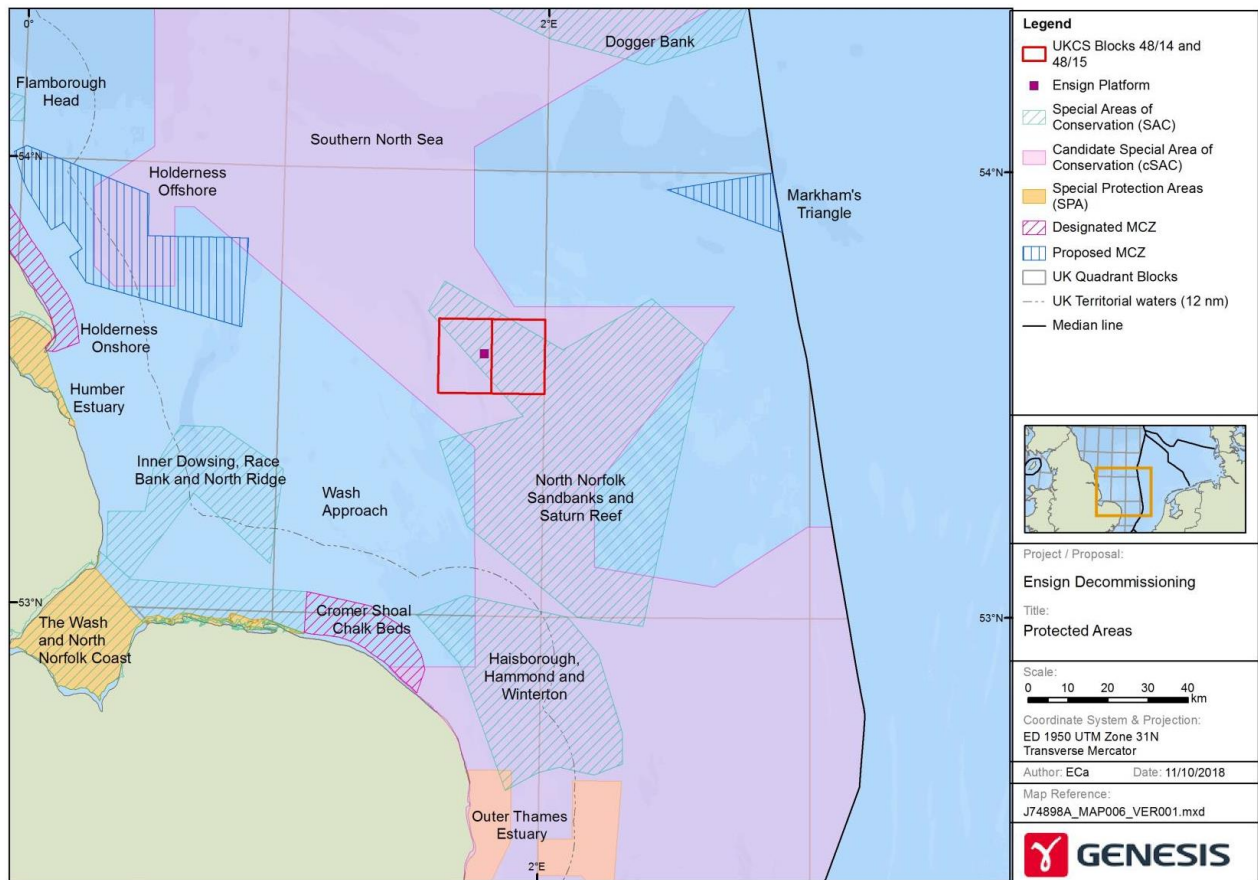


Figure 1.6.1: Field Location in UKCS

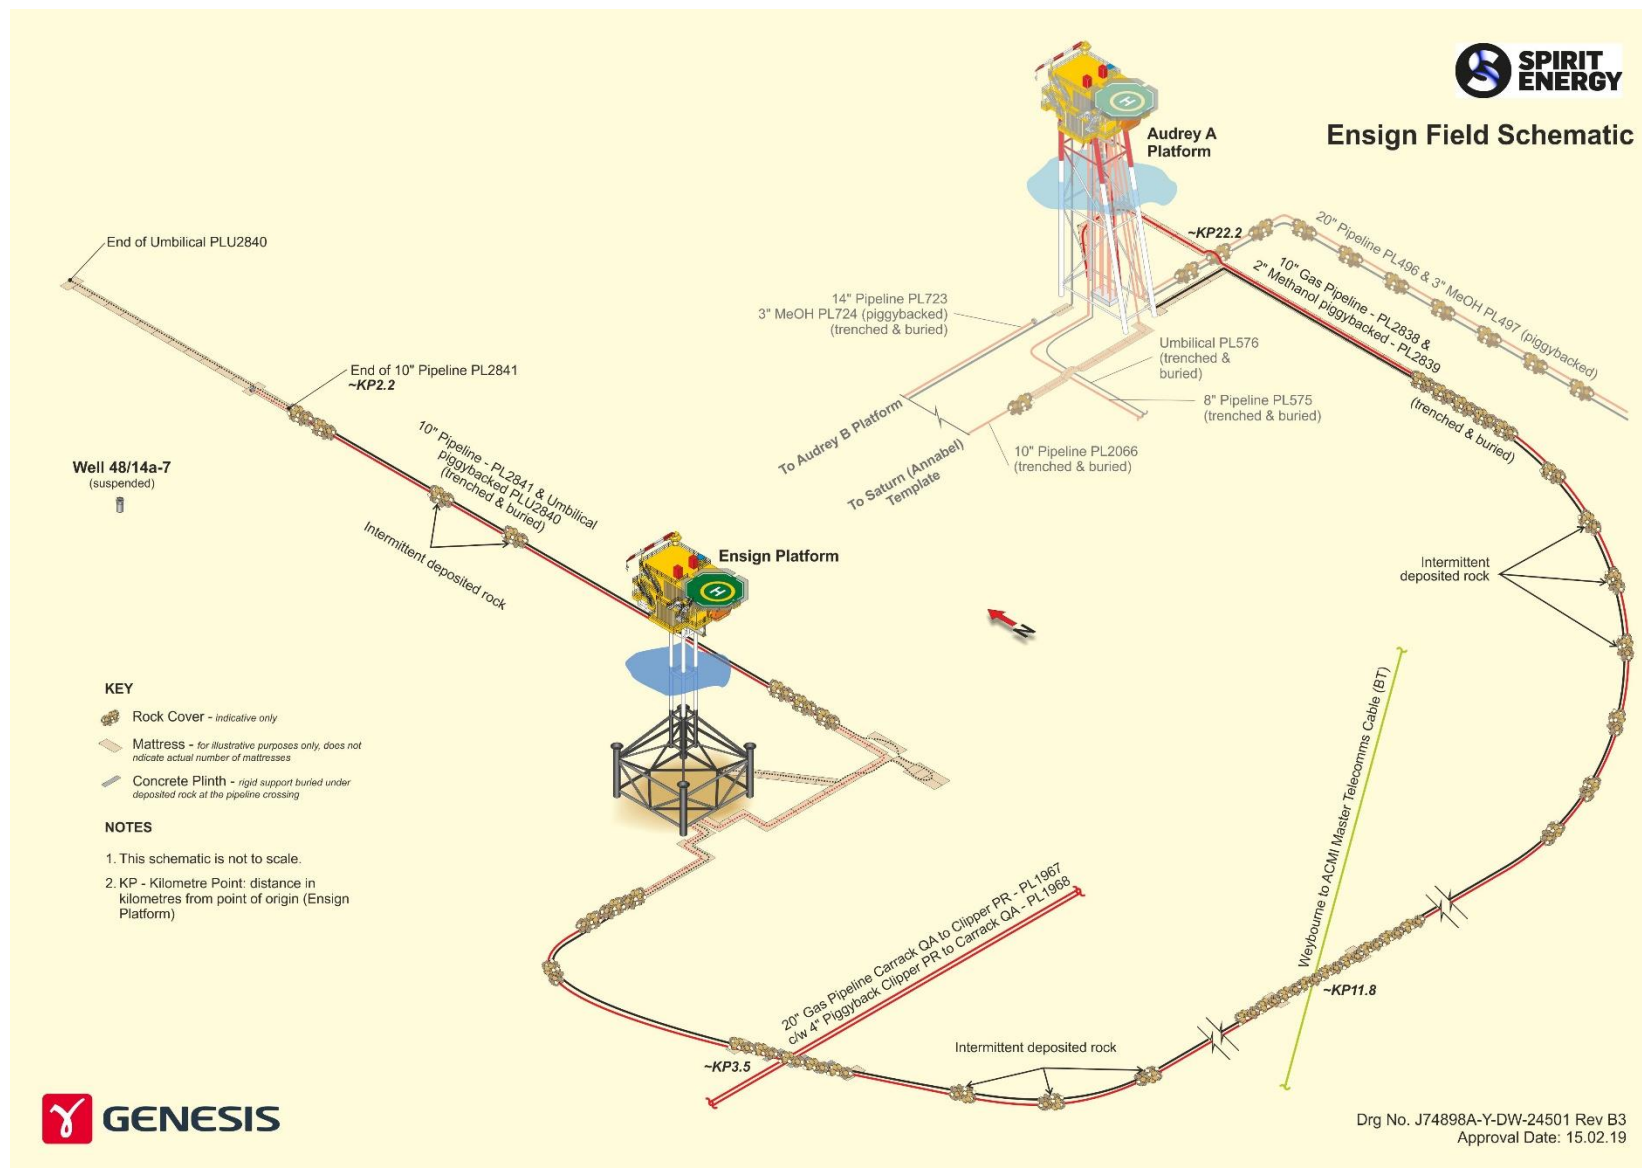


Figure 1.6.2: Ensign Prior to Decommissioning

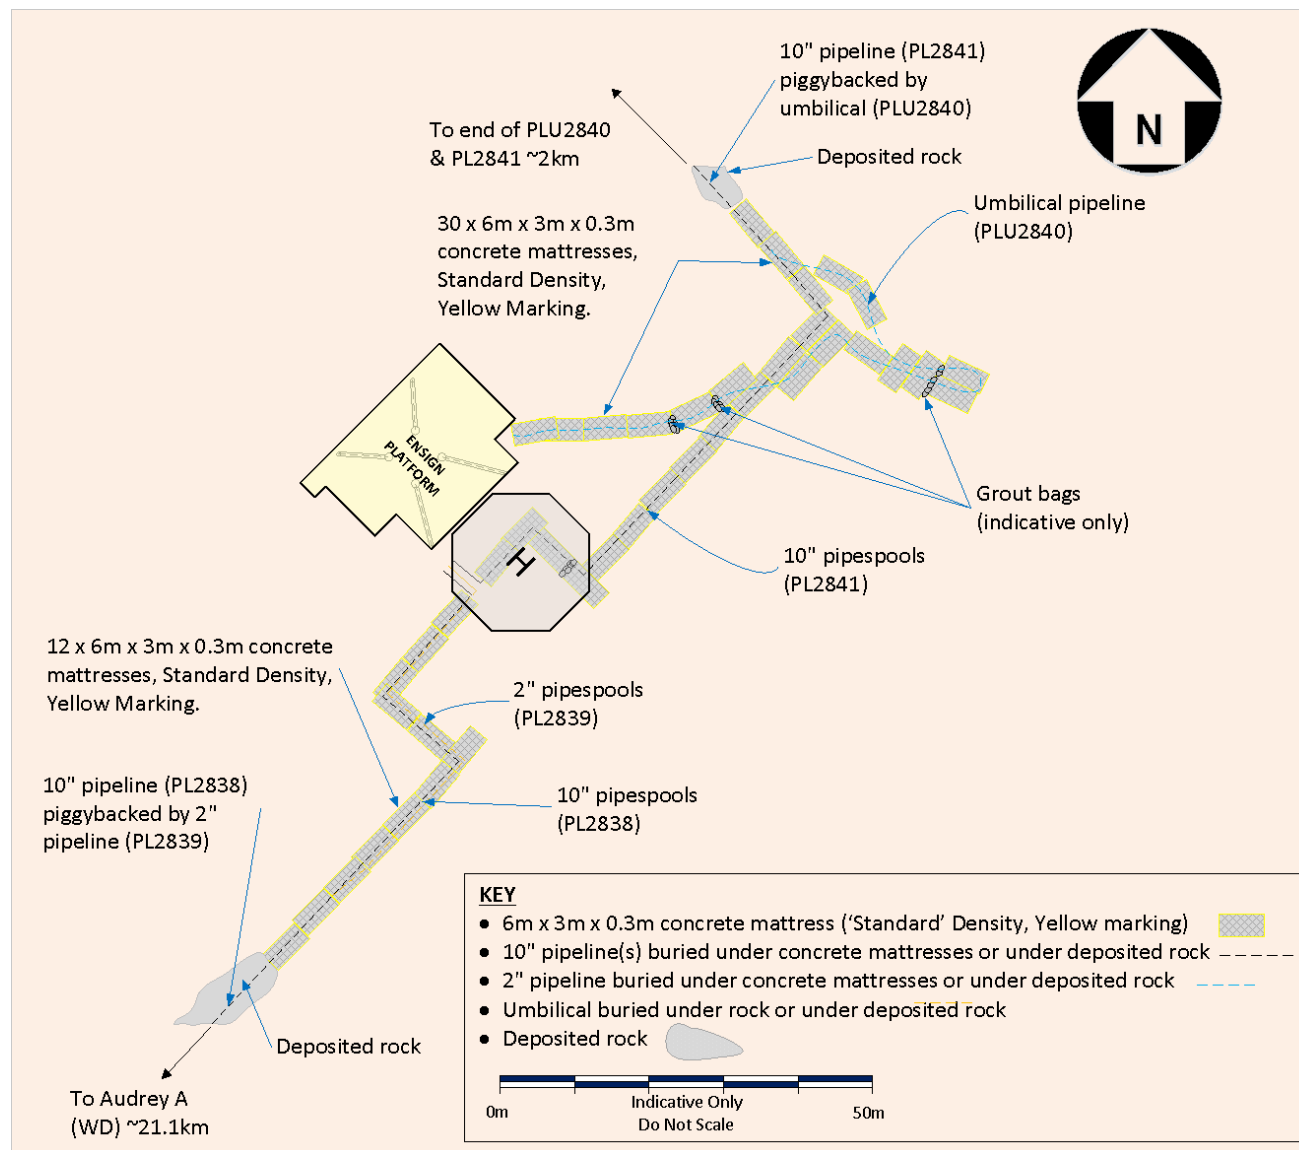


Figure 1.6.3: Overview of Ensign Approaches

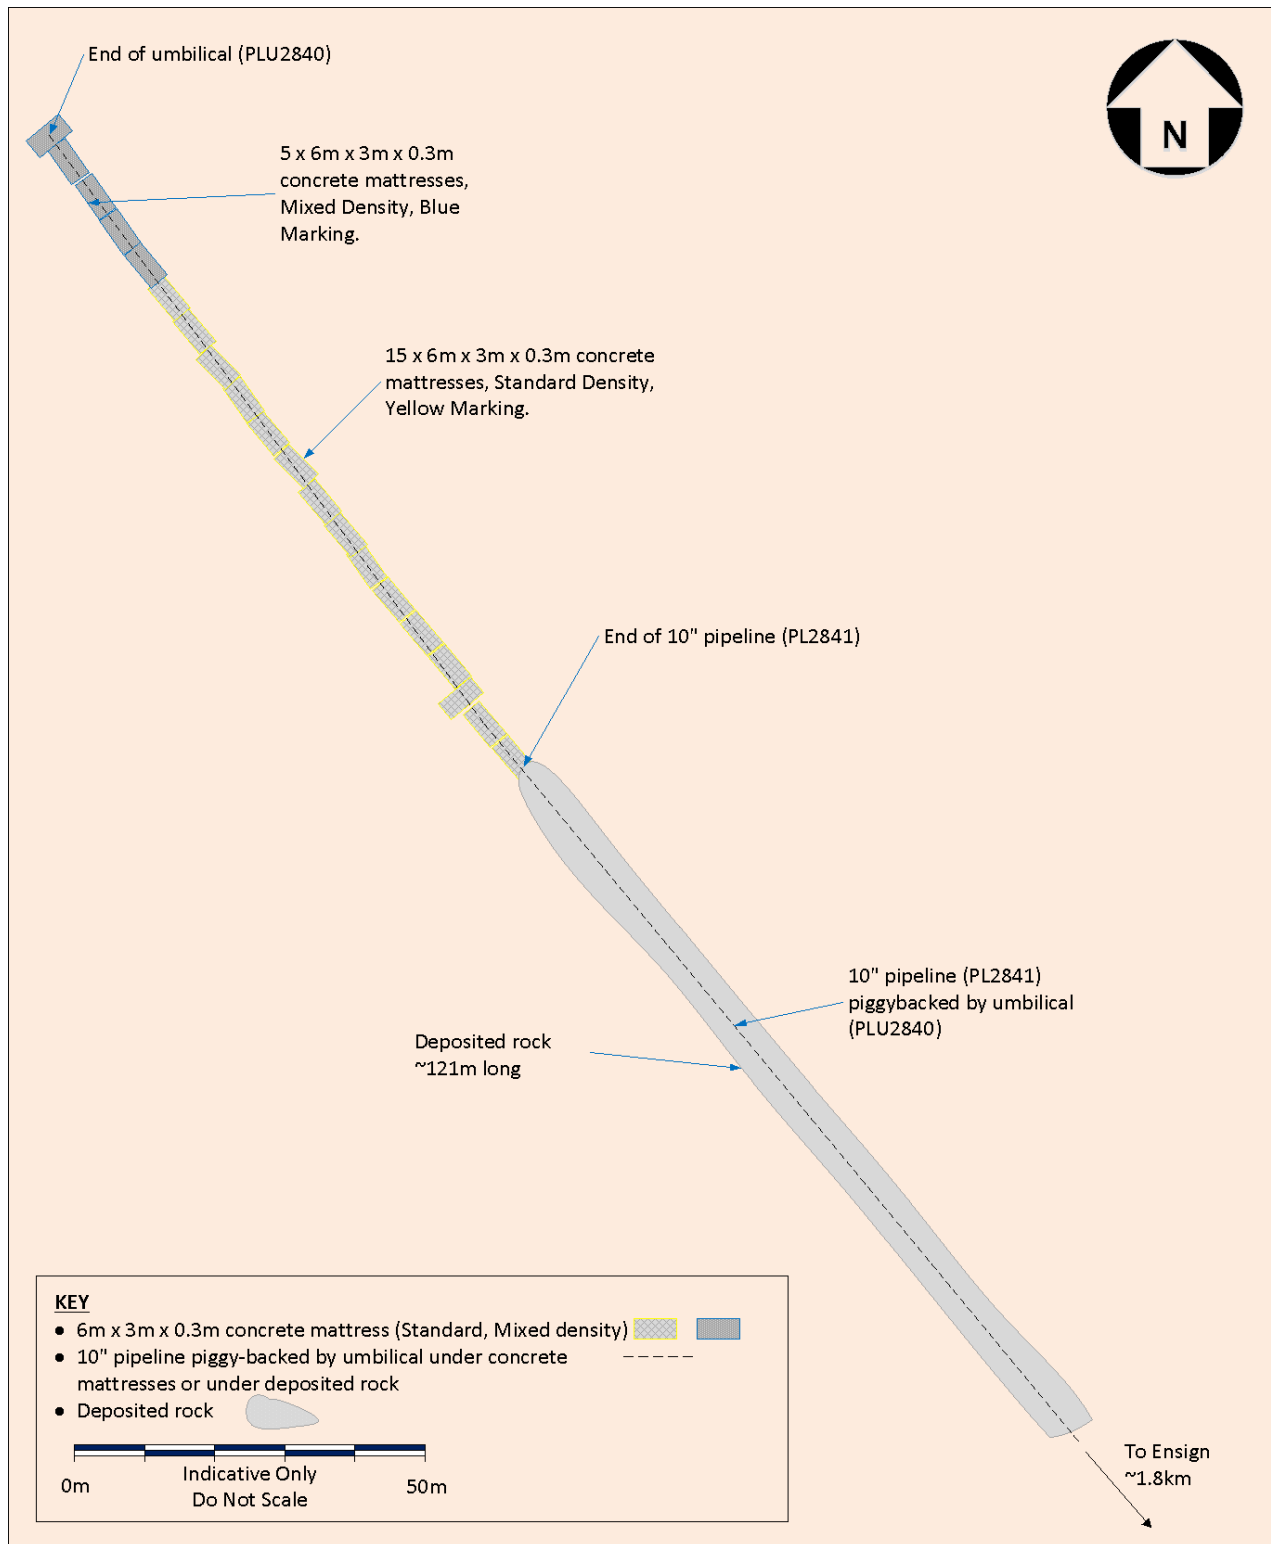


Figure 1.6.4: Ensign Suspended Well Approaches (~KP1.9)


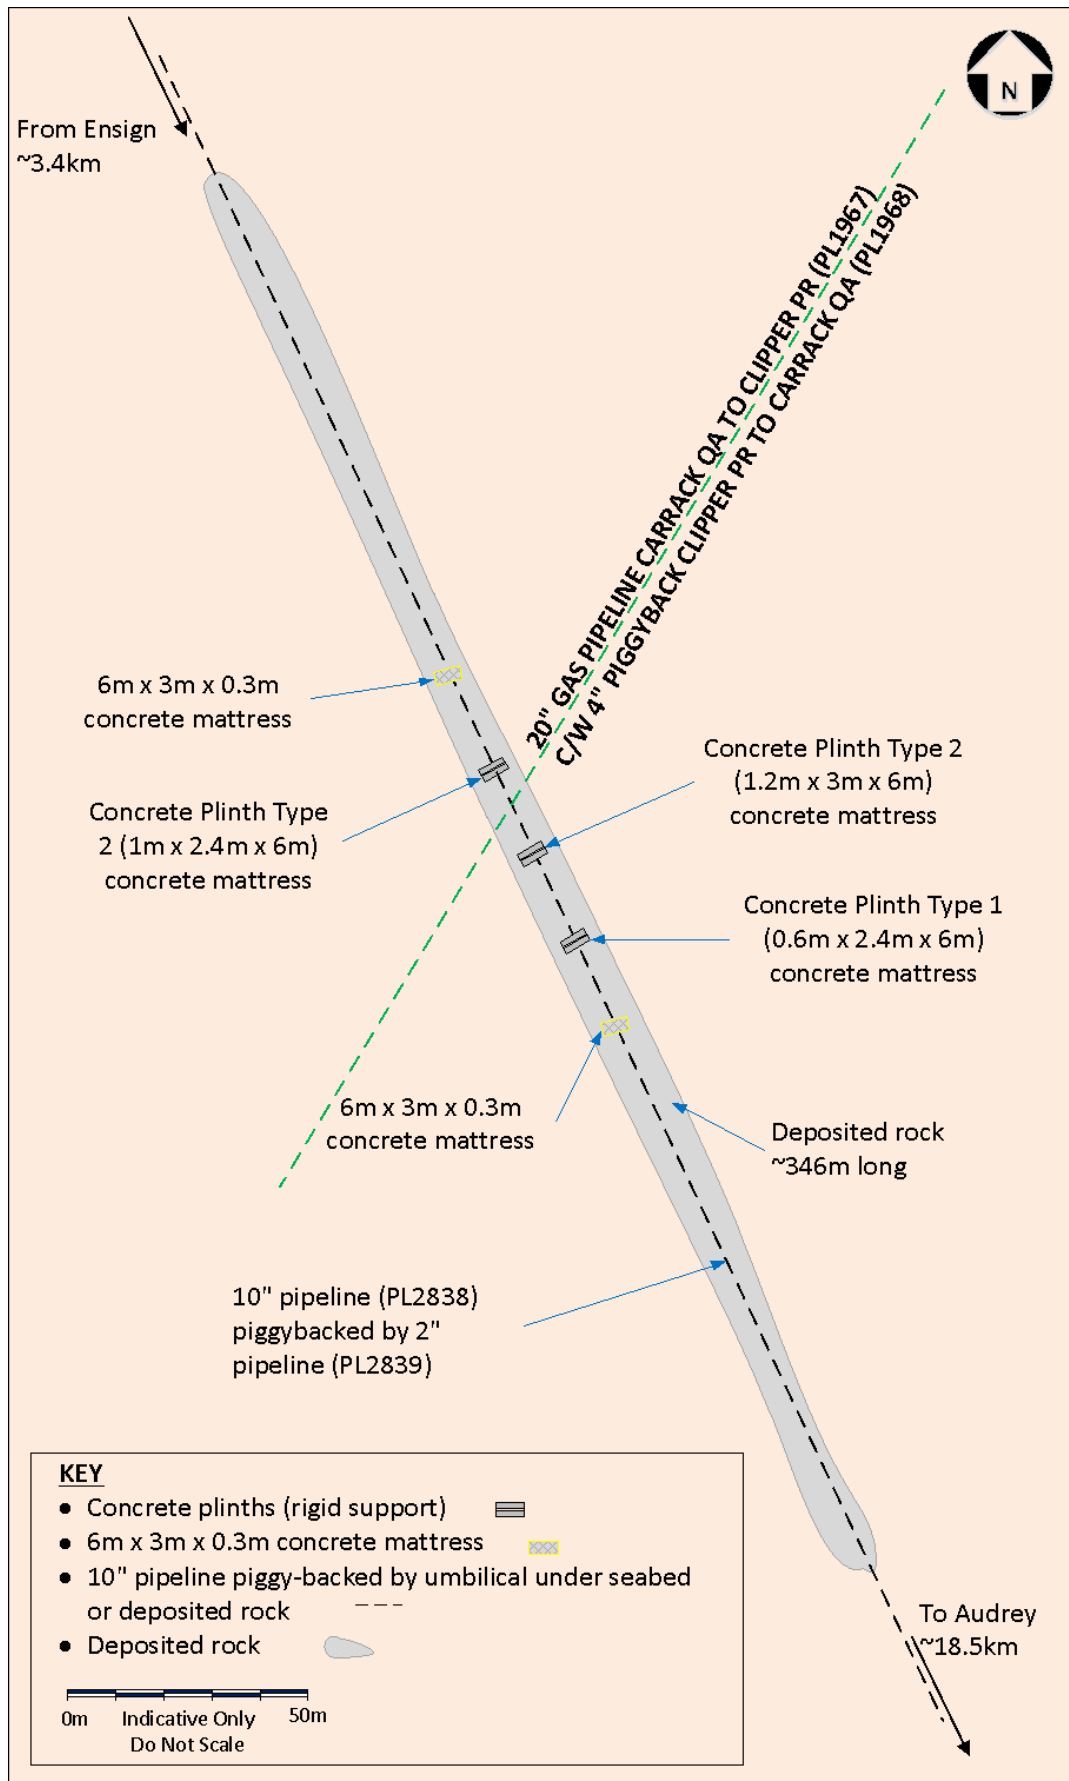


Figure 1.6.5: Carrack QA to Clipper PR Pipeline Crossing (~KP3.5)

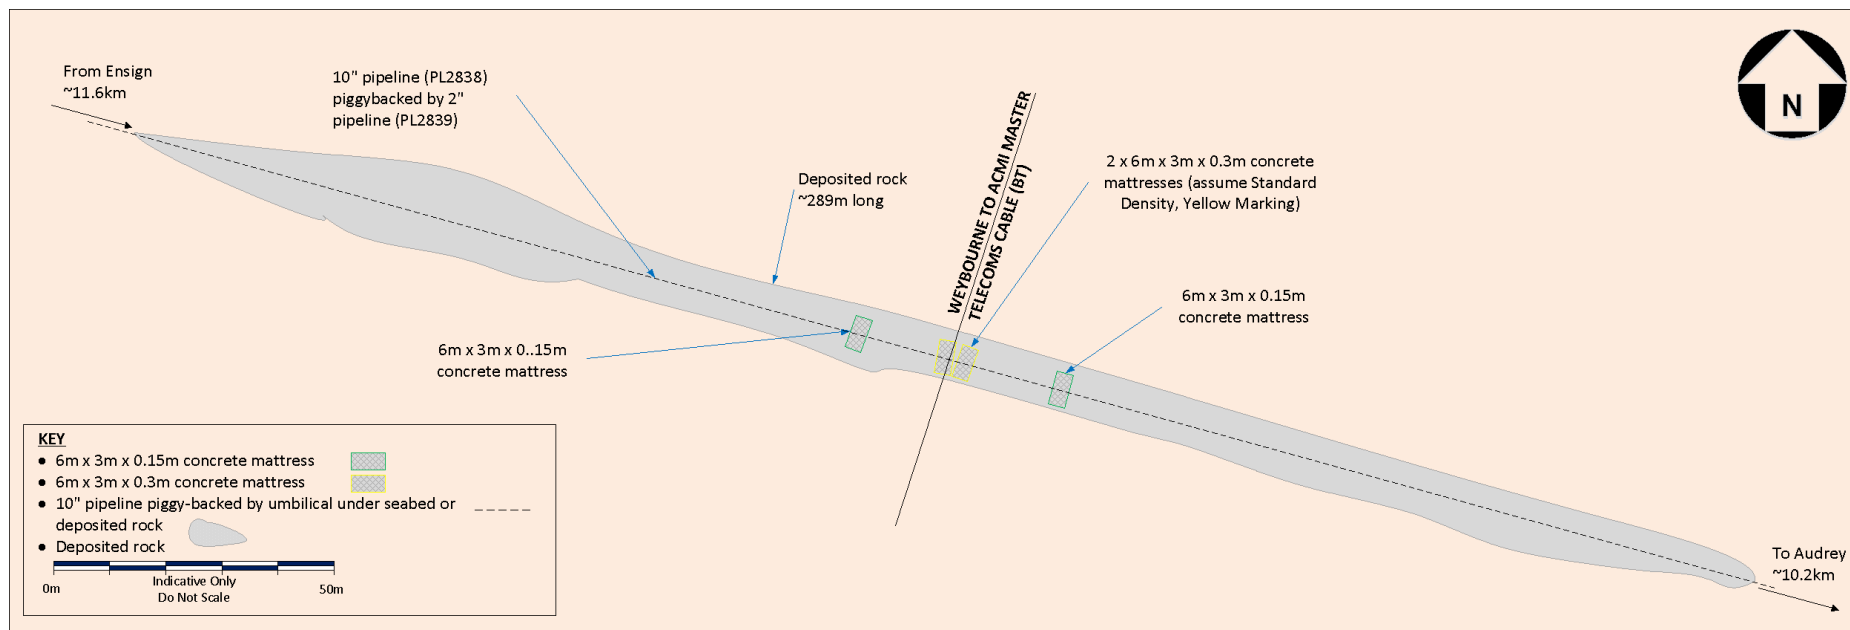

**Figure 1.6.6: Overview of Weybourne to ACMI Cable Crossing (~KP11.8)**

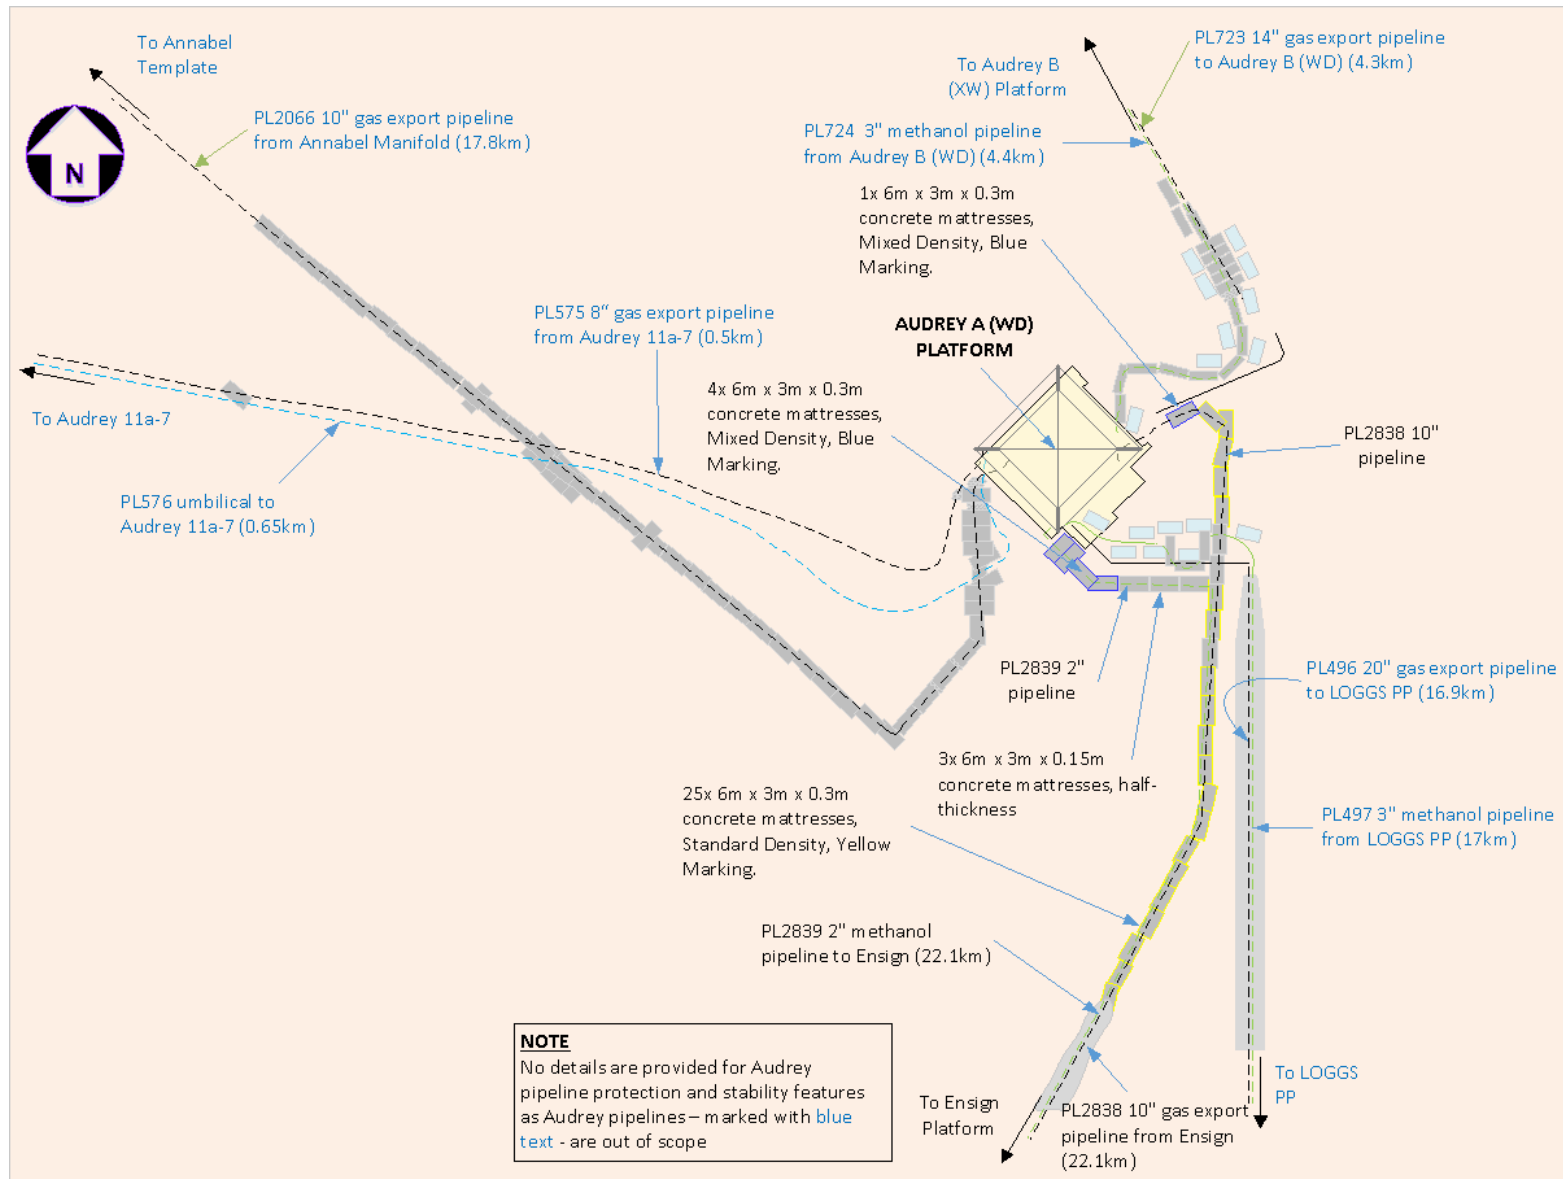


Figure 1.6.7: Overview of Approaches to Audrey A (WD)

Table 1.6.1: Adjacent Facilities					
Owner	Name	Type	Distance/Direction	Information <sup>1</sup>	Status
Spirit Energy	Audrey A (WD)	Fixed Steel Platform. NUI	16.9km ESE of Ensign	Ensign used to export gas via Audrey A onto LOGGS	Cold Suspension
Spirit Energy	Audrey B (XW)	Fixed Steel Platform. NUI	13.2km ESE of Ensign		Cold Suspension
CPUK	LOGGS Riser Platform	Fixed Steel Platform. NUI	26.8km SE of Ensign		Operational
CPUK	LOGGS Compression Platform	Fixed Steel Platform. NUI	26.9km SE of Ensign		Operational
CPUK	North Valiant Platform	Fixed Steel Platform. NUI	27km SE of Ensign		Operational
CPUK	LOGGS Production Platform	Fixed Steel Platform. NUI	27km SE of Ensign		Operational
CPUK	LOGGS Accommodation Platform	Fixed Steel Platform.	27km SE of Ensign		Operational
Shell UK Limited	Clipper PH	Fixed Steel Platform	14.3km S of Ensign	Accommodation Platform	Operational
Shell UK Limited	Clipper PR	Fixed Steel Platform. NUI	14.3km S of Ensign	Riser Platform	Operational
Shell UK Limited	Clipper PW	Fixed Steel Platform. NUI	14.8km S of Ensign	Wellhead Platform	Operational
Shell UK Limited	Clipper PC	Fixed Steel Platform. NUI	14.9km S of Ensign	Compression Platform	Operational
Shell UK Limited	Clipper PM	Fixed Steel Platform. NUI	14.9km S of Ensign	Metering & Manifold Platform	Operational
Shell UK Limited	Clipper PT	Fixed Steel Platform	14.9km S of Ensign	Production & Platform	Operational
Shell UK Limited	Carrack QA to Clipper PR 20" Pipeline	Pipeline PL1967	Pipeline crossing under PL2838 (& PL2839) at KP3.5 from Ensign (Figure 1.6.5)	20" Gas export pipeline piggybacked by 4" MEG pipeline	Operational
Shell UK Limited	Clipper PR to Carrack QA 4" Pipeline	Pipeline PL1968			
BT	Weybourne to ACMI Cable	Cable	Cable crossing under PL2838 (& PL2839) at KP11.8 from Ensign (Figure 1.6.6)	PL2838 & PL2839 cross over this cable	Unknown

<sup>1</sup> Where pipelines share a crossing, the KP refers to the gas pipeline PL2838 and not the methanol pipeline

**Table 1.6.1: Adjacent Facilities**  
**Impacts of Decommissioning Proposals**

There are no direct impacts on adjacent facilities from the associated decommissioning works outside the Ensign installation.

Where crossings and concrete mattresses are overlain with rock, it is proposed to decommission the rock and the infrastructure beneath by leaving *in situ*.

As part of the environmental appraisal we have considered potential in combination or cumulative effect of activities in the area, including decommissioning and new developments. This has been done using data that are publicly available. However, operational windows tend to include a degree of flexibility, so it is not possible to be precise. However, as part of the operational phase any potential impacts will be mitigated in two ways. The first is via direct communication with the parties involved, and the other is via submission of the MATs and SATs.

## 1.7 Industrial Implications

The activities to decommission the pipelines will be completed using a Dive Support Vessel (DSV), Remotely Operated Vehicle Support Vessel (ROVSV), Construction Support Vessel (CSV), or Multi Support Vessel (MSV). The need for diving related activities will be minimised.

It is Spirit Energy's intention to develop a contract strategy that will result in an efficient and cost-effective execution of the decommissioning works. Where appropriate existing framework agreements may be used for decommissioning of the pipelines and pipeline stabilisation features. Spirit Energy will try to combine Ensign decommissioning activities with other development or decommissioning activities to reduce mobilisation costs should the opportunity arise; as a minimum the current intention is for decommissioning activities at the Audrey A (WD) location to be carried out at the same time as activities for Ensign pipelines PL2838 and PL2839. The decommissioning schedule allows flexibility for when decommissioning operations are carried out and completed.

## 2. DESCRIPTION OF ITEMS TO BE DECOMMISSIONED

### 2.1 Pipelines including stabilisation features

Table 2.1.1: Pipeline/Flowline/Umbilical Information									
Description	Pipeline Number (as per PWA)	Diameter (NB) (inches)	Length (km) <sup>1</sup>	Description of Component Parts	Product Conveyed	From – To End Points	Burial Status	Pipeline Status	Current Content
Gas pipeline	PL2838	10"	22.315	3-LPP coated steel pipeline	Natural gas, condensate, water	ESDV flange at Ensign Platform to ESDV flange at Audrey A (WD)	Fully trenched and buried with extensive deposited rock	Out of use	Inhibited seawater
Methanol pipeline	PL2839	2"	22.240	3-LPP coated steel pipeline	Methanol and corrosion inhibitor	Audrey-LOGGS Methanol Pipeline tie-in at Audrey A (WD) to Ensign NPAI 3" Methanol Riser ESDV Flange	As PL2838	Out of use	Inhibited seawater
Control and Chemical Injection Umbilical	PLU2840	4.8"	2.190	Wire armoured Electro-Hydraulic Control and Chemical Injection Umbilical	N/A	Ensign umbilical TUTU to end of Concrete Mattresses on approach top Ensign Well	Fully trenched and buried with extensive rock	Out of use	6 x Hydraulic (Aqualink 300v2/300E) 4 x Chemical Injection (Aquaglycol 24/24F)
Gas pipeline	PL2841	10"	2.050	3-LPP coated steel pipeline	N/A	End of deposited rock on approach to Ensign Well to ESDV Flange at Ensign NPAI	As PLU2840	Out of use	Filtered Treated Seawater
<b>NOTE 1:</b> PL2838 & PL2839 and PLU2840 & PL2841 are piggybacked. PL2840 & PL2841 were not brought into operation.									

**Table 2.1.2: Subsea Pipeline Stabilisation Features**

Stabilisation Feature	Total Number	Total Weight (Te)	Location(s)	Exposed/Buried/Condition
Concrete mattresses & plinths	20	168.5	5 x MD in vicinity of undeveloped Ensign subsea well; 15 x SD in vicinity of undeveloped Ensign subsea well; Refer Figure 1.6.4.	Survey data suggests that most of the concrete mattresses in vicinity of Ensign subsea well approach are visible.
	42	348.6	12 x SD in vicinity of Ensign Platform (PL2838/PL2839); 30 x SD in vicinity of Ensign Platform (PLU2840/PL2841); Refer Figure 1.6.3.	Survey data suggests that most of the concrete mattresses in vicinity of Ensign are visible.
	4	27.2	2 x HT at Weybourne to ACMI Cable Crossing; 2 x SD at Weybourne to ACMI Cable Crossing; Refer Figure 1.6.6.	These mattresses are buried under rock at the crossing.
	7	56	2 x HT at Carrack QA to Clipper PR Pipeline Crossing; 2 x SD at Carrack QA to Clipper PR Pipeline Crossing; 1 x Concrete Plinth Type 1 (1.m x 2.4m x 6m); 1 x Concrete Plinth Type 2 (1m x 2.4m x 6m); 1 x Concrete Plinth Type 3 (0.6m x 2.4m x 6m); Refer Figure 1.6.5.	These mattresses and plinths are buried under deposited rock at the crossing.
	33	261.9	5 x MD in vicinity of Audrey A (WD) Platform; 25 x SD in vicinity of Audrey A (WD) Platform; 3 x HT in vicinity of Audrey A (WD) Platform; Refer Figure 1.6.7.	Survey data suggests that most of the concrete mattresses in vicinity of Audrey A (WD) are visible.
Grout bags	358	9.0	Notional number of grout bags. As-built data not explicit.	Survey data suggests that most of the grout bags in vicinity of Ensign are visible.
Deposited rock	n/a	1,084	Approaches to Ensign undeveloped subsea well, 121m long; Figure 1.6.4.	Largely exposed.
	n/a	2,306	Approaches to Ensign NPAL, 244m long; Figure 1.6.3.	Largely exposed

**Table 2.1.2: Subsea Pipeline Stabilisation Features**

<b>Stabilisation Feature</b>	<b>Total Number</b>	<b>Total Weight (Te)</b>	<b>Location(s)</b>	<b>Exposed/Buried/Condition</b>
	n/a	782	Approaches to Audrey A (WD), 124m long; Figure 1.6.7	Largely exposed
	n/a	6,925	PL2838 & PL2839 UHB Mitigation, intermittent between KP0.02 and KP21.1; Total 1,7km long	Largely exposed
	n/a	76	PLU2840 and PL2841 UHB Mitigation, between KP0.18 and KP.19 and between KP0.28 and KP0.29; Total 18m long	Largely exposed
	n/a	7,179	Carrack QA to Clipper PR Pipeline Crossing; 346m long; Figure 1.6.5	Largely exposed
	n/a	3,598	Weybourne to ACMI Master Cable Crossing; 249m long; Figure 1.6.6	Largely exposed

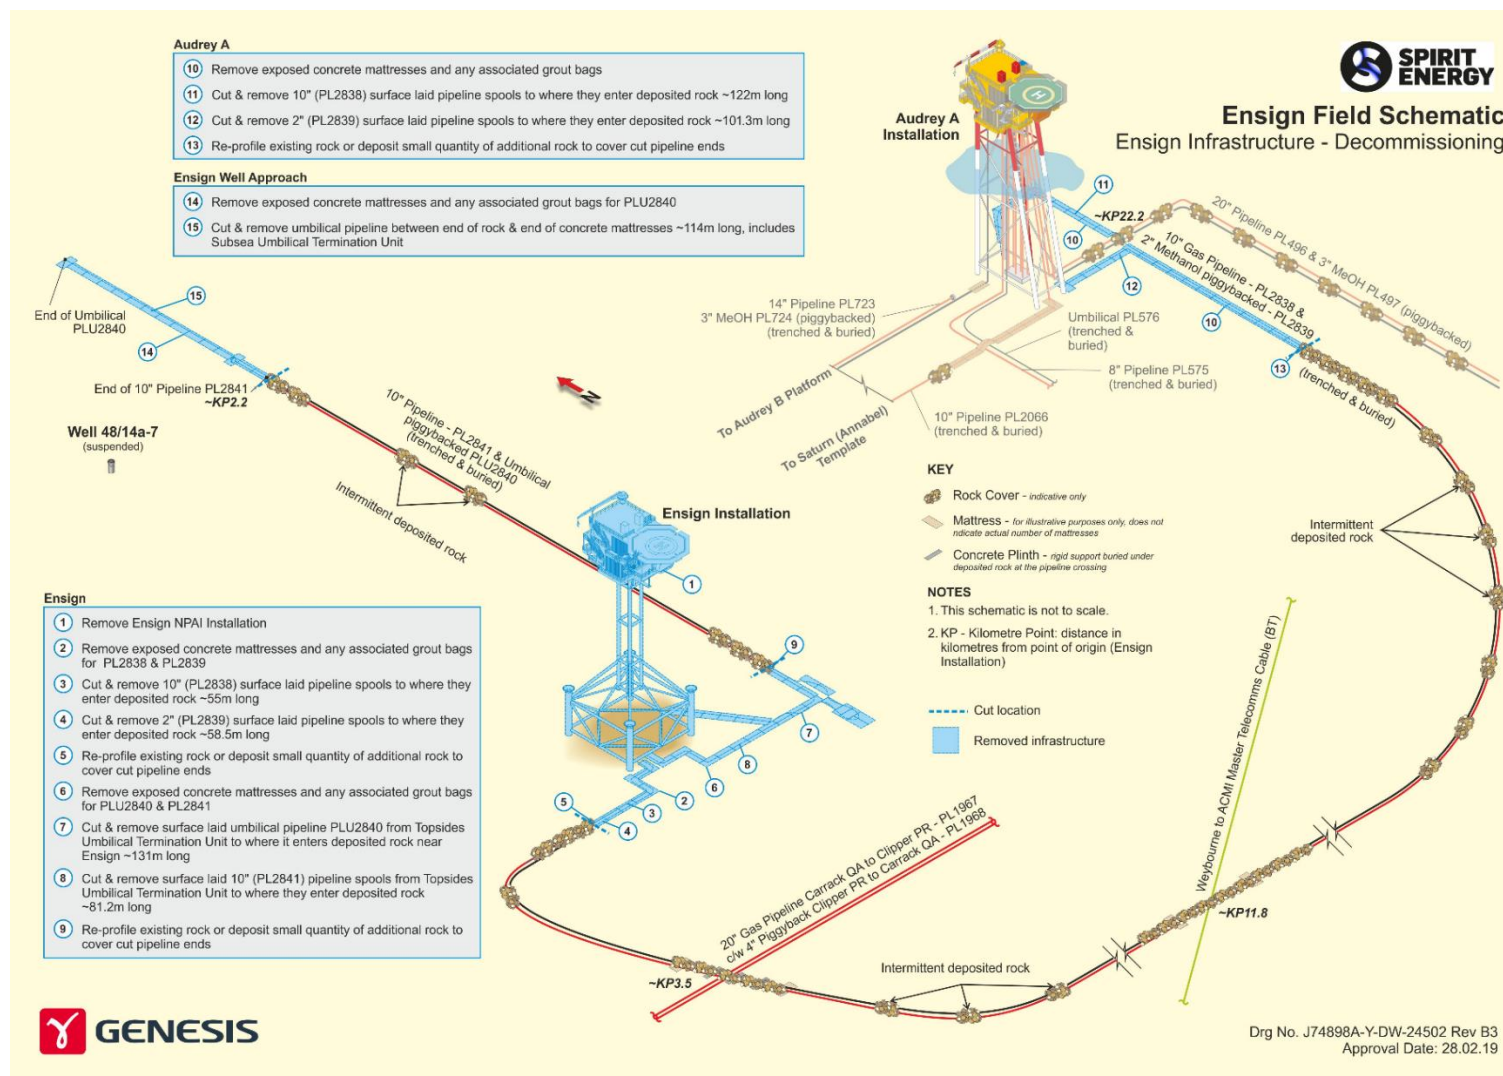


Figure 2.1.1: Overview of Ensign decommissioning proposals<sup>2</sup>

<sup>2</sup> Although the Ensign installation is not addressed in this Decommissioning Programme, for completeness the decommissioning proposals are included on this schematic.

## 2.2 Inventory Estimates

### Estimated Inventory: Pipelines & Stabilisation Features (Excl. Rock)

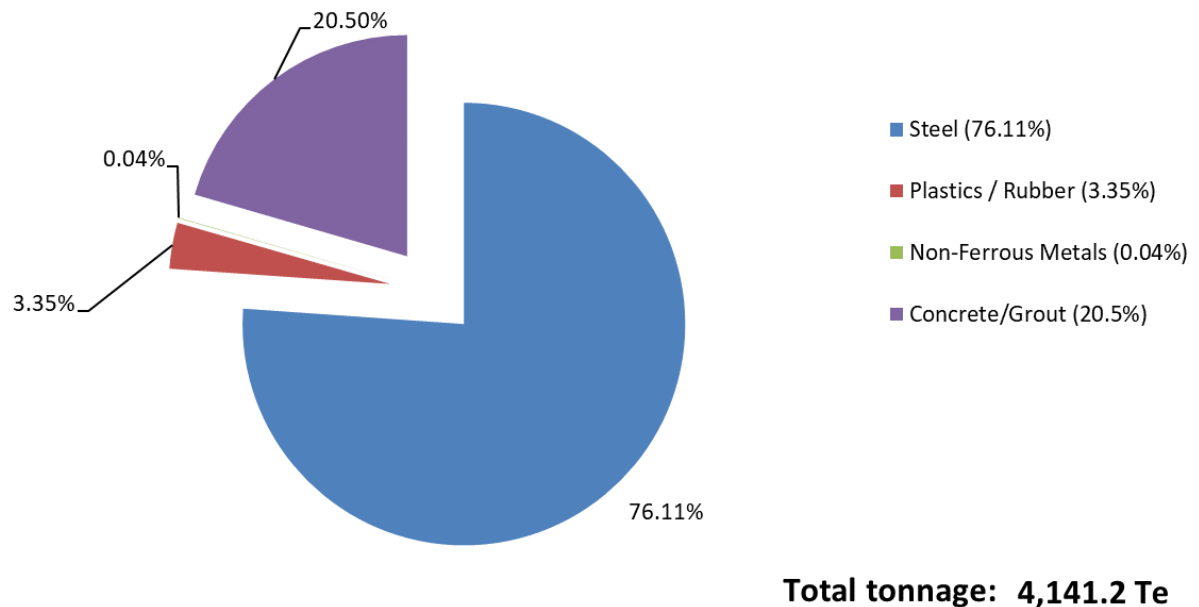


Figure 2.2.1: Pie chart of estimated pipeline inventory

Refer to Section 4.7 of the Environmental Appraisal [2] for further details.

## 3. REMOVAL AND DISPOSAL METHODS

Waste will be dealt with in accordance with the Waste Framework Directive. The reuse of an installation or pipelines (or parts thereof) is first in the order of preferred decommissioning options. Options for the reuse of the pipelines (or parts thereof) are currently under investigation. Waste generated during decommissioning will be segregated by type and periodically transported to shore in an auditable manner through licensed waste contractors. Steel and other recyclable metal are estimated to account for the greatest proportion of the materials inventory. Refer to Section 4.7 of the Environmental Appraisal [2] for further details concerning disposal of waste.

## 3.1 Pipelines

### 3.1.1 Decommissioning Options

All exposed pipelines or pipespools on approach to the undeveloped subsea well, the Ensign installation and Audrey A (WD) installation will be completely removed. That is, all pipelines buried under concrete mattresses that would otherwise be exposed will be removed.

The following options considered and identified in terms of applicability to the pipelines listed in Table 3.1.1 are:

- 1) Complete removal;
- 2) Leave *in situ*, making pipeline ends safe.

Table 3.1.1: Pipeline or Pipeline Groups Decommissioning Options			
Pipeline or Group	Condition of line/group (Surface laid/Trenched/ Buried/ Spanning)	Whole or part of pipeline/group	Decommissioning options considered
PL2838 & PL2839	Trenched and buried throughout with deposited rock at locations (total length of rock 2,544m) to prevent upheaval buckling, at pipeline crossings, and on approach to the Ensign and Audrey A (WD) installations.	Whole 10" gas pipeline and piggybacked 2" methanol pipeline, except short lengths of pipespools buried under concrete mattresses.	1 & 2
PLU2840 & PL2841	Trenched and buried throughout with deposited rock at locations (total length 259m) to prevent upheaval buckling, and on approach to the undeveloped Ensign Well and Ensign installation.	Whole unused 10" gas pipeline and piggybacked umbilical pipeline except short lengths buried under concrete mattresses.	1 & 2

### 3.1.2 Comparative Assessment Method

A comparative assessment of the decommissioning options was performed in accordance with the Spirit Energy Guidance for Comparative Assessments for Decommissioning. Each decommissioning option was qualitatively assessed against Safety, Environment, Technical and Societal and Cost. Refer [3] for details.

### 3.1.3 Outcome of Comparative Assessment

Table 3.1.2: Outcomes of Comparative Assessment		
Pipeline or Group	Recommended Option	Justification
PL2838 & PL2839	<p>Leave most of the pipelines <i>in situ</i>.</p> <p>At Ensign sever the pipelines where they emerge from the deposited rock and disconnect them from the riser flanges. Completely remove otherwise exposed 10" pipespools (~55m long) and exposed 2" methanol pipespools (~58.5m) once the associated stabilisation features have been removed.</p> <p>At Audrey A (WD) sever the pipeline or pipespools where they emerge from the</p>	Both pipelines are buried and stable for most of their length except for the ends at Ensign and Audrey A (WD). Therefore, we propose to leave most of the pipelines <i>in situ</i> except for the short-exposed ends. This will result in minimal seabed disturbance, lower energy usage, and reduced risk to personnel and lower cost; all contribute to the proposed

**Table 3.1.2: Outcomes of Comparative Assessment**

Pipeline or Group	Recommended Option	Justification
	<p>deposited rock and disconnect them from the riser flanges. Completely remove otherwise exposed 10" pipespools (~122m) and exposed 2" methanol pipespools (~101.3m) once the associated stabilisation features have been removed.</p> <p>At the ends the deposited rock will be redistributed slightly to ensure that the pipeline ends remain buried; as a contingency measure it may be necessary to deposit up to 2Te of loose rock over each of the pipeline ends.</p>	<p>recommendation.</p> <p>Refer Appendix A.1 for pipeline burial profile.</p> <p>Monitoring to confirm the pipelines remain buried will be completed to a schedule agreed with OPRED.</p>
PLU2840 & PL2841	<p>Leave most of the pipelines <i>in situ</i>.</p> <p>On approach to the undeveloped Ensign subsea well only the umbilical pipeline is protected by the concrete mattresses; completely remove the section of umbilical pipeline as it exits the deposited rock to the end of the concrete mattresses (~114m long). At this point the 10" pipeline does not extend past the deposited rock.</p> <p>At Ensign sever the 10" pipeline where it emerges from the deposited rock and disconnect it from the riser flange. Disconnect the umbilical pipeline from the TUTU and cut umbilical where it enters the deposited rock. Completely remove otherwise exposed 10" pipespools (~81.2m) and exposed umbilical pipeline (~131m; this dimension excludes length between TUTU and bottom of J-tube ~50m long) once the associated stabilisation features have been removed. The short length of umbilical pipeline inside the J-tube and up to the TUTU will also be recovered as part of removal operations.</p> <p>At the ends the deposited rock will be redistributed slightly to ensure that the pipeline ends remain buried; as a contingency measure it may be necessary to deposit up to 2Te of loose rock over each of the pipeline ends.</p>	<p>Both pipelines are buried and stable for most of their length. Therefore, we propose to leave most of the pipelines <i>in situ</i> except for the short otherwise-exposed ends. This will result in minimal seabed disturbance, lower energy usage, and reduced risk to personnel and lower cost; all contribute to the proposed recommendation.</p> <p>Refer Appendix A.2 for pipeline burial profile.</p> <p>Monitoring to confirm the pipelines remain buried will be completed to a schedule agreed with OPRED.</p>

## 3.2 Pipeline Stabilisation Features

All concrete mattresses will be recovered to shore unless noted otherwise.

Table 3.2.1: Pipeline Stabilisation Features			
Stabilisation features	Number	Description	Disposal Route (if applicable)
Concrete mattresses (underneath pipeline crossings, underneath or on top of pipespools)	103	20x (6m x 3m x 0.3m) near undeveloped subsea well; 42x (6m x 3m x 0.3m) near Ensign; 4x (6m x 3m x 0.3m) at Weybourne to ACMI Cable Crossing; 2x (6m x 3m x 0.3m) at Carrack QA to Clipper PR Pipeline Crossing; 2x (6m x 3m x 0.15m) at Carrack QA to Clipper PR Pipeline Crossing; 33x (30x 6m x 3m x 0.3m & 3x 6m x 3m x 0.15m) near Audrey A (WD).	Recover all exposed concrete mattresses to shore for re-use, recycling or disposal. Leave the concrete mattresses buried under deposited rock at the pipeline and cable crossings <i>in situ</i> .
Concrete plinths	3	At Carrack QA to Clipper PR Pipeline Crossing; 1x Concrete Plinth Type 1 (1.m x 2.4m x 6m); 1x Concrete Plinth Type 2 (1m x 2.4m x 6m); 1x Concrete Plinth Type 3 (0.6m x 2.4m x 6m).	Leave the concrete plinths buried under deposited rock at the pipeline crossing <i>in situ</i> .
Grout bags, commonly placed adjacent to or over concrete mattresses.	358	25kg grout bags.	If found and exposed, recover to shore for re-use, recycling or disposal.
Deposited Rock	21,951Te	Interspersed along the pipeline routes.	Leave <i>in situ</i>

## 3.3 Waste Streams

Table 3.3.1: Waste Stream Management Method	
Waste Stream	Removal and Disposal Method
Bulk liquids	The various pipelines have been flushed and left filled with seawater. The corrosion inhibitor and methanol has already been removed from the methanol line, and the umbilical pipeline has never been used. Any residual fluids from within these pipelines will be released to marine environment under permit prior to removal to shore. Further cleaning and decontamination will take place onshore prior to re-use or recycling.
Marine growth	Where necessary and practicable, to allow access some marine growth will be removed offshore. The remainder will be brought to shore and disposed of according to guidelines and company policies.
NORM	Tests for NORM will be undertaken offshore by the Radiation Protection Supervisor and any NORM encountered will be dealt with and disposed of in accordance with guidelines and company policies and under appropriate permit.
Asbestos	No asbestos is expected, but if small quantities are found they will be dealt with and disposed of in accordance with guidelines and company policies.
Other hazardous wastes	Other hazardous waste will be recovered to shore and disposed of according to guidelines and company policies and under appropriate permit.

**Table 3.3.1: Waste Stream Management Method**

Waste Stream	Removal and Disposal Method
Onshore Dismantling sites	Appropriate licensed sites will be selected. The dismantling site must demonstrate proven disposal track record and waste stream management throughout the deconstruction process and demonstrate their ability to deliver re-use and recycling options.

**Table 3.3.2: Inventory Disposition**

Inventory	Total Inventory Tonnage	Planned tonnage to shore	Planned tonnage decommissioned <i>in situ</i>
Pipelines	4,141	860	3,281

All recovered material will be transported onshore for re-use, recycling or disposal. It is not possible to predict the market for reusable materials with any confidence, so the figures presented here are aspirational.

**Table 3.3.3: Re-use, Recycle & Disposal Aspirations for Recovered Material**

Inventory	Re-use	Recycle	Disposal
Pipelines	<5%	>95%	<5%

Refer to [2] for further details.

## 4. ENVIRONMENTAL IMPACT ASSESSMENT

### 4.1 Potential Environmental Impacts and their Management

Environmental Appraisal Summary:

There will be some planned and unplanned environmental impacts arising from decommissioning of the Ensign infrastructure (48/14a). Long-term environmental impacts from the decommissioning operations are expected to be low. Incremental cumulative impacts and trans-boundary effects associated with the planned decommissioning operations are also expected to be low.

#### 4.1.1 Overview

Table 4.1.1: Environmental Impact Management [2]

Activity	Main Impacts	Management
Decommissioning pipelines (offshore)	<p>Decommissioning of the pipelines <i>in situ</i> will require activities such as local water-jetting of sediments, cutting and temporary placement of equipment or components. Any exposed pipeline ends will be cut back at the buried location. Removed components will be lifted from the seabed by ROVSV or CSV. Principal impacts will include</p> <ul style="list-style-type: none"><li>• disturbance of the seabed from cutting and removal activities;</li><li>• noise from removal and cutting activities and operational support vessels;</li><li>• operational discharges from vessels;</li><li>• production of waste material.</li></ul> <p>These effects are expected to be short-term and localised. The seabed and associated ecosystem is expected to recover rapidly once activities cease.</p>	<p>Activities will be planned to be executed as efficiently as possible, minimising disturbance of the seabed to reduce the potential for impact on the area around the pipelines.</p> <p>Consideration will be given where equipment and/or components should be temporarily placed on the seabed prior to removal, seeking to minimise the requirement wherever possible.</p> <p>Vessels will be managed to minimise the durations required and associated discharges. In addition, on board operational practices will address fuel efficiency, noise management and minimise waste.</p>
Decommissioning stabilisation features	<p>The Decommissioning Programme includes the removal of existing concrete mattresses and any</p>	<p>Activities will be planned to be executed as efficiently as possible, minimising disturbance of the seabed to reduce the potential for</p>

**Table 4.1.1: Environmental Impact Management [2]**

Activity	Main Impacts	Management
	<p>exposed grout bags if found. Mattresses and grout bags will be lifted from the seabed by ROVSV or CSV. Impacts will include disturbance of the seabed and noise from vessels. These effects are expected to be short-term and localised. The seabed and associated ecosystem is expected to recover rapidly once activities cease.</p>	<p>impact.</p> <p>Consideration will be given to how the work is to be conducted seeking to minimise the requirement wherever possible.</p> <p>Vessels will be managed to minimise the durations required and associated discharges.</p> <p>In addition, on board operational practices will address fuel efficiency, noise management and minimise waste, in accordance with the marine assurance standard.</p>

## 5. INTERESTED PARTY CONSULTATIONS

### 5.1 Consultations Summary

During the public consultation period (08 October 2019 to 07 November 2019), copies of the Decommissioning Programmes and supporting documents were forwarded to the following Statutory Consultees:

- The National Federation of Fishermen's Organisations (NFFO);
- The Scottish Fishermen's Federation (SFF);
- The Northern Ireland Fish Producer's Organisation (NIFPO); and,
- Global Marine Group (GMG).

Meetings and telephone calls have been held with NFFO to advise of progress and to provide more detail of the proposals.

Copies of the Decommissioning Programmes and supporting documents were made available as a download from the Spirit Energy Decommissioning website: [www.spirit-energy.com/ensign](http://www.spirit-energy.com/ensign)

A bound copy of the Decommissioning Programmes was made available in the Hull Central Library.

A public notice was published in the following local newspapers and online media published by JPI Media:

- Hull Daily Mail – 08 October 2019;

A public notice was also published in the "London Gazette" on 08 October 2019. Please refer to Appendix B.1 for a copy of the public notices. The public notice gave instructions for representations to be made in writing by Thursday 07 November 2019. Spirit Energy received no comments or any written or verbal representation from the public in direct response to the public notice or during the public consultation period.

Copies were also submitted for consideration to OPRED.

### 5.2 Stakeholder Consultations & Feedback

**Table 5.2.1: Summary of Stakeholder Comments**

Who	Comment	Response
<b>INFORMAL CONSULTATIONS</b>		
NFFO	The decommissioning proposals herein were presented to NFFO on 22 Oct 2018.	The NFFO had no adverse comment to make concerning the decommissioning proposals.
SFF	The decommissioning proposals herein were presented to SFF on 28 Jan 2018.	The SFF had no adverse comment to make concerning the decommissioning proposals.
<b>STATUTORY CONSULTATIONS</b>		
NFFO	The Decommissioning Programmes and supporting documentation were sent to NFFO via email on 08 October 2019.	No further comment concerning the proposals, noting that NFFO would be looking forward to working closely with Spirit-Energy throughout the decommissioning process.
SFF	The Decommissioning Programmes and supporting documentation were	The SFF had no adverse comment to make concerning the decommissioning

**Table 5.2.1: Summary of Stakeholder Comments**

Who	Comment	Response
	sent to NIFPO via email on 08 October 2019.	proposals.
NIFPO	The Decommissioning Programmes and supporting documentation were sent to SFF via email on 08 October 2019.	The NIFPO had no adverse comment to make concerning the decommissioning proposals.
GMG	The Decommissioning Programmes and supporting documentation were sent to GMG via email on 08 October 2019.	The GMG had no adverse comment to make concerning the decommissioning proposals. Notify Kingfisher Fortnightly Bulletin and to ESCA as well as any other methods of ensuring that other sea users are informed of any active operations that interact with the seabed.
Public	No adverse comments received.	

## **6. PROGRAMME MANAGEMENT**

### **6.1 Project Management and Verification**

A Spirit Energy project management team will manage the operations of competent contractors selected for all decommissioning activities. The team will ensure the decommissioning is executed safely, in accordance with legislation and Spirit Energy Health and Safety principles. Changes to the Decommissioning Programme will be discussed with OPRED with any necessary approvals sought.

### **6.2 Post-Decommissioning Debris Clearance and Verification**

#### **6.2.1 Offshore**


The Ensign installation sites including the 500m safety zones and along a 100m wide corridor along the all pipelines will be subject to clean seabed verification surveys when decommissioning activities have concluded. Due to the sensitive nature of the North Norfolk Sandbanks and surrounding area, we would propose to work with OPRED and NFFO to use a non-invasive and evidence-based approach to establish an acceptable clear seabed for the pipelines outside of the existing 500m safety zone.

Any seabed oil and gas debris will be recovered for onshore disposal or recycling in line with existing disposal methods. Independent verification of a clear seabed will be obtained by working with OPRED and NFFO to agree on using a non-invasive and evidence-based approach. This will be included in the Close Out Report and sent to the Seabed Data Centre (Offshore Installations) at the Hydrographic Office.

### **6.3 Schedule**


A proposed schedule is provided in Figure 6.3.1. The activities are subject to the acceptance of the Decommissioning Programme presented in this document and any unavoidable constraints (e.g. vessel availability) that may be encountered while executing the decommissioning activities. Therefore, activity schedule windows have been included to account for this uncertainty.

The commencement of offshore decommissioning activities will depend on commercial agreements and commitments.

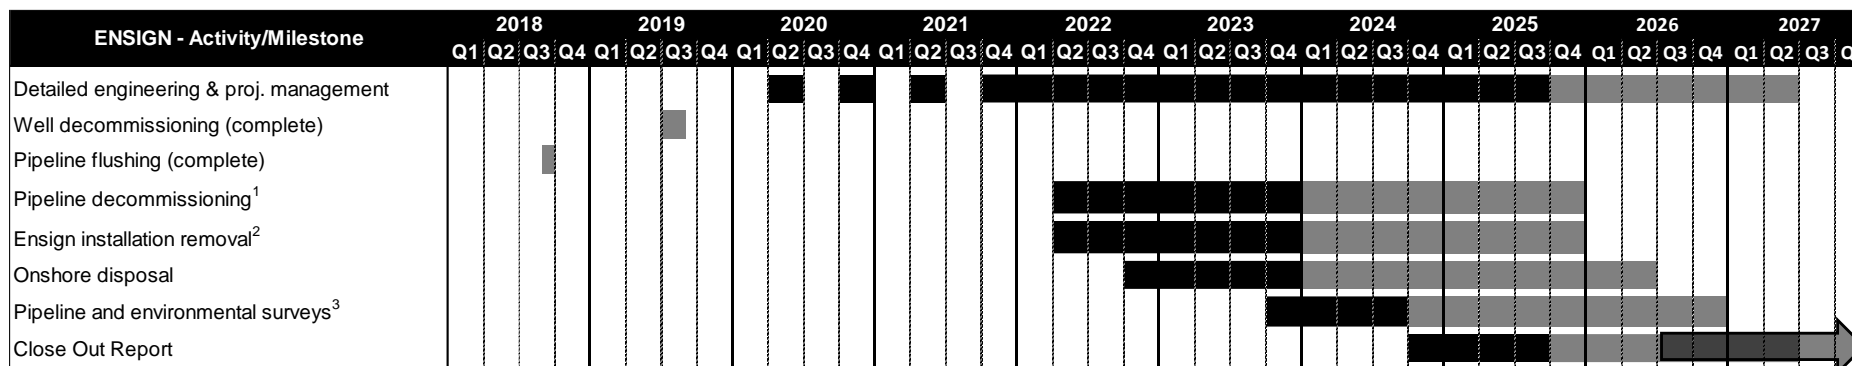

#### Notes / Key

Earliest potential activity. 

Activity window to allow commercial flexibility associated with decommissioning activities. 

1. Current intention is that Ensign pipelines at Audrey 'A' be decommissioned at the same time as the pipelines at Audrey 'A' while retaining some flexibility in schedule;

2. Current intention is that Ensign installation will be removed in the same campaign as the Audrey installations while retaining some flexibility in schedule;

3. Post decommissioning surveys; timing of any future surveys to be agreed with OPRED.

Figure 6.3.1: Gantt Chart of Project Plan

## **6.4 Costs**

Decommissioning costs will be provided separately to OPRED and OGA.

## **6.5 Close Out**

A close out report will be submitted within 12 months of completion of the offshore work, including debris clearance and post-decommissioning surveys, as required in OPRED guidance notes. The report will explain any variance from the Decommissioning Programme.

## **6.6 Post-Decommissioning Liability, Monitoring and Evaluation**

After decommissioning activities have been concluded, pipeline status surveys and environmental surveys will be completed with the findings being sent to OPRED in the Close Out report. The frequency and scope of future surveys will be agreed with OPRED and supported by a risk assessment. Residual liability will remain with the Section 29 holders identified in Table 1.4.2. Unless agreed otherwise in advance with OPRED, Spirit Energy will remain the focal point for such matters, such as any change in ownership, for example.

The requirement for legacy and liability management will be described in more detail in the Close Out report.


## **7. SUPPORTING DOCUMENTS**

- [1] Fugro (2019) Pre-Decommissioning Environmental & Debris Survey, Ensign, 182070V1.1;
- [2] Spirit Energy (2019) Ensign Decommissioning Environmental Appraisal, SPT-DCM-SNS0104-REP-0002;
- [3] Spirit Energy (2019) Ensign Decommissioning Comparative Assessment for Pipelines, SPT-DCM-SNS-104-REP-0003;
- [4] Spirit Energy (2019) Ensign Installation Decommissioning Programme, SPT-DCM-SNS0104-REP-0005.

## APPENDIX A BURIAL PROFILES

### Appendix A.1 PL2838 & PL2839 Burial Profile

**PL2838** is the 10" gas export pipeline ~22.3km long overall, and it is piggybacked with **PL2839** (~22.2km long). That is, **PL2839** is connected to **PL2838** using clamps. **PL2838** is routed from the Ensign platform to Audrey A (WD) and from there gas used to be comingled with Gas from Audrey A (WD) and transported via **PL496** to LOGGS Production Platform. At ~KP3.5 the pipelines cross over the 20" Carrack QA to Clipper PR gas export pipeline and 4" piggybacked Clipper PR to Carrack QA MEG pipeline. At ~KP11.8 the pipelines cross over the Weybourne to ACMI Master cable. Both pipelines exhibit a good depth of burial and cover along their original trenched and buried lengths.

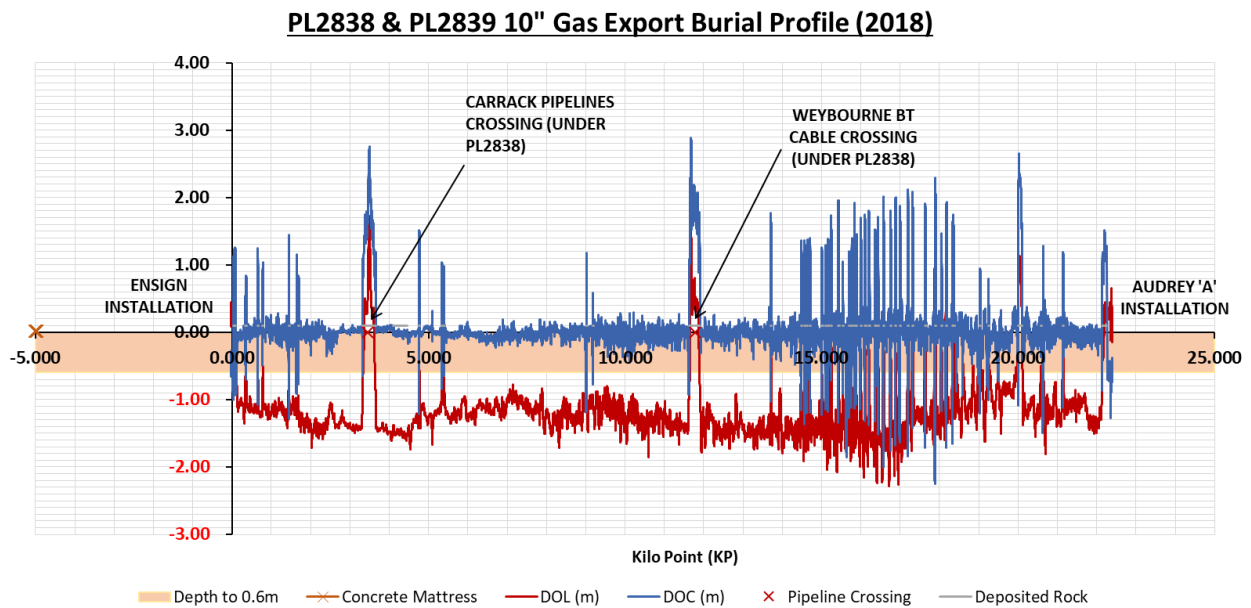

**Figure A.1.1: PL2838 (& PL2839) Burial Profile**

## Appendix A.2 PLU2840 & PL2841 Burial Profile

**PL2841** is the 10" gas export pipeline ~2.1km long overall, and it is piggybacked by **PLU2840**, an umbilical pipeline (~2.2km long). That is, **PLU2840** is connected to **PL2841** using clamps. **PLU2840** is routed to the end of the concrete mattresses on approach to the suspended subsea well, whereas **PL2840** terminates at the end of the deposited rock. Both pipelines exhibit a good depth of burial and cover along their original trenched and buried lengths.

### PL2841 10" Gas Export Burial Profile (2018)

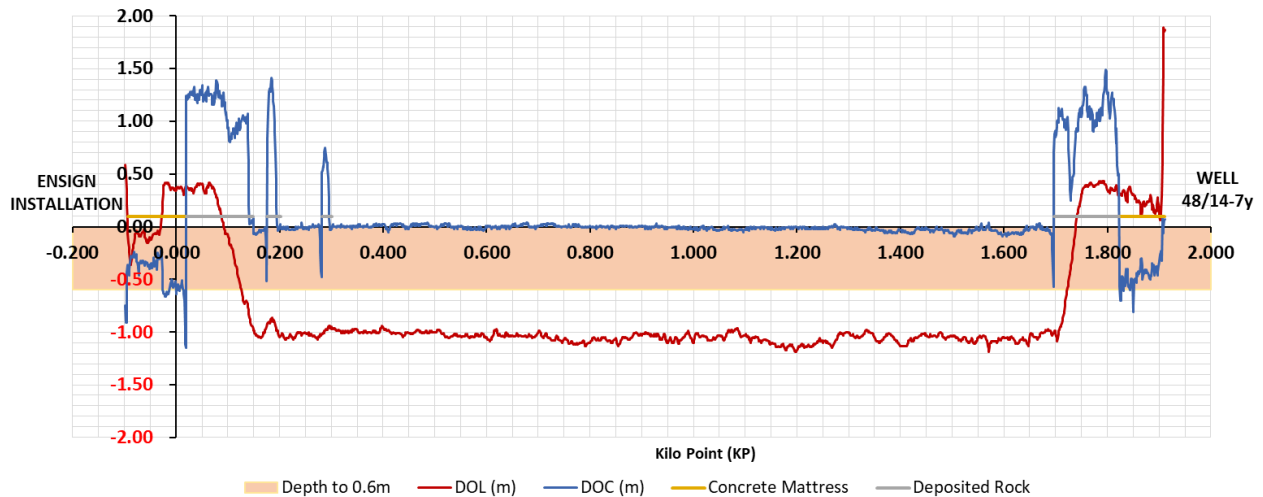


Figure A.2.1: PL2841 Burial Profile

### PLU2840 Umbilical Burial Profile (2018)

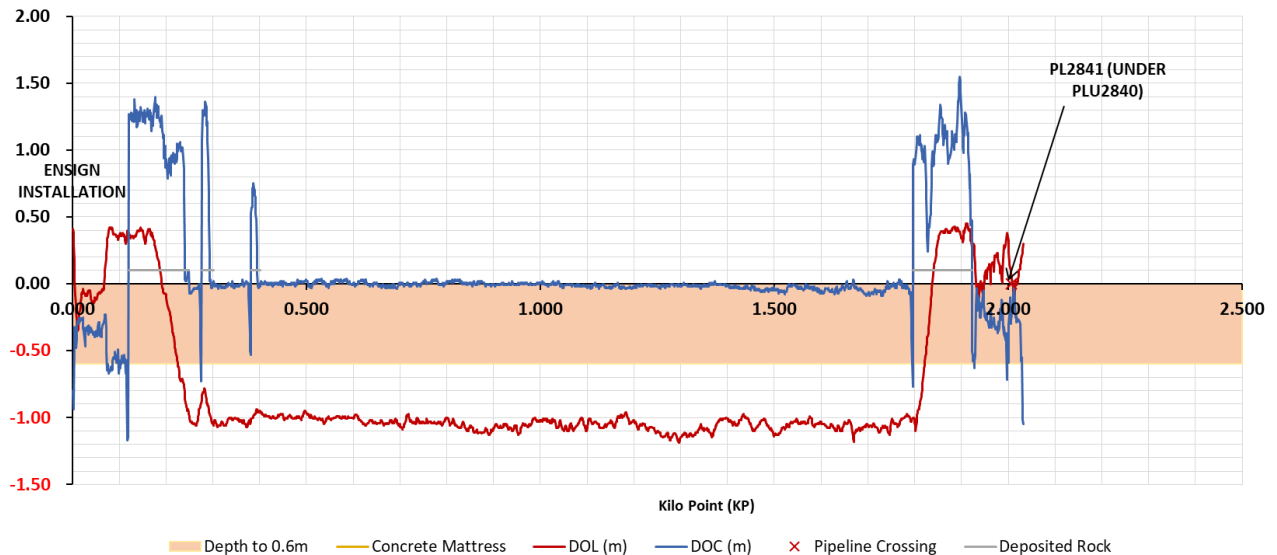


Figure A.2.2: PLU2840 Burial Profile

## APPENDIX B PUBLIC NOTICE & CONSULTEE CORRESPONDENCE

### Appendix B.1 Public Notices

<p><b>SPIRIT ENERGY NORTH SEA LIMITED THE PETROLEUM ACT 1998 ENSIGN DECOMMISSIONING PROJECT</b></p> <p>Spirit Energy North Sea Limited has submitted, for the consideration of the Secretary of State for Business, Energy &amp; Industrial Strategy, draft Decommissioning Programmes for the Ensign installations and associated pipelines in accordance with the provisions of the Petroleum Act 1998. It is a requirement of the Act that interested parties be consulted on such decommissioning proposals.</p> <p>The facilities covered by the Decommissioning Programmes are:</p> <ul style="list-style-type: none"> <li>• The Ensign installation offshore ~109km east of Easington in UK block 48/14a; and,</li> <li>• The pipelines associated with Ensign (PL2838, PL2839, PLU2840 &amp; PL2841).</li> </ul> <p>Spirit Energy North Sea Limited hereby gives notice that the Ensign Decommissioning Programmes can be viewed at the internet address: <a href="http://www.spirit-energy.com/ensign">www.spirit-energy.com/ensign</a></p> <p>Alternatively, a hardcopy of the Decommissioning Programmes can be inspected by contacting Ross Davidson, Head of Communications, at the following location during office hours: Spirit Energy Limited IQ Building, 15 Justice Mill Lane, Aberdeen, AB11 6EQ</p> <p>Hard copies of the Programmes will also be made available at Hull Central Library, Albion Street, Hull, HU1 3TF.</p> <p>Representations regarding the Ensign Decommissioning Programmes should be submitted in writing to Ross Davidson, Head of Communications, at the above address. Representations should be received by 07 November 2019.</p> <p>Date 08 October 2019.</p> <p>Ross Davidson, Head of Communications, Spirit Energy Limited, IQ Building, 15 Justice Mill Lane, Aberdeen AB11 6EQ</p>	<p><b>SPIRIT ENERGY NORTH SEA LIMITED THE PETROLEUM ACT 1998 ENSGN DECOMMISSIONING PROJECT</b></p> <p>Spirit Energy North Sea Limited has submitted, for the consideration of the Secretary of State for Business, Energy &amp; Industrial Strategy, draft Decommissioning Programmes for the Ensign installations and associated pipelines in accordance with the provisions of the Petroleum Act 1998. It is a requirement of the Act that interested parties be consulted on such decommissioning proposals. The facilities covered by the Decommissioning Programmes are:</p> <ul style="list-style-type: none"> <li>• The Ensign installation offshore ~109km east of Easington in UK block 48/14a; and,</li> <li>• The pipelines associated with Ensign (PL2838, PL2839, PLU2840 &amp; PL2841).</li> </ul> <p>Spirit Energy North Sea Limited hereby gives notice that the Ensign Decommissioning Programmes can be viewed at the internet address: <a href="http://www.spirit-energy.com/ensign">www.spirit-energy.com/ensign</a></p> <p>Alternatively, a hardcopy of the Decommissioning Programmes can be inspected by contacting Ross Davidson, Head of Communications, at the following location during office hours:</p> <p>Spirit Energy Limited IQ Building 15 Justice Mill Lane Aberdeen AB11 6EQ</p> <p>Hard copies of the Programmes will also be made available at Hull Central Library, Albion Street, Hull, HU1 3TF.</p> <p>Representations regarding the Ensign Decommissioning Programmes should be submitted in writing to Ross Davidson, Head of Communications, at the above address. Representations should be received by 07 November 2019.</p> <p>Date 08 October 2019</p> <p><i>Ross Davidson</i>, Head of Communications, Spirit Energy Limited, IQ Building, 15 Justice Mill Lane, Aberdeen AB11 6EQ (3402002)</p>
---	---

Table B.1.1: Public Notices: Hull Daily Mail & The London Gazette (published 08 Oct 2019)

## Appendix B.2 NFFO – Mr Ian Rowe, via email

# NFFO Services Ltd



30 Monkgate  
York  
YO31 7PF  
Tel: 01904 635 432  
8<sup>th</sup> October 2019.

Ross Davidson  
Spirit Energy  
IQ Building  
15 Justice Mill Lane  
Aberdeen  
AB11 6EQ

Hello Ross

In reference to the decommissioning program for the Ensign and associated infield pipelines.

The National Federation Fisherman's Organisation would like to thank Spirit Energy for the detailed documentation explaining the planned methodology on planned decommissioning of these assets.

The Federation has no adverse comments to add on the documentation received regarding the proposed decommissioning program of these assets and NFFO Services department look forward to working closely with Spirit Energy throughout the decommissioning process.

Kind Regards

Ian Rowe

NFFO Services

General Manager.

**From:** Davidson, Ross  
**Sent:** 08 October 2019 08:36  
**To:** ian@nffo.org.uk  
**Cc:** Laptech Ltd, Aberdeen DC  
**Subject:** Consultation: Spirit Energy's Ensign Decommissioning Programmes

Dear Ian,

Spirit Energy North Sea Limited has submitted, for the consideration of the Secretary of State for Business, Energy & Industrial Strategy, draft Decommissioning Programmes for the Ensign installations and associated pipelines in accordance with the provisions of the Petroleum Act 1998. It is a requirement of the Act that interested parties be consulted on such decommissioning proposals.

The facilities covered by the Decommissioning Programmes are:

- The Ensign installation offshore ~109km east of Easington in UK block 48/14a; and,
- The pipelines associated with Ensign (PL2838, PL2839, PLU2840 & PL2841).

Spirit Energy North Sea Limited hereby gives notice that the Ensign Decommissioning Programmes can be viewed at the internet address: [www.spirit-energy.com/ensign](http://www.spirit-energy.com/ensign).

Alternatively, electronic copies of the Decommissioning Programmes, Comparative Assessment and Environmental Appraisal are attached to this email.

Separately, you will receive a document transmittal from our document control department, please can you return this to acknowledge receipt.

Please can you confirm that you've received all that you require, and if you have any questions or concerns, please make any representations to the undersigned by 07 November, 2019.

Best regards,  
Ross.

**Ross Davidson**, Head of Communications, SPIRIT ENERGY, IQ Building, 15 Justice Mill Lane, Aberdeen AB11 6EQ

## **Appendix B.3 SFF – Mr Steven Alexander & Mr Andrew Third**

**From:** Steven Alexander <S.Alexander@sff.co.uk>

**Sent:** 15 November 2019 17:12

**To:** 'Davidson, Ross' <ross.davidson@spirit-energy.com>; Andrew Third <A.Third@sff.co.uk>

**Cc:** Laptech Ltd; Aberdeen DC; MacKenzie, Susan

**Subject:** RE: Consultation: Spirit Energy's Ensign Decommissioning Programmes

Hi Ross,

Given the locality of this particular Field, I can advise that the Scottish Fishermen's Federation (SFF) is content to leave it with the National Federation of Fishermen's Organisations (NFFO) to respond to you on these plans.

Thanks and kind regards,

Steven

Steven Alexander, Offshore Liaison, Scottish Fishermen's Federation, 24 Rubislaw Terrace, Aberdeen, AB10 1XE

---

**From:** Davidson, Ross

**Sent:** 08 October 2019 08:38

**To:** s.alexander@sff.co.uk; a.third@sff.co.uk

**Cc:** Laptech Ltd; Aberdeen DC

**Subject:** Consultation: Spirit Energy's Ensign Decommissioning Programmes

Dear Steven, Andrew,

Spirit Energy North Sea Limited has submitted, for the consideration of the Secretary of State for Business, Energy & Industrial Strategy, draft Decommissioning Programmes for the Ensign installations and associated pipelines in accordance with the provisions of the Petroleum Act 1998. It is a requirement of the Act that interested parties be consulted on such decommissioning proposals.

The facilities covered by the Decommissioning Programmes are:

- The Ensign installation offshore ~109km east of Easington in UK block 48/14a; and,
- The pipelines associated with Ensign (PL2838, PL2839, PLU2840 & PL2841).

Spirit Energy North Sea Limited hereby gives notice that the Ensign Decommissioning Programmes can be viewed at the internet address: [www.spirit-energy.com/ensign](http://www.spirit-energy.com/ensign).

Alternatively, electronic copies of the Decommissioning Programmes, Comparative Assessment and Environmental Appraisal are attached to this email.

Separately, you will receive a document transmittal from our document control department, please can you return this to acknowledge receipt.

Please can you confirm that you've received all that you require, and if you have any questions of concerns, please make any representations to the undersigned by 07 November, 2019.

Best regards,

Ross.

**Ross Davidson**, Head of Communications, SPIRIT ENERGY, IQ Building, 15 Justice Mill Lane, Aberdeen AB11 6EQ

## **Appendix B.4 NIFPO – Mr Wayne Sloan**

**From:** Wayne Sloan <waynes@fpoffshoreservices.co.uk>

**Sent:** 15 November 2019 15:36

**To:** Davidson, Ross <ross.davidson@spirit-energy.com>

**Cc:** Laptech Ltd; Aberdeen DC; MacKenzie, Susan

**Subject:** Re: Consultation: Spirit Energy's Ensign Decommissioning Programmes

Hi Ross,

Apologies for not responding. I've no feedback on any of the documents. Cheers

Kind Regards

Wayne Sloan, Offshore Manager, FP Offshore Services (NI) Ltd

---

**From:** Davidson, Ross

**Sent:** 08 October 2019 08:39

**To:** waynes@fpoffshoreservices.co.uk

**Cc:** Laptech Ltd; Aberdeen DC

**Subject:** Consultation: Spirit Energy's Ensign Decommissioning Programmes

Dear Wayne,

Spirit Energy North Sea Limited has submitted, for the consideration of the Secretary of State for Business, Energy & Industrial Strategy, draft Decommissioning Programmes for the Ensign installations and associated pipelines in accordance with the provisions of the Petroleum Act 1998. It is a requirement of the Act that interested parties be consulted on such decommissioning proposals.

The facilities covered by the Decommissioning Programmes are:

- The Ensign installation offshore ~109km east of Easington in UK block 48/14a; and,
- The pipelines associated with Ensign (PL2838, PL2839, PLU2840 & PL2841).

Spirit Energy North Sea Limited hereby gives notice that the Ensign Decommissioning Programmes can be viewed at the internet address: [www.spirit-energy.com/ensign](http://www.spirit-energy.com/ensign).

Alternatively, electronic copies of the Decommissioning Programmes, Comparative Assessment and Environmental Appraisal are attached to this email.

Separately, you will receive a document transmittal from our document control department, please can you return this to acknowledge receipt.

Please can you confirm that you've received all that you require, and if you have any questions of concerns, please make any representations to the undersigned by 07 November, 2019.

Best regards,

Ross.

Ross Davidson, Head of Communications, SPIRIT ENERGY, IQ Building, 15 Justice Mill Lane, Aberdeen AB11 6EQ

## Appendix B.5 GMG – Mr John Wrottesley

**From:** Wrottesley, John (Global Marine Group) <John.Wrottesley@globalmarine.group>

**Sent:** 15 November 2019 15:37

**To:** Davidson, Ross <ross.davidson@spirit-energy.com>

**Cc:** Laptech Ltd; Aberdeen DC; MacKenzie, Susan

**Subject:** RE: Consultation: Spirit Energy's Ensign Decommissioning Programmes

Dear Ross,

Apologies for the delay in responding.

The nearest active telecommunications cables belong to Tampnet, and I note that these have been identified along with subsea power cables.

Notifications should be issued prior to and during operations in case of any future developments in close vicinity depending on operational timescales.

I would not expect any interaction with In-Service cables and have no further comment.

Best regards,

John

---

**From:** Davidson, Ross

**Sent:** 08 October 2019 08:39

**To:** john.wrottesley@globalmarine.group

**Cc:** Laptech Ltd; Aberdeen DC

**Subject:** Consultation: Spirit Energy's Ensign Decommissioning Programmes

Dear John,

Spirit Energy North Sea Limited has submitted, for the consideration of the Secretary of State for Business, Energy & Industrial Strategy, draft Decommissioning Programmes for the Ensign installations and associated pipelines in accordance with the provisions of the Petroleum Act 1998. It is a requirement of the Act that interested parties be consulted on such decommissioning proposals.

The facilities covered by the Decommissioning Programmes are:

- The Ensign installation offshore ~109km east of Easington in UK block 48/14a; and,
- The pipelines associated with Ensign (PL2838, PL2839, PLU2840 & PL2841).

Spirit Energy North Sea Limited hereby gives notice that the Ensign Decommissioning Programmes can be viewed at the internet address: [www.spirit-energy.com/ensign](http://www.spirit-energy.com/ensign).

Alternatively, electronic copies of the Decommissioning Programmes, Comparative Assessment and Environmental Appraisal are attached to this email.

Separately, you will receive a document transmittal from our document control department, please can you return this to acknowledge receipt.

Please can you confirm that you've received all that you require, and if you have any questions of concerns, please make any representations to the undersigned by 07 November, 2019.

Best regards,

Ross.

Ross Davidson, Head of Communications, SPIRIT ENERGY, IQ Building, 15 Justice Mill Lane, Aberdeen AB11 6EQ