

Construction Noise and Vibration Monthly Report – October 2022

London Borough of Ealing

© HS₂ Ltd. gov.uk/hs₂

Non-Techn	ical Summary	1					
Abbreviati	ons and Descriptions	3					
1 Intr	oduction	4					
1.2	Measurement Locations	8					
2 Sum	mary of Results	10					
2.1	Summary of Measured Noise and Vibration Levels	10					
2.2	Exceedances of the SOAEL	14					
2.3	Exceedances of Trigger Level	16					
2.4	Complaints	17					
Appendix A	A Site Locations	18					
Appendix E	B Monitoring Locations	24					
Appendix (Data	30					
List of tabl	es						
Table 1: Tak	ole of Abbreviations	3					
Table 2: Mo	nitoring Locations	8					
	nmary of Measured dB L _{Aeq} Data over the Monitoring Period	11					
	nmary of Measured PPV Data over the Monitoring Period	14 15					
Table 5: Summary of Exceedances of SOAEL							
Table 6: Summary of Total Exceedances of SOAEL							
	nmary of Exceedances of Trigger Levels	17					
Table 8: Sur	nmary of Complaints	17					

Non-Technical Summary

This Noise and Vibration Monitoring Report fulfils HS2 Limited's commitment detailed in the Environmental Minimum Requirements (EMRs), Annex 1, Code of Construction Practice, to present the results of noise and vibration monitoring carried out within the London Borough of Ealing (LBE) (including one monitoring location on the boundary with the London Borough of Hammersmith and Fulham) during the month of October 2022.

Within this period monitoring was undertaken at the following worksites:

- Noise monitoring was undertaken in the vicinity of the Atlas Road worksite (ref. AR)
 where tunnel boring machine works, concreting access staircases, installation of
 handrails, conveyor works, installation of guard rails and gantry crane works were
 underway.
- Noise and vibration monitoring were undertaken in the vicinity of the Willesden EuroTerminal worksite (ref. WET), where deliveries and removal of waste, conveyor works, installation of gantry crane bases and rails, access road maintenance works, cabling works and installation of lighting were underway.
- Noise monitoring was undertaken in the vicinity of the Victoria Road Crossover Box worksite (worksite ref. VRCB), where:
 - excavation works, diaphragm wall works, steel fixing works, concrete works, installation of section of conveyor, concrete lining works, commissioning of batching plant, shuttering works and tunnel set up works were underway.
 - At Victoria Road Ancillary Shaft, secondary concrete lining works, fitting out works, installation of services and plant.
- Noise monitoring was undertaken in the vicinity of the Flat Iron compound (worksite ref. FIC), where conveyor works were underway.
- Noise and vibration monitoring were undertaken in proximity of the Old Oak
 Common depot worksite (ref. OOC), where material movement, fixing of reinforced
 bars, form works, shuttering works, site entrance works, diaphragm wall works,
 construction of capping beams, excavation works, removal of waste, digging works,
 drainage installations, utility installation and road sweeping were underway.
- Noise and vibration monitoring were undertaken in proximity of the Scheme 6
 worksite (ref. S6), where civil works, signalling works, survey works and overhead
 line electrification works were underway.
- Noise monitoring was undertaken in proximity of the Mandeville Road Ventilation Shaft worksite (ref.: MRVS), where grouting and drainage works were underway.
- Noise and vibration monitoring were undertaken in proximity of the Green Park
 Way Ventilation Shaft worksite (ref. GPWVS), where road sweeping, de-watering
 works, installation of viewing platform, installation of key clamp railings, installation
 of calking joints between segments, shaft sinking works, cabling works, installation

- of services, sprayed concrete lining works, plant and equipment maintenance works were underway.
- Noise monitoring was undertaken in proximity of the Westgate Ventilation Shaft (ref. WVS), where excavation works, sprayed concrete lining works, installation of shuttering and reinforcement bars, installation of tunnel edge protection, milling of joints, installation of tunnel drainage box, extension of the ventilation and services, installation of lighting, jacking and packing works, plant and equipment maintenance and concrete pours were underway.

Further works, where monitoring was not undertaken, were also underway at:

- Atlas Road Sub-Station where power utility works were underway; and
- Wormwood Scrubs where manhole construction, pipe jacking and tunnelling works were underway.

The HS2 threshold levels for significant noise impacts, which are defined in Information Paper E23 (https://www.gov.uk/government/publications/hs2-information-papers-environment), were exceeded nine (9) times during the reporting period.

There were no exceedances of trigger levels, as defined in Section 61 consents during the reporting period.

Two (2) complaints were received during the monitoring period. A description of complaints, the results of investigation and any actions taken are detailed in Table 8 of this report.

Abbreviations and Descriptions

The abbreviations, descriptions and project terminology used within this report can be found in Table 1.

Table 1: Table of Abbreviations

Acronym/Term	Definition
L _{Aeq,T}	See equivalent continuous sound pressure level
Ambient sound	A description of the all-encompassing sound at a given location and time which will include sound from many sources near and far. Ambient sound can be quantified in terms of the equivalent continuous sound pressure level, $L_{pAeq,T}$
Decibel(s), or dB	Between the quietest audible sound and the loudest tolerable sound there is a million to one ratio in sound pressure (measured in Pascal (Pa)). Because of this wide range, a level scale called the decibel (dB) scale, based on a logarithmic ratio, is used in sound measurement. Audibility of sound covers a range of approximately 0-140dB.
Decibel(s) A- weighted, or dB(A)	The human ear system does not respond uniformly to sound across the detectable frequency range and consequently instrumentation used to measure sound is weighted to represent the performance of the ear. This is known as the 'A weighting' and is written as 'dB(A)'.
Equivalent continuous sound pressure level, or L _{Aeq,T}	An index used internationally for the assessment of environmental sound impacts. It is defined as the notional unchanging level that would, over a given period of time (T), deliver the same sound energy as the actual time-varying sound over the same period. Hence fluctuating sound levels can be described in terms of an equivalent single figure value, typically expressed as a decibel level.
Exclusion of data	Measurement of noise levels can be affected by weather conditions such as prolonged periods of rain, winds speeds higher than 5m/s and snow/ice ground cover. Noise levels measured during these periods are considered not representative of normal noise conditions at the site and, for the purposes of this report, are excluded from the assessment of exceedances and calculation of typical noise levels and are also greyed out in charts. Identifiable incongruous noise and vibration events not attributable to HS2 construction noise are also excluded.
Façade	A facade noise level is the noise level 1m in front of a large reflecting surface. The effect of reflection, is to produce a slightly higher (typically +3 dB) sound level than it would be if the reflecting surface was not there.
Free-field	A free-field noise level is the noise level measured at a location where no reflective surfaces, other than the ground, lies within 3.5 metres of the microphone position.
LOAEL	Lowest Observed Adverse Effect Level - the level above which adverse effects on health and quality of life can be detected.
Peak particle velocity, or PPV	Instantaneous maximum velocity reached by a vibrating element as it oscillates about its rest position. The PPV is a simple indicator of perceptibility and risk of damage to structures due to vibration. It is usually measured in mm/s.
SOAEL	Significant Observed Adverse Effect Level - the level above which significant adverse effects on health and quality of life occur.
Sound pressure level	The parameter by which sound levels are measured in air. It is measured in decibels. The threshold of hearing has been set at 0dB, while the threshold of pain is approximately 120dB. Normal speech is approximately 60dB at a distance of 1 metre and a change of 3dB in a time varying sound signal is commonly regarded as being just detectable. A change of 10dB is subjectively twice, or half, as loud.
Vibration dose value, or VDV	An index used to evaluate human exposure to vibration in buildings. While the PPV provides information regarding the magnitude of single vibration events, the VDV provides a measure of the total vibration experienced over a specified period of time (typically 16h daytime and 8h night-time). It takes into account the magnitude, the number and the duration of vibration events and can be used to quantify exposure to continuous, impulsive, occasional and intermittent vibration. The vibration dose value is measured in m/s ^{1.75} .

1 Introduction

- 1.1.1 HS2 is required to undertake noise (and vibration) monitoring as necessary to comply with the requirements of the High Speed Rail (London-West Midlands) Environmental Minimum Requirements, including specifically Annex 1: Code of Construction Practice, in addition to any monitoring requirements arising from conditions imposed through consents under Section 61 of the Control of Pollution Act, 1974 or through Undertakings & Assurances given to third parties. Such monitoring may be undertaken for the following purposes:
 - monitoring the impact of construction works;
 - to investigate complaints, incidents and exceedance of trigger levels; or
 - monitoring the effectiveness of noise and vibration control measures.
- 1.1.2 Monitoring data and interpretive reports are to be provided to each relevant local authority on a monthly basis and shall include a summary of the construction activities occurring, the data recorded over the monitoring period, any complaints received, any periods in exceedance of agreed trigger levels, the results of any investigations and any actions taken or mitigation measures implemented. This report provides noise data, and interpretation thereof, for monitoring carried out by HS2 within the London Borough of Ealing (LBE) (including one monitoring location on the boundary with the London Borough of Hammersmith and Fulham) during the month for the period 1st to 31st October 2022.
- 1.1.3 Active construction sites in the local authority area, where noise and vibration monitoring were conducted during this period, include:
 - Atlas Road worksite, ref. AR (see plan 4 in Appendix A), where work activities included:
 - Tunnel boring machine works, including slab works, concrete pours, grouting plant works, welding and assembly works.
 - Concreting access staircases.
 - o Installation of handrails.
 - Conveyor works, including installation of belts and cabling and conveyor commissioning works.
 - o Installation of guard rails.
 - Gantry cranes works, including installation of cabling and commissioning, rail works and installation of buffer stops.

- Willesden EuroTerminal worksite, ref. WET (see plan 4 in Appendix A), where work activities included:
 - Waste deliveries, including loading of soil into railway trucks for removal from site.
 - Conveyor construction works, including maintenance works.
 - Installation of gantry crane bases and rails, including delivery of sections of gantry cranes.
 - Access road general maintenance works.
 - Cabling works.
 - Installation of lighting.
- Victoria Road Crossover Box worksite, ref. VRCB (see plan 4 in Appendix A), where work activities included:
 - Excavation works.
 - o Diaphragm wall works, including trimming and demolition works.
 - Steel fixing.
 - o Capping beam works, including shuttering and concreting works.
 - Installation of sections of conveyor, including bases and installation of towers and spans.
 - Installation of sprayed concrete lining batching plant, including installation of base slabs, installation of the batching plant, cement silos, fibre dosing plant and concrete blocks.
 - Commissioning of batching plant, including preparation of trial mixes/calibration.
 - Shuttering works.
 - Tunnel set up works, including installation of reinforcement and concrete delivery lines.
 - Victoria Road Ancillary Shaft works comprising secondary concrete lining works, fitting out works, installation of services and plant.
- Flat Iron compound, worksite ref. FIC (see plan 4 in Appendix A), where work activities included:
 - o Conveyor works, including installation of gantry pylons and spans.

- Old Oak Common depot worksite, located in the London Borough of Hammersmith and Fulham (LBHF), ref. OOC (see plan 4 in Appendix A), where work activities included:
 - Material movement.
 - o Fixing of reinforced bars, shuttering and form works.
 - Site entrance works, including kerb installation.
 - o Diaphragm wall works, including diaphragm wall breakdown.
 - Construction of capping beams.
 - Excavation works.
 - Digging works.
 - o Drainage installation.
 - Waste removal from site.
 - Utility installation.
 - Road sweeping works.
- Scheme 6 worksite, located in the London Borough of Hammersmith and Fulham (LBHF), ref. S6 (see plan 4 in Appendix A), where work activities included:
 - Civil works.
 - Signalling works.
 - Survey works.
 - Overhead line electrification works.
- Mandeville Road Ventilation Shaft worksite, reference MRVS (see plan 1 in Appendix A), where work activities included:
 - o Grouting works, including drilling and casting works.
 - Drainage works.
- Green Park Way Ventilation Shaft worksite, reference GPWVS (see plan 2 in Appendix A), where work activities included:
 - Road sweeping.
 - De-watering works.
 - o Installation of viewing platform.
 - Installation of key clamp railings.

- Shaft sinking works, including excavation works, installation of pre-cast concrete rings and shaft construction works.
- o Installation of calking joints between segments.
- Cabling works.
- Installation of services.
- Sprayed concrete lining works.
- Plant and equipment maintenance works.
- Westgate Ventilation Shaft worksite, reference WVS (see plan 3 in Appendix A), where work activities included:
 - Excavation works.
 - Sprayed concrete lining works.
 - o Installation of shuttering and reinforcement bars.
 - Installation of tunnel edge protection.
 - Milling of joints.
 - Installation of tunnel drainage box.
 - Extension of the ventilation and services.
 - Installation of lighting.
 - Jacking and packing works.
 - o Plant and equipment maintenance.
 - o Concrete pours.
- 1.1.4 Further works, where monitoring did not take place, were undertaken at:
 - Atlas Road Sub-Station where power utility works were underway; and
 - Wormwood Scrubs where manhole construction, pipe jacking and tunnelling works were underway.
- 1.1.5 The applicable standards, guidance, and monitoring methodology are outlined in the construction noise and vibration monitoring methodology report which can be found at the following location

https://www.gov.uk/government/collections/monitoring-the-environmental-effects-of-hs2. Noise and vibration monitoring reports for previous months can also be found at this location.

1.2 Measurement Locations

- 1.2.1 Twenty-one (21) noise and eight (8) vibration monitoring installations were active in October in the LBE area. Table 2 summarises the position of noise and vibration monitoring installations within the LBE area in October 2022.
- 1.2.2 A noise monitor (ref.: WT-N01) was installed at Scheme 6 worksite (worksite ref.: S6) on Saturday 1st October.
- 1.2.3 Maps showing the position of noise and vibration monitoring installations are presented in Appendix B.

Table 2: Monitoring Locations

Worksite Reference	Measurement Reference	Address				
AR	N032	Shaftesbury Gardens				
	N033	Outside The Collective, Atlas Road / Victoria Road				
	N060	Atlas Road next to Bashey Road				
WET	N034	Stephenson Street (north)				
	N035	Stephenson Street (south)				
	N041	Junction of Stephenson Street / Goodhall Street				
	V057	37, Stephenson Street				
	V052	63, Stephenson Street				
VRCB	N031	School Road, outside Acton Business Centre				
	N050	Acton Square, outside North Acton Station				
FIC	N029	Braitrim House, Victoria Road				
	N042	Boden House Car Park				
	N049	Flat Iron compound railway fence, Victoria Rd North Acton				
00C	OOC-N01	Old Oak Common Lane				
	OOC-N02	Old Oak Common Lane, Hilltop Works				
	OOC-N03	Old Oak Lane Halt, Wells House Road				
	OOC-V02	Kildun Court, Old Oak Common Lane				
	OOC-V03	Wells House Road Alleyway				
S6	WT-N01	Old Oak Lane Halt, Wells House Road				
MRVS	N040	Badminton Close				
	N058	Mandeville Road				
	N063	Mandeville Road				
	V055	Mandeville Road				

Worksite Reference	Measurement Reference	Address
	V056	Mandeville Road
GPWVS	N059	Green Park Way Ventilation Shaft
	N064	Green Park Way Ventilation Shaft
	V053	Green Park Way, Greenford
	V054	Green Park Way Ventilation Shaft
WVS	N062	Westgate Ventilation Shaft

2 Summary of Results

2.1 Summary of Measured Noise and Vibration Levels

2.1.1 Table 3 presents a summary of the measured noise levels at each monitoring location over the reporting period. The $L_{Aeq,T}$ is presented for each of the relevant time periods averaged over the calendar month, along with the highest single period $L_{Aeq,T}$ that was found to occur within the month.

Table 3: Summary of Measured dB L_{Aeq} Data over the Monitoring Period

Worksite Reference	Measurement Reference	Site Address	Free-field or Façade measurement	Weekday Average L _{Aeq,T} (highest day L _{Aeq,T})				Saturday Average L _{Aeq,T} (highest day L _{Aeq,T})				Sunday / Public Holiday Average L _{Aeq,T} (highest day L _{Aeq,T})			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
AR	AR N032	Shaftesbury Gardens	Free-field	63.5	65.0	63.1	62.2	58.7	60.6	62.5	62.5	62.3	58.6	61.7	58.1
			(64.7)	(67.0)	(64.5)	(67.6)	(66.9)	(61.6)	(62.9)	(63.6)	(66.8)	(69.8)	(66.6)	(64.4)	
	N033	Outside The Collective, Atlas Road/Victoria Road	Free-field	67.5	67.7	65.2	64.2	61.2	63.7	66.5	63.8	64.2	59.8	63.1	60.4
				(72.5)	(69.7)	(68.9)	(70.1)	(69.0)	(65.2)	(69.9)	(64.5)	(72.6)	(69.6)	(67.8)	(66.3)
	N060	Atlas Road next to	Free-field	53.7	63.8	53.5	56.5	56.0	56.0	57.7	56.5	52.2	51.9	51.7	53.8
		Bashey Road		(61.6)	(67.4)	(57.8)	(66.5)	(71.4)	(59.6)	(60.0)	(61.5)	(55.3)	(59.3)	(58.6)	(60.0)
WET	N034	Stephenson Street	Free-field	52.7	57.2	55.0	54.7	50.6	52.1	54.1	49.8	51.4	46.4	51.1	47.4
		(north)		(55.3)	(72.3)	(58.3)	(59.2)	(58.7)	(52.8)	(56.6)	(52.6)	(57.2)	(51.3)	(58.8)	(50.8)
	N035	Stephenson Street	Free-field	53.7	56.8	52.9	51.3	49.1	53.4	54.6	49.5	50.4	48.0	50.8	47.9
		(south)		(55.5)	(59.5)	(58.8)	(58.1)	(59.5)	(55.0)	(55.8)	(51.3)	(58.0)	(53.0)	(57.6)	(52.3)
	N041	3	Free-field	54.3	58.3	55.3	54.6	51.4	52.9	56.2	52.8	53.4	49.7	53.7	49.5
		Street/Goodhall Street		(56.8)	(66.8)	(60.3)	(59.5)	(60.6)	(54.3)	(60.1)	(56.4)	(62.1)	(58.0)	(61.4)	(52.7)

Worksite Reference	Measurement Reference	Sita Addrace	Free-field or Façade measurement	Weekday Average L _{Aeq,Т} (highest day L _{Aeq,Т})				Saturday Average L _{Aeq,T} (highest day L _{Aeq,T})				Sunday / Public Holiday Average L _{Aeq,T} (highest day L _{Aeq,T})			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
VRCB	N031	School Road, outside Acton Business Centre	Free-field	64.4 (72.6)	69.6 (72.7)	63.4	61.9 (71.5)	58.0 (64.1)	61.2	70.6 (71.9)	71.5 (76.5)	63.0 (70.2)	56.7 (62.4)	61.1	57.6 (62.7)
1	Acton Square, outside North Acton Station	Free-field	63.3	65.1 (67.3)	62.5 (67.3)	61.8	59.5	61.8	63.5	62.0 (62.5)	61.6 (68.5)	58.3	61.1	57.6 (62.5)	
FIC	N029	Braitrim House, Victoria Road	Free-field	53.9 (59.3)	61.5	52.5	54.7	54.5	52.9	55.0	53.3	52.1	48.3	53.7	52.4 (65.0)
	N042	Bodens car park	Free-field	61.6 (64.2)	63.2	55.7	54.4 (59.6)	52.4 (58.1)	59.3	62.5 (64.0)	62.6	55.2	51.9	54.0 (65.2)	51.5 (54.9)
	N049	Flat Iron compound	Free-field	57.0 (60.5)	76.7 (78.5)	57.1 (71.4)	55.9 (65.6)	57.3 (71.9)	55.9 (58.1)	60.8 (68.8)	57.7	56.1 (67.0)	50.3	55.5 (81.6)	53.8 (60.1)
ООС	OOC-N01	Old Oak Common Lane	Free-field	67.1 (69.5)	69.0 (71.8)	66.3	65.4 (73.0)	61.4	63.8	65.8 (66.6)	66.1	65.5 (68.1)	60.8	65.1 (68.7)	60.9
	OOC-N02	Old Oak Common Lane, Hilltop Works	Free-field	67.1 (69.2)	70.2 (71.6)	66.6 (68.2)	65.2 (72.9)	61.6	63.8 (64.5)	65.6 (66.3)	65.8 (66.4)	65.6 (70.6)	61.2	64.8 (67.6)	61.2 (69.8)
	OOC-N03	Old Oak Lane Halt, Wells House Road	Free-field	56.1 (58.5)	59.9 (61.2)	56.9 (58.3)	56.1 (59.3)	52.4 (59.1)	54.1 (56.8)	55.4 (57.4)	55.3 (57.8)	54.8 (58.8)	51.1 (58.6)	55.4 (58.4)	52.1 (56.6)
S6	WT-N01	Old Oak Lane Halt, Wells House Road	Free-field	57.9 (59.7)	62.7 (64.0)	61.4 (62.8)	59.7 (61.8)	55.5 (61.9)	54.5 (58.6)	58.8 (60.0)	58.4 (61.3)	58.1 (62.0)	54.0 (60.0)	58.5 (63.5)	55.3 (59.9)

Worksite Reference	Measurement Reference	Site Address	Free-field or Façade measurement	Weekday Average L _{Aeq,} т (highest day L _{Aeq,т})				Saturday Average L _{Aeq,T} (highest day L _{Aeq,T})				Sunday / Public Holiday Average L _{Aeq,T} (highest day L _{Aeq,T})			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
MRVS N040 N058	Badminton Close	ose Free-field	55.1	55.1	53.8	55.9	51.9	58.1	55.2	53.7	56.9	52.2	53.9	51.1	
			(59.1)	(57.4)	(56.0)	(72.9)	(61.7)	(60.2)	(57.0)	(55.2)	(73.7)	(59.1)	(59.8)	(55.3)	
	N058	Mandeville Road	free-field	56.4	70.4	65.2	57.6	52.7	56.5	65.2	65.2	60.0	52.7	58.2	51.8
				(58.3)	(72.9)	(73.2)	(74.3)	(68.4)	(57.8)	(70.8)	(72.5)	(72.8)	(58.1)	(72.7)	(56.6)
	N063	Mandeville Road	Free-field	58.9	68.0	59.1	60.0	55.7	60.1	66.7	64.3	61.4	55.8	58.3	55.1
				(60.4)	(70.4)	(67.1)	(76.3)	(65.7)	(63.1)	(69.3)	(71.4)	(71.3)	(61.1)	(64.9)	(59.0)
GPWVS	N059	Green Park Way	Free-field	56.8	62.9	55.7	56.2	53.3	56.2	54.8	53.8	53.7	50.4	52.6	50.9
		Ventilation Shaft		(59.6)	(77.7)	(63.5)	(64.1)	(61.6)	(59.3)	(58.4)	(55.2)	(59.0)	(56.7)	(57.7)	(55.4)
	N064	Green Park Way	Façade	56.0	59.1	56.0	55.6	52.4	59.7	57.9	54.5	54.9	51.2	54.2	51.0
		Ventilation Shaft		(58.7)	(71.0)	(58.9)	(63.9)	(61.5)	(78.0)	(70.5)	(55.8)	(57.1)	(55.5)	(57.8)	(56.6)
WVS	N062		Free-field	61.5	65.9	58.3	58.9	57.0	63.5	65.7	62.0	59.3	51.0	57.5	56.1
	Shaft		(65.8)	(73.7)	(60.8)	(66.8)	(70.7)	(72.3)	(71.6)	(69.8)	(73.2)	(60.1)	(62.7)	(62.3)	

2.1.2 Table 4 presents a summary of the measured vibration levels at each monitoring location over the reporting period. The highest PPV measured during the monitoring along any axis is presented in the table.

Table 4: Summary of Measured PPV Data over the Monitoring Period

Worksite Reference	Measurement Reference	Monitor Address	Highest PPV measured in any axis, mm/s
WET	V052	63, Stephenson Street	2.98 (Y-axis)
	V057	37, Stephenson Street	2.14 (X-axis)
00C	OOC-V02	Kildun Court, Old Oak Common Lane	1.72 (Y-axis)
	OOC-V03	Wells House Road Alleyway	1.02 (Y-axis)
GPWVS	V053	Green Park Way, Greenford	1.63 (Z-axis)
	V054	Green Park Way Ventilation Shaft	1.14 (Z-axis)
MRVS	V055	Mandeville Road	0.87 (Y-axis)
	V056	Mandeville Road	1.61 (X-axis)

2.1.3 Appendix C presents graphs of the noise and vibration monitoring data over the month for each of the measurement locations. Noise data presented consists of the hourly L_{Aeq} values and, where relevant, the L_{Aeq,T} values (where the time period T has been taken to be the averaging period as specified in Table 1 of HS2 Information Paper E23). Vibration data presented consist of hourly PPV values. The full data set for the monitoring equipment can be found at the following location: https://data.gov.uk/dataset/24542ae7-dd44-444f-b259-871c4cc43b5e/environmental-monitoring-data.

2.2 Exceedances of the SOAEL

- 2.2.1 The significant observed adverse effect level (SOAEL) is defined in the 'Planning Practice Guidance Noise' as the level above which "noise causes a material change in behaviour and/or attitude, e.g. avoiding certain activities during periods of intrusion; where there is no alternative ventilation, having to keep windows closed most of the time because of the noise. Potential for sleep disturbance resulting in difficulty in getting to sleep, premature awakening and difficulty in getting back to sleep. Quality of life diminished due to change in acoustic character of the area."
- 2.2.2 HS2 Phase One Information Paper E23: Control of Construction Noise and Vibration sets out the SOAELs for construction noise.

- 2.2.3 Where reported construction noise levels exceed the SOAEL, relevant periods will be identified. Summary statistics to evaluate ongoing qualification for noise insulation and temporary rehousing are also presented where relevant.
- 2.2.4 Table 5 presents a summary of recorded exceedances of the SOAEL at each measurement location over the reporting period, including the number of exceedances during each time period.

Table 5: Summary of Exceedances of SOAEL

Worksite Reference	Measurement Reference	Site Address	Day (Weekday, Saturday, Sunday, Night)	Time period	Number of exceedances of SOAEL	
AR	N032	Shaftesbury Gardens	All days	All periods	No exceedance	
	N033	Outside The Collective, Atlas Road / Victoria Road	All days	All periods	No exceedance	
	N060	Atlas Road next to Bashey Road	All days	All periods	No exceedance	
WET	N034	Stephenson Street (north)	All days	All periods	No exceedance	
	N035	Stephenson Street (south)	All days	All periods	No exceedance	
	N041	Junction of Stephenson Street / Goodhall Street	All days	All periods	No exceedance	
VRCB	N031	School Road, outside Acton Business Centre	All days	All periods	Not applicable*	
	N050	Acton Square, outside North Acton Station	All days	All periods	No exceedance	
FIC	N029	Braitrim House, Victoria Road	All days	All periods	No exceedance	
	N042	Bodens Car Park	All days	All periods	No exceedance	
	N049	Flat Iron compound	All days	All periods	No exceedance	
00C	OOC-N01	Old Oak Common Lane	All days	All periods	No exceedance	
	OOC-N02	Old Oak Common Lane, Hilltop Works	All days All periods		No exceedance	
	OOC-N03	Old Oak Lane Halt, Wells House Road	All days	All periods	No exceedance	

Worksite Reference	Measurement Reference	Site Address	Day (Weekday, Saturday, Sunday, Night)	Time period	Number of exceedances of SOAEL
S6	WT-N01	Old Oak Lane Halt, Wells House Road	Nights	2200-0700	14
MRVS	N040	Badminton Close	All days	All periods	No exceedance
	N058	Mandeville Road	All days	All periods	No exceedance
	N063	Mandeville Road	All days	All periods	No exceedance
GPWVS	N059	Green Park Way Ventilation Shaft	All days	All periods	Not applicable*
	N064	Green Park Way Ventilation Shaft	All days	All periods	Not applicable*
WVS	N062	Westgate Ventilation Shaft	All days	All periods	Not applicable*

^{*} The defined SOAEL criteria are not applicable to non-residential properties

2.2.5 For the purpose of assessing eligibility for noise insulation or temporary rehousing, multiple exceedances of the SOAEL in a 24-hour period would be counted as a single exceedance during that day. Over the reporting period, the overall number of SOAEL exceedances at each measurement location is shown in Table 6 and may be lower than the total sum of individual exceedances reported in Table 5 for each location.

Table 6: Summary of Total Exceedances of SOAEL

Worksite Reference	Measurement Reference	Monitor Address	Total of SOAEL exceedances in the month
S6	WT-N01	Old Oak Lane Halt, Wells House Road	9

2.2.6 Nine (9) 24-hour periods that experienced an exceedance of the SOAEL due to HS2 construction works were recorded during October 2022. Exceedances occurred at noise monitor WT-N01 during night-time periods.

2.3 Exceedances of Trigger Level

2.3.1 Table 7 provides a summary of exceedances of the Section 61 trigger noise levels determined to be due to HS2 related construction noise measured during the reporting period, along with the findings of any investigation.

Table 7: Summary of Exceedances of Trigger Levels

Complaint Reference Number (if applicable)	Worksite Reference	Date and Time Period	Identified Source	Results of Investigation (including noise monitoring results)	Actions Taken
-	-	-	-	-	-

2.4 Complaints


2.4.1 Table 8 provides a summary of complaint information related to noise and vibration received during the reporting period, along with the findings of any investigation.

Table 8: Summary of Complaints


Complaint Reference Number	Worksite Reference	Description of Complaint	Results of Investigation	Actions Taken
HS2-22-84253-E-C	AR/OOC	Complaint regarding noise disturbance from continuous loud noise coming from the HS2 site since 9AM.	The investigation showed that the noise may have been caused by an incident at a transfer point within the Atlas Road site where the conveyor changes direction. The contractor found an issue with one of the components in the transfer tower, causing a vibration noise.	The contractor put additional measures to prevent the vibration noise happening again. The stakeholder was contacted and informed about the results of investigation and action taken.
HS2-22-44085-C	OOC	Complaint about noise and pollution from the site, likely to be from heavy machinery and vehicles.	Monitors in the area have shown no exceedances.	Mitigations and measures explained to stakeholder, along with links to local authority noise and air quality reports. Stakeholder also provided with detail of where monitors are located in the area along with further info on air quality impacts and assessments.

Appendix A Site Locations


HS2 Worksite identification plan - Overview

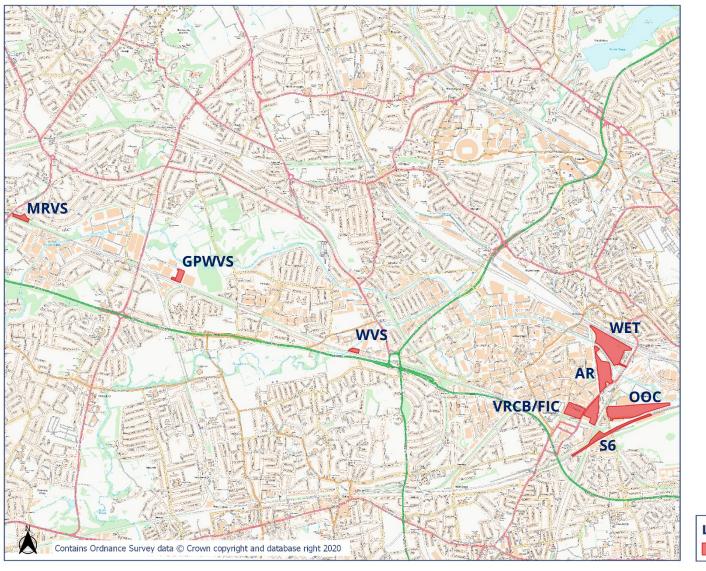

HS2 Worksite Identification Plan - 1

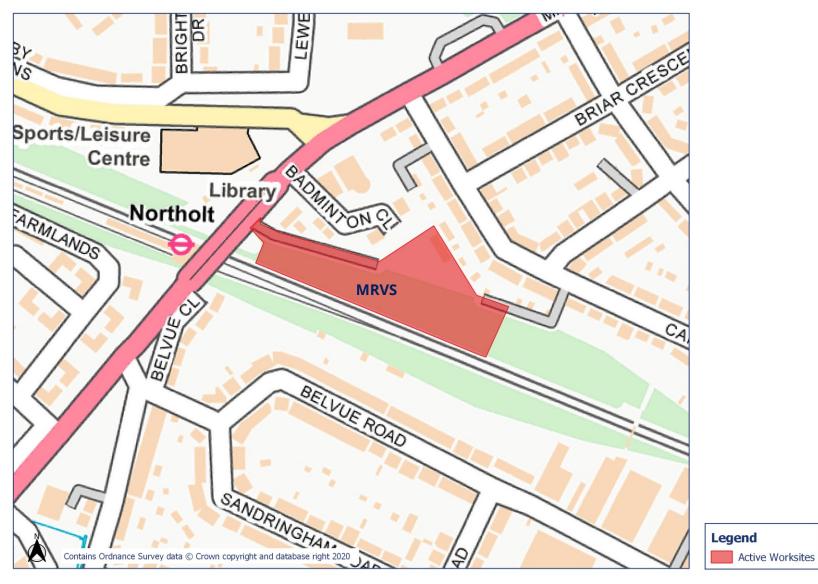


HS2 Worksite Identification Plan - 2

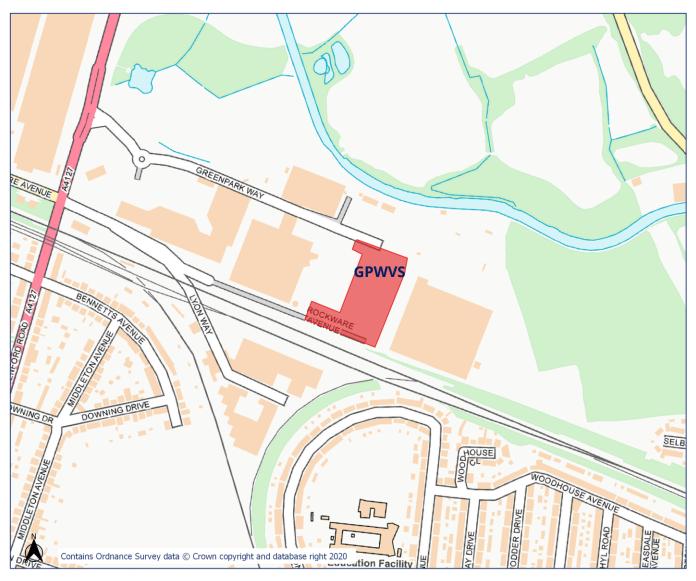




HS2 Worksite Identification Plan - 3

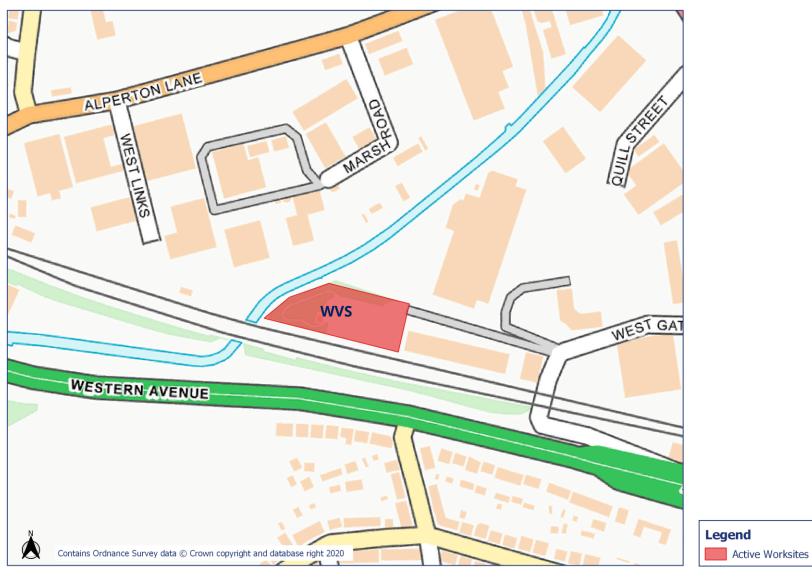


HS2


Worksite Identification Plan - 4

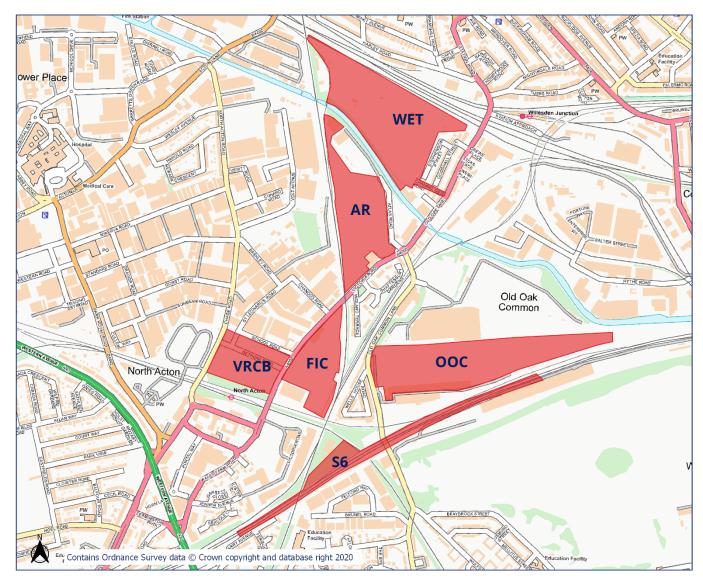





Appendix B Monitoring Locations

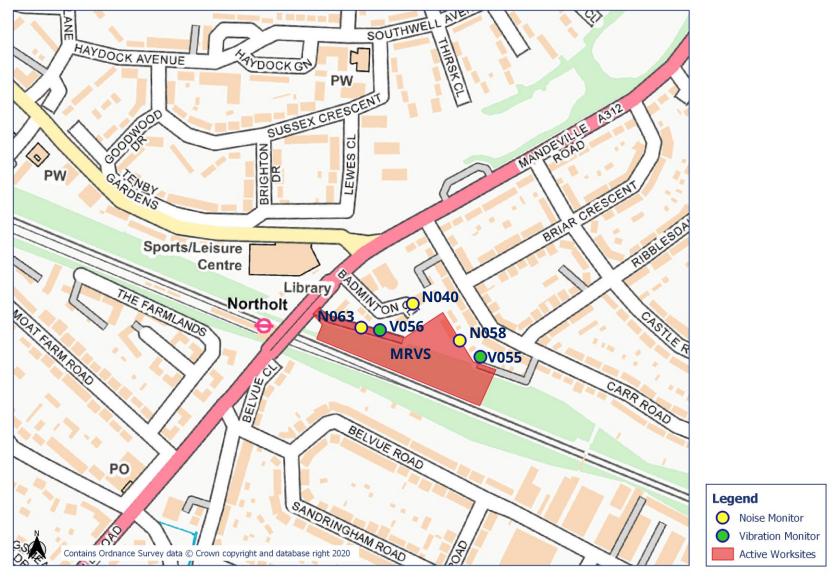

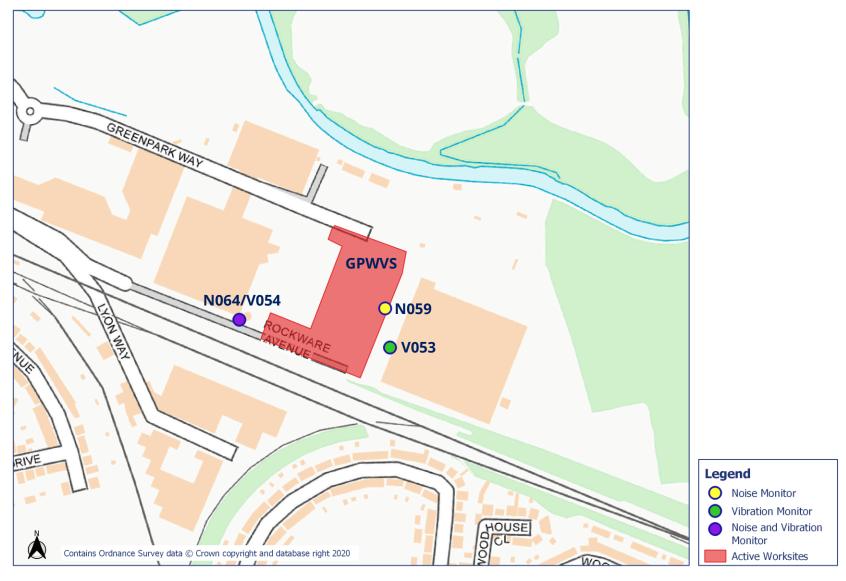

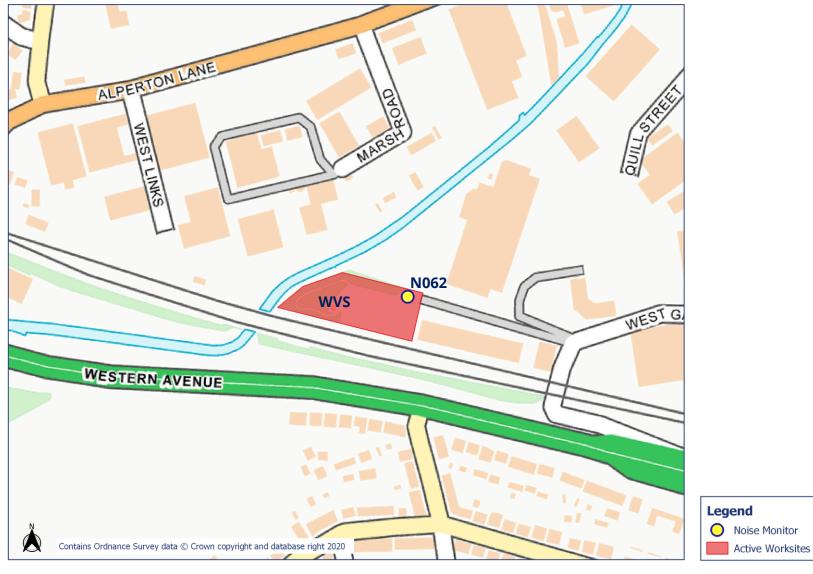

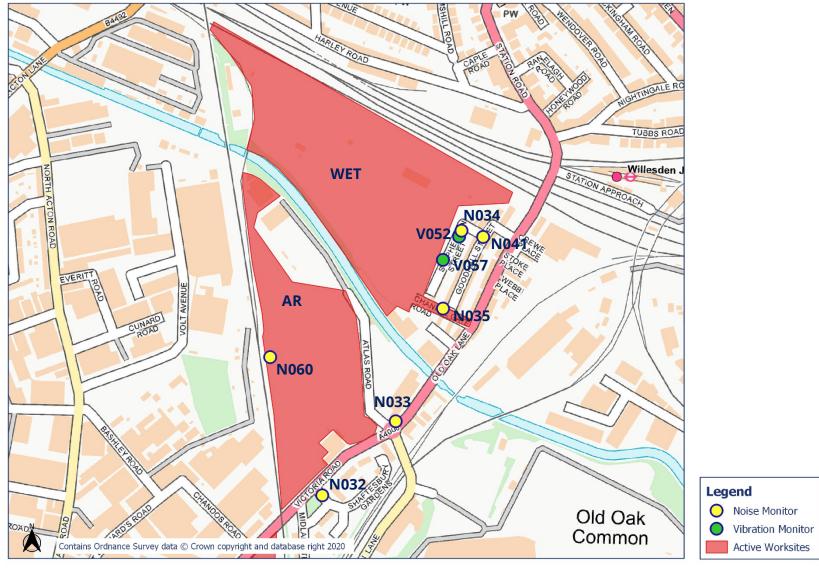





Appendix C Data


Noise


The following graphs show the hourly measured ambient noise level $L_{Aeq,1h}$ and, where relevant, the averaged noise level $L_{Aeq,T}$ values, where the time period T is as specified in Table 1 of HS2 Information Paper E23. Periods with adversely weather affected noise levels are greyed out and have been excluded from the calculation of the $L_{Aeq,T}$ values in Table 3 of the main report.


Worksite: Atlas Road worksite (AR) - Monitoring Ref: N032

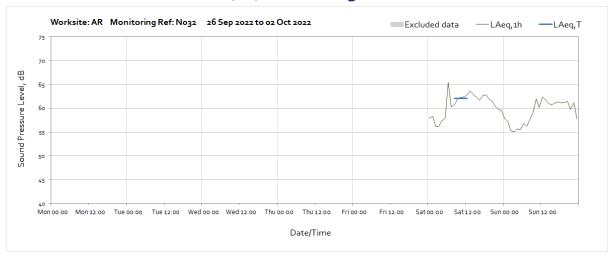

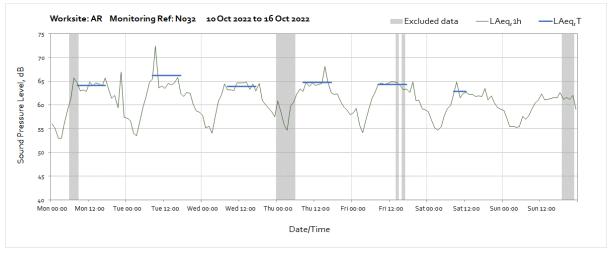

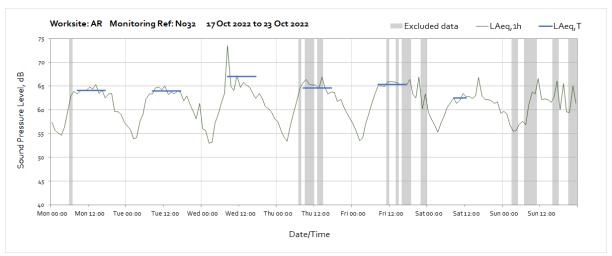


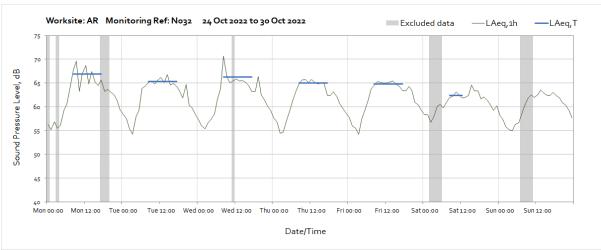


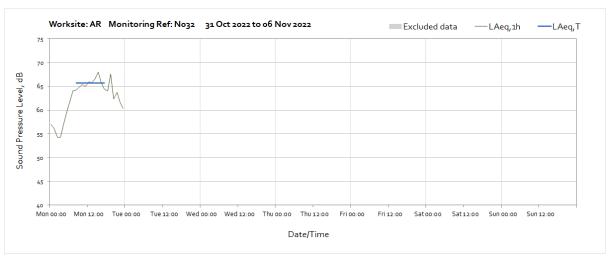



Worksite: Atlas Road worksite (AR) - Monitoring Ref: N033




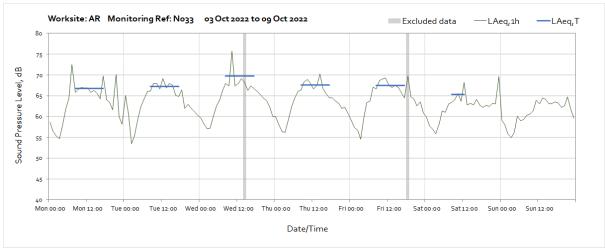

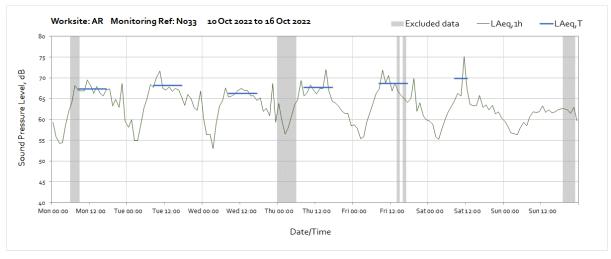

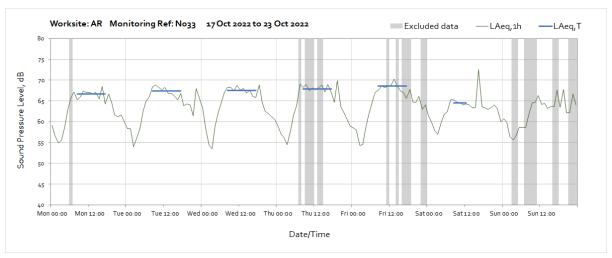


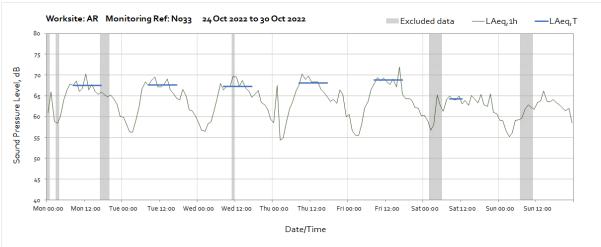


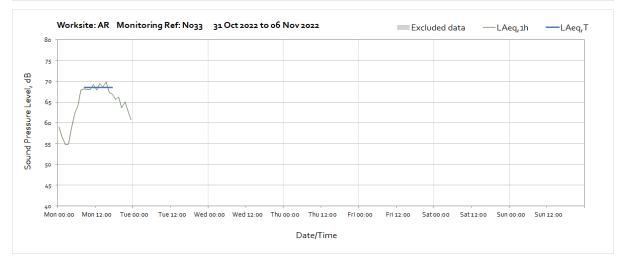



Worksite: Atlas Road worksite (AR) - Monitoring Ref: N060




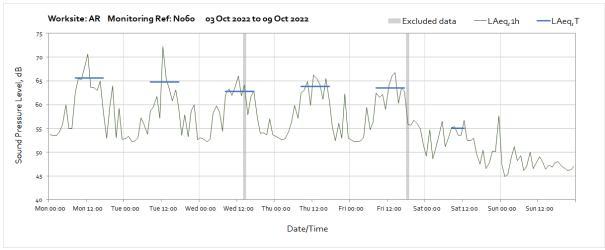

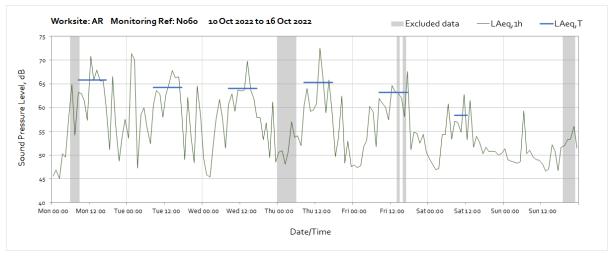

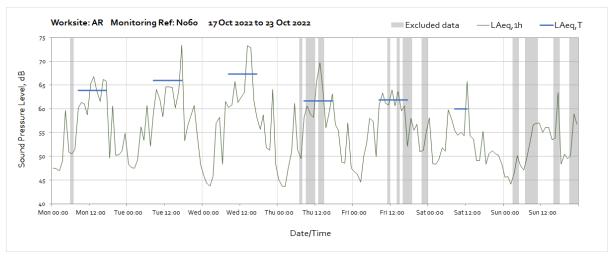


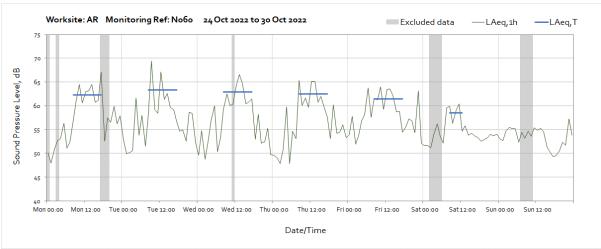


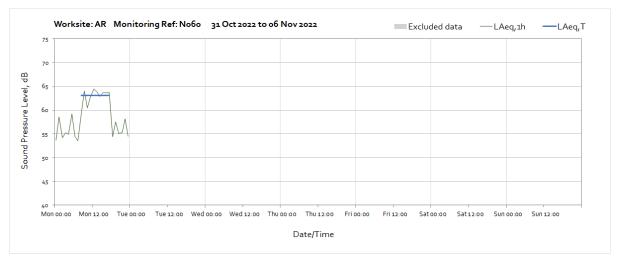



Worksite: Willesden Euro Terminal (WET) - Monitoring Ref: N034




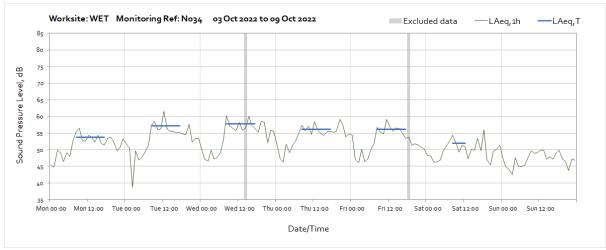

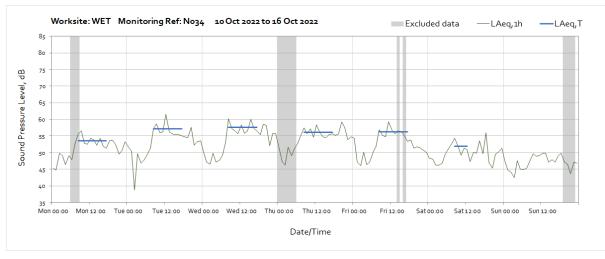


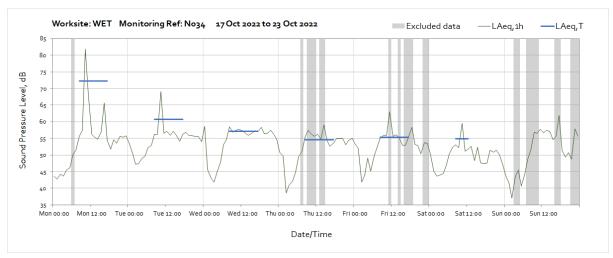

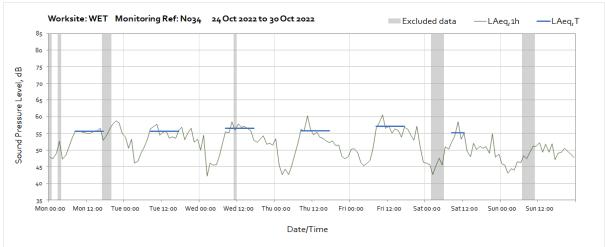


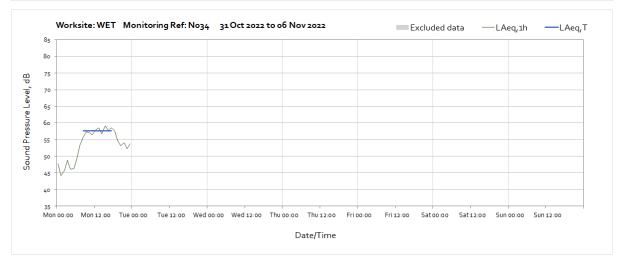


Worksite: Willesden Euro Terminal (WET) - Monitoring Ref: N035

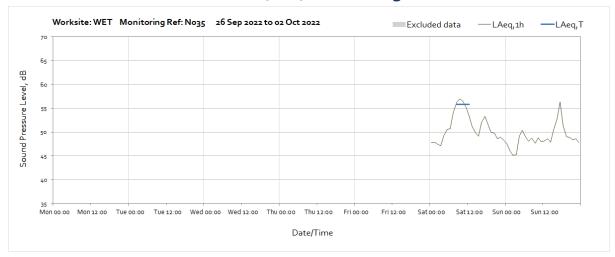




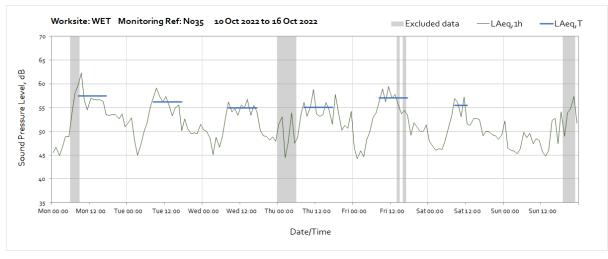


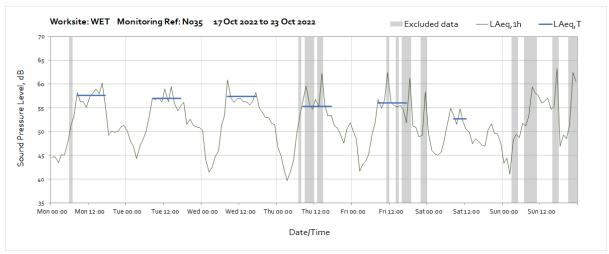





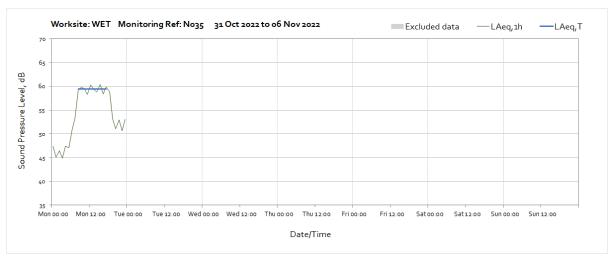



Worksite: Willesden Euro Terminal (WET) - Monitoring Ref: N041

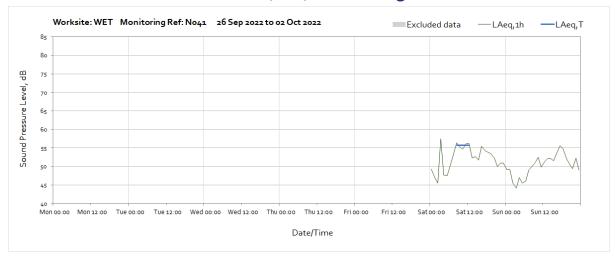


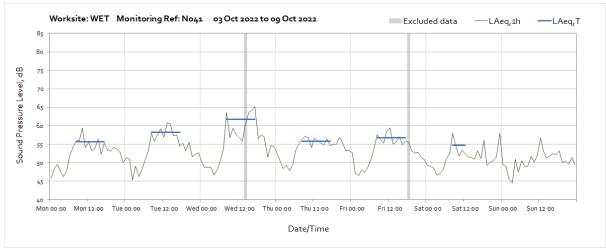

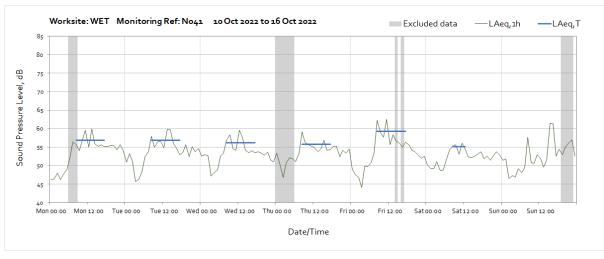


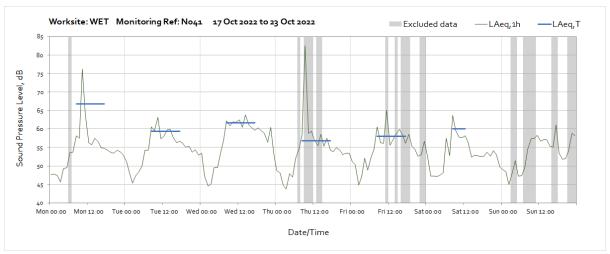


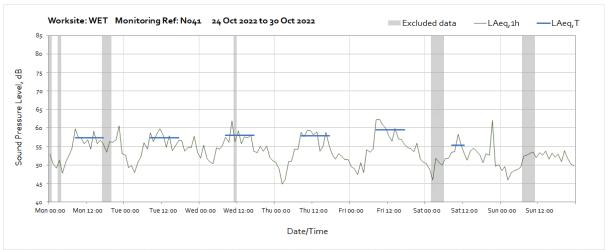


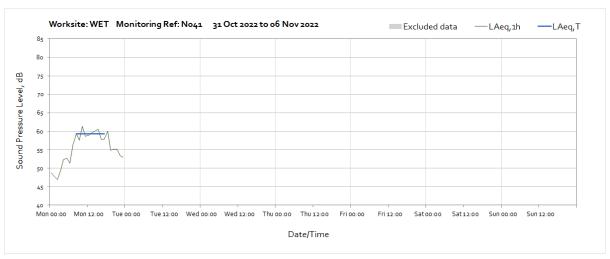



Worksite: Victoria Road Crossover Box (VRCB) - Monitoring Ref: N031

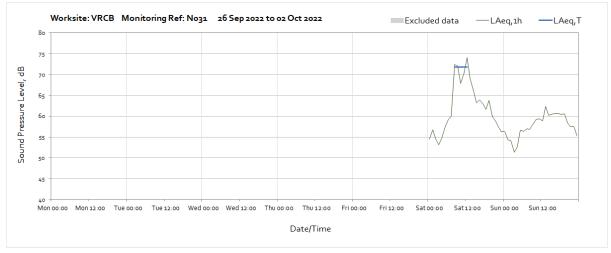


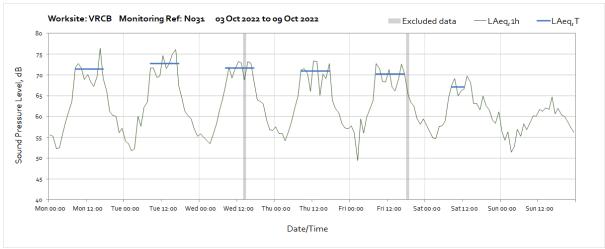

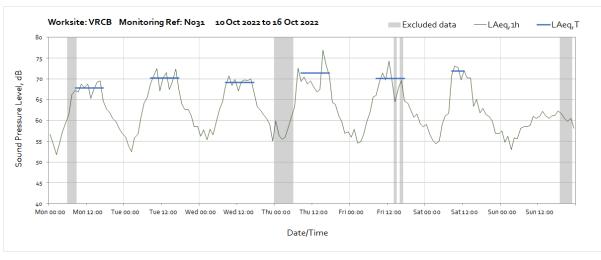


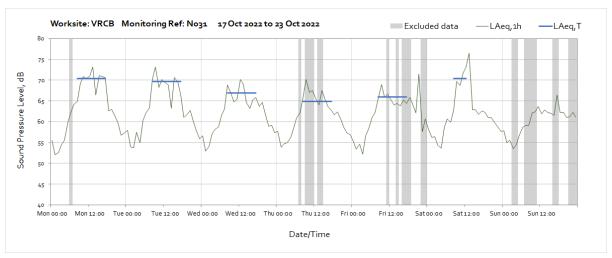


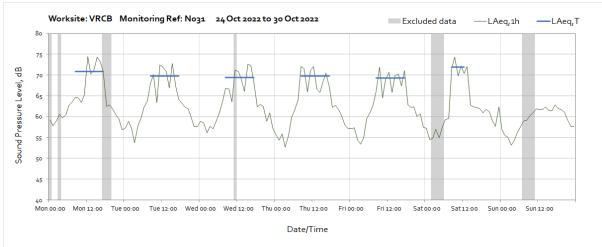


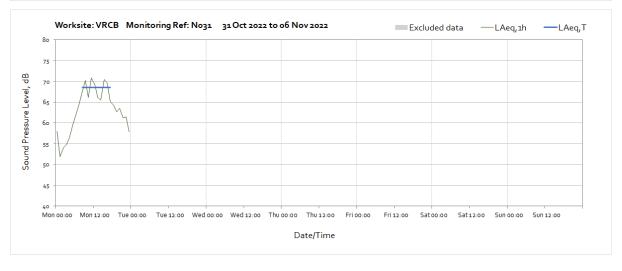



Worksite: Victoria Road Crossover Box (VRCB) - Monitoring Ref: N050

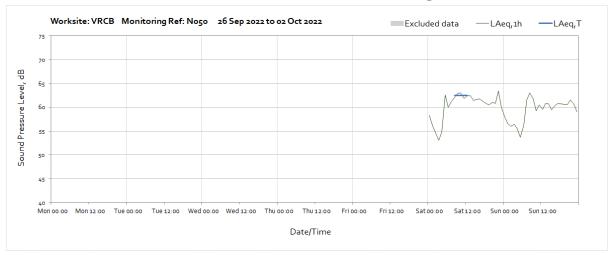


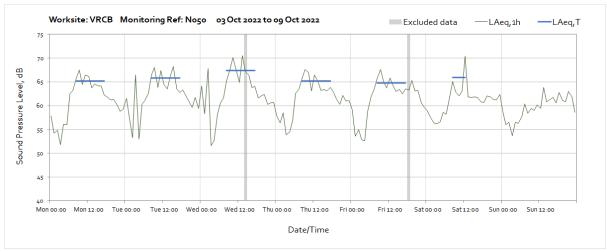

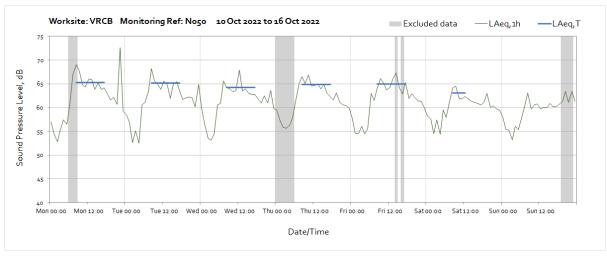

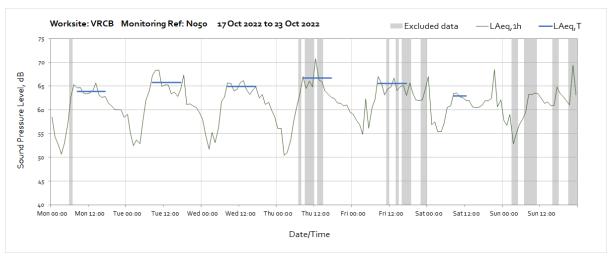


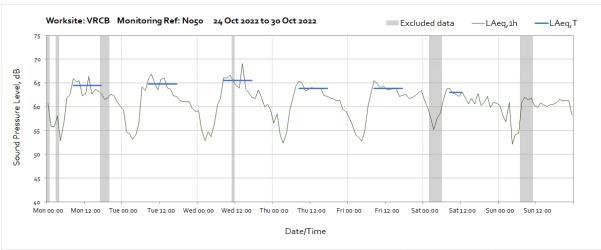


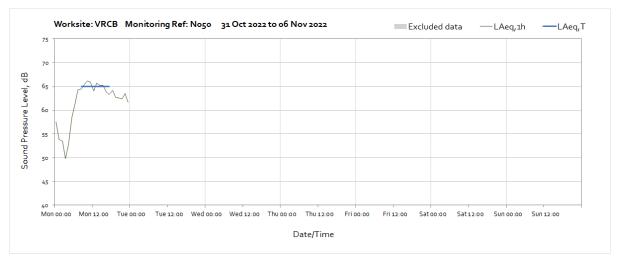



Worksite: Flat Iron Compound (FIC) - Monitoring Ref: N029




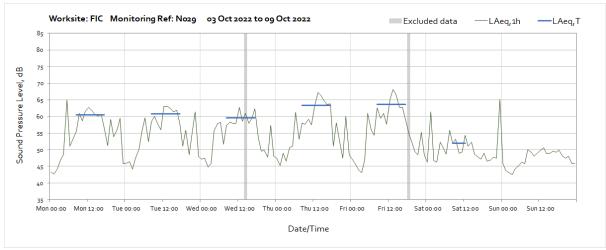

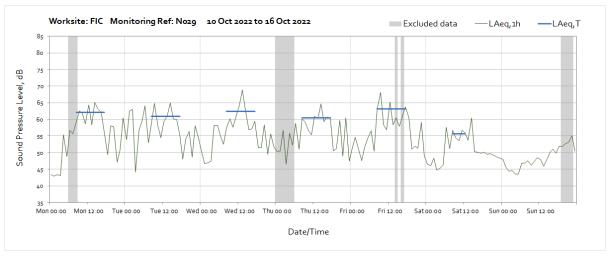

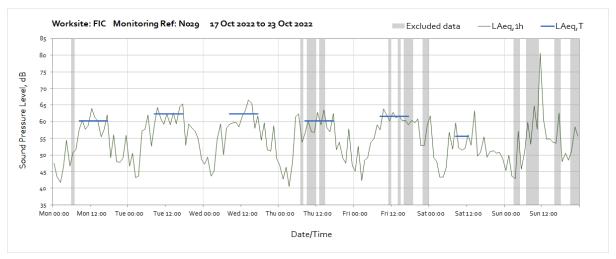


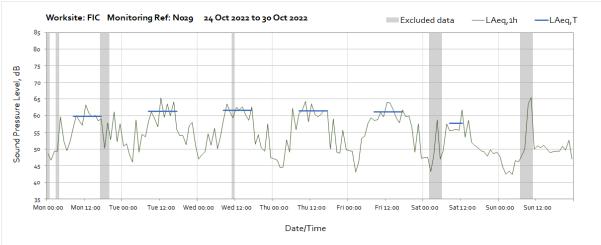


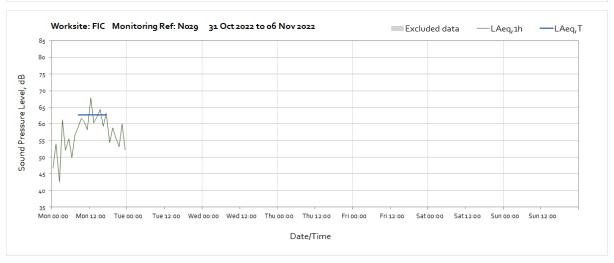



Worksite: Flat Iron Compound (FIC) - Monitoring Ref: N042




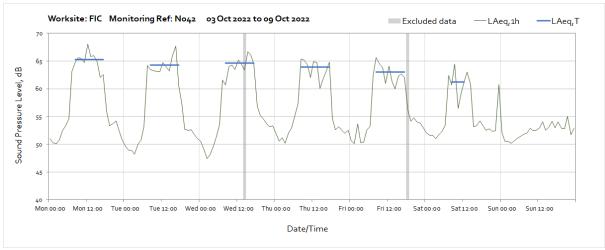

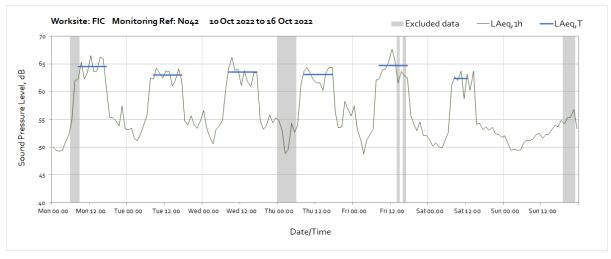


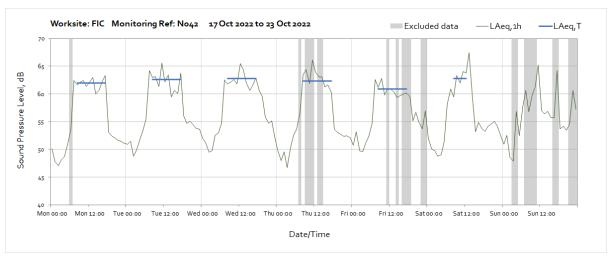


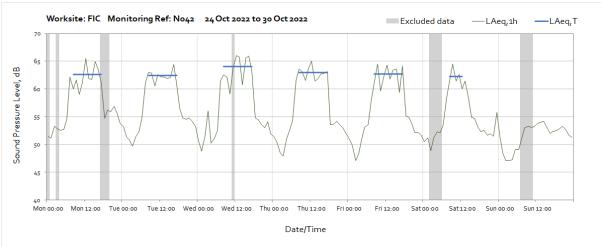


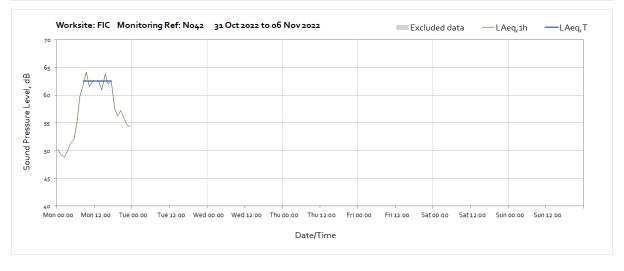



Worksite: Flat Iron Compound (FIC) - Monitoring Ref: N049

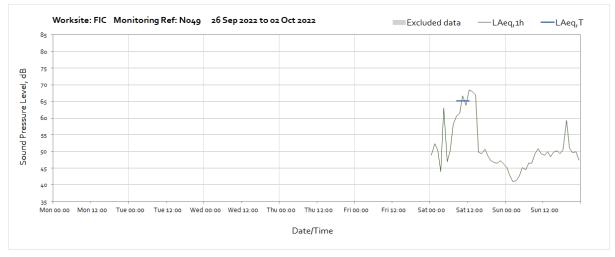

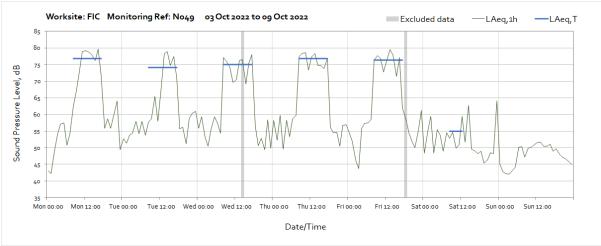

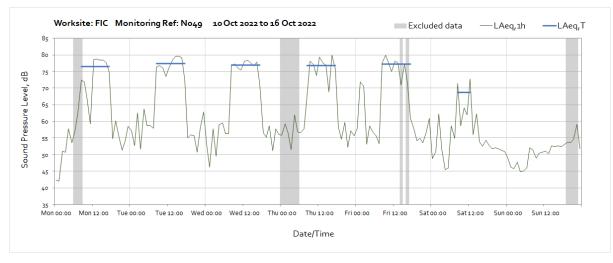


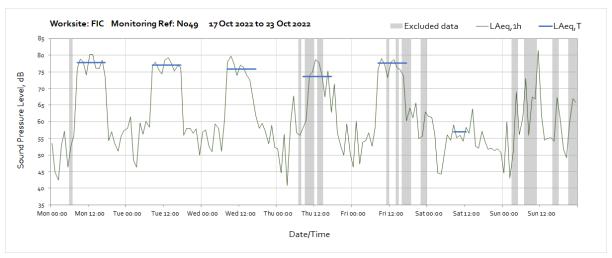


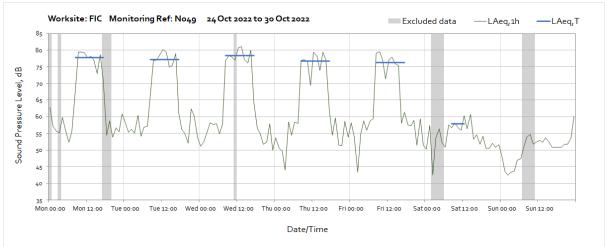






Worksite: Old Oak Common (OOC) - Monitoring Ref: OOC-N01

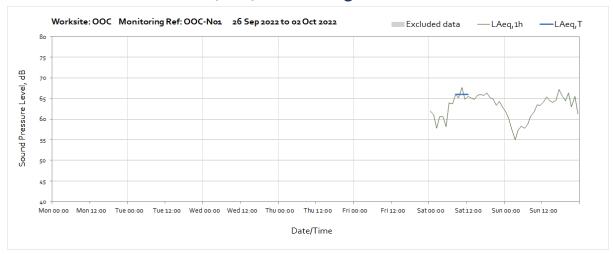


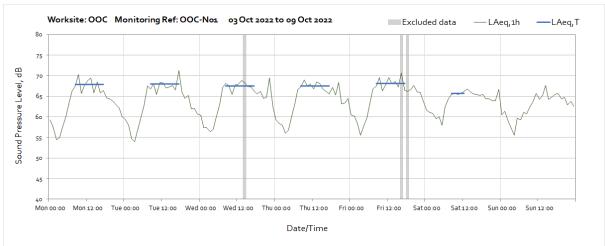

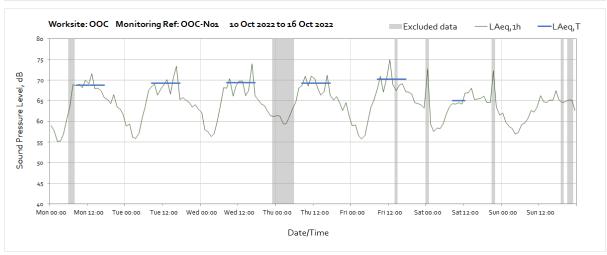


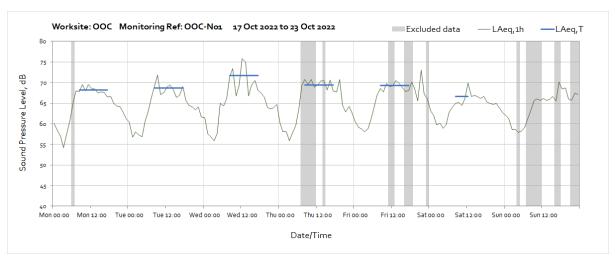


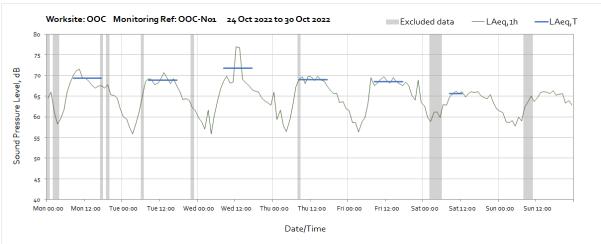


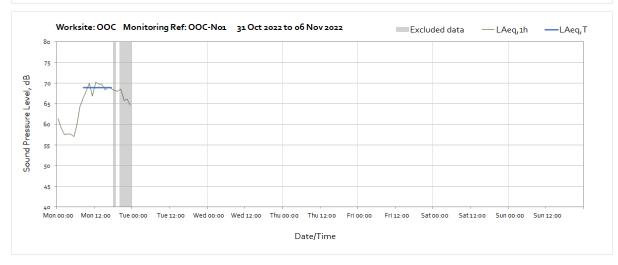



Worksite: Old Oak Common (OOC) - Monitoring Ref: OOC-N02

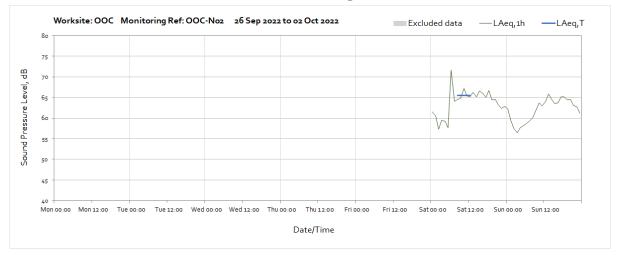


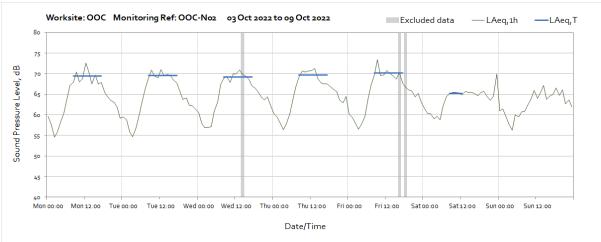

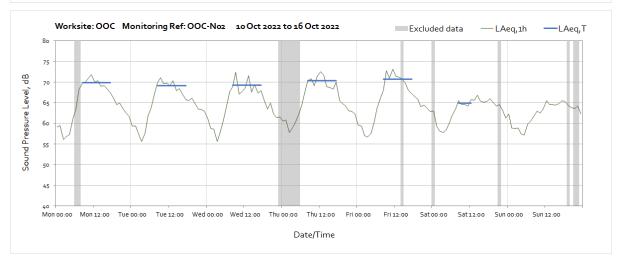


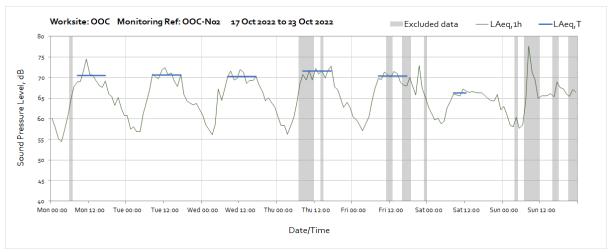


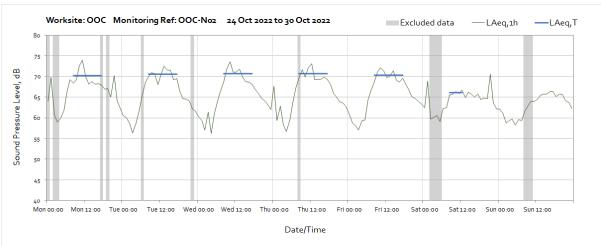


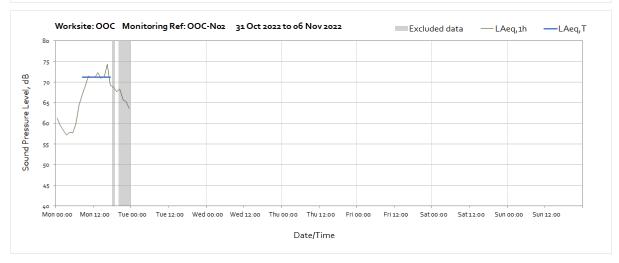



Worksite: Old Oak Common (OOC) - Monitoring Ref: OOC-N03

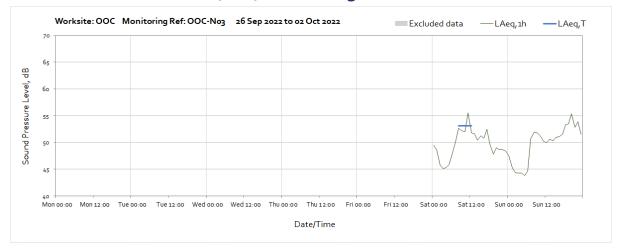


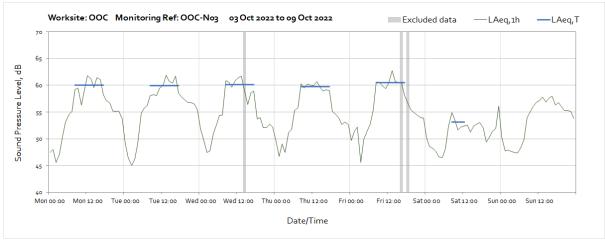

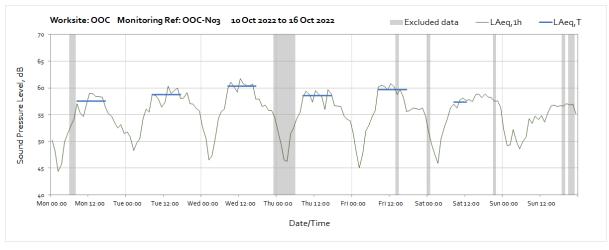


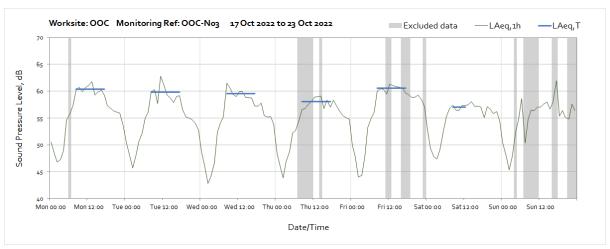

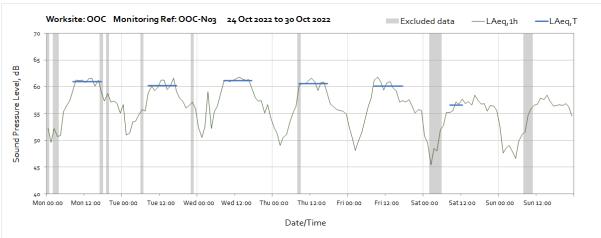


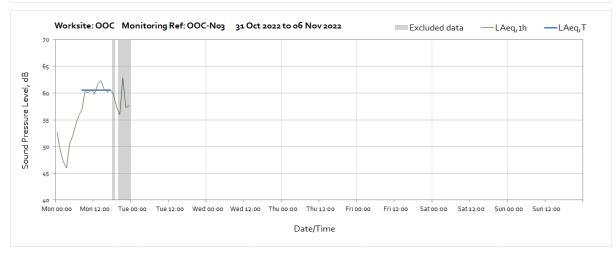



Worksite: Old Oak Common (OOC) - Monitoring Ref: WT-N01

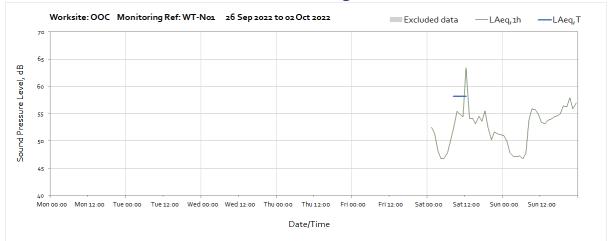



Note: Missing data at 00:00 on Saturday 1st October were due to a temporary set-up glitch at the monitoring station.

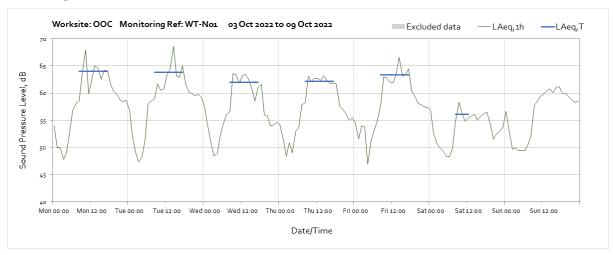

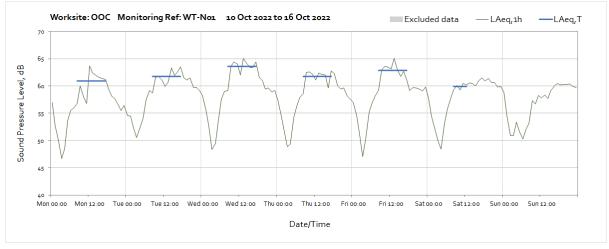


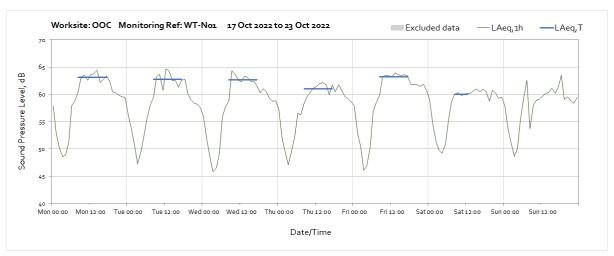


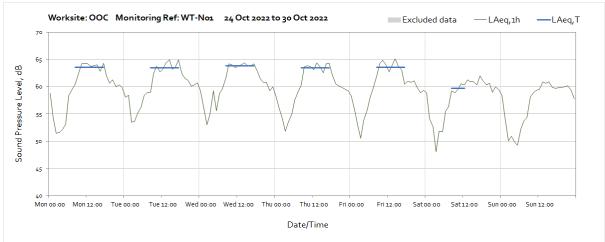


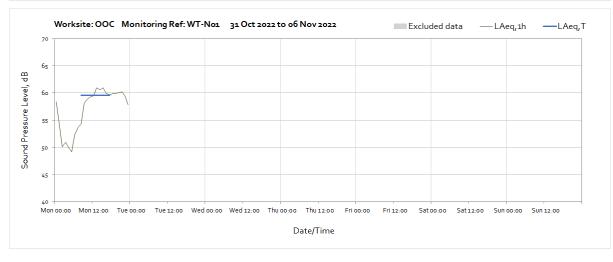



Worksite: Mandeville Road Ventilation Shaft (MRVS) - Monitoring Ref: N040

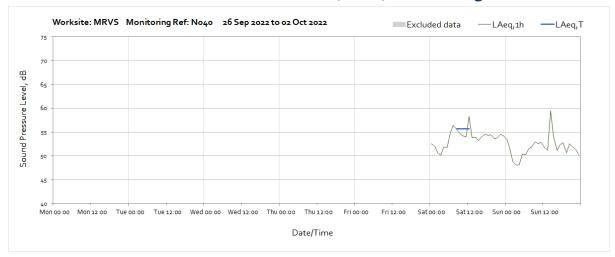


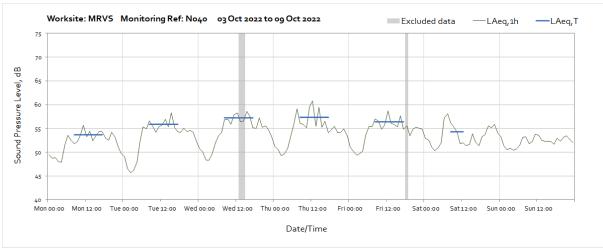

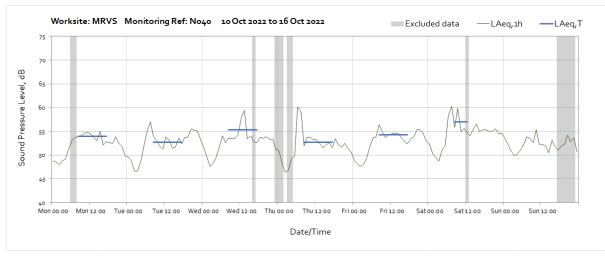


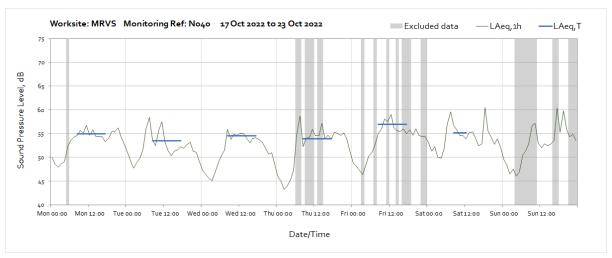


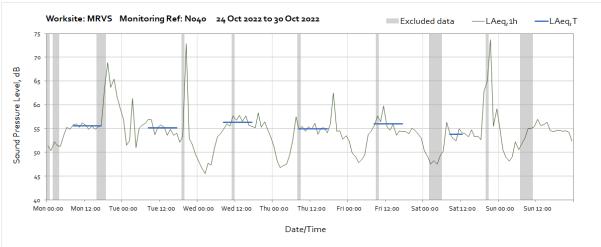


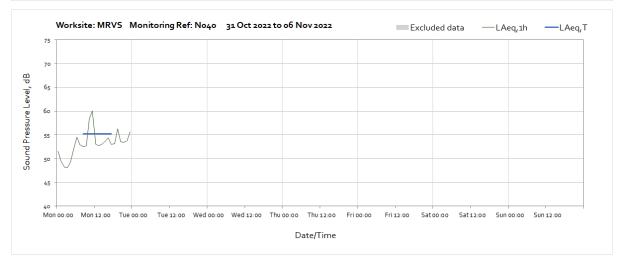



Worksite: Mandeville Road Ventilation Shaft (MRVS) - Monitoring Ref: N058

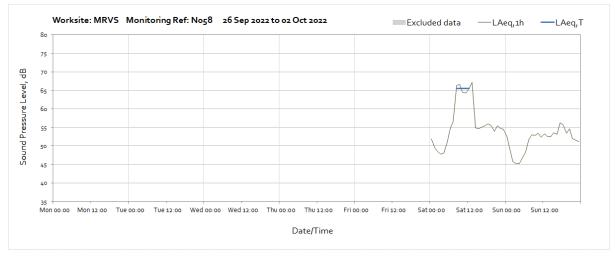


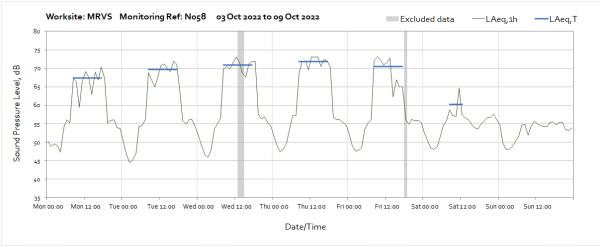

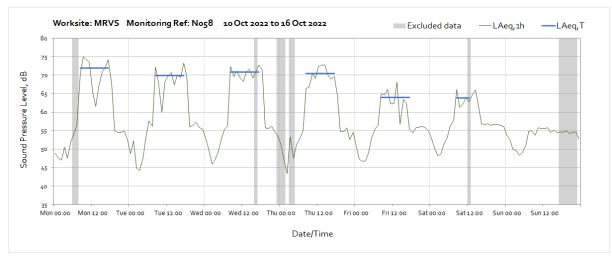


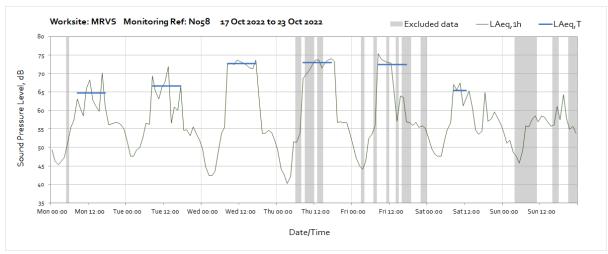


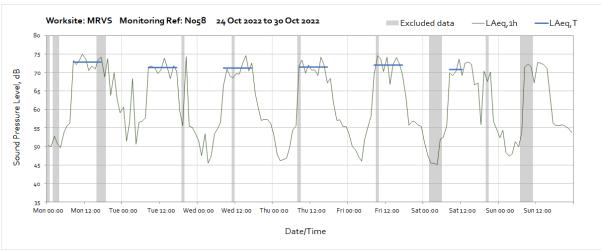


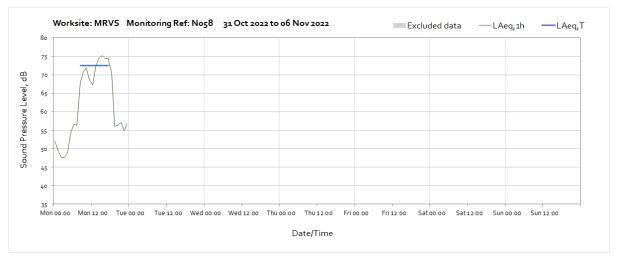



Worksite: Mandeville Road Ventilation Shaft (MRVS) - Monitoring Ref: N063

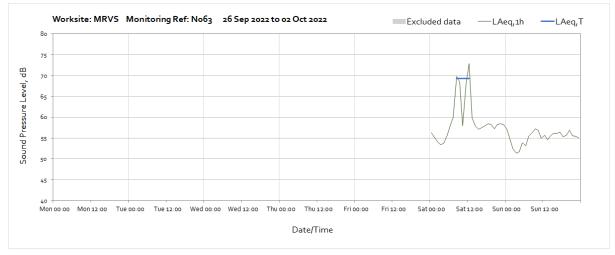


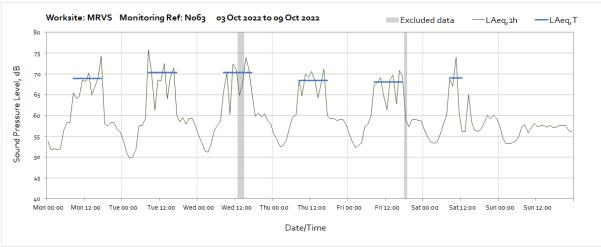

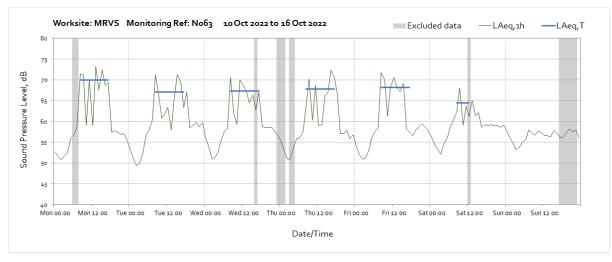


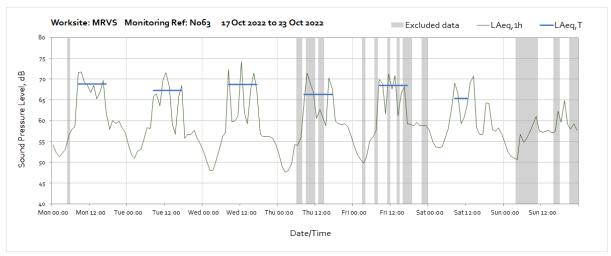


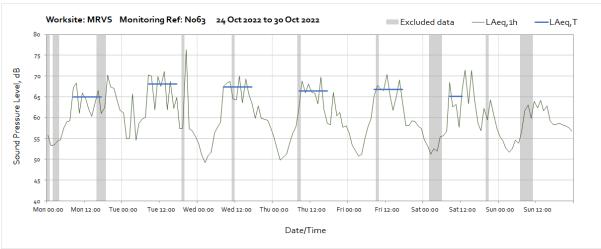


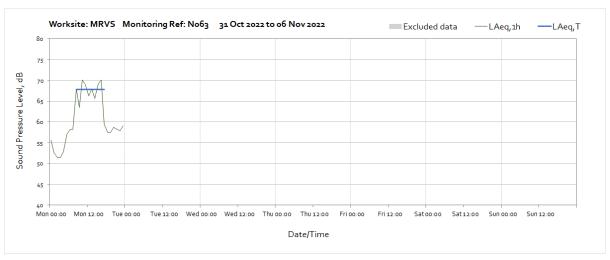



Worksite: Green Park Way Vent Shaft (GPWVS) - Monitoring Ref: N059

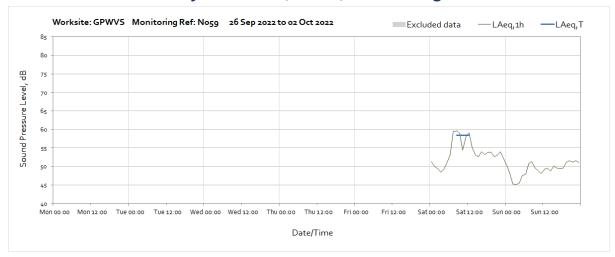


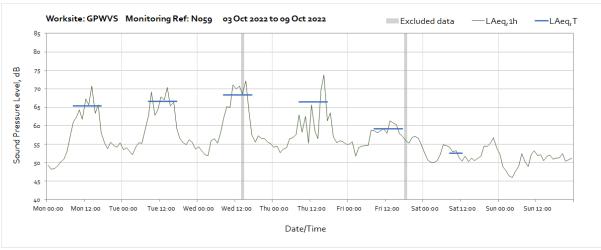

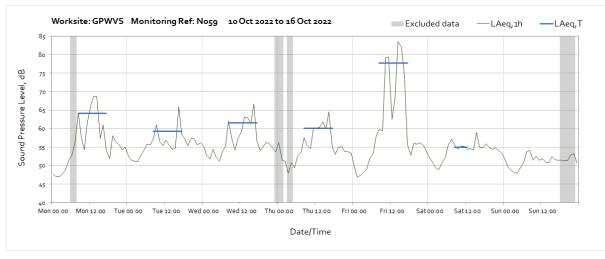


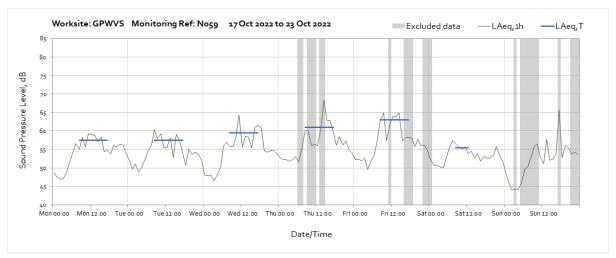


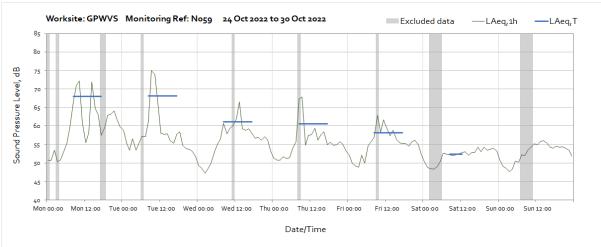


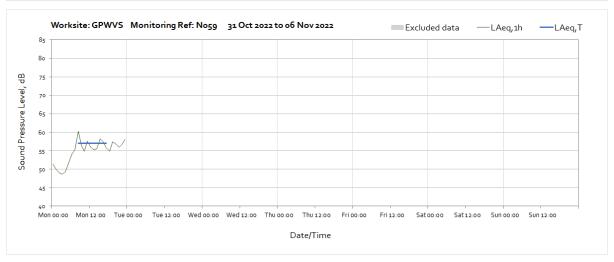



Worksite: Green Park Way Vent Shaft (GPWVS) - Monitoring Ref: N064

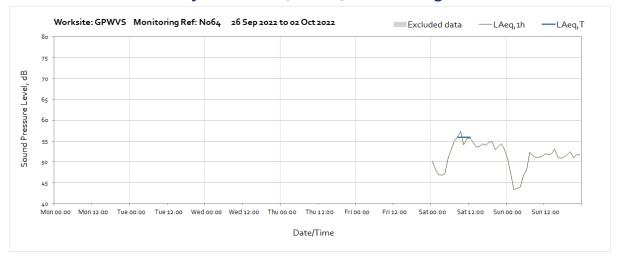


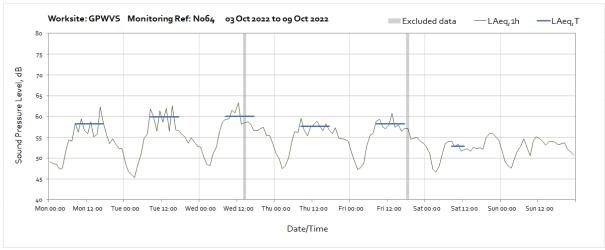

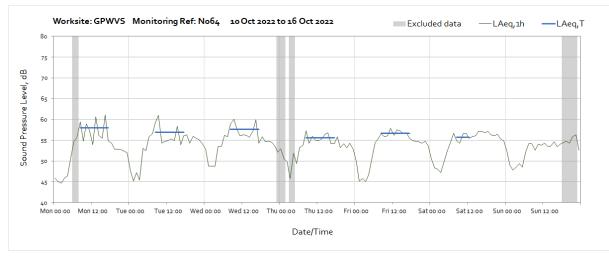


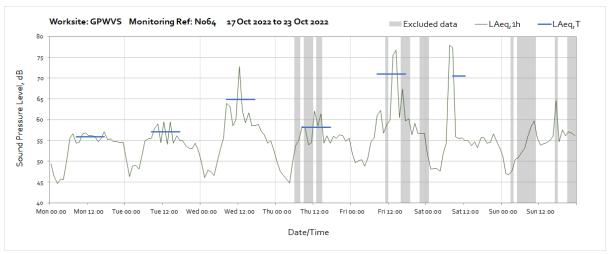


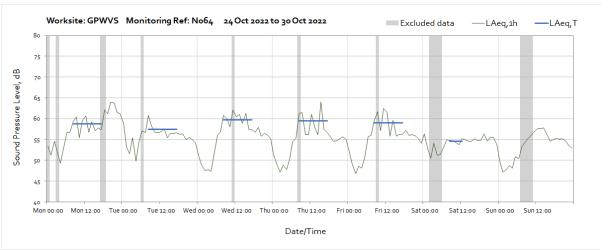


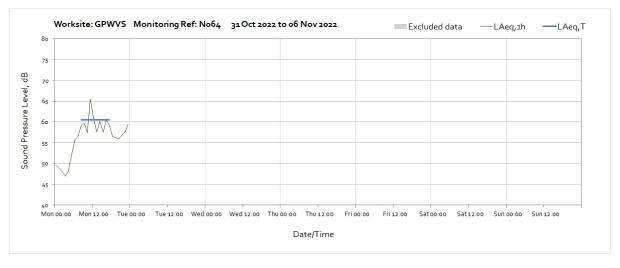



Worksite: Westgate Ventilation Shaft (WVS) - Monitoring Ref: N062

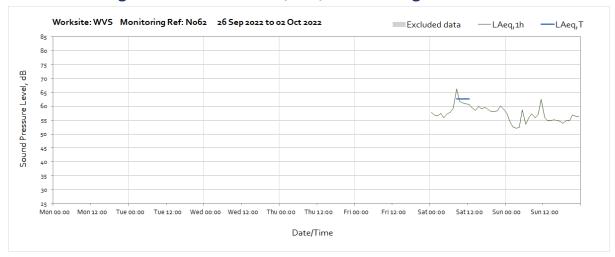


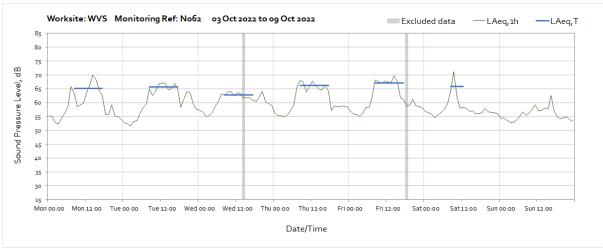

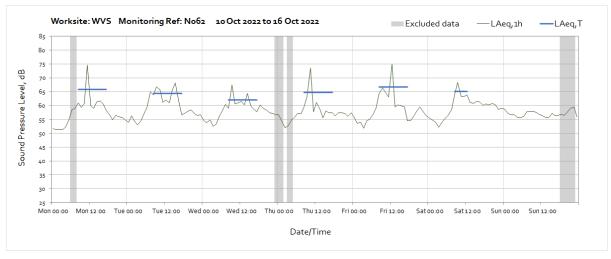

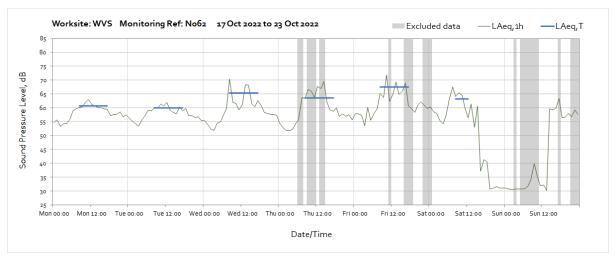

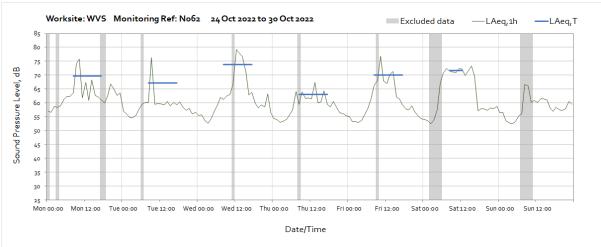


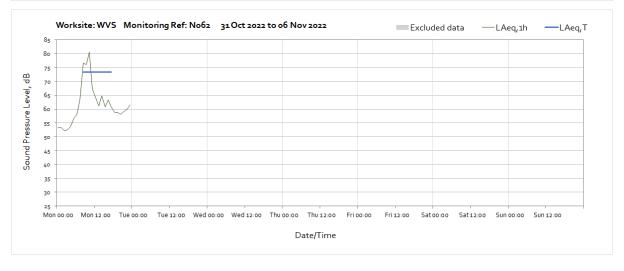



Vibration


The following graphs show the hourly measured peak particle velocity PPV recorded during the monitoring period. The graphs show the highest PPV of the three orthogonal axis x, y and z. Where high values of PPV were caused by local interference with the vibration monitor, which are not representative of HS2 construction works, these values have been greyed out in the following charts and have been excluded to calculate values in Table 4 of the main report.


Worksite: Willesden Euro Terminal (WET) - Monitoring Ref: V057

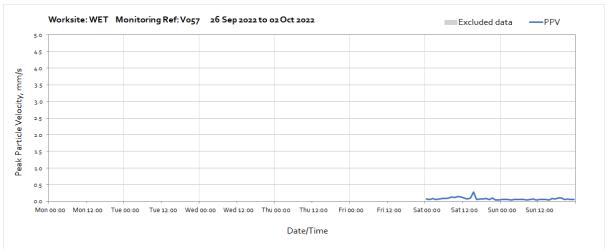

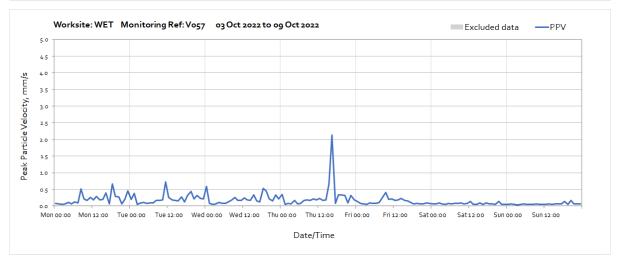

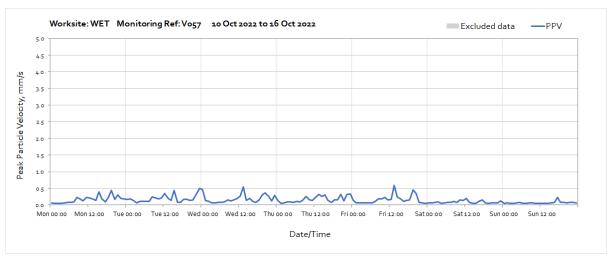


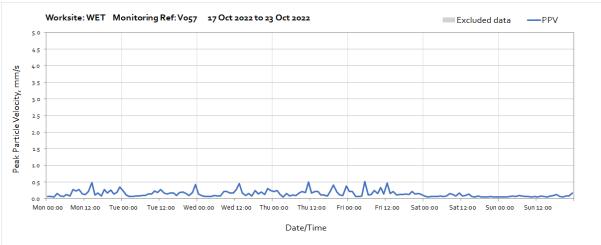


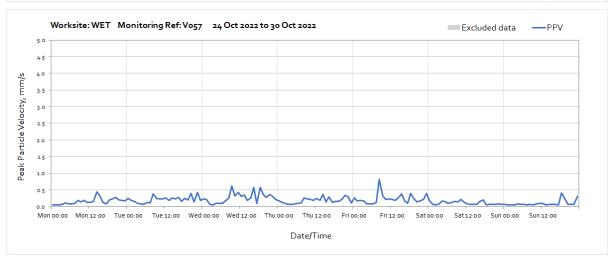






Worksite: Willesden Euro Terminal (WET) - Monitoring Ref: V052

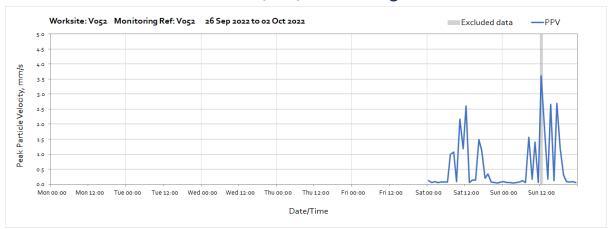


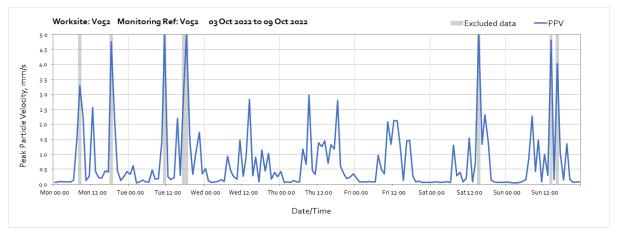

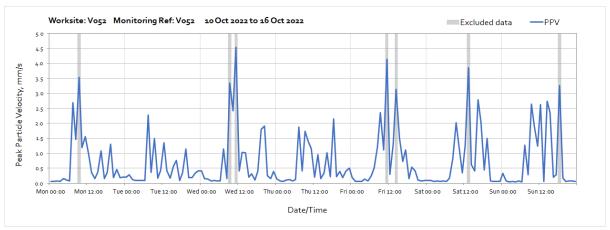


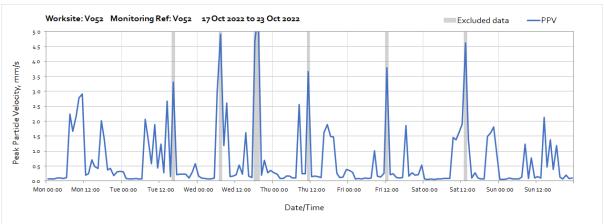


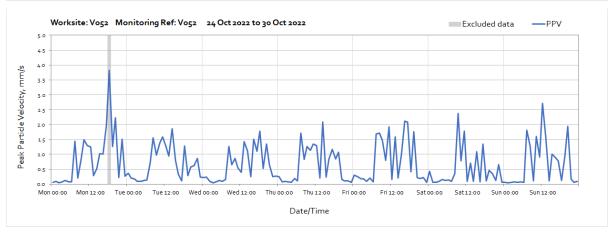


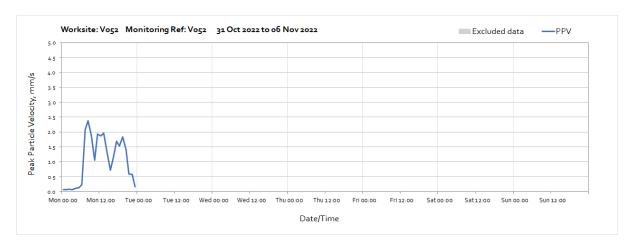



Worksite: Old Oak Common (OOC) - Monitoring Ref: OOC-V02

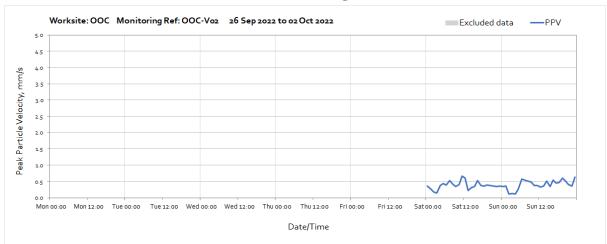


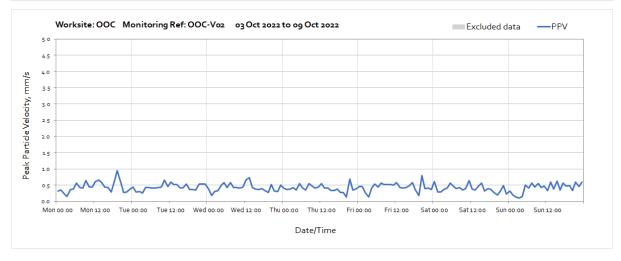

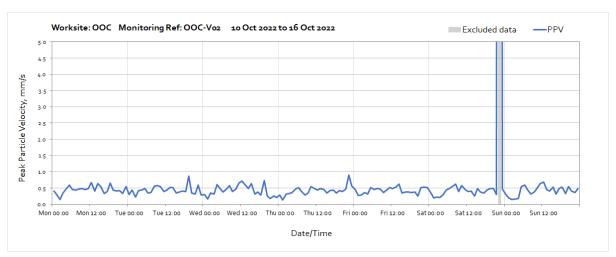


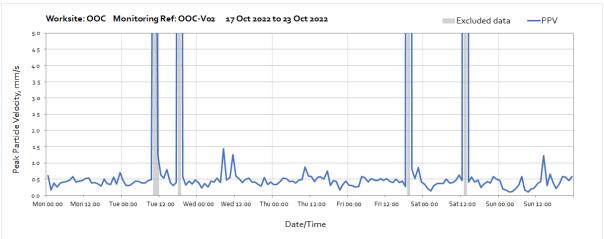


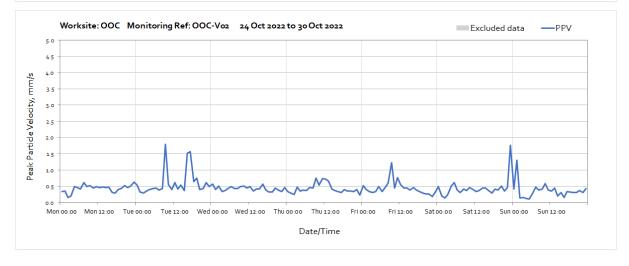


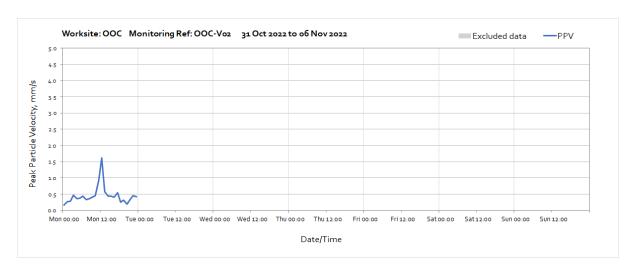



Worksite: Old Oak Common (OOC) - Monitoring Ref: OOC-V03

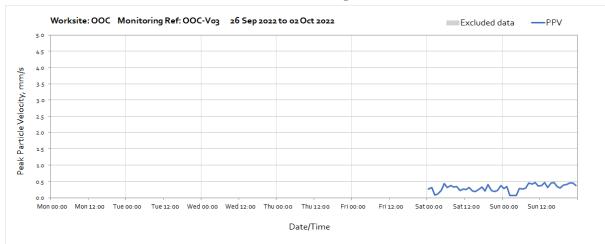


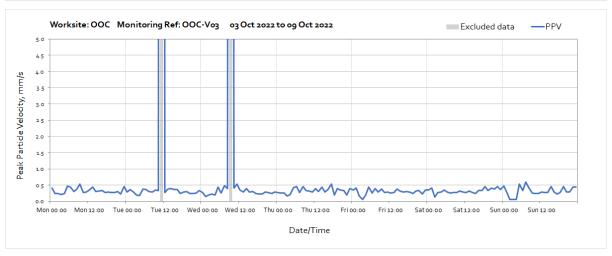

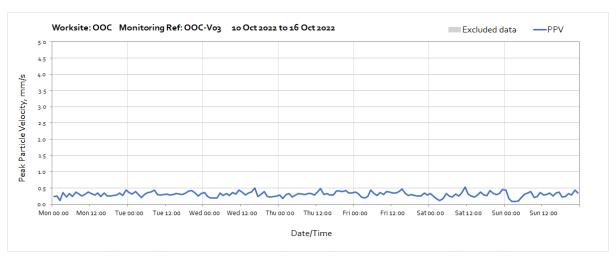


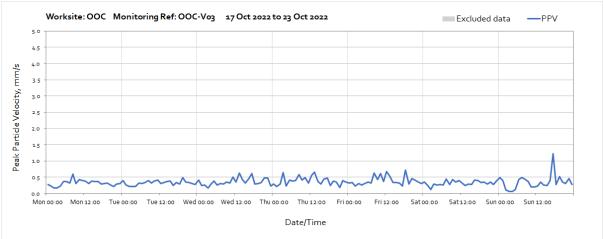

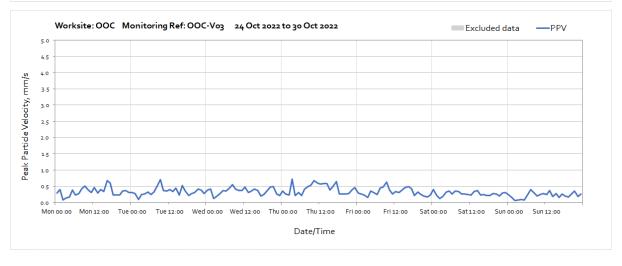


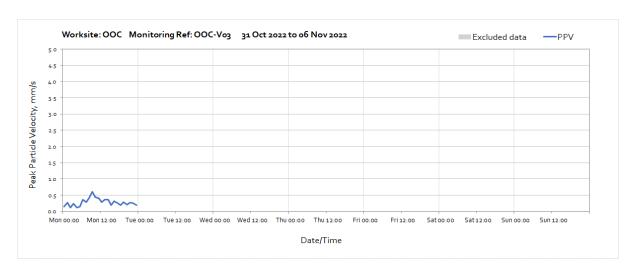



Worksite: Mandeville Road Vent Shaft (MRVS) - Monitoring Ref: V055

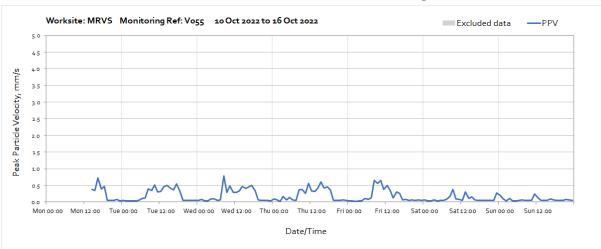

Note: Missing data from the beginning of the month until 14:00 on Monday 10th October was due to loss of battery power at the monitoring station.

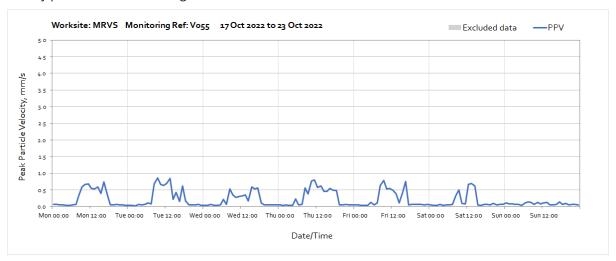


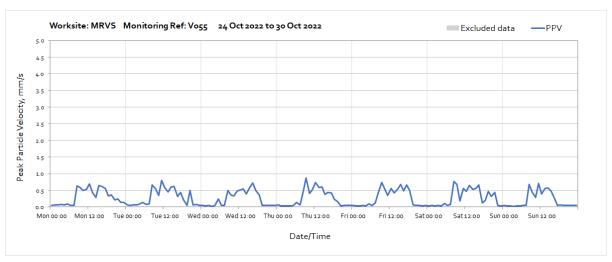


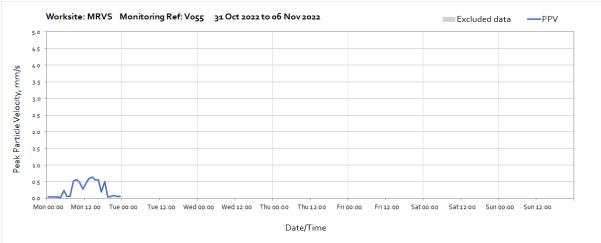



Worksite: Mandeville Road Vent Shaft (MRVS) - Monitoring Ref: V056




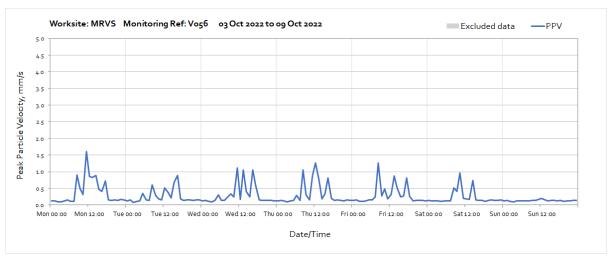

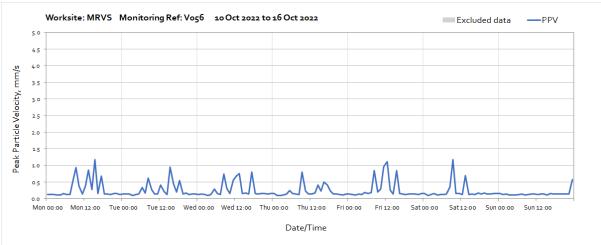


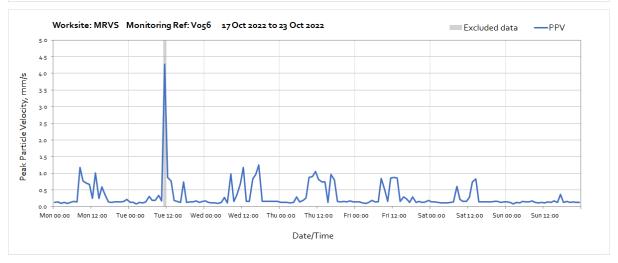


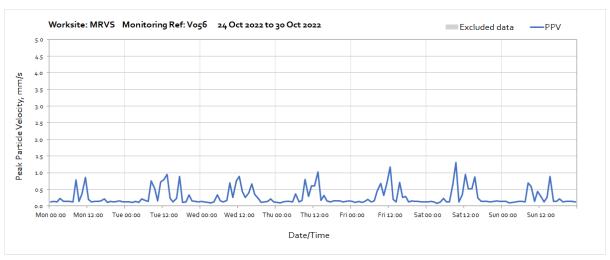


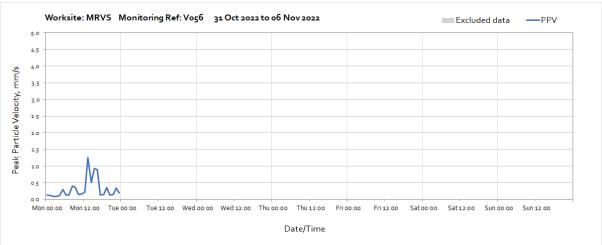



Worksite: Green Park Way Vent Shaft (GPWVS) - Monitoring Ref: V053

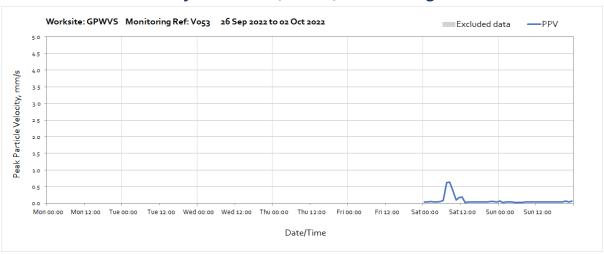


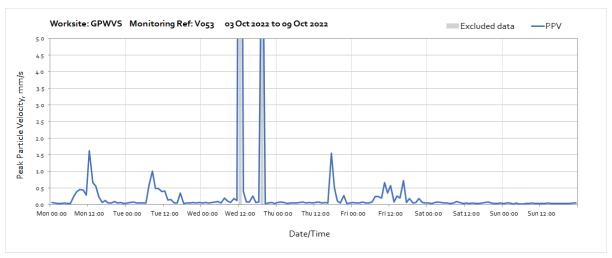

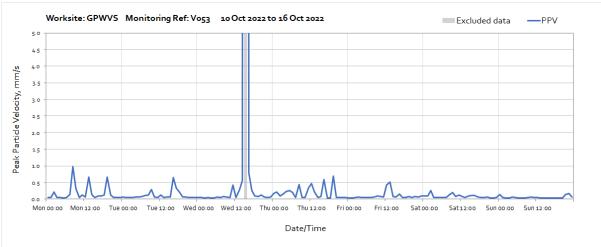

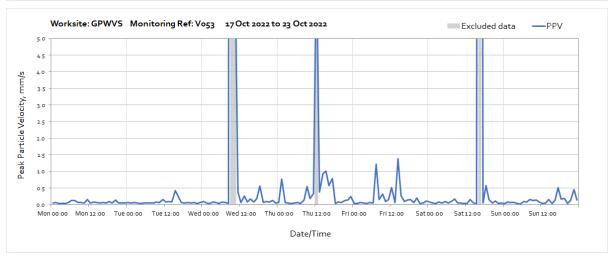

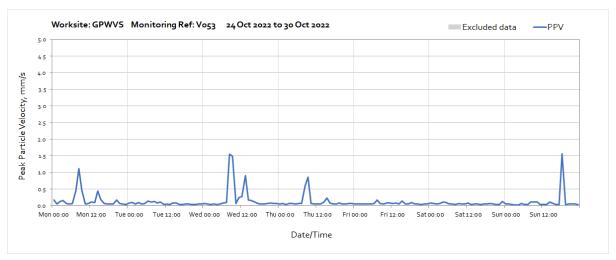

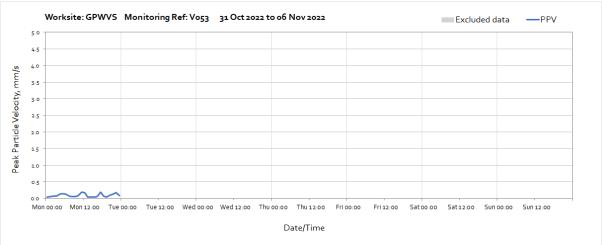

Worksite: Green Park Way Vent Shaft (GPWVS) - Monitoring Ref: V054

