

Construction Noise and Vibration Monthly Report – April 2023

London Borough of Ealing

© HS2 Ltd. gov.uk/hs2

MOII-16	ecnni	cai Summary	
Abbrev	viatio	ns and Descriptions	3
1	Intro	duction	4
	1.2	Measurement Locations	8
2	Sumi	mary of Results	10
	2.1	Summary of Measured Noise and Vibration Levels	10
	2.2	Exceedances of the SOAEL	14
	2.3	Exceedances of Trigger Level	16
	2.4	Complaints	17
Appen	dix A	Site Locations	19
Appen	dix B	Monitoring Locations	25
Appen	dix C	Data	31
List of	table	es	
Table 1	: Tabl	e of Abbreviations	3
Table 2	2: Mor	nitoring Locations	8
		nmary of Measured dB L _{Aeq} Data over the Monitoring Period	11
		nmary of Measured PPV Data over the Monitoring Period	14
		nmary of Exceedances of SOAEL	15
		nmary of Total Exceedances of SOAEL	16
		nmary of Exceedances of Trigger Levels	17
Table 8	3: Sum	nmary of Complaints	17

Non-Technical Summary

This Noise and Vibration Monitoring Report fulfils HS2 Limited's commitment detailed in the Environmental Minimum Requirements (EMRs), Annex 1, Code of Construction Practice, to present the results of noise and vibration monitoring carried out within the London Borough of Ealing (LBE) (including one monitoring location on the boundary with the London Borough of Hammersmith and Fulham) during the month of April 2023.

Within this period monitoring was undertaken at the following worksites:

- Noise monitoring was undertaken in proximity of the Mandeville Road Ventilation Shaft worksite (ref.: MRVS), where installation of dewatering wells, capping beam works, excavation works, installation of pre-cast concrete lining rings, installation of cabins and services, drainage works and cabling works were underway.
- Noise and vibration monitoring were undertaken in proximity of the Green Park
 Way Ventilation Shaft worksite (ref.: GPWVS), where general site operations,
 installation of grouting wells, vegetation clearance, shaft construction works, waterproofing works, removal of concrete bases, pipe bridge and legs, maintenance of
 plant and equipment were underway.
- Noise monitoring was undertaken in proximity of the Westgate Ventilation Shaft (ref.: WVS), where adit construction works, drilling works, construction of manhole and backfilling, plant and equipment maintenance were underway.
- Noise monitoring was undertaken in the vicinity of the Atlas Road worksite (ref.: AR)
 where excavation works, concrete works, installation of safety barriers, conveyor
 works, material delivery and storage, tunnel boring machine operations, installation
 of cabling, lighting installation, fencing works and electrical workshop construction
 works were underway.
- Noise and vibration monitoring were undertaken in the vicinity of the Willesden EuroTerminal worksite (ref.: WET), where installation of gantry crane, refurbishment works, cabling works, water tank installation, gates and hoarding works, installation of ducts and removal of materials were underway.
- Noise monitoring was undertaken in the vicinity of the Victoria Road Crossover Box worksite (worksite ref.: VRCB), where excavation works, diaphragm wall works, demolition works, concrete breaking out, wire sawing, steel fixing and shuttering, duct works, construction of bases, installation of conveyor sections and fencing works were underway. At the Victoria Road Ancillary Shaft tunnel construction works were underway.
- Noise monitoring was undertaken in the vicinity of the Flat Iron compound (worksite ref.: FIC), where conveyor installation, cabling works, reconfiguration of vehicle holding area entrance, tunnel boring machine delivery and assembly, installation of ducts and construction of base slabs were underway.

- Noise and vibration monitoring were undertaken in proximity of the Old Oak
 Common depot worksite (ref.: OOC), where concrete works, drainage and kerb
 installation, diaphragm wall breakdown, steel fixing, excavation works, plank
 installation, road sweeping, piling platform works, demobilisation works,
 construction of crane pad and stockpile removal were underway.
- Noise and vibration monitoring were undertaken in proximity of the Scheme 6 worksite (ref.: S6), where civil works, signalling works, survey works, overhead line equipment works, electrification and plant works were underway.

Further works, where monitoring did not take place, were undertaken at Atlas Road Sub-Station where power utility works, open cut excavation and installation of duct route were underway.

The HS2 threshold levels for significant noise impacts, which are defined in Information Paper E23 (https://www.gov.uk/government/publications/hs2-information-papers-environment), was exceeded seventeen (17) times during the reporting period.

There were no exceedances of trigger levels, as defined in Section 61 consents during the reporting period.

Seven (7) complaints were received during the monitoring period. A description of complaints, the results of investigation and any actions taken are detailed in Table 8 of this report.

Abbreviations and Descriptions

The abbreviations, descriptions and project terminology used within this report can be found in Table 1.

Table 1: Table of Abbreviations

Acronym/Term	Definition
L _{Aeq,T}	See equivalent continuous sound pressure level
Ambient sound	A description of the all-encompassing sound at a given location and time which will include sound from many sources near and far. Ambient sound can be quantified in terms of the equivalent continuous sound pressure level, $L_{pAeq,T}$
Decibel(s), or dB	Between the quietest audible sound and the loudest tolerable sound there is a million to one ratio in sound pressure (measured in Pascal (Pa)). Because of this wide range, a level scale called the decibel (dB) scale, based on a logarithmic ratio, is used in sound measurement. Audibility of sound covers a range of approximately 0-140dB.
Decibel(s) A- weighted, or dB(A)	The human ear system does not respond uniformly to sound across the detectable frequency range and consequently instrumentation used to measure sound is weighted to represent the performance of the ear. This is known as the 'A weighting' and is written as 'dB(A)'.
Equivalent continuous sound pressure level, or L _{Aeq,T}	An index used internationally for the assessment of environmental sound impacts. It is defined as the notional unchanging level that would, over a given period of time (T), deliver the same sound energy as the actual time-varying sound over the same period. Hence fluctuating sound levels can be described in terms of an equivalent single figure value, typically expressed as a decibel level.
Exclusion of data	Measurement of noise levels can be affected by weather conditions such as prolonged periods of rain, winds speeds higher than 5m/s and snow/ice ground cover. Noise levels measured during these periods are considered not representative of normal noise conditions at the site and, for the purposes of this report, are excluded from the assessment of exceedances and calculation of typical noise levels and are also greyed out in charts. Identifiable incongruous noise and vibration events not attributable to HS2 construction noise are also excluded.
Façade	A facade noise level is the noise level 1m in front of a large reflecting surface. The effect of reflection, is to produce a slightly higher (typically +3 dB) sound level than it would be if the reflecting surface was not there.
Free-field	A free-field noise level is the noise level measured at a location where no reflective surfaces, other than the ground, lies within 3.5 metres of the microphone position.
LOAEL	Lowest Observed Adverse Effect Level - the level above which adverse effects on health and quality of life can be detected.
Peak particle velocity, or PPV	Instantaneous maximum velocity reached by a vibrating element as it oscillates about its rest position. The PPV is a simple indicator of perceptibility and risk of damage to structures due to vibration. It is usually measured in mm/s.
SOAEL	Significant Observed Adverse Effect Level - the level above which significant adverse effects on health and quality of life occur.
Sound pressure level	The parameter by which sound levels are measured in air. It is measured in decibels. The threshold of hearing has been set at 0dB, while the threshold of pain is approximately 120dB. Normal speech is approximately 60dB at a distance of 1 metre and a change of 3dB in a time varying sound signal is commonly regarded as being just detectable. A change of 10dB is subjectively twice, or half, as loud.
Vibration dose value, or VDV	An index used to evaluate human exposure to vibration in buildings. While the PPV provides information regarding the magnitude of single vibration events, the VDV provides a measure of the total vibration experienced over a specified period of time (typically 16h daytime and 8h night-time). It takes into account the magnitude, the number and the duration of vibration events and can be used to quantify exposure to continuous, impulsive, occasional and intermittent vibration. The vibration dose value is measured in m/s ^{1.75} .

1 Introduction

- 1.1.1 HS2 is required to undertake noise (and vibration) monitoring as necessary to comply with the requirements of the High Speed Rail (London-West Midlands) Environmental Minimum Requirements, including specifically Annex 1: Code of Construction Practice, in addition to any monitoring requirements arising from conditions imposed through consents under Section 61 of the Control of Pollution Act, 1974 or through Undertakings & Assurances given to third parties. Such monitoring may be undertaken for the following purposes:
 - monitoring the impact of construction works;
 - to investigate complaints, incidents and exceedance of trigger levels; or
 - monitoring the effectiveness of noise and vibration control measures.
- 1.1.2 Monitoring data and interpretive reports are to be provided to each relevant local authority on a monthly basis and shall include a summary of the construction activities occurring, the data recorded over the monitoring period, any complaints received, any periods in exceedance of agreed trigger levels, the results of any investigations and any actions taken or mitigation measures implemented. This report provides noise data, and interpretation thereof, for monitoring carried out by HS2 within the London Borough of Ealing (LBE) (including one monitoring location on the boundary with the London Borough of Hammersmith and Fulham) during the month for the period 1st to 30th April 2023.
- 1.1.3 Active construction sites in the local authority area, where noise and vibration monitoring were conducted during this period, include:
 - Mandeville Road Ventilation Shaft worksite, reference MRVS (see plan 1 in Appendix A), where work activities included:
 - Installation of dewatering wells.
 - Capping beam works, including steel fixing, shuttering and concrete pours.
 - Excavation works.
 - o Installation of pre-cast concrete lining rings.
 - o Installation of cabins and services, including power and water connections.
 - Drainage works.
 - Cabling works.

- Green Park Way Ventilation Shaft worksite, reference GPWVS (see plan 2 in Appendix A), where work activities included:
 - General site operations, including site maintenance, road sweeping, vegetation management, adjustment of walkways and fencing.
 - o Installation of grouting wells.
 - Vegetation clearance.
 - Shaft construction works, including sprayed concrete lining and excavation works.
 - Water-proofing works.
 - o Removal of concrete bases, pipe bridge and legs.
 - Plant and equipment maintenance.
- Westgate Ventilation Shaft worksite, reference WVS (see plan 3 in Appendix A), where work activities included:
 - Adit construction works, including excavation and installation of sprayed concrete lining.
 - Drilling works.
 - Construction of manhole and backfilling, including removal of and reerection of hoarding.
 - Plant and equipment maintenance.
- Atlas Road worksite, ref. AR (see plan 4 in Appendix A), where work activities included:
 - Excavation works.
 - Concrete works, including infill sections of base slabs.
 - o Installation of safety barriers.
 - o Conveyor works, including electrical connections.
 - Material delivery and storage.
 - Tunnel boring machine operations, including assembly, commissioning and maintenance, installation of rings and back grouting.
 - Installation of cabling.
 - Lighting installation.
 - Fencing works.

- o Electrical workshop construction works.
- Willesden EuroTerminal worksite, ref. WET (see plan 4 in Appendix A), where work activities included:
 - Installation of gantry crane, including commissioning and electrical installation works.
 - Refurbishment works.
 - Cabling works, including installation of lighting.
 - Water tank installation.
 - Gates and hoarding works.
 - Installation of ducts.
 - o Removal of materials, including loading of spoil into railway trucks.
- Victoria Road Crossover Box worksite, ref. VRCB (see plan 4 in Appendix A), where work activities included:
 - Excavation works.
 - Site maintenance.
 - Diaphragm wall works, including repairing and hydro-demolition works, wire sawing, breaking out works, removal of blocks and construction of coring holes.
 - Steel-fixing and shuttering works.
 - Duct works.
 - Construction of base for tower crane.
 - Installation of conveyor sections.
 - Installation of fencing.
 - Victoria Road Ancillary Shaft where tunnel construction works were underway.
- Flat Iron compound, worksite ref. FIC (see plan 4 in Appendix A), where work activities included:
 - Conveyor installation.
 - Cabling works.
 - o Reconfiguration of vehicle holding area entrance.
 - Tunnel boring machine delivery and assembly.

- Installation of ducts.
- Construction of base slabs.
- Old Oak Common depot worksite, located in the London Borough of Hammersmith and Fulham (LBHF), ref. OOC (see plan 4 in Appendix A), where work activities included:
 - Concrete works, including concrete pours.
 - Drainage and kerb installation.
 - Diaphragm wall breakdown.
 - Steel fixing.
 - Excavation works.
 - o Plank installation.
 - Road sweeping.
 - Piling platform works.
 - o Demobilisation works.
 - Construction of crane pad.
 - Stockpile removal.
- Scheme 6 worksite, which is partly located in the London Borough of Hammersmith and Fulham (LBHF), ref. S6 (see plan 4 in Appendix A), where work activities included:
 - Civil works.
 - Signalling works.
 - Electrification and plant works.
 - Survey works.
 - Overhead line equipment works.
- 1.1.4 Further works, where monitoring did not take place, were undertaken at Atlas Road Sub-Station where power utility works, open cut excavation and installation of duct route were underway.
- 1.1.5 The applicable standards, guidance, and monitoring methodology are outlined in the construction noise and vibration monitoring methodology report which can be found at the following location

https://www.gov.uk/government/collections/monitoring-the-environmental-effects-of-hs2. Noise and vibration monitoring reports for previous months can also be found at this location.

1.2 Measurement Locations

- 1.2.1 Twenty-two (22) noise and eight (8) vibration monitoring installations were active in April in the LBE area. Table 2 summarises the position of noise and vibration monitoring installations within the LBE area in April 2023.
- 1.2.2 Maps showing the position of noise and vibration monitoring installations are presented in Appendix B.

Table 2: Monitoring Locations

Worksite Reference	Measurement Reference	Address			
MRVS	N040	Badminton Close			
	N058	Mandeville Road			
	N063	Mandeville Road			
	BLV-N001	45 Belvue Road			
	V055	Mandeville Road			
	V056	Mandeville Road			
GPWVS	N059	Green Park Way Ventilation Shaft			
	N064	Green Park Way Ventilation Shaft			
	V053	Green Park Way, Greenford			
	V054	Green Park Way Ventilation Shaft			
WVS	N062	Westgate Ventilation Shaft			
AR	N032	Shaftesbury Gardens			
	N033	Outside The Collective, Atlas Road / Victoria Road			
	N060	Atlas Road next to Bashey Road			
WET	N034	Stephenson Street (north)			
	N035	Stephenson Street (south)			
	N041	Junction of Stephenson Street / Goodhall Street			
	V057	37, Stephenson Street			
	V052	63, Stephenson Street			
VRCB	N031	School Road, outside Acton Business Centre			
	N050	Acton Square, outside North Acton Station			
FIC	N029	Braitrim House, Victoria Road			

Worksite Reference	Measurement Reference	Address
	N042	Boden House Car Park
	N049	Flat Iron compound railway fence, Victoria Rd North Acton
OOC	OOC-N01	Old Oak Common Lane
	OOC-N02	Old Oak Common Lane, Hilltop Works
	OOC-N03	Old Oak Lane Halt, Wells House Road
	OOC-V02	Kildun Court, Old Oak Common Lane
	OOC-V03	Wells House Road Alleyway
S6	WT-N01	Old Oak Lane Halt, Wells House Road

2 Summary of Results

2.1 Summary of Measured Noise and Vibration Levels

2.1.1 Table 3 presents a summary of the measured noise levels at each monitoring location over the reporting period. The $L_{Aeq,T}$ is presented for each of the relevant time periods averaged over the calendar month, along with the highest single period $L_{Aeq,T}$ that was found to occur within the month.

Table 3: Summary of Measured dB L_{Aeq} Data over the Monitoring Period

Worksite Reference	Measurement Reference	t Site Address	Free-field or Façade measurement	Weekday Average L _{Aeq,T} (highest day L _{Aeq,T})				Saturday Average L _{Aeq,T} (highest day L _{Aeq,T})				Sunday / Public Holiday Average L _{Aeq,T} (highest day L _{Aeq,T})			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
MRVS	N040	Badminton Close	Free-field	53.0	54.7	53.0	53.1	51.5	53.2	52.8	52.9	52.5	50.9	52.8	50.8
				(55.2)	(62.8)	(55.9)	(56.3)	(60.3)	(54.6)	(54.1)	(54.8)	(54.6)	(57.1)	(55.5)	(53.9)
	N058	Mandeville Road	Free-field	55.4	64.6	57.3	55.3	52.6	53.6	60.4	60.1	56.4	49.1	57.8	50.0
				(63.9)	(68.8)	(64.9)	(64.2)	(63.7)	(54.4)	(63.7)	(63.7)	(61.8)	(55.0)	(64.0)	(54.8)
	N063	Mandeville Road	Free-field	59.7	66.6	58.3	57.4	55.4	58.0	61.2	58.5	56.6	53.9	57.2	54.6
				(65.5)	(69.4)	(68.5)	(60.1)	(61.3)	(59.0)	(66.7)	(61.4)	(59.1)	(57.6)	(62.8)	(58.7)
	BLV-N001	45 Belvue Road	Free-field	57.4	59.9	56.8	56.3	54.0	56.9	58.1	57.4	56.9	51.1	56.2	52.3
				(59.1)	(62.6)	(58.8)	(59.6)	(65.1)	(57.7)	(60.7)	(60.0)	(68.7)	(56.4)	(59.7)	(58.6)
GPWVS	N059	Green Park Way	Free-field	57.8	60.2	54.0	54.9	54.2	52.8	53.0	53.3	52.3	51.3	55.3	51.6
		Ventilation Shaf		(66.6)	(66.5)	(59.9)	(59.9)	(64.7)	(53.9)	(53.8)	(54.5)	(54.1)	(55.1)	(64.9)	(53.8)
	N064	Green Park Way	Facado	54.9	57.4	55.2	54.0	51.9	52.7	52.6	52.3	52.1	49.6	53.5	50.4
		Ventilation Shaft	Façade	(56.8)	(67.6)	(61.5)	(59.9)	(57.9)	(53.8)	(53.6)	(54.0)	(54.8)	(55.0)	(56.7)	(54.5)
WVS	N062	Westgate Ventilation	Free-field	62.4	64.6	57.9	57.8	56.0	58.7	61.6	58.7	56.5	53.8	57.4	54.4
		Shaft	Tree-field	(69.4)	(67.6)	(61.9)	(62.3)	(61.3)	(64.5)	(64.8)	(66.8)	(63.2)	(60.3)	(64.8)	(61.4)
AR	N032	Shaftesbury Gardens	Free-field	64.7	64.7	63.5	62.5	60.0	62.2	63.7	63.3	62.6	59.3	62.0	59.3
				(66.0)	(66.7)	(65.3)	(66.4)	(63.9)	(65.2)	(69.4)	(67.2)	(67.3)	(64.3)	(69.6)	(64.3)

Worksite Reference	Measurement Reference	Site Address	Free-field or Façade measurement	Weekday Average L _{Aeq,T} (highest day L _{Aeq,T})				Saturday Average L _{Aeq,T} (highest day L _{Aeq,T})				Sunday / Public Holiday Average L _{Aeq,T} (highest day L _{Aeq,T})			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
	N033	Outside The Collective, Atlas Road/Victoria Road	Free-field	67.7 (69.0)	67.5 (68.8)	66.5 (70.1)	64.9 (70.8)	61.9 (66.9)	63.5 (64.9)	64.4 (65.1)	65.3 (67.6)	64.0 (66.8)	60.4 (66.5)	63.0 (67.1)	61.0 (67.0)
	N060	Atlas Road next to Bashey Road	Free-field	58.9 (66.0)	65.2 (71.2)	58.1 (66.2)	60.4 (73.1)	59.6 (73.1)	56.3 (66.6)	58.1 (58.9)	55.6 (57.0)	54.4 (62.2)	48.8 (57.0)	52.4 (63.9)	51.3 (60.9)
WET	N034	Stephenson Street (north)	Free-field	55.7 (68.0)	58.3 (62.0)	56.6 (60.6)	56.4 (62.0)	52.0 (58.7)	51.0 (54.3)	55.0 (56.7)	54.5 (56.1)	55.2 (64.4)	46.5 (54.6)	52.2 (58.0)	46.7 (51.8)
	N035	Stephenson Street (south)	Free-field	55.9 (62.6)	57.5 (64.1)	54.9 (60.1)	53.3 (71.3)	48.9 (56.5)	51.8 (53.7)	62.3 (74.0)	52.5 (55.1)	52.4 (59.4)	46.1 (54.1)	51.7 (59.8)	47.3 (63.4)
	N041	Junction of Stephenson Street/Goodhall Street	Free-field	55.6 (60.4)	58.4 (65.0)	56.9 (63.2)	55.5 (59.3)	51.3 (57.0)	50.4 (51.8)	54.7 (55.7)	55.2 (56.4)	55.8 (66.4)	49.5 (58.4)	53.0 (59.6)	50.0 (53.7)
VRCB	N031	School Road, outside Acton Business Centre	Free-field	62.7 (65.6)	66.3 (70.9)	64.4 (69.6)	62.2 (66.1)	56.5 (63.7)	57.1 (64.3)	65.1 (67.1)	64.1 (68.5)	60.5 (68.3)	54.6 (64.2)	57.3 (60.8)	55.7 (63.7)
	N050	Acton Square, outside North Acton Station	Free-field	65.1 (69.0)	65.3 (67.5)	63.4 (65.1)	62.5 (65.8)	60.1 (73.7)	63.9 (65.7)	63.9 (64.7)	62.5 (64.0)	62.3 (67.9)	59.5 (65.7)	62.2 (72.6)	59.4 (66.0)
FIC	N029	Braitrim House, Victoria Road	Free-field	60.0 (64.3)	64.3 (75.2)	56.9 (64.2)	58.7 (67.9)	58.0 (69.6)	57.2 (59.4)	57.4 (58.9)	56.5 (62.6)	53.6 (58.7)	47.4 (53.5)	49.8 (56.5)	51.3 (65.1)
	N042	Bodens car park	Free-field	63.6 (67.5)	65.7 (68.4)	59.4 (62.2)	57.8 (60.6)	55.6 (60.5)	59.8 (61.9)	62.7 (67.6)	62.3 (69.3)	58.9 (69.2)	54.6 (58.5)	55.3 (58.1)	54.1 (57.4)

Worksite Reference	Measurement Reference	Site Address	Free-field or Façade measurement	Weekday Average L _{Aeq,T} (highest day L _{Aeq,T})				Saturday Average L _{Aeq,T} (highest day L _{Aeq,T})				Sunday / Public Holiday Average L _{Aeq,T} (highest day L _{Aeq,T})				
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700	
	N049	Flat Iron compound	Flat Iron compound	Free-field	60.5	74.9	59.4	61.6	60.3	57.1	62.0	58.5	56.5	48.7	50.4	52.7
				(65.7)	(78.2)	(65.2)	(69.7)	(73.3)	(61.7)	(67.6)	(68.5)	(63.9)	(54.7)	(54.5)	(64.2)	
ooc	OOC-N01	Old Oak Common Lane	Free-field	67.0	69.4	68.0	65.9	61.8	62.8	64.8	65.1	66.2	61.6	64.3	61.1	
				(71.6)	(71.0)	(74.6)	(69.7)	(67.9)	(64.0)	(66.2)	(65.3)	(71.0)	(67.0)	(68.9)	(65.9)	
	OOC-N02	Old Oak Common Lane,	Free-field	67.5	70.8	68.5	66.8	61.6	63.1	66.1	64.8	68.7	61.1	66.1	60.6	
		Hilltop Works		(72.4)	(72.9)	(72.4)	(83.6)	(72.8)	(64.3)	(68.5)	(65.9)	(86.1)	(68.5)	(81.3)	(64.7)	
	OOC-N03	Old Oak Lane Halt,	Free-field	56.6	61.8	57.6	56.2	53.0	55.3	55.8	55.6	56.3	51.9	55.6	52.9	
		Wells House Road		(58.7)	(64.5)	(60.7)	(60.6)	(58.7)	(56.8)	(57.0)	(56.4)	(59.2)	(58.8)	(59.0)	(57.0)	
S6	WT-N01		Free-field	56.5	63.1	60.3	57.9	53.9	55.4	56.3	56.5	57.2	53.1	56.4	53.8	
		Wells House Road		(58.6)	(66.8)	(64.2)	(61.8)	(60.5)	(58.0)	(57.5)	(57.5)	(60.8)	(59.8)	(60.4)	(58.3)	

2.1.2 Table 4 presents a summary of the measured vibration levels at each monitoring location over the reporting period. The highest PPV measured during the monitoring along any axis is presented in the table.

Table 4: Summary of Measured PPV Data over the Monitoring Period

Worksite Reference	Measurement Reference	Monitor Address	Highest PPV measured in any axis, mm/s
GPWVS	V053	Green Park Way, Greenford	2.33 (X-axis)
	V054	Green Park Way Ventilation Shaft	1.17 (Z-axis)
MRVS V055		Mandeville Road	0.98 (X-axis)
	V056	Mandeville Road	0.91 (Z-axis)
WET	V052	63, Stephenson Street	2.89 (Y-axis)
	V057	37, Stephenson Street	1.05 (Z-axis)
00C	OOC-V02	Kildun Court, Old Oak Common Lane	1.75 (X-axis)
	OOC-V03	Wells House Road Alleyway	0.66 (X-axis)

2.1.3 Appendix C presents graphs of the noise and vibration monitoring data over the month for each of the measurement locations. Noise data presented consists of the hourly L_{Aeq} values and, where relevant, the L_{Aeq,T} values (where the time period T has been taken to be the averaging period as specified in Table 1 of HS2 Information Paper E23). Vibration data presented consist of hourly PPV values. The full data set for the monitoring equipment can be found at the following location: https://data.gov.uk/dataset/24542ae7-dd44-444f-b259-871c4cc43b5e/environmental-monitoring-data.

2.2 Exceedances of the SOAEL

- 2.2.1 The significant observed adverse effect level (SOAEL) is defined in the 'Planning Practice Guidance Noise' as the level above which "noise causes a material change in behaviour and/or attitude, e.g. avoiding certain activities during periods of intrusion; where there is no alternative ventilation, having to keep windows closed most of the time because of the noise. Potential for sleep disturbance resulting in difficulty in getting to sleep, premature awakening and difficulty in getting back to sleep. Quality of life diminished due to change in acoustic character of the area."
- 2.2.2 HS2 Phase One Information Paper E23: Control of Construction Noise and Vibration sets out the SOAELs for construction noise.

- 2.2.3 Where reported construction noise levels exceed the SOAEL, relevant periods will be identified. Summary statistics to evaluate ongoing qualification for noise insulation and temporary rehousing are also presented where relevant.
- 2.2.4 Table 5 presents a summary of recorded exceedances of the SOAEL at each measurement location over the reporting period, including the number of exceedances during each time period.

Table 5: Summary of Exceedances of SOAEL

Worksite Reference	Measurement Reference	ference		Time period	Number of exceedances of SOAEL	
MRVS	N040	Badminton Close	All days	All periods	No exceedance	
	N058	Mandeville Road	Sundays	0700-2200	2	
	N063	Mandeville Road	All days	All periods	No exceedance	
	BLV-N001	45 Belvue Road	All days	All periods	No exceedance	
GPWVS	N059	Green Park Way Ventilation Shaft	All days	All periods	Not applicable*	
	N064	Green Park Way Ventilation Shaft	All days	All periods	Not applicable*	
WVS	N062	Westgate Ventilation Shaft	All days	All periods	Not applicable*	
AR	N032	Shaftesbury Gardens	All days	All periods	No exceedance	
	N033	Outside The Collective, Atlas Road / Victoria Road	All days	All periods	No exceedance	
	N060	Atlas Road next to Bashey Road	All days	All periods	No exceedance	
WET	N034	Stephenson Street (north)	All days	All periods	No exceedance	
	N035	Stephenson Street (south)	All days	All periods	No exceedance	
	N041	Junction of Stephenson Street / Goodhall Street	All days	All periods	No exceedance	
VRCB	N031	School Road, outside Acton Business Centre	All days	All periods	Not applicable*	
	N050	Acton Square, outside North Acton Station	All days	All periods	No exceedance	

Worksite Reference	Measurement Reference	Site Address	Day (Weekday, Saturday, Sunday, Night)	Time period	Number of exceedances of SOAEL
FIC	N029	Braitrim House, Victoria Road	All days	All periods	No exceedance
	N042	Bodens Car Park	All days	All periods	No exceedance
	N049	Flat Iron compound	All days	All periods	No exceedance
00C	OOC-N01	Old Oak Common Lane	All days	All periods	No exceedance
	OOC-N02	Old Oak Common Lane, Hilltop Works	All days	All periods	No exceedance
	OOC-N03	Old Oak Lane Halt, Wells House Road	All days	All periods	No exceedance
S6	WT-N01	Old Oak Lane Halt, Wells House Road	Nights	2200-0700	33

^{*} The defined SOAEL criteria are not applicable to non-residential properties

2.2.5 For the purpose of assessing eligibility for noise insulation or temporary rehousing, multiple exceedances of the SOAEL in a 24-hour period would be counted as a single exceedance during that day. Over the reporting period, the overall number of SOAEL exceedances at each measurement location is shown in Table 6 and may be lower than the total sum of individual exceedances reported in Table 5 for each location.

Table 6: Summary of Total Exceedances of SOAEL

Worksite Reference	Measurement Reference	Monitor Address	Total of SOAEL exceedances in the month
S6	WT-N01	Old Oak Lane Halt, Wells House Road	15
MRVS	N058	Mandeville Road	2

2.2.6 Seventeen (17) 24-hour periods that experienced an exceedance of the SOAEL were recorded due to HS2 construction works during April 2023. Exceedances occurred at noise monitor N058 during Sundays and noise monitor WT-N01 during night-time periods.

2.3 Exceedances of Trigger Level

2.3.1 Table 7 provides a summary of exceedances of the Section 61 trigger noise levels determined to be due to HS2 related construction noise measured during the reporting period, along with the findings of any investigation.

Table 7: Summary of Exceedances of Trigger Levels

Complaint Reference Number (if applicable)	Worksite Reference	Date and Time Period	Identified Source	Results of Investigation (including noise monitoring results)	Actions Taken
-	-	-	-	-	-

2.4 Complaints

2.4.1 Table 8 provides a summary of complaint information related to noise and vibration received during the reporting period, along with the findings of any investigation.

Table 8: Summary of Complaints


Complaint Reference Number	Worksite Reference	Description of Complaint	Results of Investigation	Actions Taken
HS2-23-44538-C HS2-23-44541-C	OOC	Complaint regarding noise and vibration issues. Resident described the effects as trembling and shaking like an earthquake.	Disturbance due to roller activity. Section 61 permits the works however, this particular batch of works has now been completed	Results of investigation have been relayed to the stakeholder
HS2-23-44547-C	OOC	Complaint due to noise from site at just before 6am. Stakeholder noted the noise sounded like drilling.	Disturbance was due to movement of an oversized vehicle from site area at early hours of the morning to prevent disruption on local roads."	Explanation and apology provided to resident by contractor.
HS2-23-44561-C HS2-23-93440-E-C	VRCB	Complaint regarding ongoing noise.	The site has Section 61 in place to allow for works 24/7.	Confirmed to resident that best practicable means and mitigation are being used. Resident previously began and stopped a special cases application. It has been suggested to consider again.

Complaint Reference Number	Worksite Reference	Description of Complaint	Results of Investigation	Actions Taken
HS2-23-93521-E-C HS2-23-44579-C	VRCB	Complaint about alarm or siren sounding every hour during night.	Noise due to conveyor belt in operation during night (consents in place).	Mitigation activity carried out - reduced start up sirens by 20% or replaced with white noise sirens. Rollers that are not working efficiently were replaced. Continued ongoing maintenance of the structure. Conveyor team is looking at sound attenuation at any transfer points where possible.

Appendix A Site Locations




HS2 Worksite identification plan - Overview

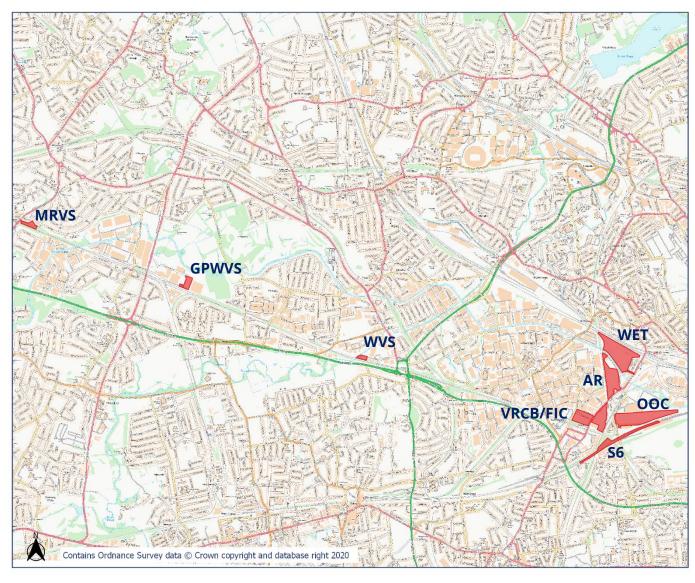




HS2 Worksite Identification Plan - 1

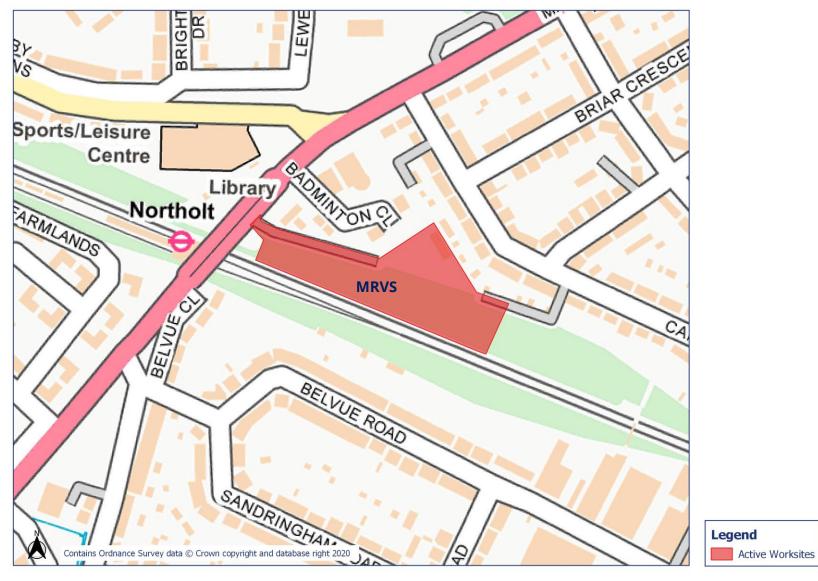


HS2 Worksite Identification Plan - 2

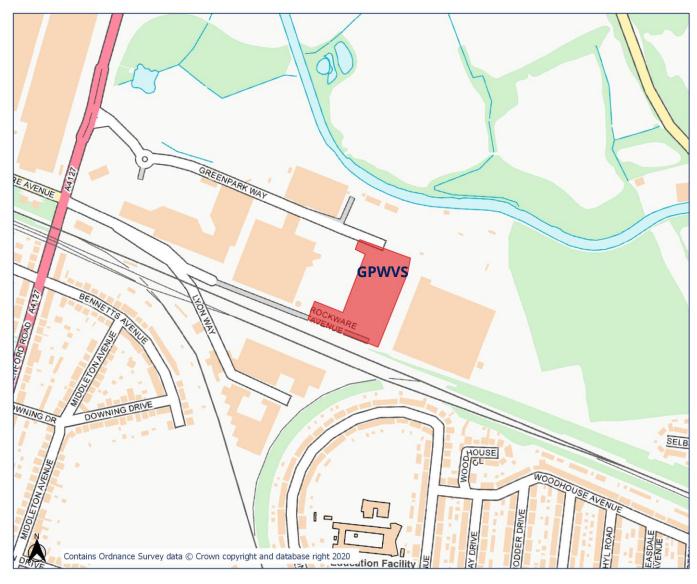




HS2 Worksite Identification Plan - 3

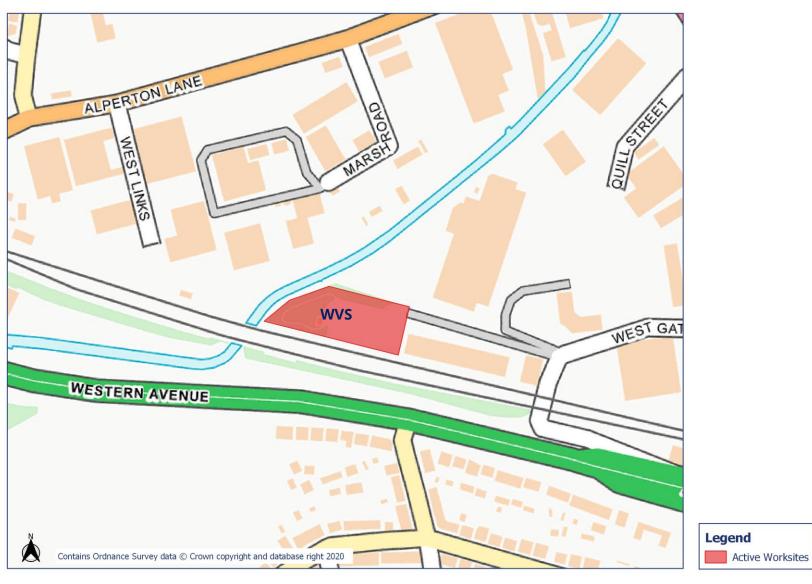


HS2


Worksite Identification Plan - 4

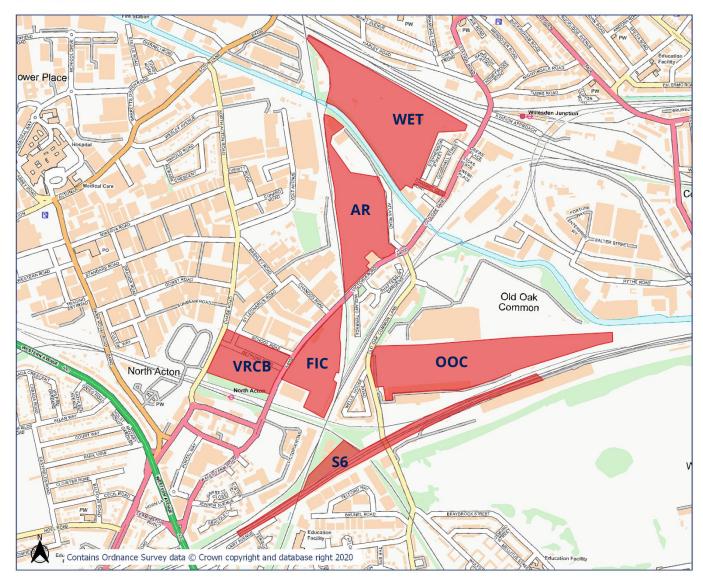






Appendix B Monitoring Locations

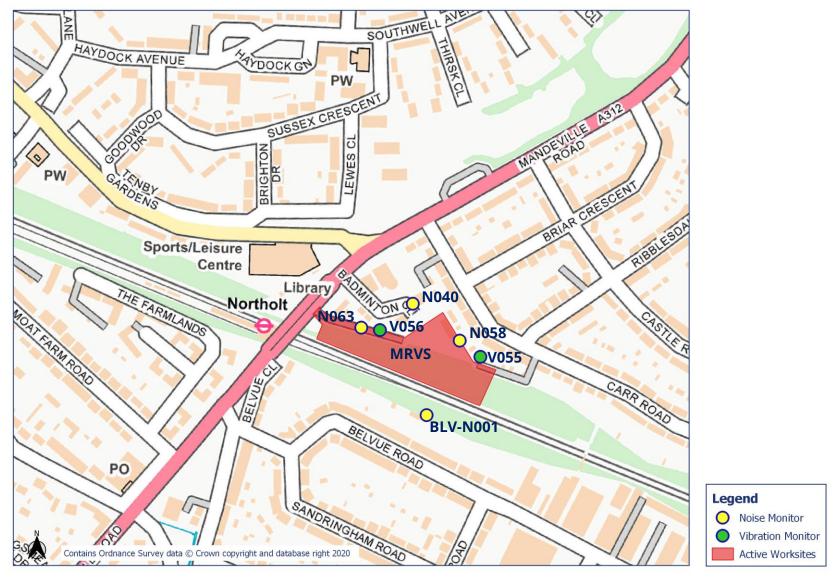

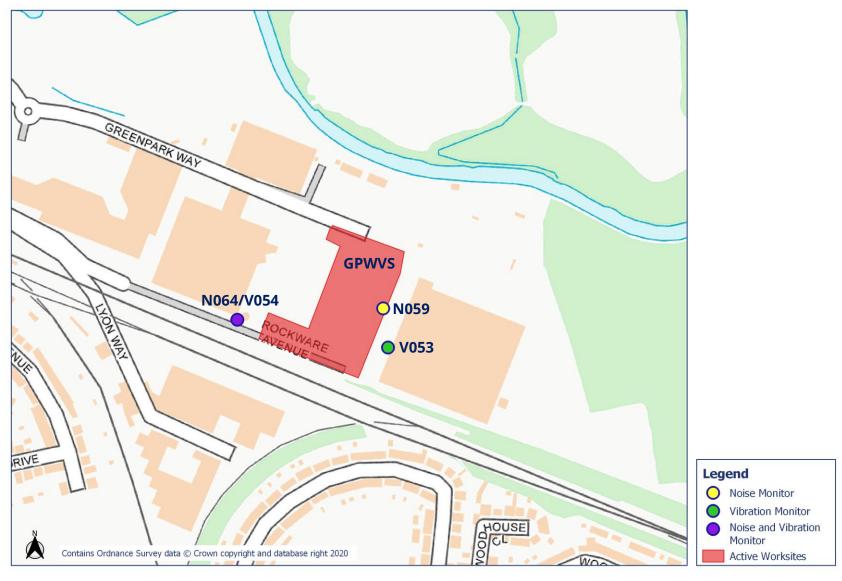

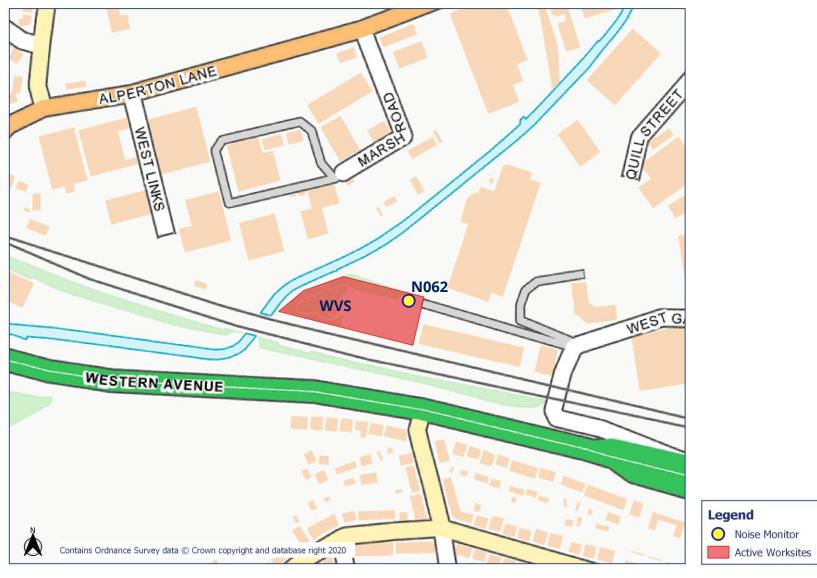

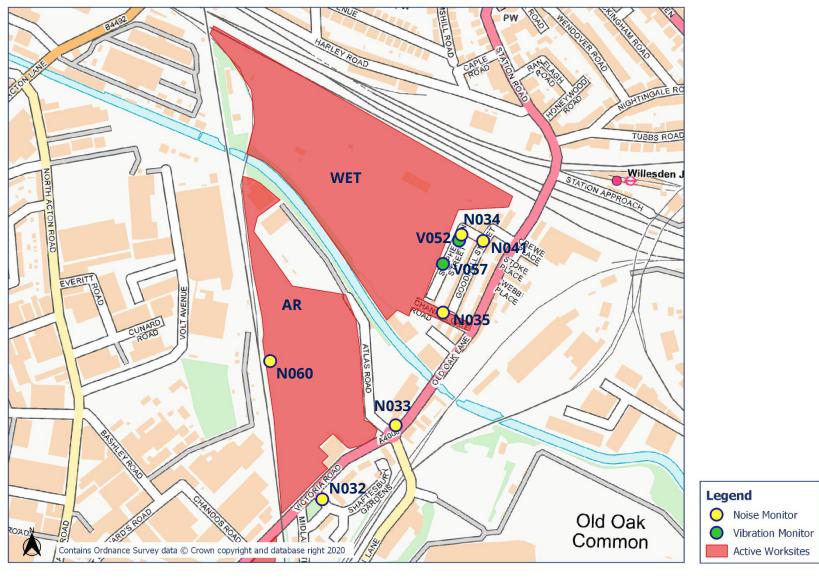

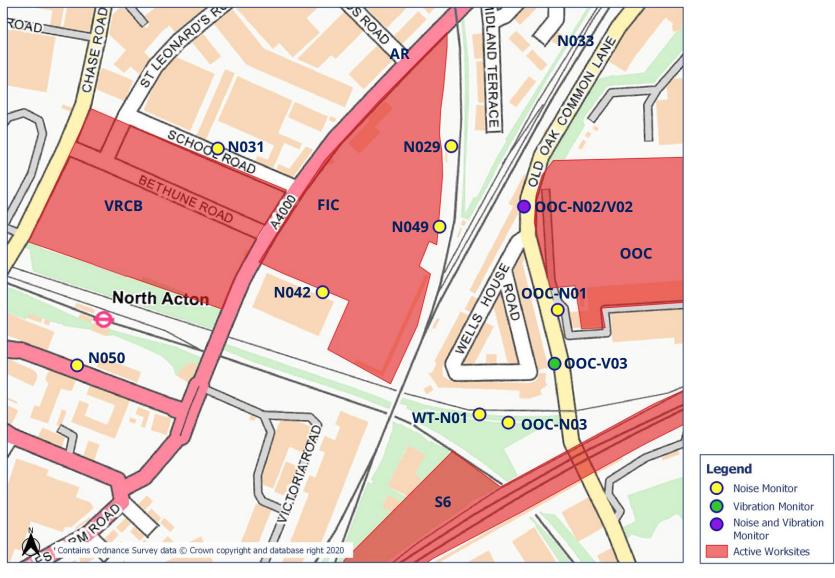



Appendix C Data


Noise


The following graphs show the hourly measured ambient noise level $L_{Aeq,1h}$ and, where relevant, the averaged noise level $L_{Aeq,T}$ values, where the time period T is as specified in Table 1 of HS2 Information Paper E23. Periods with adversely weather affected noise levels are greyed out and have been excluded from the calculation of the $L_{Aeq,T}$ values in Table 3 of the main report.


Worksite: MRVS - Monitoring Ref: N040

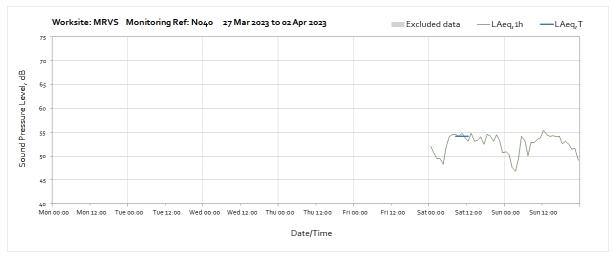

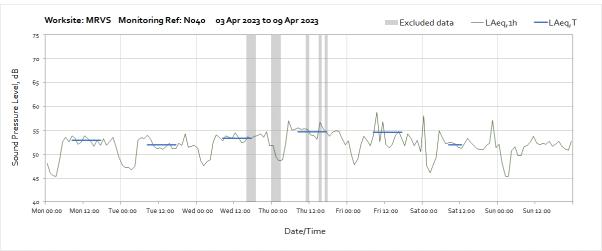


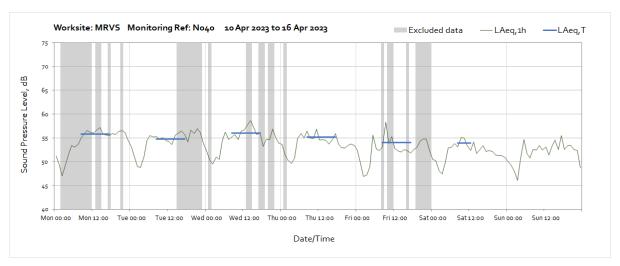


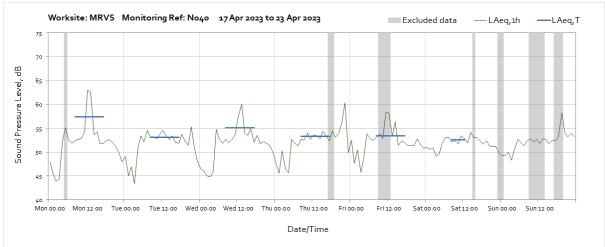


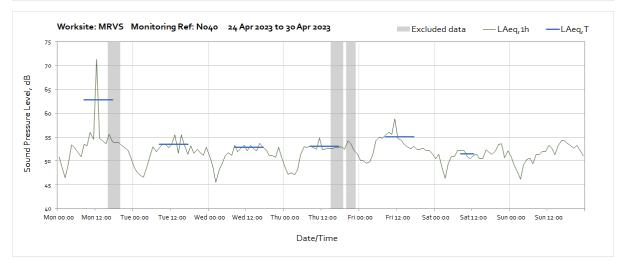



Worksite: MRVS - Monitoring Ref: N058

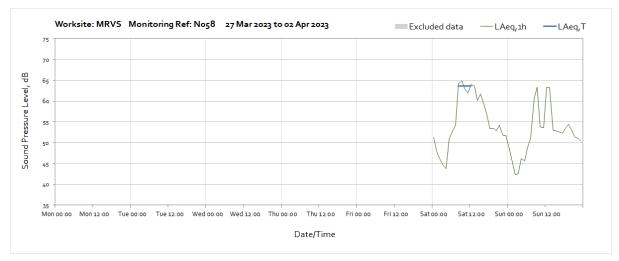

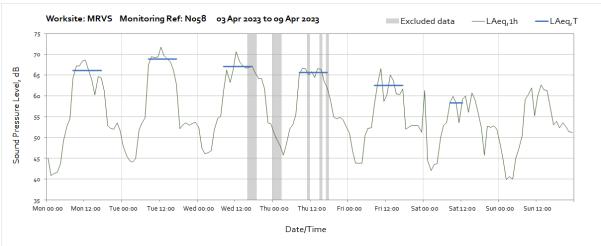


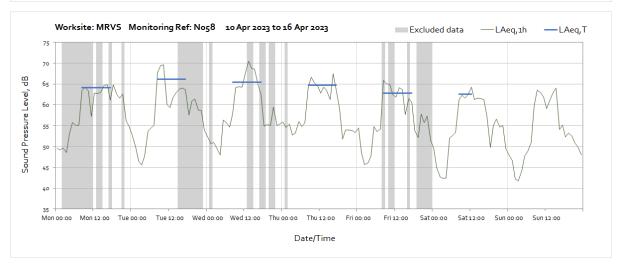


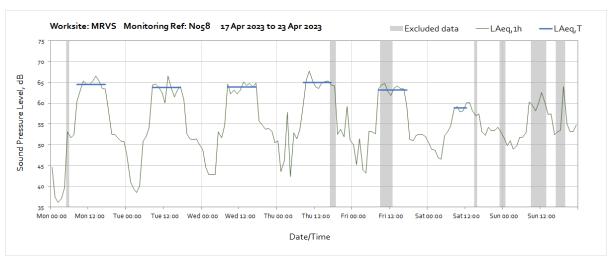


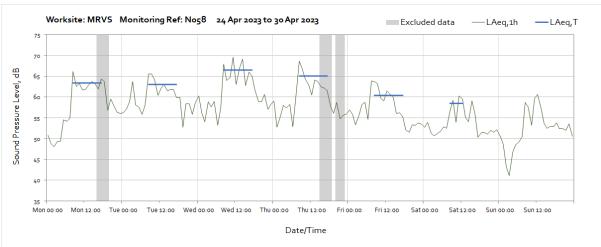



Worksite: MRVS - Monitoring Ref: N063

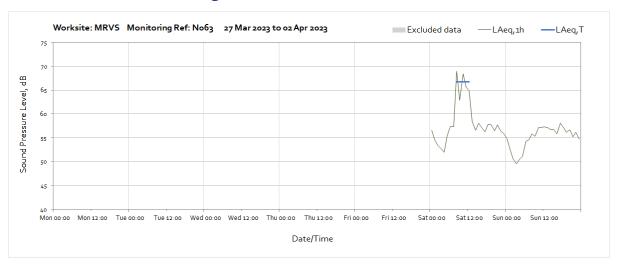

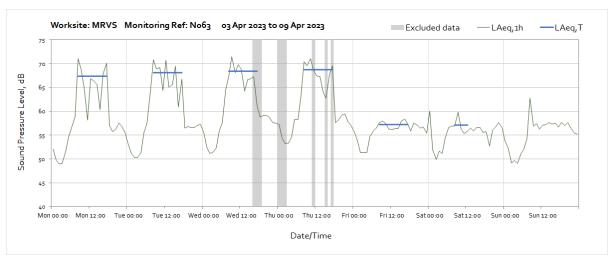


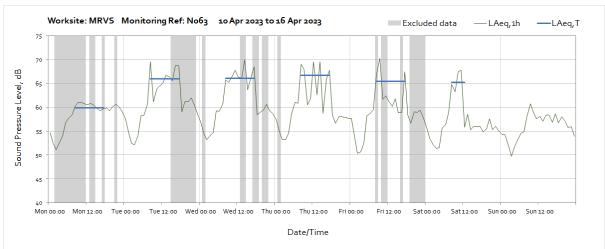


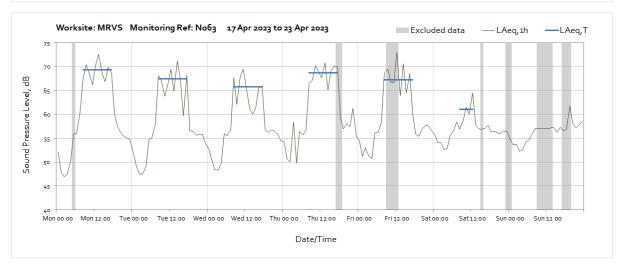


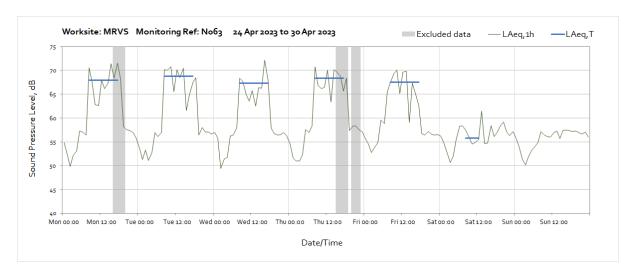



Worksite: MRVS - Monitoring Ref: BLV-N001

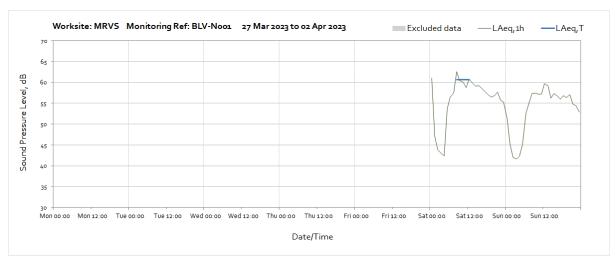

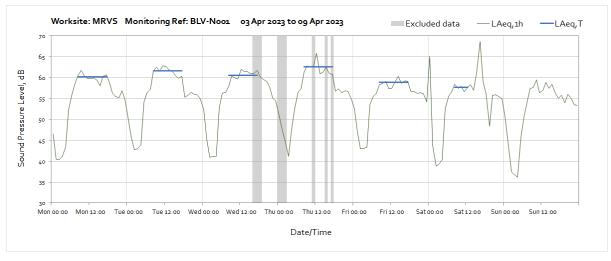


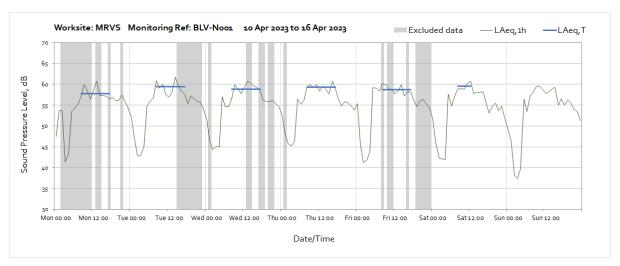


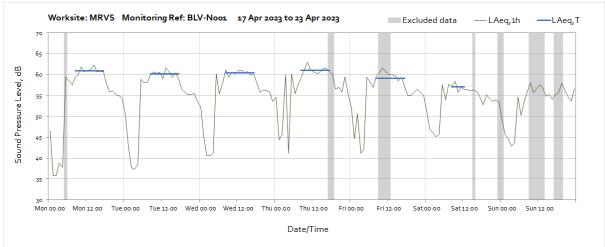


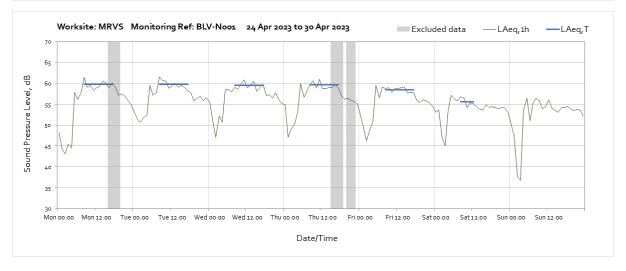



Worksite: GPWVS - Monitoring Ref: N059

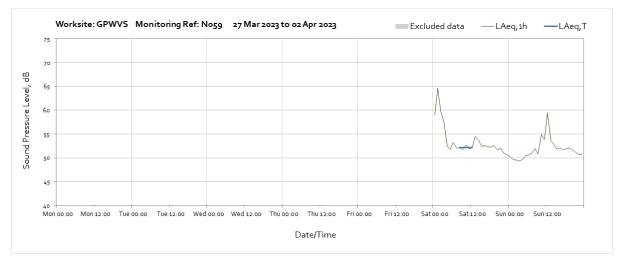

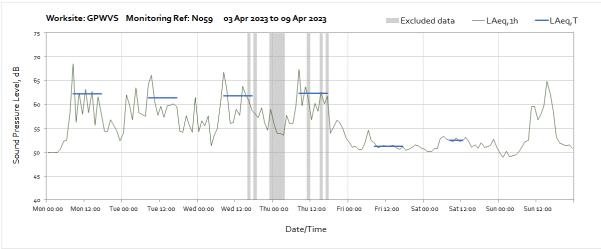

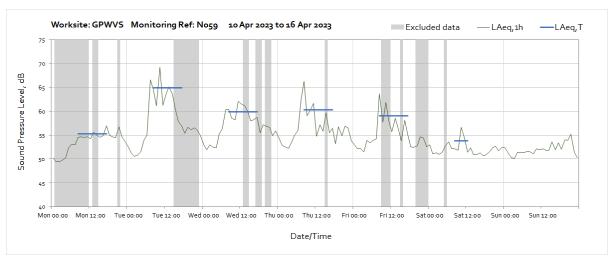


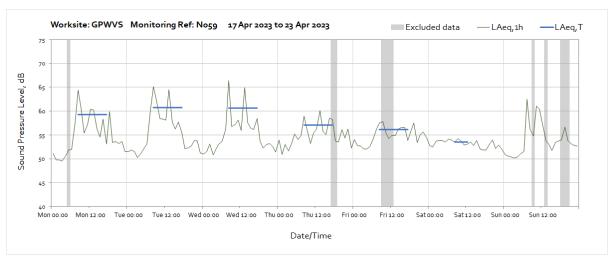


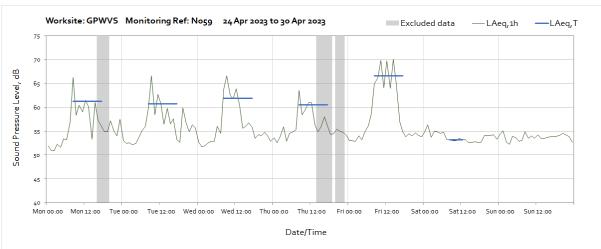



Worksite: GPWVS - Monitoring Ref: N064



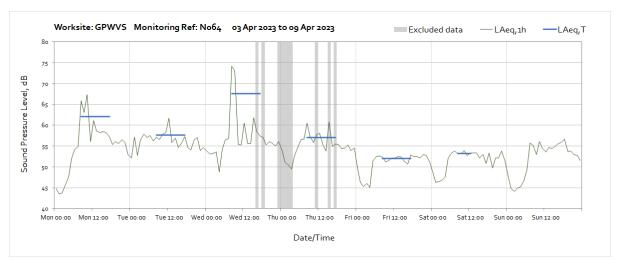


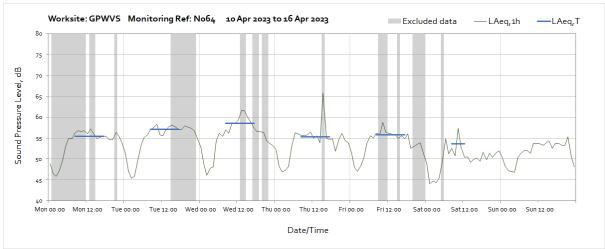


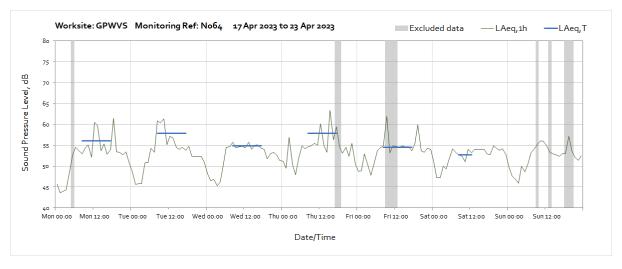


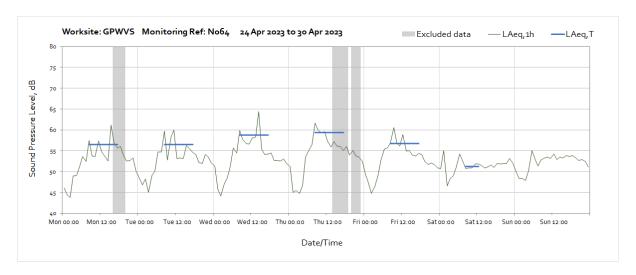



Worksite: WVS - Monitoring Ref: N062

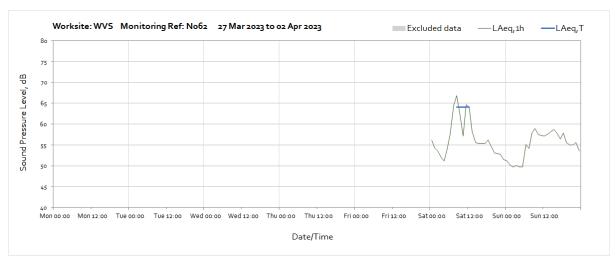

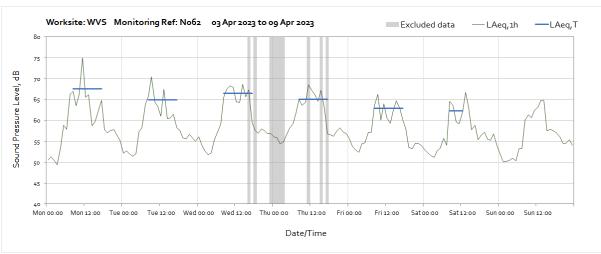


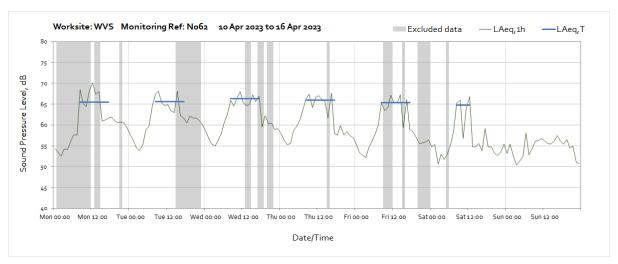


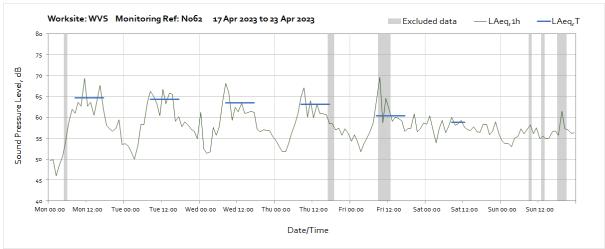


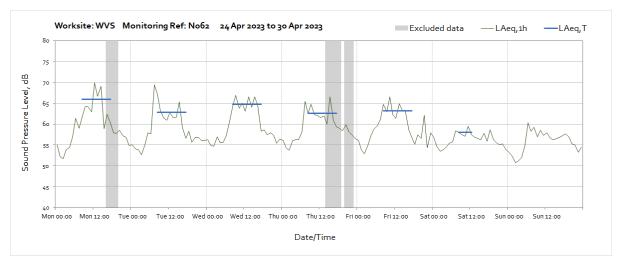



Worksite: AR - Monitoring Ref: N032

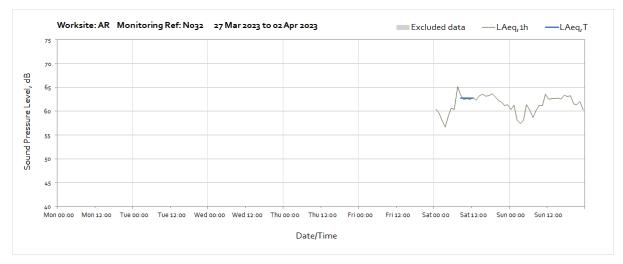

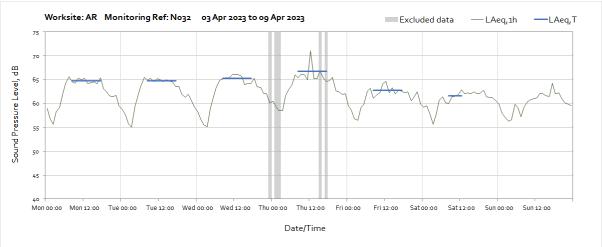


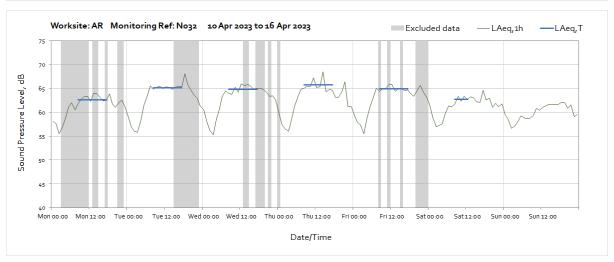


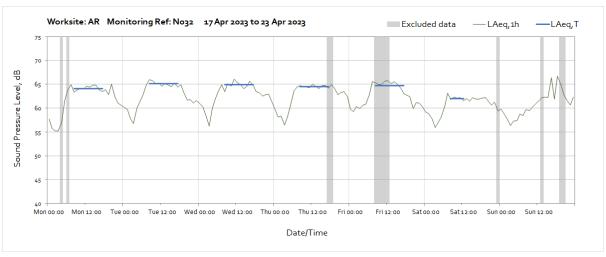


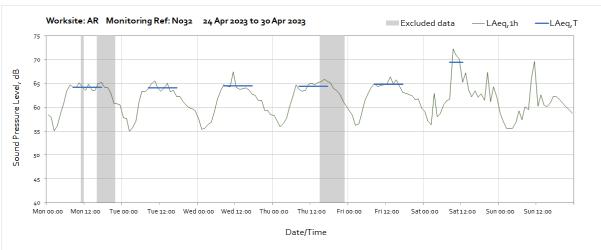



Worksite: AR - Monitoring Ref: N033

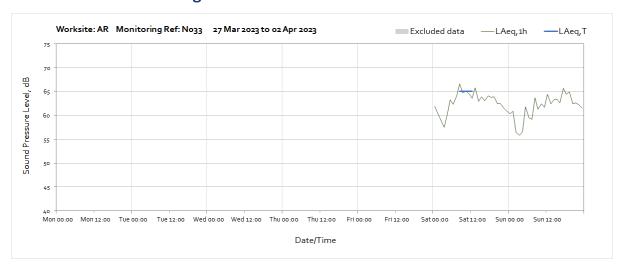

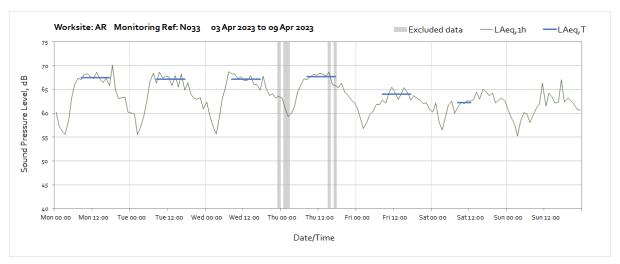


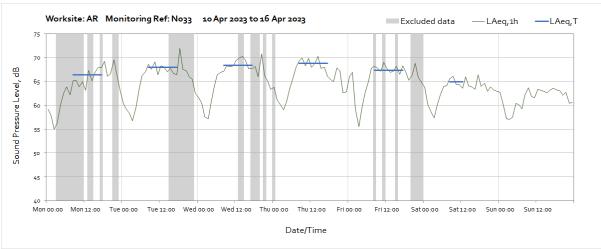


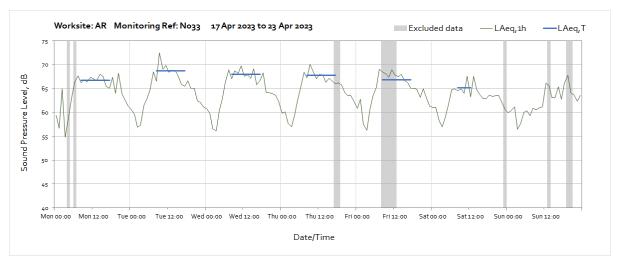


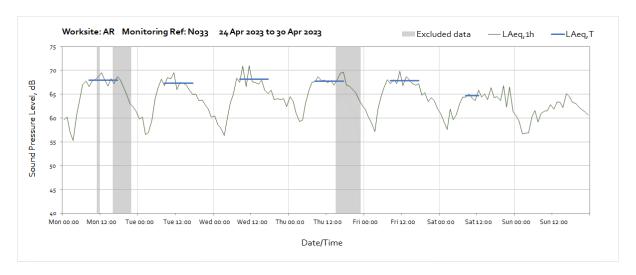



Worksite: AR - Monitoring Ref: N060

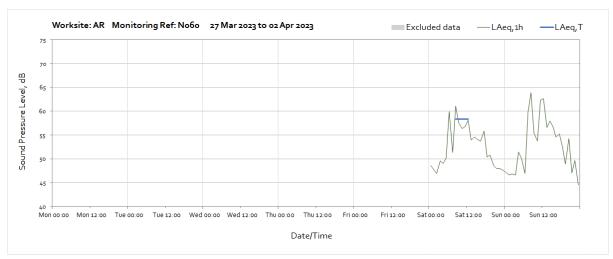

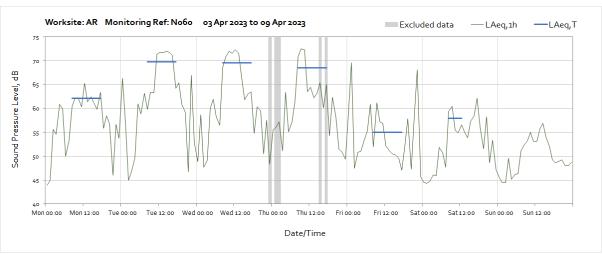


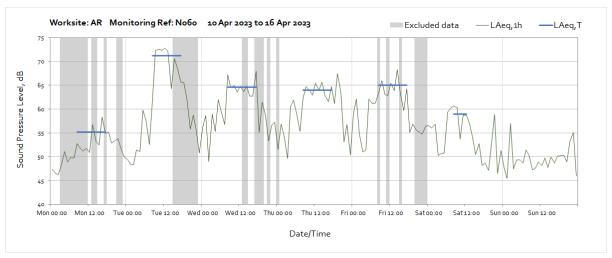


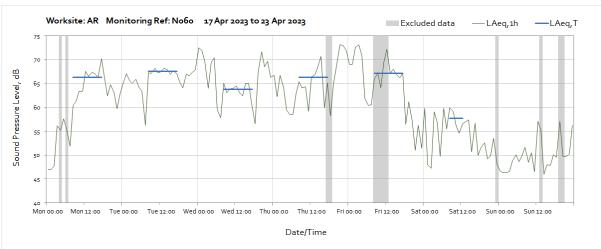


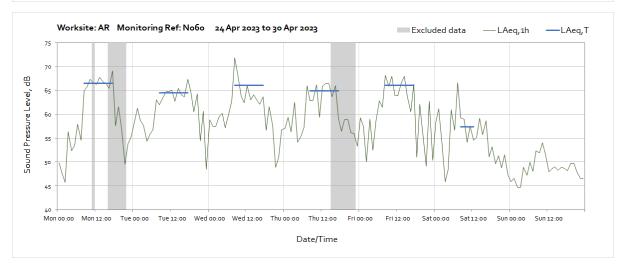



Worksite: WET - Monitoring Ref: N034

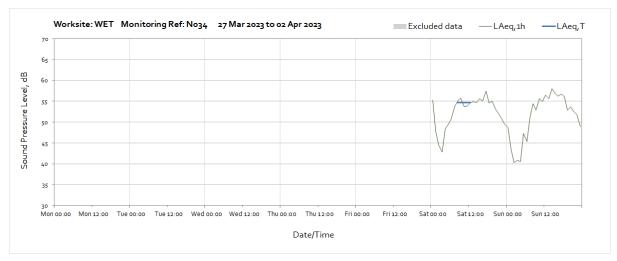

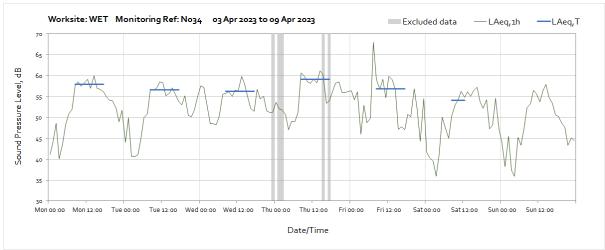


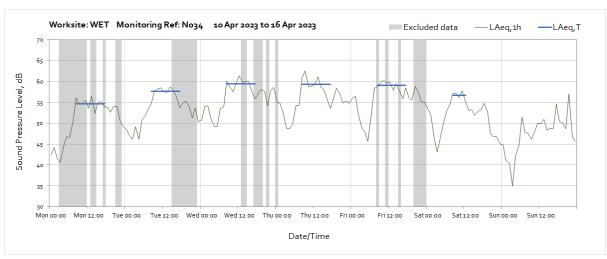


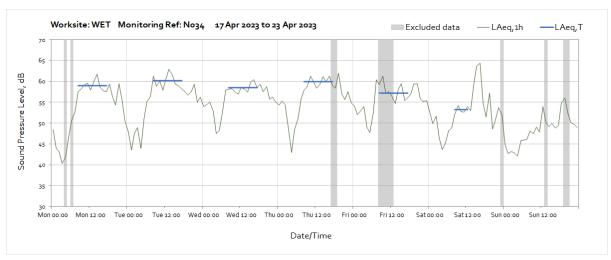


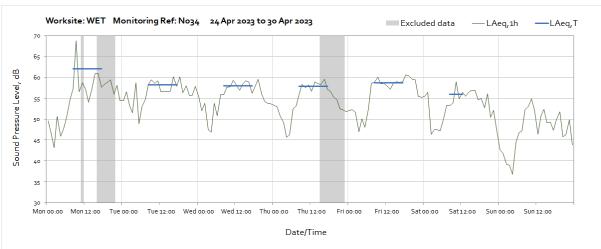



Worksite: WET - Monitoring Ref: N035

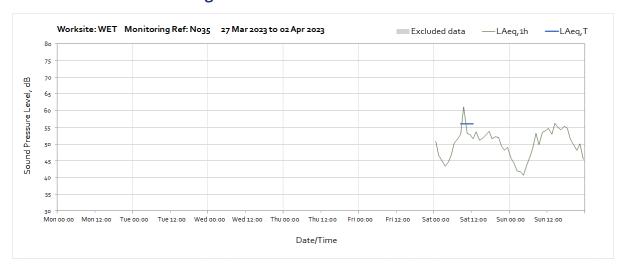

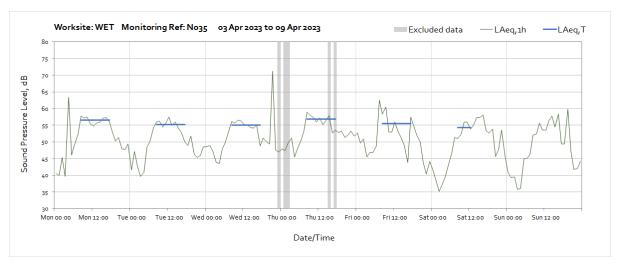


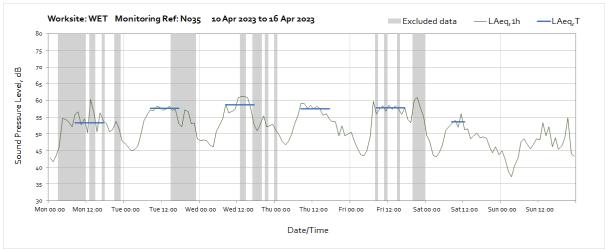


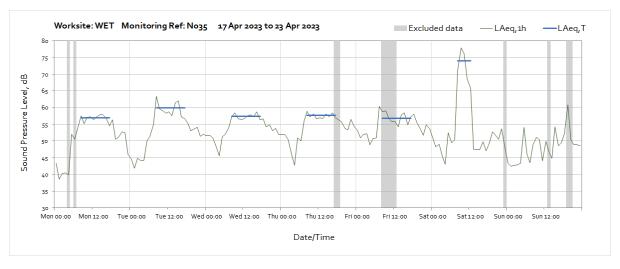


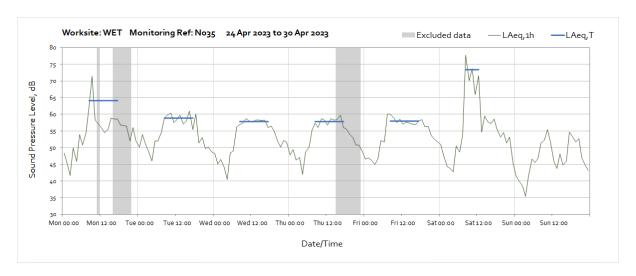


Worksite: WET - Monitoring Ref: N041

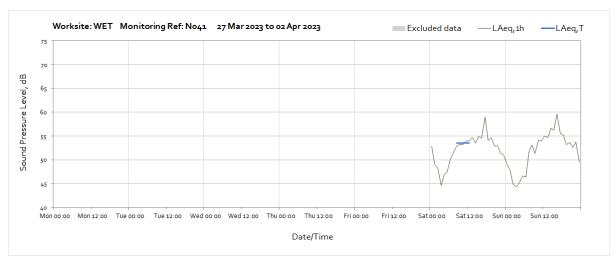

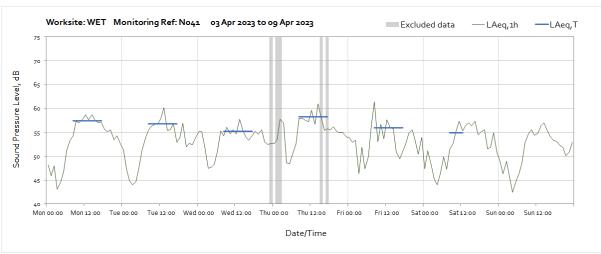


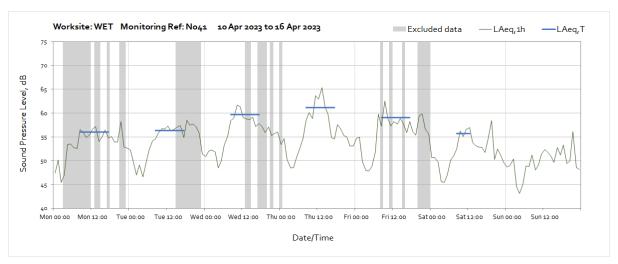




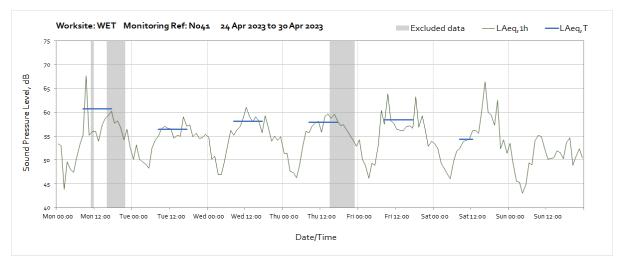



Worksite: VRCB - Monitoring Ref: N031

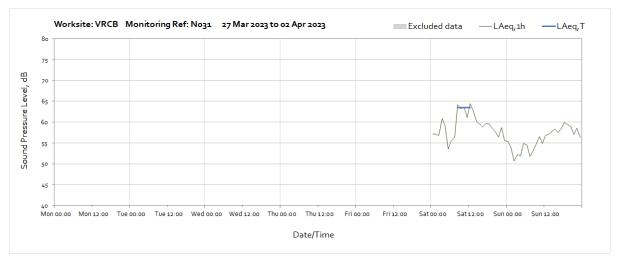




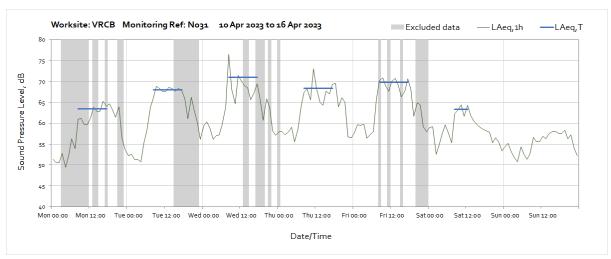


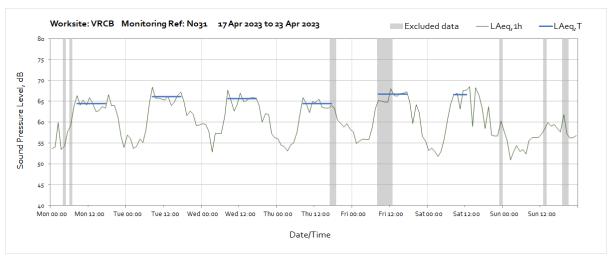


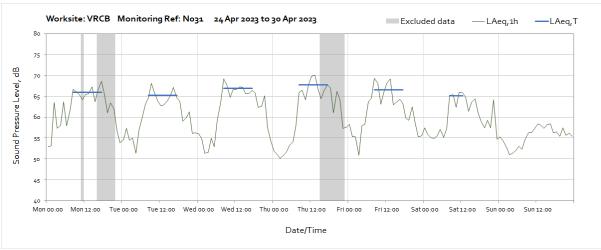



Worksite: VRCB - Monitoring Ref: N050

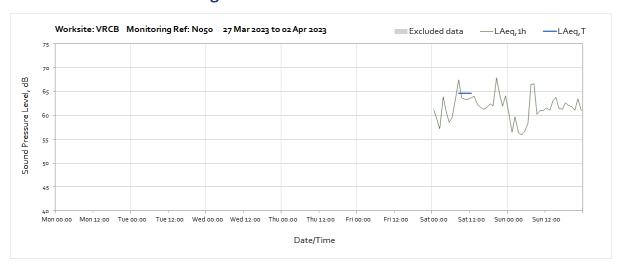

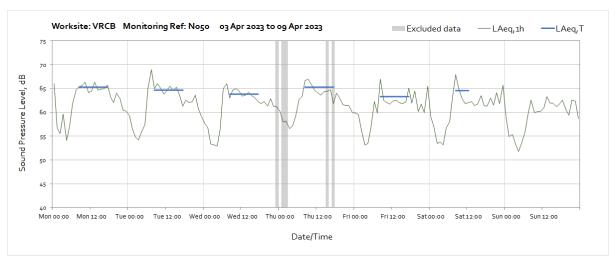


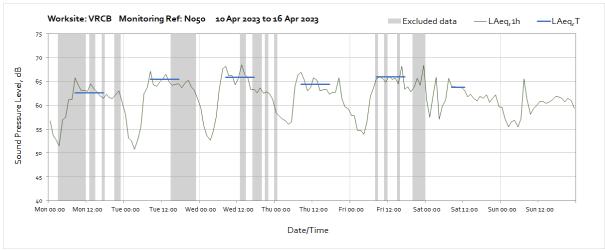


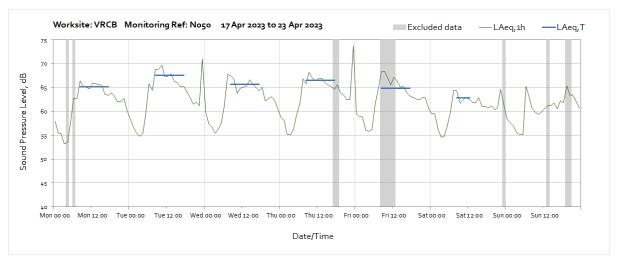


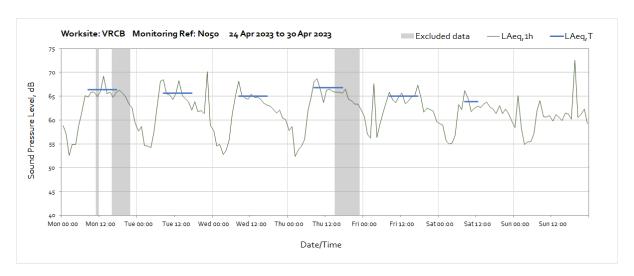



Worksite: FIC - Monitoring Ref: N029

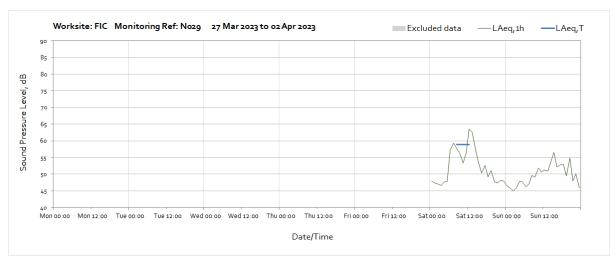

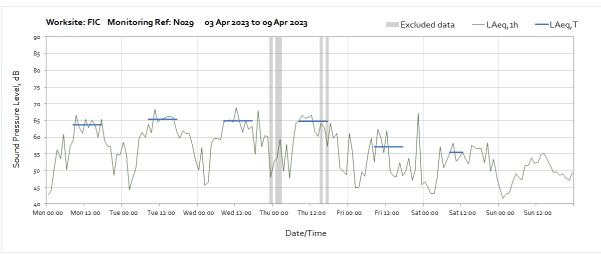


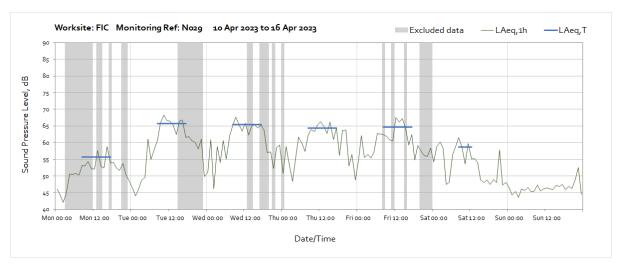

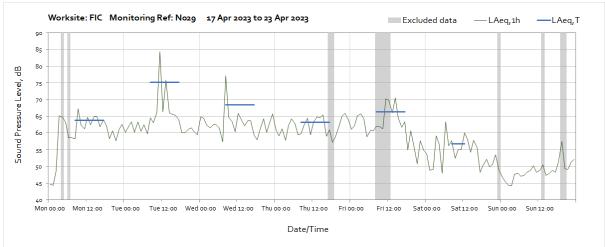


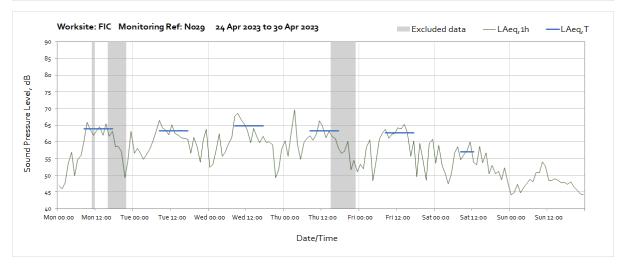



Worksite: FIC - Monitoring Ref: N042

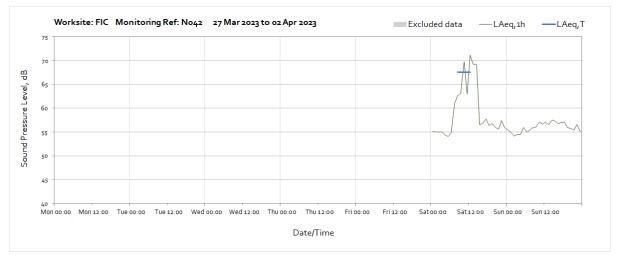



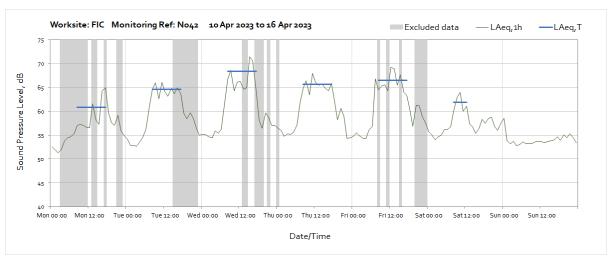


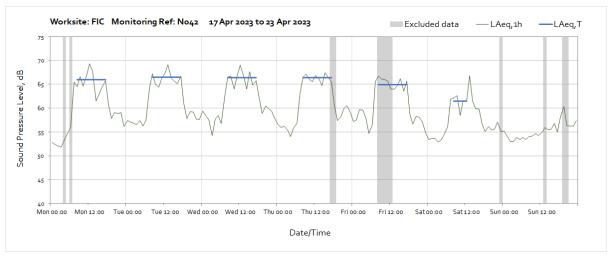


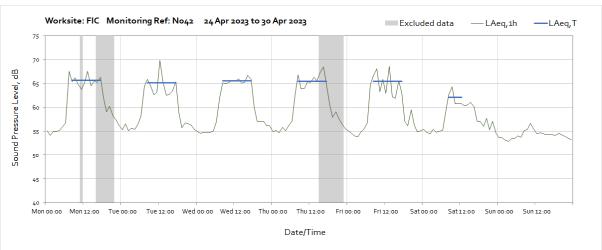



Worksite: FIC - Monitoring Ref: N049



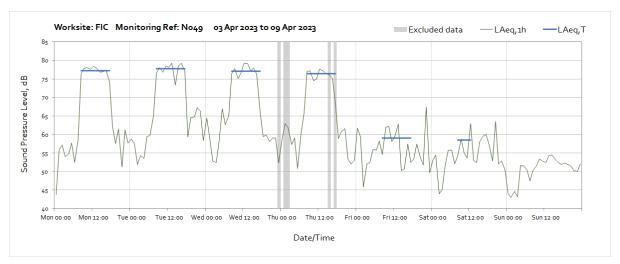


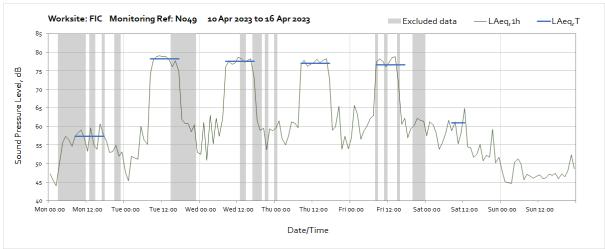


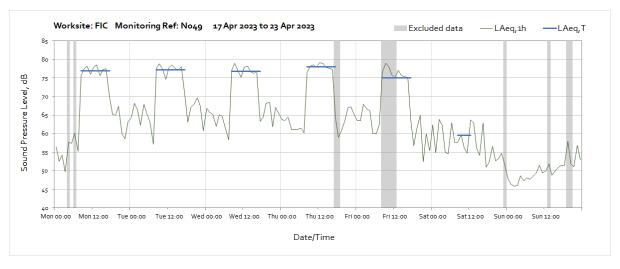


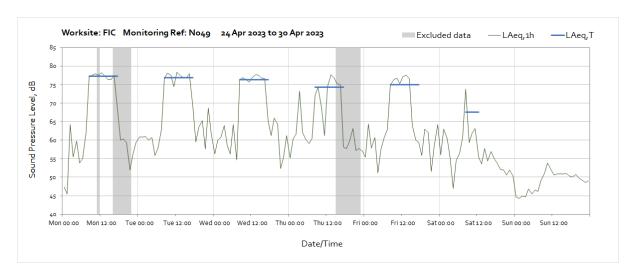



Worksite: OOC - Monitoring Ref: OOC-N01

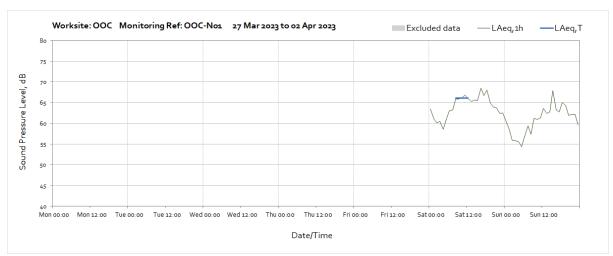

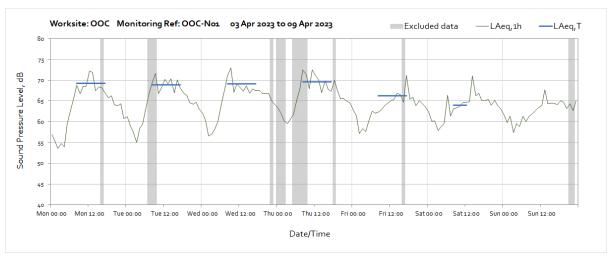


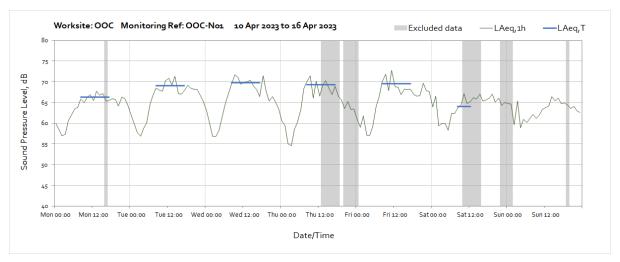


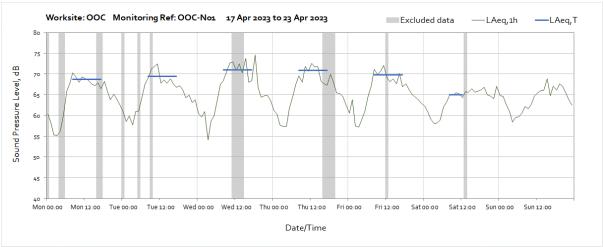


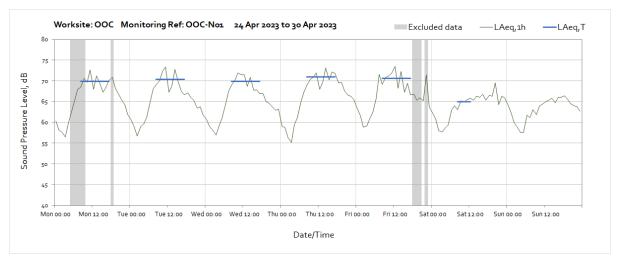



Worksite: OOC - Monitoring Ref: OOC-N02

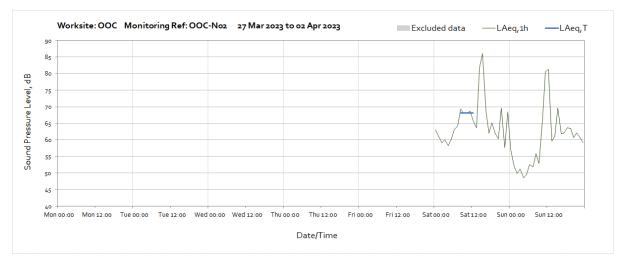

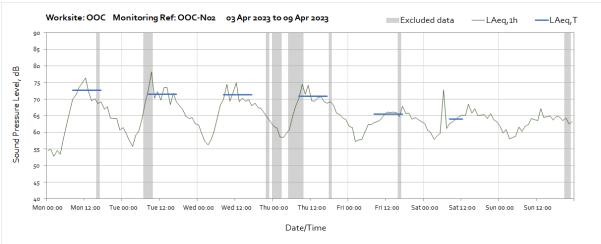


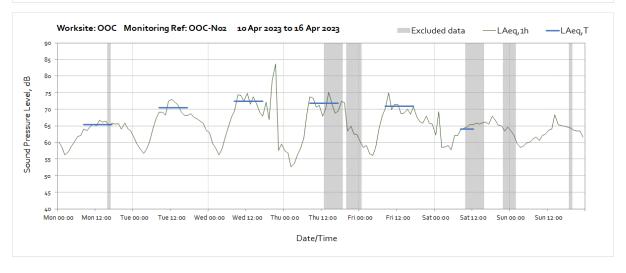


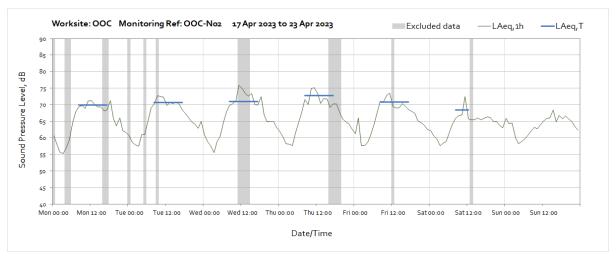


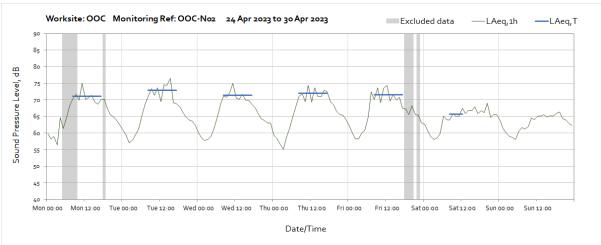



Worksite: OOC - Monitoring Ref: OOC-N03

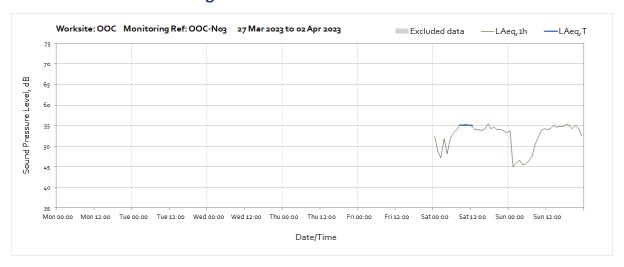

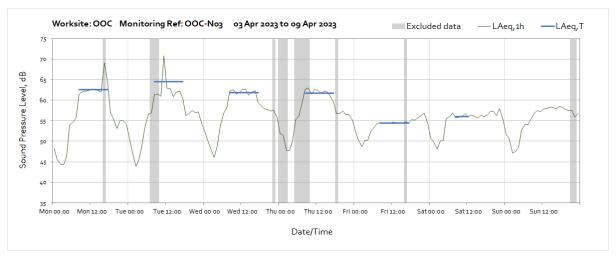


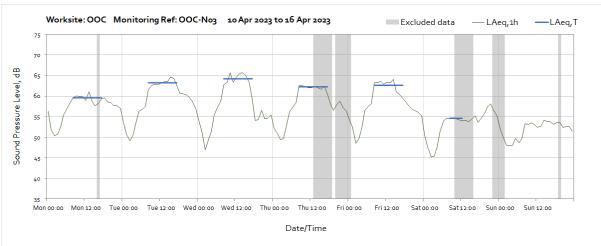

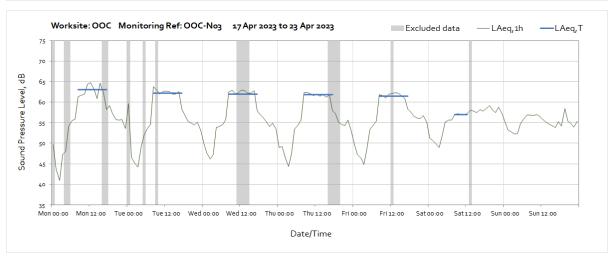


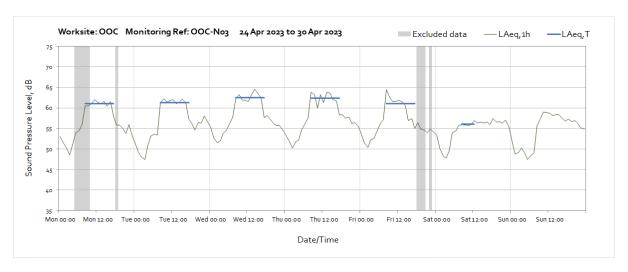



Worksite: S6 - Monitoring Ref: WT-N01

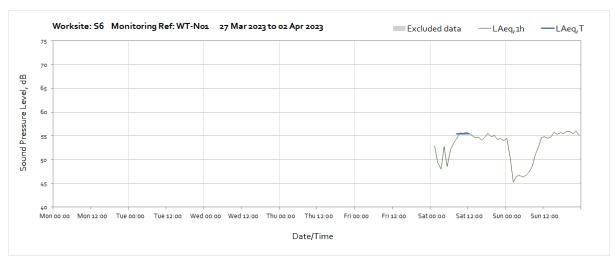


Note: Missing data between 00:00 and 01:00 on Saturday 1st April were due to an error at the monitoring station.

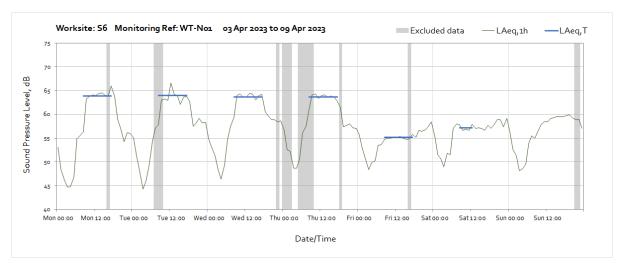

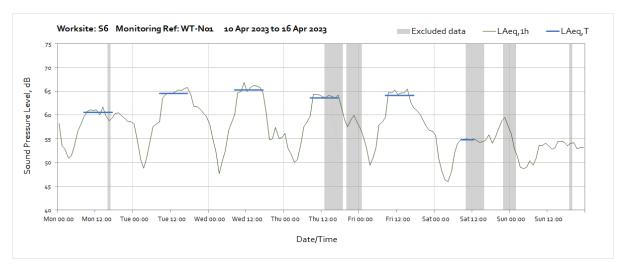

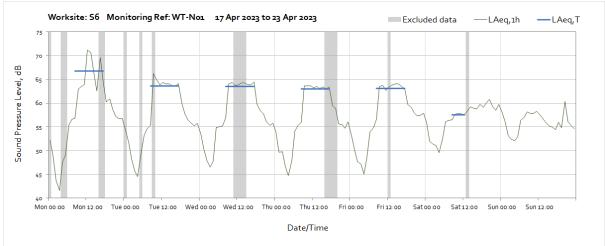


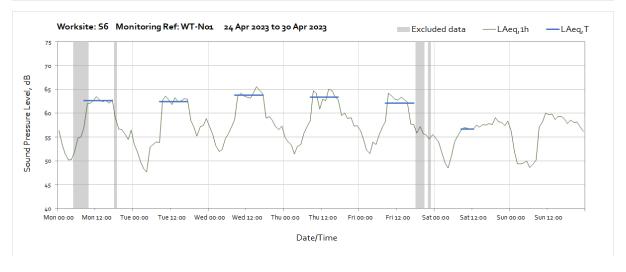



Vibration


The following graphs show the hourly measured peak particle velocity PPV recorded during the monitoring period. The graphs show the highest PPV of the three orthogonal axis x, y and z. Where high values of PPV were caused by local interference with the vibration monitor, which are not representative of HS2 construction works, these values have been greyed out in the following charts and have been excluded to calculate values in Table 4 of the main report.


Worksite: MRVS - Monitoring Ref: V055

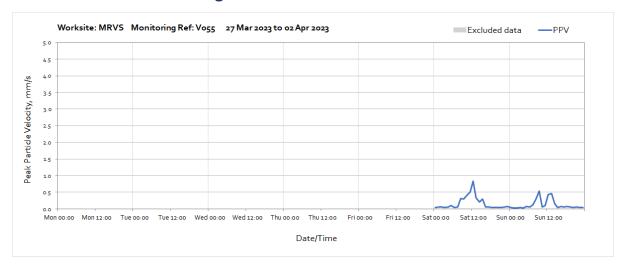

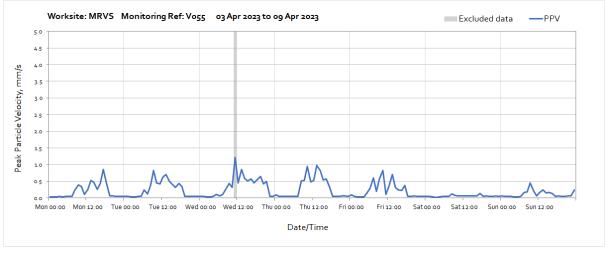


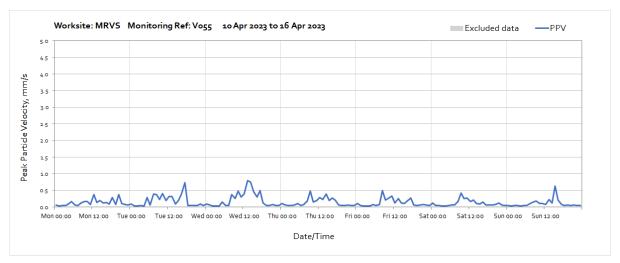

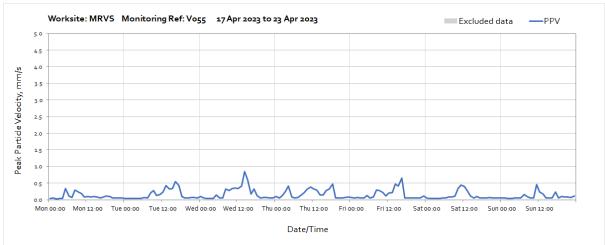


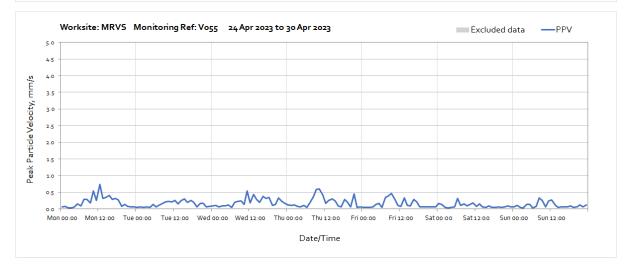



Worksite: MRVS - Monitoring Ref: V056

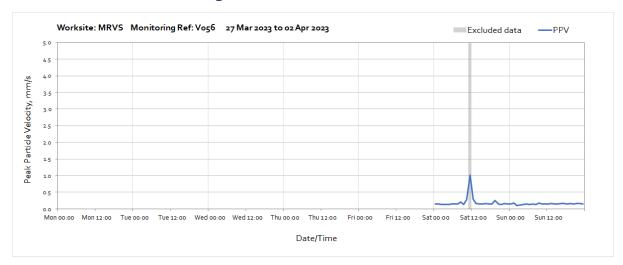




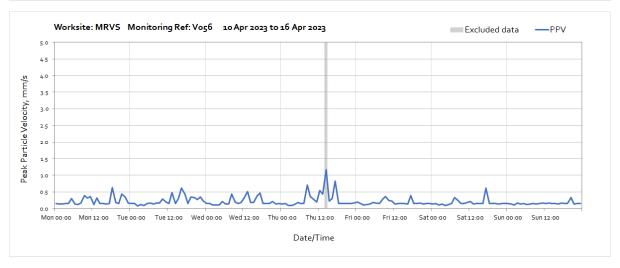


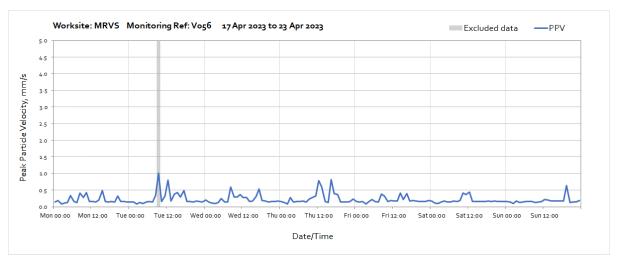


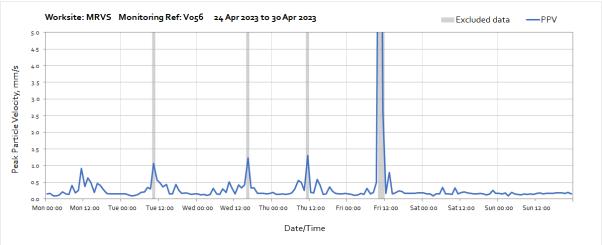



Worksite: GPWVS - Monitoring Ref: V053

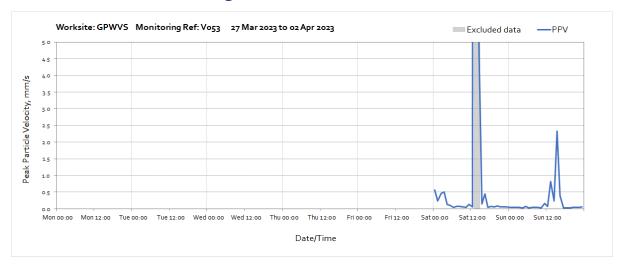

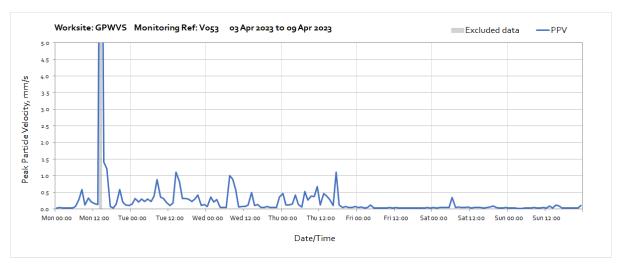


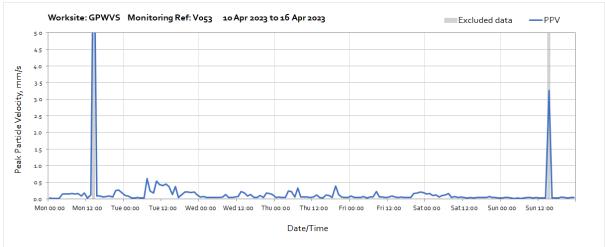


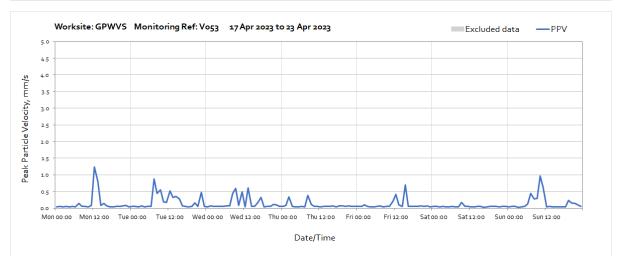


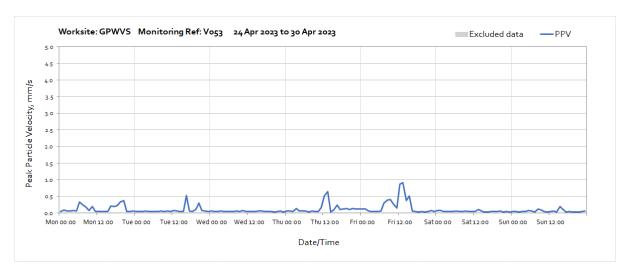



Worksite: GPWVS - Monitoring Ref: V054

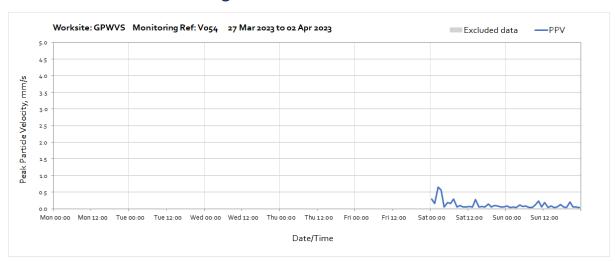

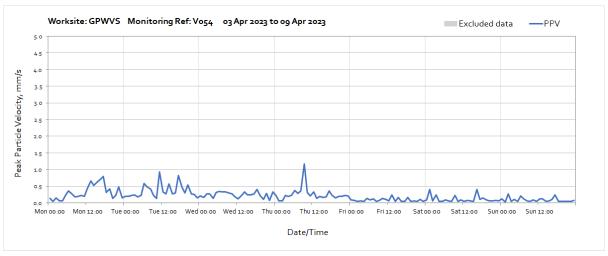


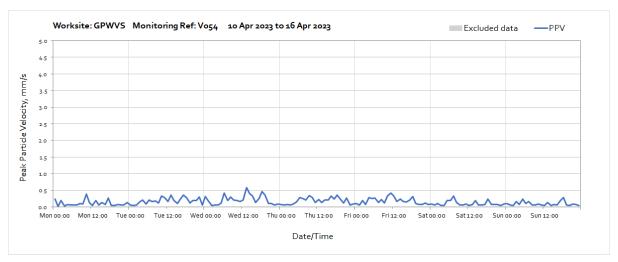


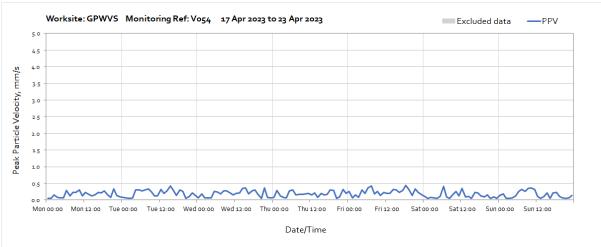


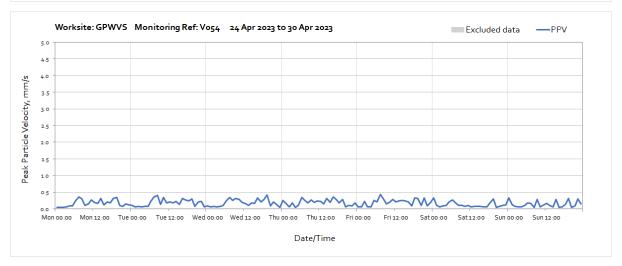



Worksite: WET - Monitoring Ref: V052

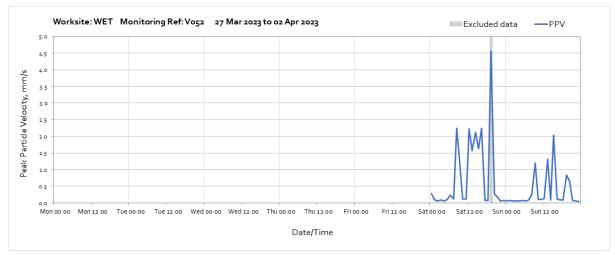

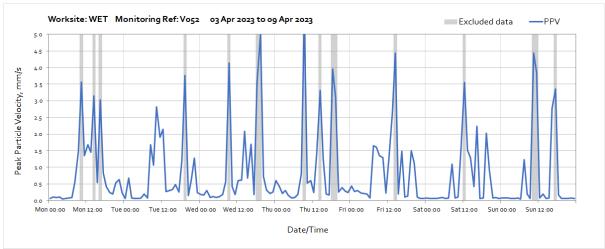


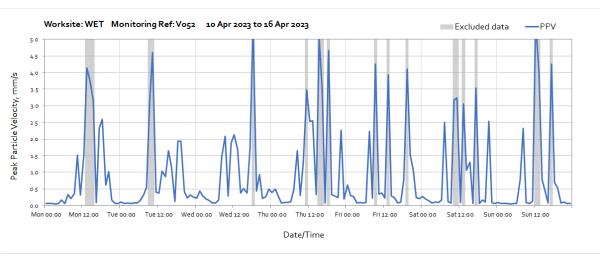


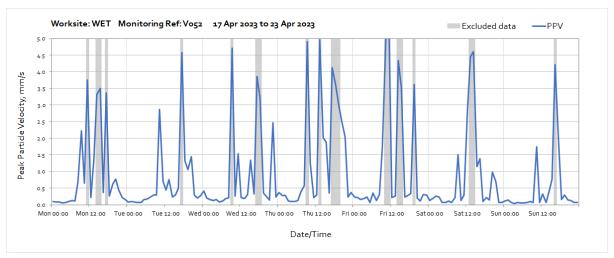


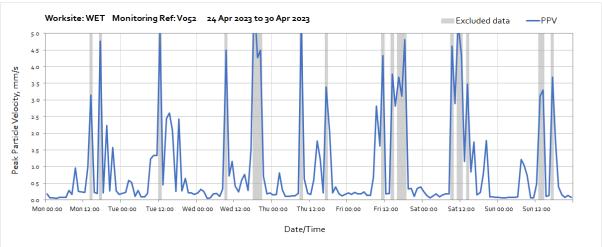



Worksite: WET - Monitoring Ref: V057

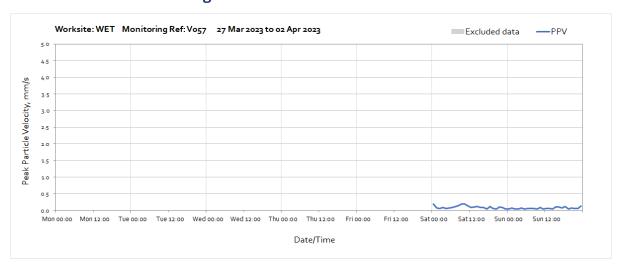

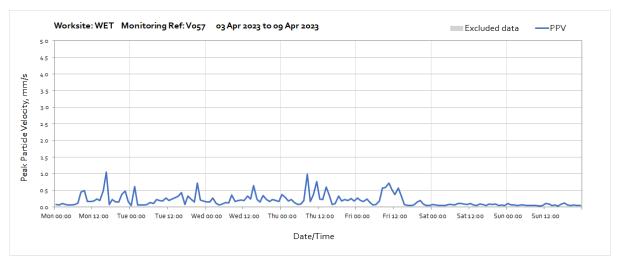


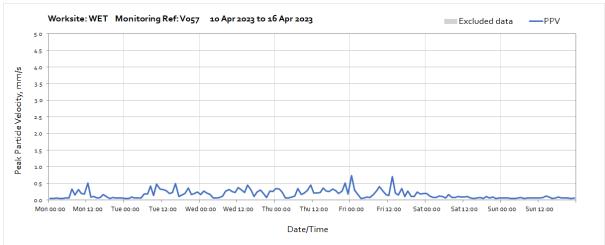


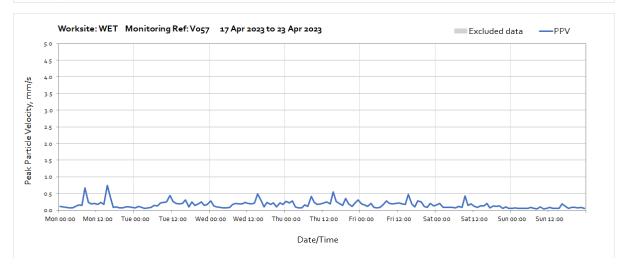


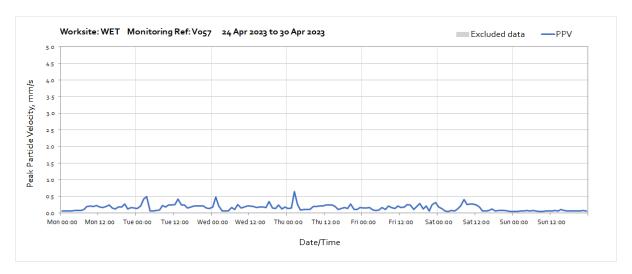



Worksite: OOC - Monitoring Ref: OOC-V02

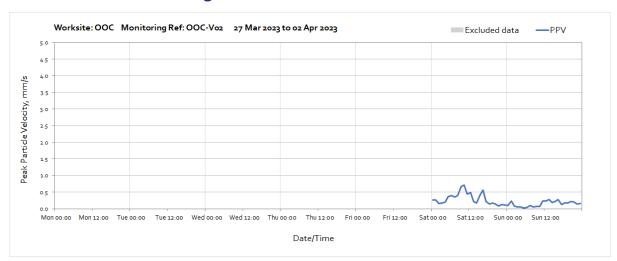

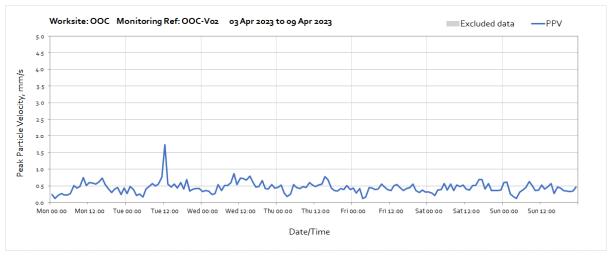

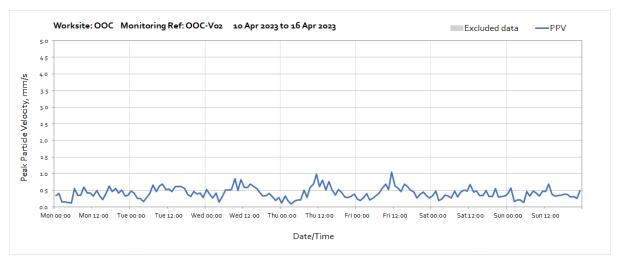

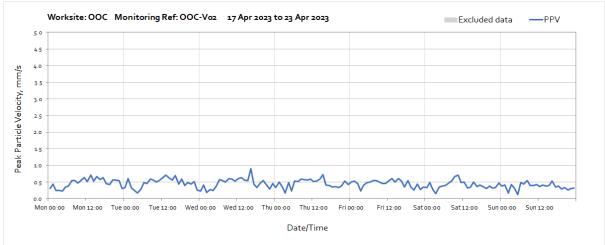

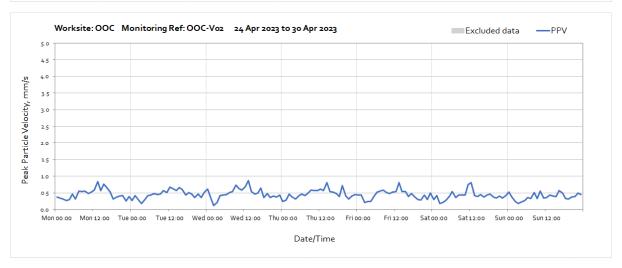

Worksite: OOC - Monitoring Ref: OOC-V03

