

April 2024

# **Construction Noise and Vibration Monthly Report – February 2024**

**London Borough of Ealing** 

© HS2 Ltd.

gov.uk/hs2

Non	-Techni	cal Summary	1			
Abb	reviatio	ons and Descriptions	3			
1	Intro	duction	4			
	1.2	Measurement Locations	8			
2	Sum	mary of Results	10			
	2.1	Summary of Measured Noise and Vibration Levels	10			
	2.2	Exceedances of the SOAEL	14			
	2.3	Exceedances of Trigger Level	16			
	2.4	Complaints	16			
Арр	endix A	Site Locations	18			
Appendix B Monitoring Locations						
Appendix C Data						

### List of tables

Table 1: Table of Abbreviations	3
Table 2: Monitoring Locations	8
Table 3: Summary of Measured dB L <sub>Aeq</sub> Data over the Monitoring Period	11
Table 4: Summary of Measured PPV Data over the Monitoring Period	14
Table 5: Summary of Exceedances of SOAEL	15
Table 6: Summary of Exceedances of Trigger Levels	16
Table 7: Summary of Complaints	17

н

-

# **Non-Technical Summary**

This Noise and Vibration Monitoring Report fulfils HS2 Limited's commitment detailed in the Environmental Minimum Requirements (EMRs), Annex 1, Code of Construction Practice, to present the results of noise and vibration monitoring carried out within the London Borough of Ealing (LBE) (including one monitoring location on the boundary with the London Borough of Hammersmith and Fulham) during the month of February 2024.

Within this period monitoring was undertaken at the following worksites:

- Noise monitoring was undertaken in proximity of the Mandeville Road Ventilation Shaft worksite (ref.: MRVS), where secondary lining works, sprayed concrete works, excavation, backfilling, waterproofing, ground investigation and installation of reinforcement bars were underway.
- Noise and vibration monitoring were undertaken in proximity of the Green Park Way Ventilation Shaft worksite (ref.: GPWVS), where general site operations, electrical works, maintenance of shaft dewatering system, steel fixing, shuttering, construction of concrete collar, tunnel boring machine eye works, excavations, sprayed concrete lining works, waterproofing, dismantling of spoil storage bin, cross passage and shaft construction works were underway.
- Noise monitoring was undertaken in proximity of the Westgate Ventilation Shaft (ref.: WVS), where sprayed concrete lining works, construction of concrete structures, walls and base slabs, installation of starter bars, backfilling, drainage, waterproofing, steel fixing and shuttering were underway.
- Noise monitoring was undertaken in the vicinity of the Atlas Road worksite (ref.: AR) where construction of spoil bin and base slabs, back-up gantries movement, removal of sections of conveyor and tunnelling infrastructure, material delivery and storage, scaffolding, steel mat platform preparation, noise mitigation and tunnel boring machine sections dismantling were underway.
- Noise and vibration monitoring were undertaken in the vicinity of the Willesden EuroTerminal worksite (ref.: WET), where general site maintenance, site lighting columns, maintenance, installation of handrails, deliveries and material loading were underway.
- Noise monitoring was undertaken in the vicinity of the Victoria Road Crossover Box worksite (worksite ref.: VRCB), where mobilisation works, excavation, diaphragm wall hydro-demolition, installation of dowels, steel fixing, shuttering, construction of head wall, drainage works, bridge crane assembly, relocation of hyperbaric chamber, batching plant dismantling and relocation, striking of shutters, installation of cabling, pipework and infrastructure, commissioning works, conveyor operations, tunnel boring machine launch, assembly and testing were underway.

- Noise monitoring was undertaken in the vicinity of the Flat Iron compound (worksite ref.: FIC), where installation and operation of conveyors, cabling works, installation of noise mitigation, batching plant relocation, bridge structure pre-assembly, sewer lining preparation works, site reconfiguration, hoarding preparation for installation, tunnel boring machine assembly and commissioning, tunnelling, and conveyor operations were underway.
- Noise and vibration monitoring were undertaken in proximity of the Old Oak Common depot worksite (ref.: OOC), where conveyor operation, concrete batching plant operation, material management and haulage, concrete works, diaphragm wall breakdown, steel and shutters fixing, excavation, drainage, road sweeping and piling underway.

Further works, where monitoring did not take place, were undertake at:

- Atlas Road Sub-Station where installation and removal of cables, excavations, ducting, backfilling, resurfacing and demobilisation were underway.
- Scheme 6 where civil and overhead line equipment works were underway.

The HS2 threshold levels for significant noise impacts, which are defined in Information Paper E23 (<u>https://www.gov.uk/government/publications/hs2-information-papers-environment</u>), were not exceeded during the reporting period.

There were no exceedances of trigger levels, as defined in Section 61 consents during the reporting period.

One (1) complaint was received during the monitoring period. A description of complaints, the results of investigation and any actions taken are detailed in Table 7 of this report.

# **Abbreviations and Descriptions**

The abbreviations, descriptions and project terminology used within this report can be found in Table 1.

Table 1: Table of Abbreviations

Acronym/Term	Definition
L <sub>Aeq,T</sub>	See equivalent continuous sound pressure level
Ambient sound	A description of the all-encompassing sound at a given location and time which will include sound from many sources near and far. Ambient sound can be quantified in terms of the equivalent continuous sound pressure level, L <sub>pAeq,T</sub>
Decibel(s), or dB	Between the quietest audible sound and the loudest tolerable sound there is a million to one ratio in sound pressure (measured in Pascal (Pa)). Because of this wide range, a level scale called the decibel (dB) scale, based on a logarithmic ratio, is used in sound measurement. Audibility of sound covers a range of approximately 0-140dB.
Decibel(s) A- weighted, or dB(A)	The human ear system does not respond uniformly to sound across the detectable frequency range and consequently instrumentation used to measure sound is weighted to represent the performance of the ear. This is known as the 'A weighting' and is written as 'dB(A)'.
Equivalent continuous sound pressure level, or L <sub>Aeq,T</sub>	An index used internationally for the assessment of environmental sound impacts. It is defined as the notional unchanging level that would, over a given period of time (T), deliver the same sound energy as the actual time-varying sound over the same period. Hence fluctuating sound levels can be described in terms of an equivalent single figure value, typically expressed as a decibel level.
Exclusion of data	Measurement of noise levels can be affected by weather conditions such as prolonged periods of rain, winds speeds higher than 5m/s and snow/ice ground cover. Noise levels measured during these periods are considered not representative of normal noise conditions at the site and, for the purposes of this report, are excluded from the assessment of exceedances and calculation of typical noise levels and are also greyed out in charts. Identifiable incongruous noise and vibration events not attributable to HS2 construction noise are also excluded.
Façade	A facade noise level is the noise level 1m in front of a large reflecting surface. The effect of reflection, is to produce a slightly higher (typically +3 dB) sound level than it would be if the reflecting surface was not there.
Free-field	A free-field noise level is the noise level measured at a location where no reflective surfaces, other than the ground, lies within 3.5 metres of the microphone position.
LOAEL	Lowest Observed Adverse Effect Level - the level above which adverse effects on health and quality of life can be detected.
Peak particle velocity, or PPV	Instantaneous maximum velocity reached by a vibrating element as it oscillates about its rest position. The PPV is a simple indicator of perceptibility and risk of damage to structures due to vibration. It is usually measured in mm/s.
SOAEL	Significant Observed Adverse Effect Level - the level above which significant adverse effects on health and quality of life occur.
Sound pressure level	The parameter by which sound levels are measured in air. It is measured in decibels. The threshold of hearing has been set at 0dB, while the threshold of pain is approximately 120dB. Normal speech is approximately 60dB at a distance of 1 metre and a change of 3dB in a time varying sound signal is commonly regarded as being just detectable. A change of 10dB is subjectively twice, or half, as loud.
Vibration dose value, or VDV	An index used to evaluate human exposure to vibration in buildings. While the PPV provides information regarding the magnitude of single vibration events, the VDV provides a measure of the total vibration experienced over a specified period of time (typically 16h daytime and 8h night-time). It takes into account the magnitude, the number and the duration of vibration events and can be used to quantify exposure to continuous, impulsive, occasional and intermittent vibration. The vibration dose value is measured in m/s <sup>1.75</sup> .

# 1 Introduction

- 1.1.1 HS2 is required to undertake noise (and vibration) monitoring as necessary to comply with the requirements of the High Speed Rail (London-West Midlands) Environmental Minimum Requirements, including specifically Annex 1: Code of Construction Practice, in addition to any monitoring requirements arising from conditions imposed through consents under Section 61 of the Control of Pollution Act, 1974 or through Undertakings & Assurances given to third parties. Such monitoring may be undertaken for the following purposes:
  - monitoring the impact of construction works;
  - to investigate complaints, incidents and exceedance of trigger levels; or
  - monitoring the effectiveness of noise and vibration control measures.
- 1.1.2 Monitoring data and interpretive reports are to be provided to each relevant local authority on a monthly basis and shall include a summary of the construction activities occurring, the data recorded over the monitoring period, any complaints received, any periods in exceedance of agreed trigger levels, the results of any investigations and any actions taken or mitigation measures implemented. This report provides noise data, and interpretation thereof, for monitoring carried out by HS2 within the London Borough of Ealing (LBE) (including one monitoring location on the boundary with the London Borough of Hammersmith and Fulham) during the month for the period 1<sup>st</sup> to 29<sup>th</sup> February 2024.
- 1.1.3 Active construction sites in the local authority area, where noise and vibration monitoring were conducted during this period, include:
  - Mandeville Road Ventilation Shaft worksite, reference MRVS (see plan 1 in Appendix A), where work activities included:
    - Secondary lining works, including concrete pours and construction of concrete tunnel eye.
    - Sprayed concrete lining works.
    - Excavation.
    - Backfilling.
    - Waterproofing.
    - Ground investigation.
    - Installation of reinforcement bars.

- Green Park Way Ventilation Shaft worksite, reference GPWVS (see plan 2 in Appendix A), where work activities included:
  - General site operations, including housekeeping and road sweeping.
  - Electrical works.
  - Maintenance of shaft dewatering system, including decommissioning of dewatering wells and dewatering pump replacement.
  - Steel fixing and shuttering.
  - Construction of concrete collar.
  - Tunnel boring machine eye works.
  - Excavations.
  - Sprayed concrete lining works.
  - Waterproofing.
  - Dismantling of spoil storage bin.
  - Cross passage construction.
  - Shaft construction.
- Westgate Ventilation Shaft worksite, reference WVS (see plan 3 in Appendix A), where work activities included:
  - Sprayed concrete lining works, including waterproofing and construction of secondary concrete lining and slabs.
  - Construction of concrete structures and walls.
  - Construction of base slabs, including earthing and concreting works.
  - Installation of starter bars.
  - Backfilling.
  - Drainage.
  - Waterproofing.
  - Steel fixing.
  - Shuttering.
- Atlas Road worksite, ref. AR (see plan 4 in Appendix A), where work activities included:
  - Construction of spoil bin.

- Construction of ramp and base slabs.
- Back-up gantries movement, dismantling and cleaning.
- Removal of sections of conveyor and tunnelling infrastructure, including power cables.
- Delivery and storage of pre-cast tunnel ring segments.
- Scaffolding works.
- Steel mat platform preparation.
- Noise mitigation works.
- Tunnel boring machine sections dismantling.
- Willesden EuroTerminal worksite, ref. WET (see plan 4 in Appendix A), where work activities included:
  - General site maintenance.
  - Site lighting columns works.
  - Maintenance works within plant room and building.
  - Installation of handrails.
  - Deliveries and material loading.
- Victoria Road Crossover Box worksite, ref. VRCB (see plan 4 in Appendix A), where work activities included:
  - Mobilisation works.
  - Excavation.
  - Diaphragm wall repair and hydro-demolition.
  - Installation of dowels, including coring and securing bars with resin.
  - Steel fixing.
  - Shuttering.
  - Construction of head wall.
  - Drainage works, including installation of manholes and maintenance works.
  - Bridge crane assembly.
  - Relocation of hyperbaric chamber.
  - Batching plant dismantling and relocation.
  - Tunnelling.

- Striking of shuttering.
- Installation of cabling, pipework and infrastructure.
- Commissioning works.
- Tunnel boring machine launch, assembly, testing and commissioning including construction of blind rigs.
- Conveyor operation.
- Flat Iron compound, worksite ref. FIC (see plan 4 in Appendix A), where work activities included:
  - Installation and operation of conveyors.
  - Cabling works.
  - Installation of noise mitigation enhancements.
  - Batching plant relocation.
  - Mobile bridge structure pre-assembly.
  - Sewer lining preparation works.
  - Site reconfiguration.
  - Hoarding preparation for installation.
  - Tunnel boring machine assembly and commissioning.
  - Tunnelling.
- Old Oak Common depot worksite, located in the London Borough of Hammersmith and Fulham (LBHF), ref. OOC (see plan 4 in Appendix A), where work activities included:
  - Conveyor operation.
  - Concrete batching plant operation.
  - Materials management and haulage.
  - Concrete works.
  - Diaphragm wall breakdown.
  - Steel and shutters fixing.
  - Excavation.
  - o Drainage.
  - Road sweeping.

- o Piling.
- 1.1.4 Further works, where monitoring did not take place, were undertaken at:
  - Atlas Road Sub-Station where installation and removal of cables, excavations, ducting, backfilling, resurfacing and demobilisation were underway.
  - Scheme 6 where civil and overhead line equipment works were underway.
- 1.1.5 The applicable standards, guidance, and monitoring methodology are outlined in the construction noise and vibration monitoring methodology report which can be found at the following location <u>https://www.gov.uk/government/collections/monitoring-the-environmental-effects-of-hs2</u>. Noise and vibration monitoring reports for previous months can also be found at this location.

### **1.2 Measurement Locations**

- 1.2.1 Twenty-one (21) noise and eight (8) vibration monitoring installations were active in February in the LBE area. Table 2 summarises the position of noise and vibration monitoring installations within the LBE area in February 2024.
- 1.2.2 Maps showing the position of noise and vibration monitoring installations are presented in Appendix B.

Worksite Reference	Measurement Reference	Address					
MRVS	N040	Badminton Close					
	N058	Mandeville Road North hoarding, Northeast Part of Site					
	N063	Mandeville Road, North Hoarding, Northwest part of Site					
	BLV-N001	45 Belvue Road					
	V055	Mandeville Road North hoarding, Northeast Part of Site					
	V056	Mandeville Road, North Hoarding, Northwest part of Site					
GPWVS	N059	Greenpark Way East boundary on hoarding					
	N064	Greenpark Way outside Tetris building					
	V053	Greenpark Way Eastern boundary					
	V054	Greenpark Way outside Tetris building (West of Site)					
WVS	N062	Westgate Ventilation Shaft, on site hoarding in Northeast corner of site.					
AR	N032	Shaftesbury Gardens					
	N033	Outside The Collective, Atlas Road / Victoria Road					

Table 2: Monitoring Locations

Worksite Reference	Measurement Reference	Address				
	N060	Atlas Road next to Bashey Road				
WET	N034	Stephenson Street (north)				
	N035	Stephenson Street (south)				
	N041	Junction of Stephenson Street / Goodhall Street				
	V057	37, Stephenson Street				
	V052	63, Stephenson Street				
VRCB	N031	School Road, outside Acton Business Centre				
	N050	Acton Square, outside North Acton Station				
FIC	N029	Braitrim House, Victoria Road				
	N042	Boden House Car Park				
	N049	Flat Iron compound railway fence, Victoria Rd North Acton				
00C	OOC-N01	Adjacent to 205 Old Oak Common Lane				
	OOC-N02	Old Oak Common Lane, Hilltop Works				
	OOC-N03	Wycombe Triangle at the rear of 63 Wells House Road				
	OOC-V02	Kildun Court, Old Oak Common Lane				
	OOC-V03	Wells House Road Alleyway				

# 2 Summary of Results

### 2.1 Summary of Measured Noise and Vibration Levels

2.1.1 Table 3 presents a summary of the measured noise levels at each monitoring location over the reporting period. The L<sub>Aeq,T</sub> is presented for each of the relevant time periods averaged over the calendar month, along with the highest single period L<sub>Aeq,T</sub> that was found to occur within the month.

#### Table 3: Summary of Measured dB L<sub>Aeq</sub> Data over the Monitoring Period

Worksite Reference	Measurement Reference	Site Address	Free-field or Façade measurement	(Highest Day L <sub>Aeq,T</sub> )				Saturday Average L <sub>Aeq,T</sub> (Highest Day L <sub>Aeq,T</sub> )				Sunday / Public Holiday Average L <sub>Aeq,T</sub> (Highest Day L <sub>Aeq,T</sub> )			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
MRVS	N040	Badminton Close	Free field	55.6 (60.9)	57.3 (62.9)	55.1 (58.2)	55.0 (59.5)	53.9 (60.4)	54.2 (56.1)	54.3 (55.2)	54.7 (55.1)	54.4 (57.3)	52.2 (55.4)	55.7 (60.8)	56.2 (66.9)
	N058	Mandeville Road	Free field	62.2 (65.6)	64.7 (66.9)	61.8 (64.4)	63.5 (67.2)	62.9 (66.3)	62.8 (64.8)	64.8 (67.0)	65.5 (66.4)	63.7 (66.5)	62.4 (66.1)	62.7	61.2 (66.6)
	N063	Mandeville Road	Free field	60.5 (64.1)	67.0 (73.1)	59.4 (63.8)	59.7 (71.2)	57.2	66.9 (70.7)	67.1 (71.6)	64.2 (69.3)	61.4 (69.2)	56.2	60.9 (73.5)	56.5
	BLV-N001	45 Belvue Road	Free field	58.4	60.3 (62.2)	57.7	58.5	(63.9) (63.9)	58.9	(7 1.3) 59.9 (62.3)	(69.5) 59.6 (61.4)	58.3	56.3	59.3	57.6
GPWVS	N059	Green Park Way Ventilation Shaf	Free field	59.1 (62.9)	62.5 (64.8)	55.5 (61.1)	(64.0)	(63.8)	58.0 (60.7)	(62.6) (62.6)	(61.1) 59.9 (62.0)	58.0 (64.3)	(55.7 (58.9)	57.0 (61.8)	55.1 (59.2)
	N064	Green Park Way Ventilation Shaft	Façade	56.7 (59.6)	60.9 (63.7)	58.3 (61.6)	56.6 (59.4)	55.0 (60.6)	56.3 (58.1)	57.7 (59.3)	56.5 (58.1)	56.6 (64.4)	53.5 (56.4)	56.2 (59.5)	55.2 (57.9)
WVS	N062	Westgate Ventilation Shaft	Free field	67.1 (80.4)	67.9 (74.8)	61.2 (63.6)	63.2 (66.9)	61.6 (66.4)	68.7 (73.0)	66.1 (68.8)	62.7 (67.0)	61.2 (66.9)	60.5 (63.4)	60.8 (67.9)	59.3 (63.3)
AR	N032	Shaftesbury Gardens	Free field	64.1 (66.0)	65.4 (66.7)	63.8 (73.2)	62.0 (64.2)	59.6 (67.5)	60.8 (61.1)	63.2 (64.1)	63.2 (63.9)	62.5 (64.1)	59.1 (61.8)	61.8 (64.6)	59.7 (63.9)

Worksite Reference	Measurement Reference	Site Address	Free-field or Façade measurement	(Highest Day L <sub>Aeq,T</sub> )				Saturday Average L <sub>Aeq,T</sub> (Highest Day L <sub>Aeq,T</sub> )				Sunday / Public Holiday Average L <sub>Aeq,T</sub> (Highest Day L <sub>Aeq,T</sub> )			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
	N033	Outside The Collective, Atlas Road/Victoria Road	Free field	68.4 (69.8)	68.6 (75.3)	66.1 (69.6)	64.3 (69.3)	61.7 (67.6)	63.6 (64.7)	66.2 (68.4)	66.9 (69.8)	65.2 (68.7)	61.1 (67.6)	64.0 (70.3)	62.6 (68.7)
	N060	Atlas Road next to Bashey Road	Free field	58.5 (62.7)	66.0 (71.5)	59.4 (70.8)	59.6 (71.7)	58.9 (71.7)	59.3 (62.5)	64.0 (65.1)	55.7 (56.0)	59.2 (70.8)	58.1 (70.3)	58.0 (71.1)	56.4 (63.2)
WET	N034	Stephenson Street (north)	Free field	54.6 (58.5)	57.3 (60.8)	55.9 (59.0)	53.9 (60.0)	51.0 (59.5)	53.7 (60.2)	53.4 (55.5)	51.3 (53.1)	51.5 (62.1)	46.4 (51.0)	53.3 (61.2)	51.4 (64.6)
	N035	Stephenson Street (south)	Free field	55.5 (58.2)	57.3 (61.0)	52.1 (57.7)	50.5 (55.3)	48.4 (59.4)	54.2 (63.3)	53.8 (56.3)	49.7 (51.7)	49.2 (53.6)	47.1 (55.2)	51.7 (60.5)	49.3 (55.1)
	N041	Junction of Stephenson Street/Goodhall Street	Free field	54.7 (57.9)	56.6 (60.8)	55.6 (59.8)	53.6 (57.4)	50.4 (59.2)	52.9 (61.2)	54.4 (55.1)	53.2 (55.1)	52.7 (56.1)	48.4 (52.8)	54.1 (60.4)	50.4 (54.6)
VRCB	N031	School Road, outside Acton Business Centre	Free field	60.3 (61.8)	63.4 (66.2)	59.8 (62.4)	58.2 (61.0)	56.0 (62.8)	56.2 (57.6)	60.9 (63.7)	62.2 (64.8)	58.3 (62.3)	54.8 (58.7)	58.6 (63.5)	57.2 (61.8)
	N050	Acton Square, outside North Acton Station	Free field	63.1 (65.1)	64.7 (66.4)	63.5 (66.5)	62.5 (67.9)	59.5 (81.9)	61.6 (63.5)	64.4 (66.3)	62.9 (63.7)	62.5 (66.9)	58.4 (62.0)	62.5 (70.1)	58.8 (62.8)
FIC	N029	Braitrim House, Victoria Road	Free field	62.2 (75.1)	64.8 (67.5)	58.9 (69.5)	57.0 (65.6)	58.3 (68.3)	60.4 (62.1)	61.3 (65.0)	62.8 (68.4)	55.2 (60.9)	51.5 (61.2)	54.0 (66.3)	55.7 (69.4)
	N042	Bodens car park	Free field	60.3 (62.8)	62.3 (64.8)	56.7 (62.1)	56.0 (60.5)	55.2 (64.7)	55.0 (57.7)	58.9 (60.5)	58.9 (61.0)	55.3 (58.4)	56.1 (61.6)	57.4 (63.4)	55.0 (60.9)

Worksite Reference		Site Address	Free-field or Façade measurement	(Highest Day L <sub>Aeq,T</sub> )				Saturday Average L <sub>Aeq,T</sub> (Highest Day L <sub>Aeq,T</sub> )				Sunday / Public Holiday Average L <sub>Aeq,T</sub> (Highest Day L <sub>Aeq,T</sub> )			
				0700 - 0800	0800 - 1800	1800 - 1900	1900 - 2200	2200 - 0700	0700 - 0800	0800 - 1300	1300 - 1400	1400 - 2200	2200 - 0700	0700 - 2200	2200 - 0700
	N049	Flat Iron compound	Free field	63.8	75.9	61.2	59.0	60.3	56.2	58.8	57.1	57.7	56.5	57.8	55.4
				(68.4)	(78.6)	(72.9)	(71.1)	(75.4)	(58.4)	(60.8)	(58.3)	(67.2)	(67.2)	(68.8)	(60.6)
00C	OOC-N01		Free-field	67.9	70.0	67.3	65.2	61.2	64.0	65.9	66.7	66.0	61.6	65.1	61.8
		Oak Common Lane		(71.3)	(72.5)	(71.2)	(68.2)	(67.0)	(64.8)	(66.5)	(67.0)	(69.2)	(70.3)	(68.1)	(67.1)
	OOC-N02	Old Oak Common Lane,	Free-field	68.4	72.5	68.3	66.0	62.5	64.8	66.9	67.6	67.4	63.2	66.4	62.0
		Hilltop Works		(69.8)	(74.2)	(72.0)	(68.5)	(67.9)	(64.9)	(67.5)	(68.1)	(69.2)	(71.2)	(69.2)	(67.9)
	OOC-N03	Old Oak Lane Halt, Wells House Road	Free-field	58.7	61.7	58.2	57.8	54.7	57.7	57.5	58.7	58.1	53.6	55.3	52.8
				(60.7)	(62.6)	(59.8)	(59.7)	(58.9)	(58.3)	(58.4)	(59.4)	(60.0)	(57.1)	(58.6)	(58.1)

2.1.2 Table 4 presents a summary of the measured vibration levels at each monitoring location over the reporting period. The highest PPV measured during the monitoring along any axis is presented in the table.

Worksite Reference	Measurement Reference	Monitor Address	Highest PPV measured in any axis, mm/s
GPWVS	V053	Green Park Way, Greenford	2.85 (X-axis)
	V054	Green Park Way Ventilation Shaft	1.59 (Y-axis)
MRVS	V055	Mandeville Road	1.64 (Y-axis)
	V056	Mandeville Road	1.59 (Z-axis)
WET	V052	63, Stephenson Street	2.97 (Y-axis)
	V057	37, Stephenson Street	1.05 (Z-axis)
000	OOC-V02	Kildun Court, Old Oak Common Lane	0.57 (Z-axis)
	OOC-V03	Wells House Road Alleyway	0.83 (Z-axis)

Table 4: Summary of Measured PPV Data over the Monitoring Period

2.1.3 Appendix C presents graphs of the noise and vibration monitoring data over the month for each of the measurement locations. Noise data presented consists of the hourly L<sub>Aeq</sub> values and, where relevant, the L<sub>Aeq,T</sub> values (where the time period T has been taken to be the averaging period as specified in Table 1 of HS2 Information Paper E23). Vibration data presented consist of hourly PPV values. The full data set for the monitoring equipment can be found at the following location: <u>https://data.gov.uk/dataset/24542ae7-dd44-444f-b259-</u> <u>871c4cc43b5e/environmental-monitoring-data</u>.

### 2.2 Exceedances of the SOAEL

- 2.2.1 The significant observed adverse effect level (SOAEL) is defined in the 'Planning Practice Guidance – Noise' as the level above which "noise causes a material change in behaviour and/or attitude, e.g. avoiding certain activities during periods of intrusion; where there is no alternative ventilation, having to keep windows closed most of the time because of the noise. Potential for sleep disturbance resulting in difficulty in getting to sleep, premature awakening and difficulty in getting back to sleep. Quality of life diminished due to change in acoustic character of the area."
- 2.2.2 HS2 Phase One Information Paper E23: Control of Construction Noise and Vibration sets out the SOAELs for construction noise.

- 2.2.3 Where reported construction noise levels exceed the SOAEL, relevant periods will be identified. Summary statistics to evaluate ongoing qualification for noise insulation and temporary rehousing are also presented where relevant.
- 2.2.4 Table 5 presents a summary of recorded exceedances of the SOAEL at each measurement location over the reporting period, including the number of exceedances during each time period.

Worksite Reference	Measurement Reference	Site Address	Day (Weekday, Saturday, Sunday, Night)	Time period	Number of exceedances of SOAEL	
MRVS	N040	Badminton Close	All days	All periods	No exceedance	
	N058	Mandeville Road	All days	All periods	No exceedance	
	N063	Mandeville Road	All days	All periods	No exceedance	
	BLV-N001	45 Belvue Road	All days	All periods	No exceedance	
GPWVS	N059	Green Park Way Ventilation Shaft	All days	All periods	Not applicable*	
	N064	Green Park Way Ventilation Shaft	All days	All periods	Not applicable*	
WVS	N062	Westgate Ventilation Shaft	All days	All periods	Not applicable*	
AR	N032	Shaftesbury Gardens	All days	All periods	No exceedance	
	N033	Outside The Collective, Atlas Road / Victoria Road	All days	All periods	No exceedance	
	N060	Atlas Road next to Bashey Road	All days	All periods	No exceedance	
WET	N034	Stephenson Street (north)	All days	All periods	No exceedance	
	N035	Stephenson Street (south)	All days	All periods	No exceedance	
	N041	Junction of Stephenson Street / Goodhall Street	All days	All periods	No exceedance	
VRCB	N031	School Road, outside Acton Business Centre	All days	All periods	Not applicable*	
	N050	Acton Square, outside North Acton Station	All days	All periods	No exceedance	

Table 5: Summary of Exceedances of SOAEL

Worksite Reference			Day (Weekday, Saturday, Sunday, Night)	Time period	Number of exceedances of SOAEL		
FIC	N029	Braitrim House, Victoria Road	All days	All periods	No exceedance		
	N042	Bodens Car Park	All days	All periods	No exceedance		
	N049	Flat Iron compound	All days	All periods	No exceedance		
00C	OOC-N01	Adjacent to 205 Old Oak Common Lane	All days	All periods	No exceedance		
	OOC-N02	Old Oak Common Lane, Hilltop Works	All days	All periods	No exceedance		
	OOC-N03	Old Oak Lane Halt, Wells House Road	All days	All periods	No exceedance		

\* The defined SOAEL criteria are not applicable to non-residential properties

2.2.5 No exceedances of the SOAEL were recorded due to HS2 construction works during February 2024.

### 2.3 Exceedances of Trigger Level

2.3.1 Table 6 provides a summary of exceedances of the Section 61 trigger noise levels determined to be due to HS2 related construction noise measured during the reporting period, along with the findings of any investigation.

Table 6: Summary of Exceedances of Trigger Levels

Complaint Reference Number (if applicable)	Worksite Reference	Date and Time Period	ldentified Source	Results of Investigation (including noise monitoring results)	Actions Taken
-	-	-	-	-	-

### 2.4 Complaints

2.4.1 Table 7 provides a summary of complaint information related to noise and vibration received during the reporting period, along with the findings of any investigation.

Table 7: Summary of Complaints

Complaint Reference Number	Worksite Reference	Description of Complaint	Results of Investigation	Actions Taken
HS2-24-105770-E-C	WET	Complaint due to noise from conveyor being too loud and disturbing sleep.	The investigation revealed that the disturbance is caused by the conveyor. The conveyor has to operate constantly as it is removing excavated material.	Maintenance work has been undertaken on the conveyor to reduce the noise the community is hearing. Findings were reported to the resident.


## **Appendix A Site Locations**

### **HS2** Worksite Identification Plan - Overview





## HS2 Worksite Identification Plan - 1

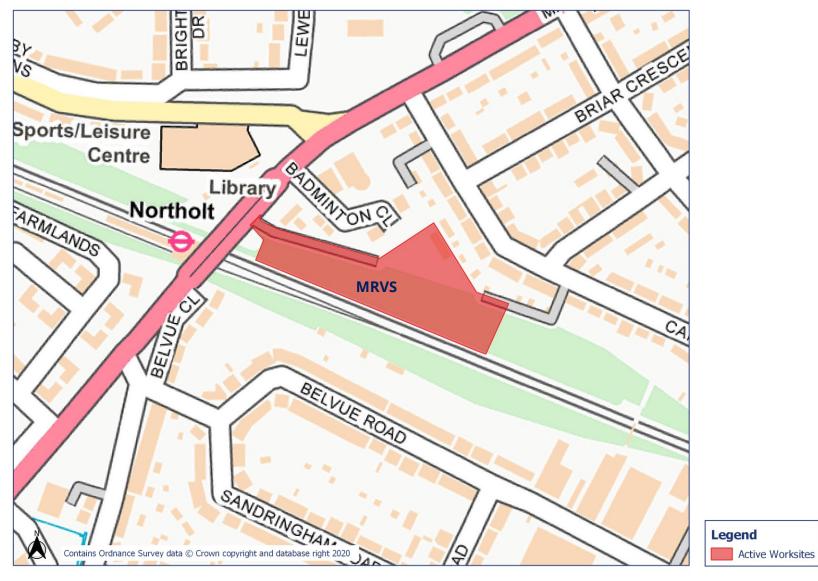












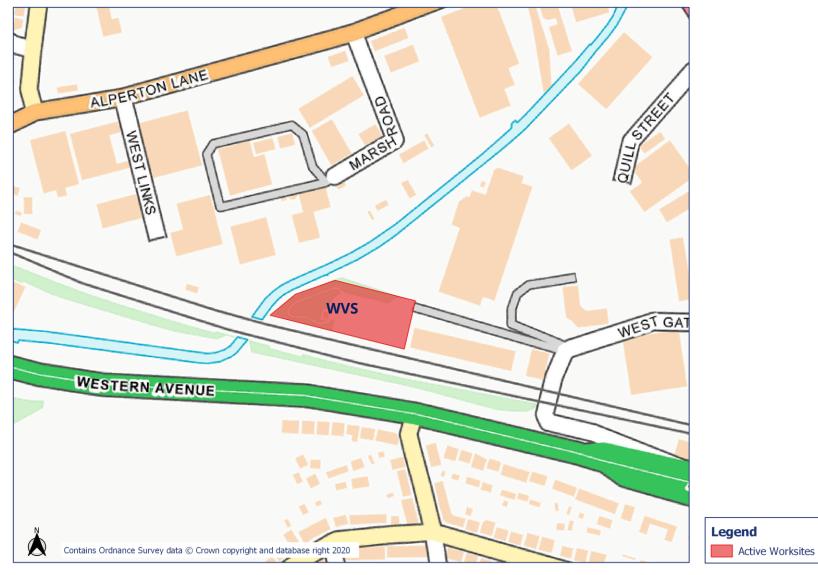


## **HS2** Worksite Identification Plan - 4

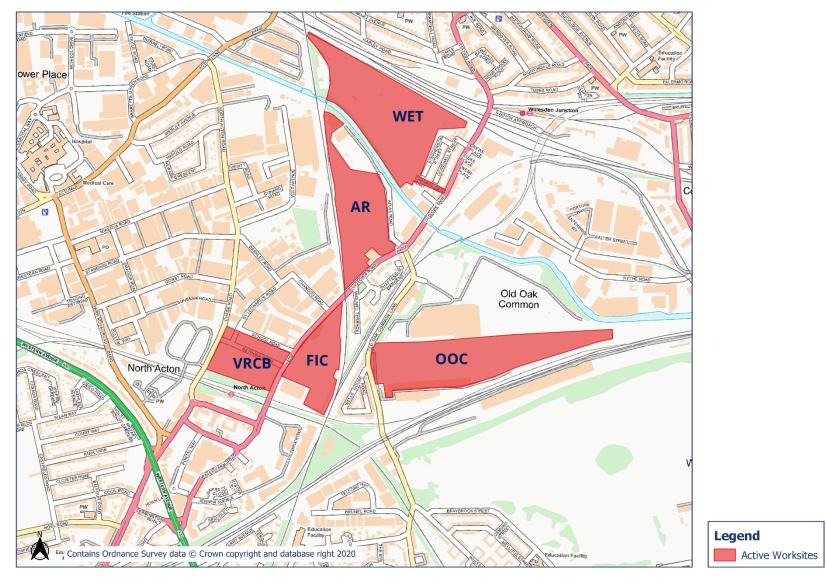


# **Appendix B Monitoring Locations**

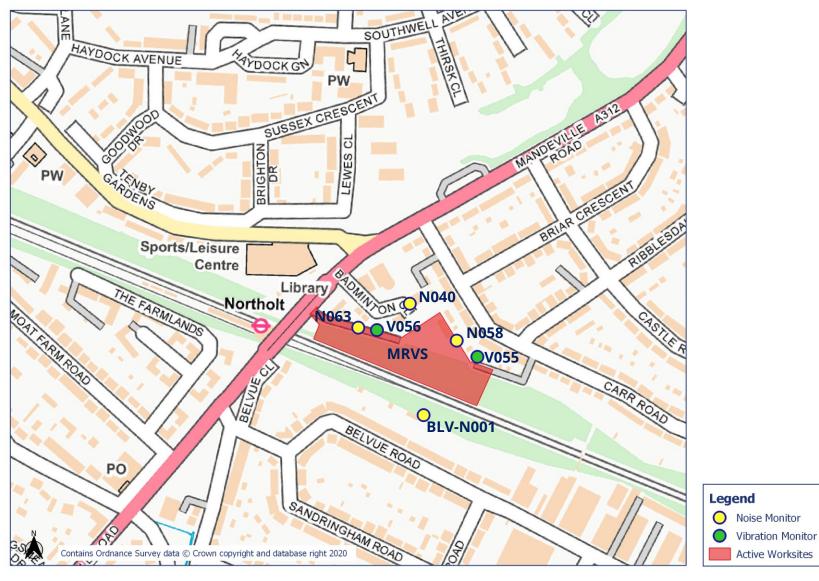




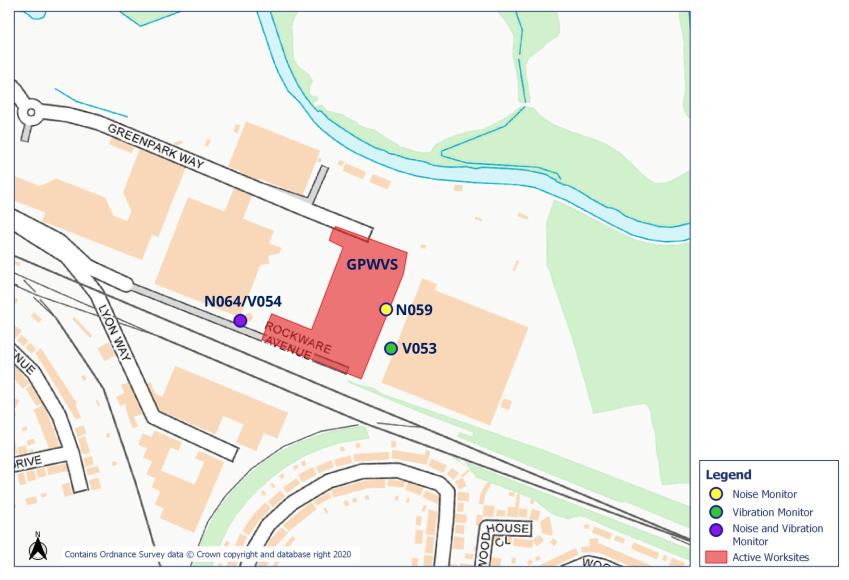




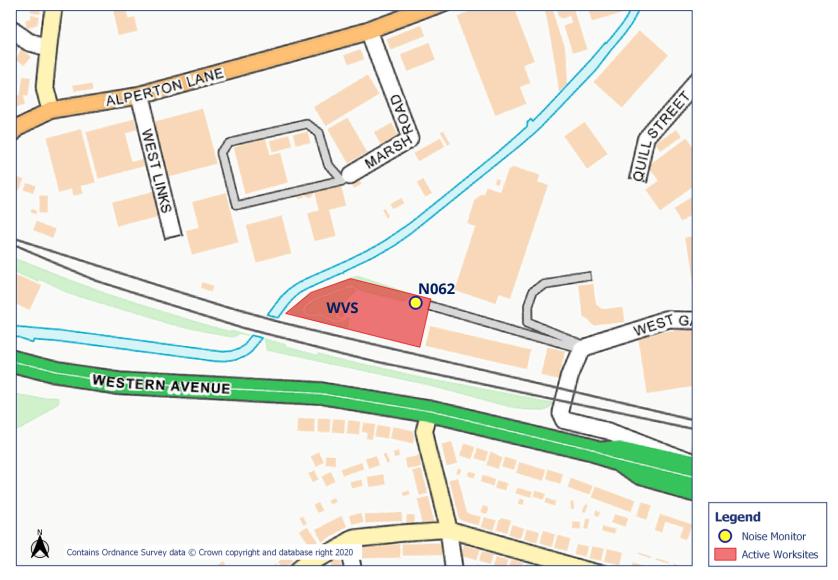



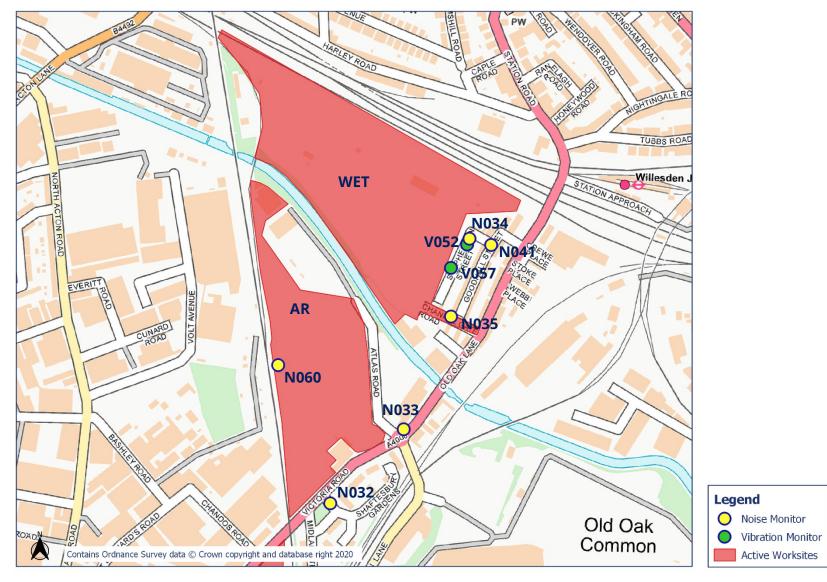



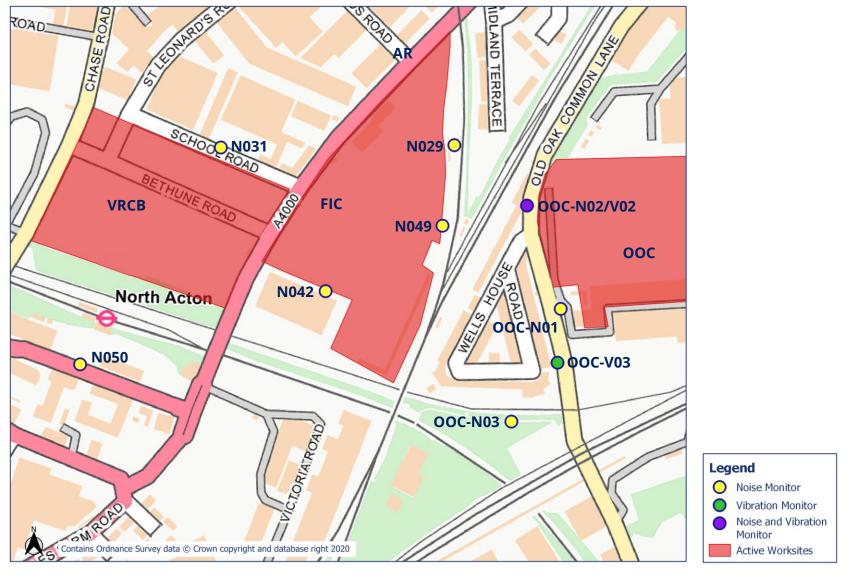





# **Appendix C Data**


### Noise


The following graphs show the hourly measured ambient noise level  $L_{Aeq,1h}$  and, where relevant, the averaged noise level  $L_{Aeq,T}$  values, where the time period T is as specified in Table 1 of HS2 Information Paper E23. Periods where noise levels are adversely affected by weather or only measured for part of the period, which are not representative of HS2 construction works, have been greyed out and excluded from the calculation of the  $L_{Aeq,T}$  values in Table 3 of the main report.

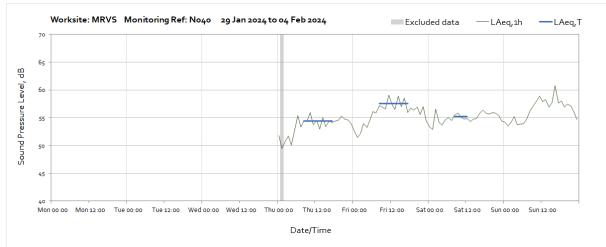



### Worksite: MRVS – Monitoring Ref: N040

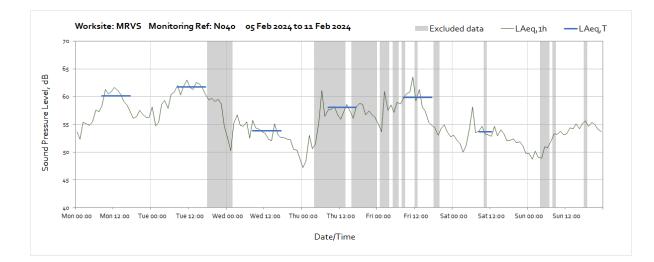

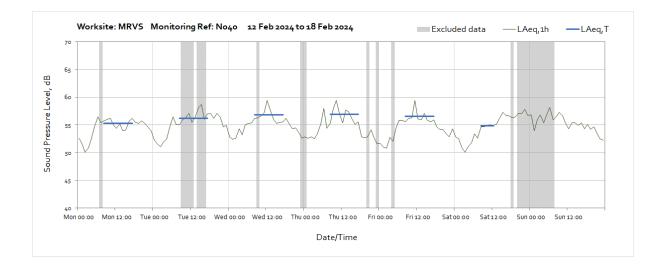


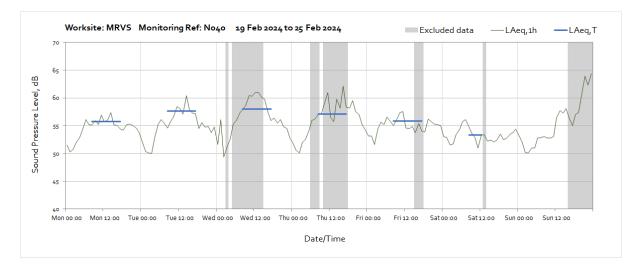


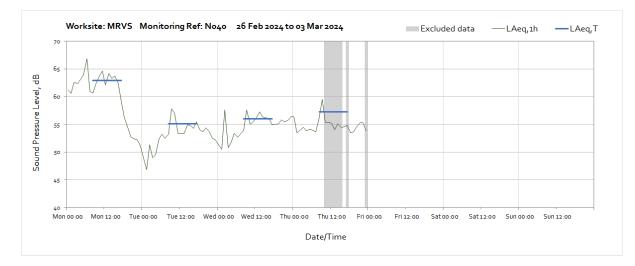


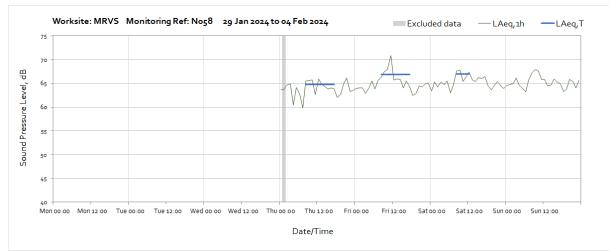


#### Worksite: MRVS - Monitoring Ref: N058

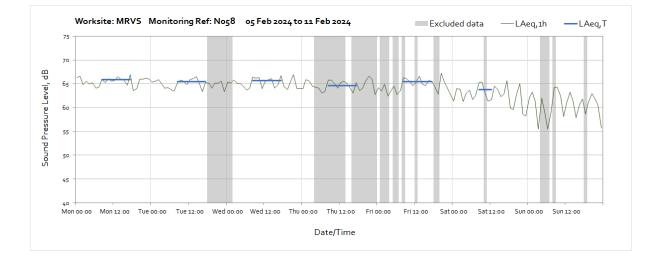

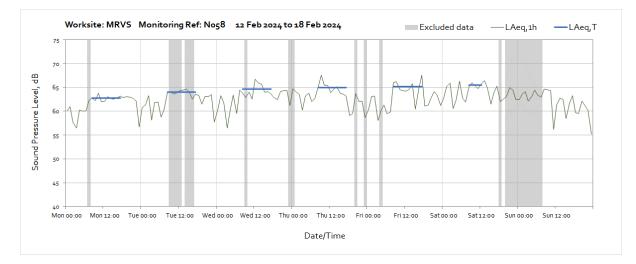


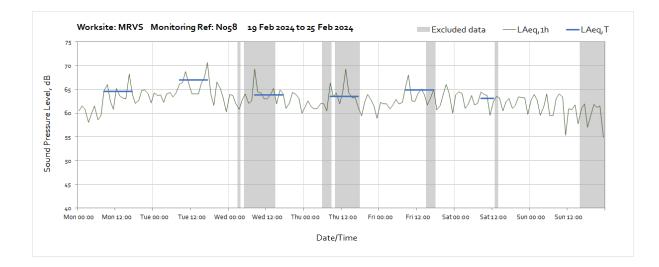


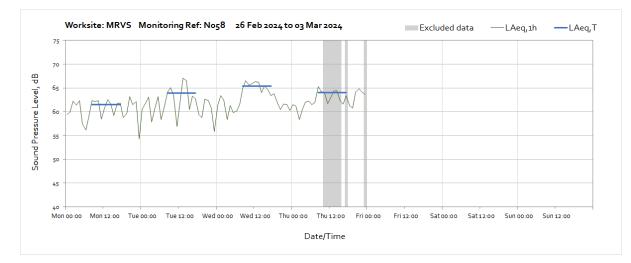



#### Worksite: MRVS - Monitoring Ref: N063



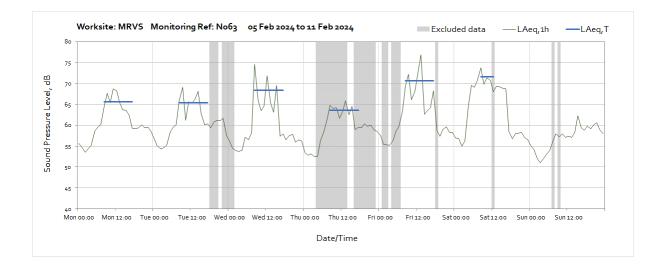


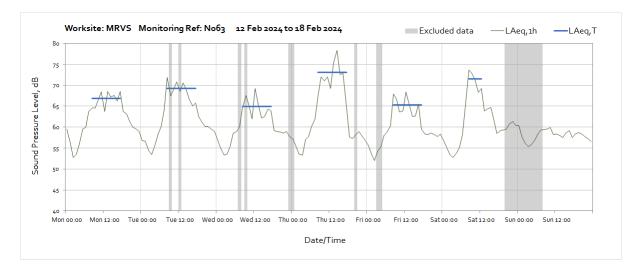


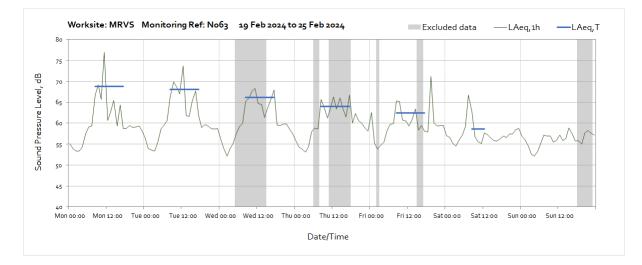


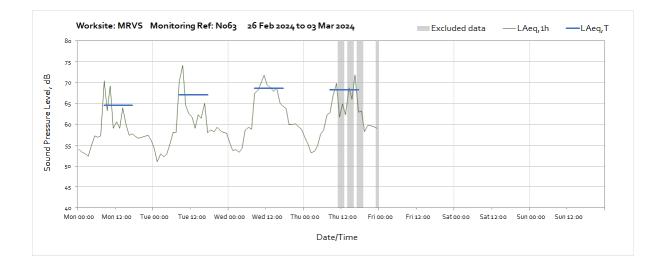


# Worksite: MRVS – Monitoring Ref: BLV-N001

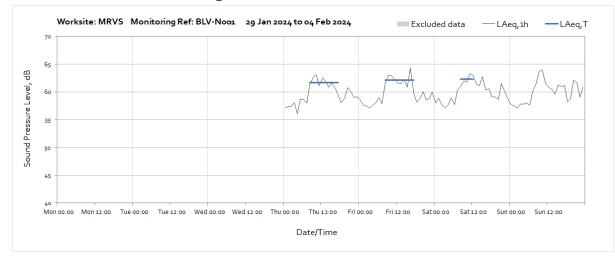

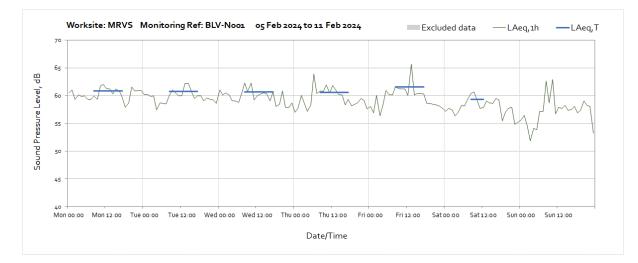


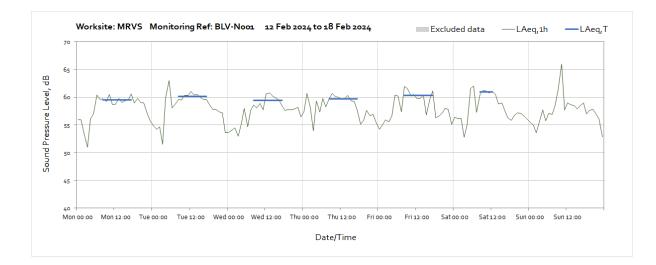


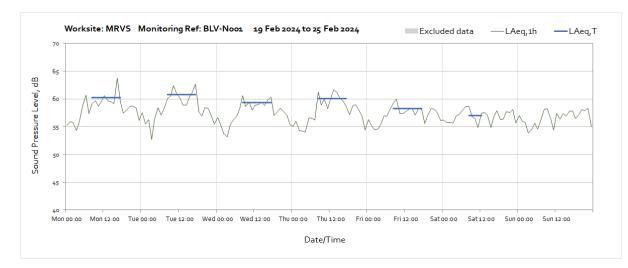








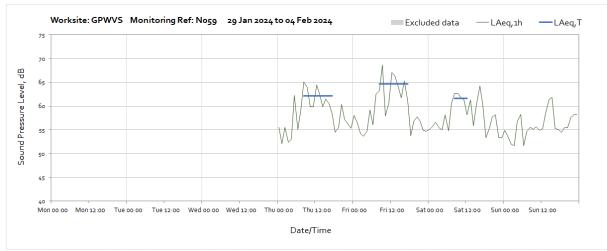

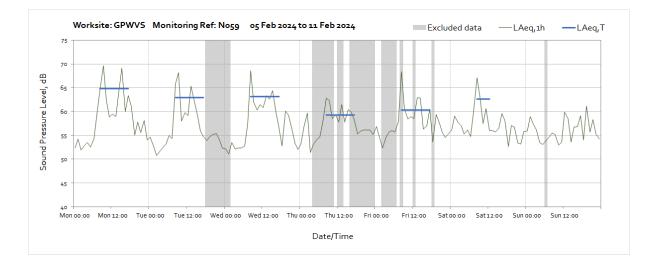


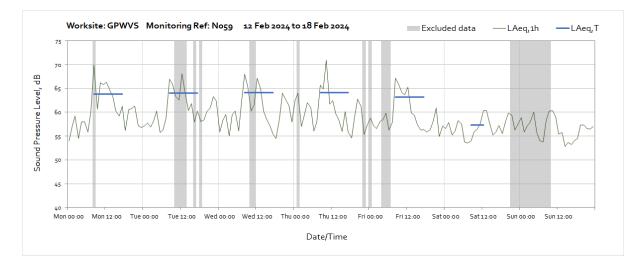


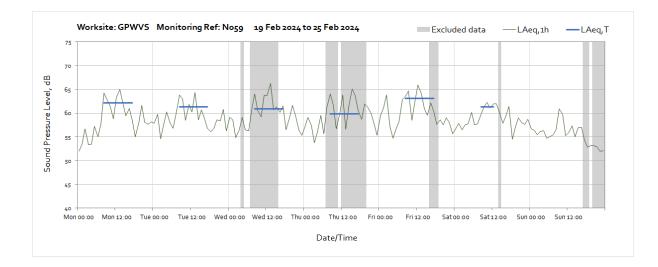


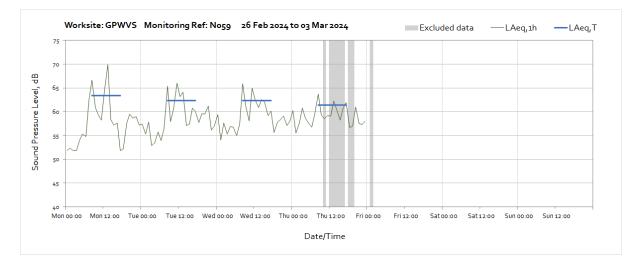



#### Worksite: GPWVS - Monitoring Ref: N064

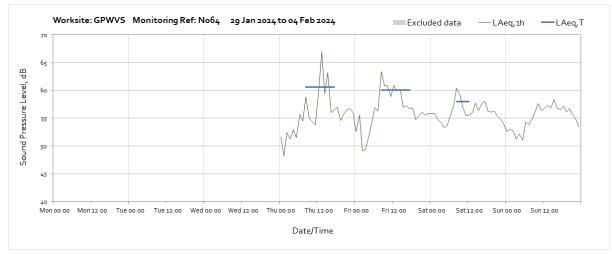

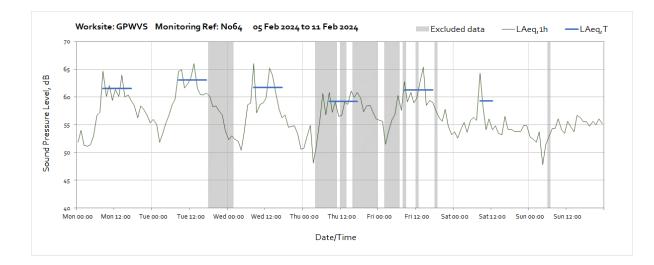


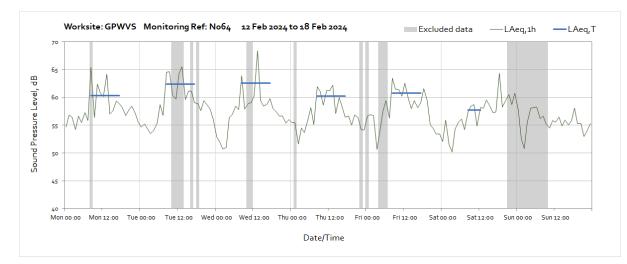


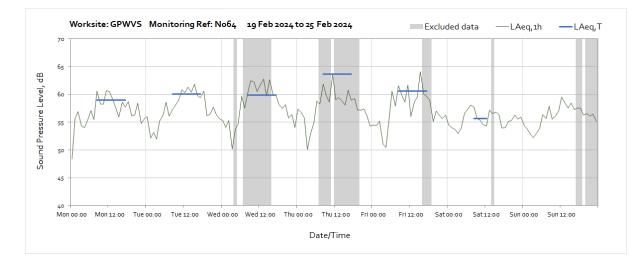


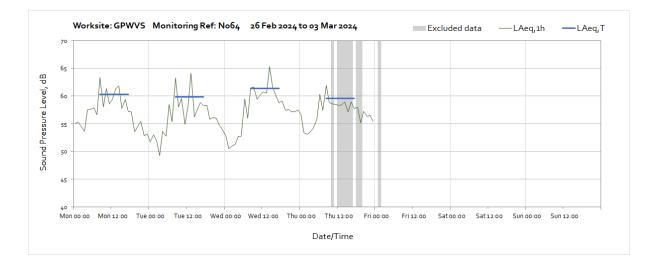



# Worksite: WVS – Monitoring Ref: N062

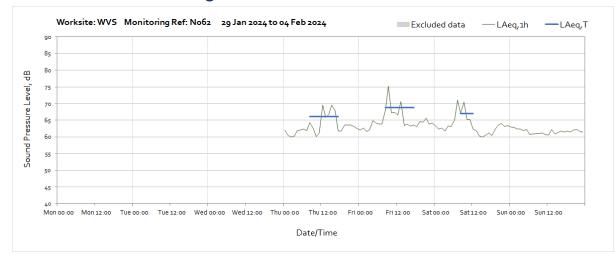


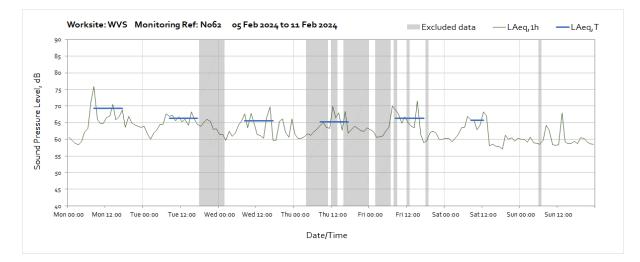

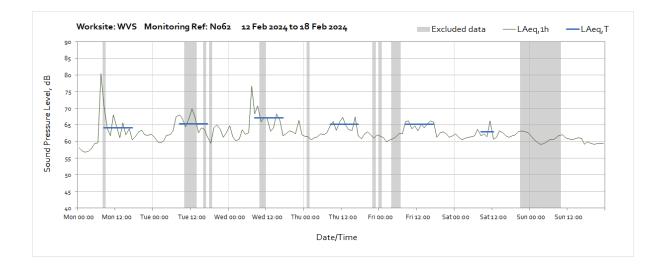


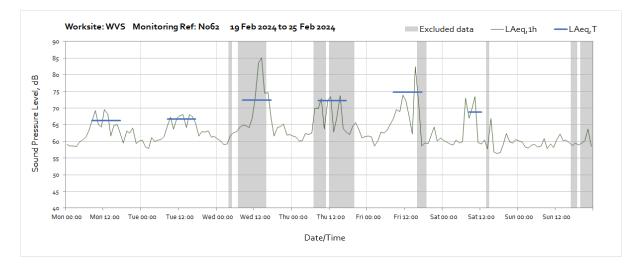


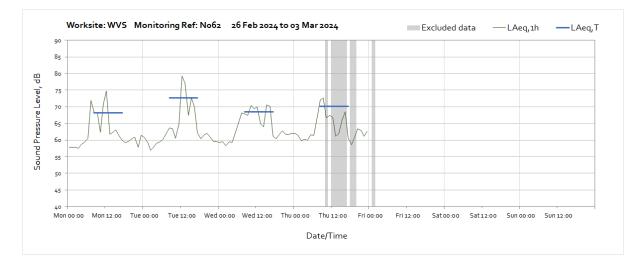


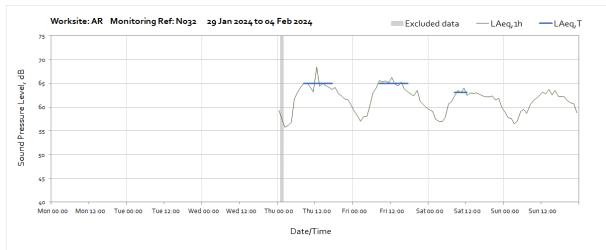


# Worksite: AR – Monitoring Ref: N032

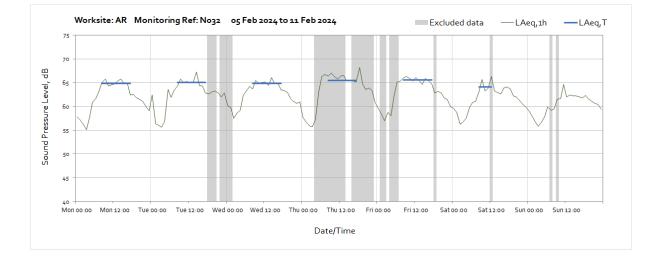


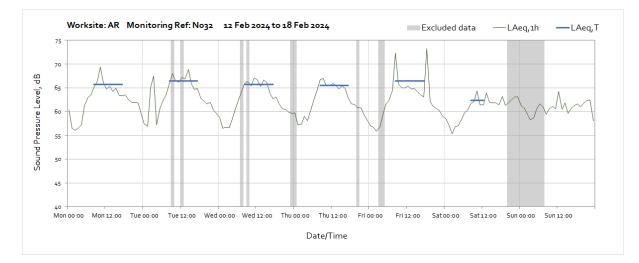


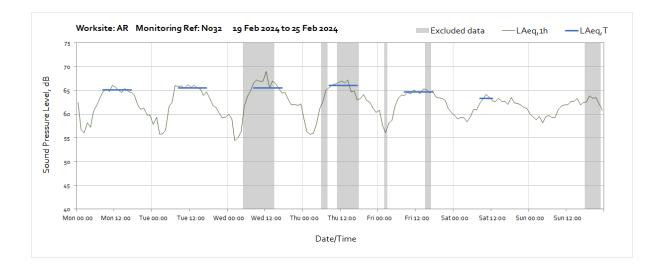


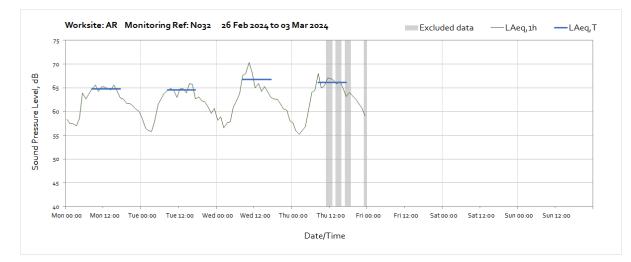



# Worksite: AR – Monitoring Ref: N033

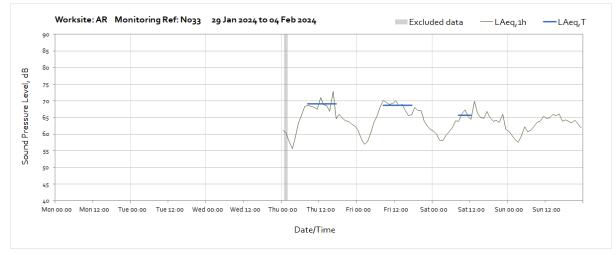

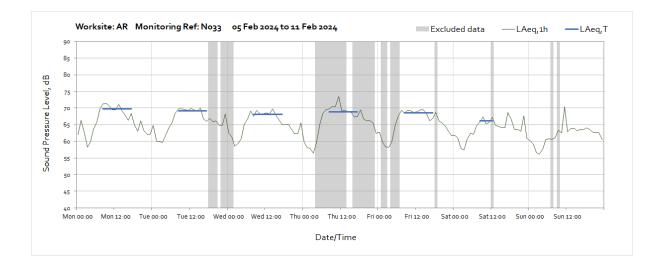


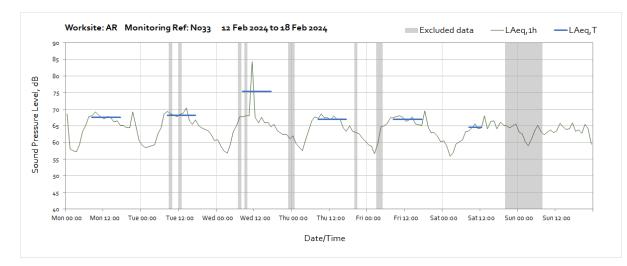


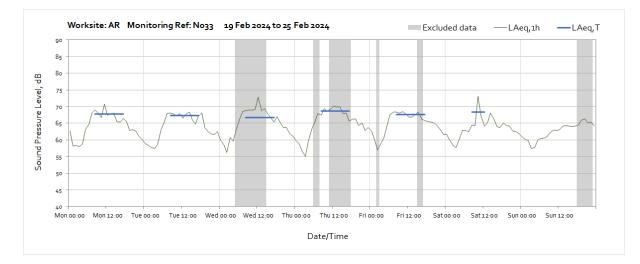


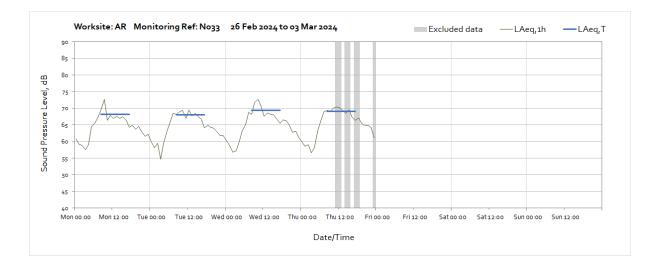



# Worksite: AR – Monitoring Ref: N060

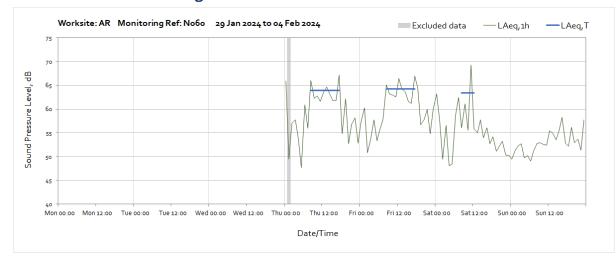


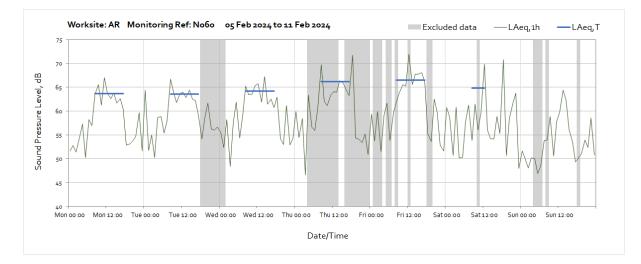

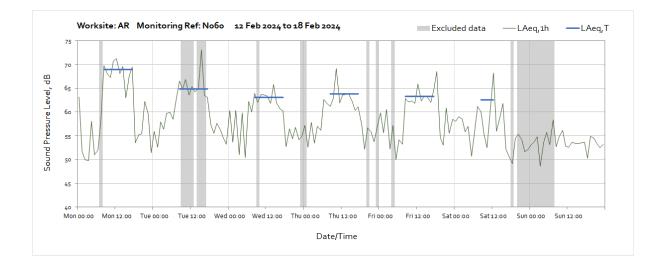


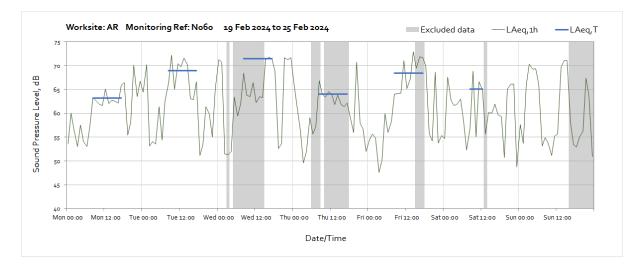


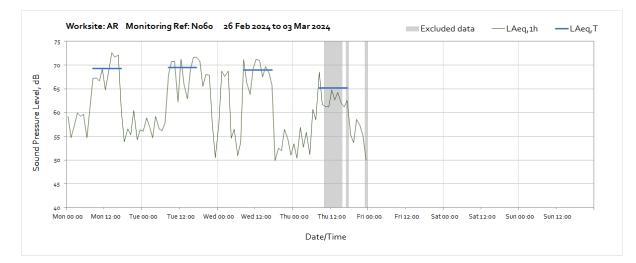


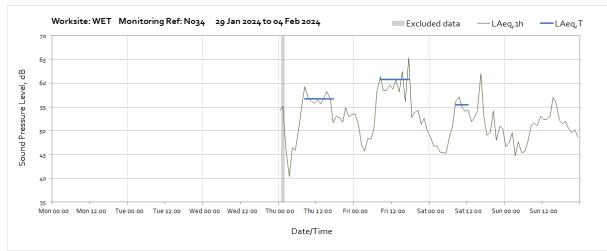


#### Worksite: WET – Monitoring Ref: N034

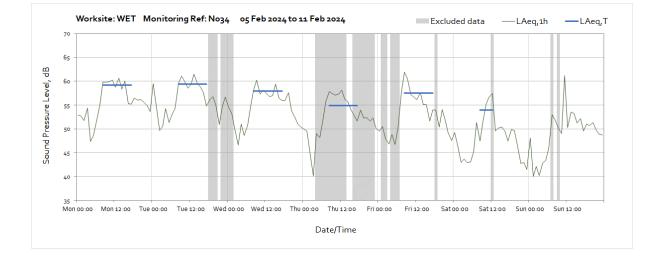


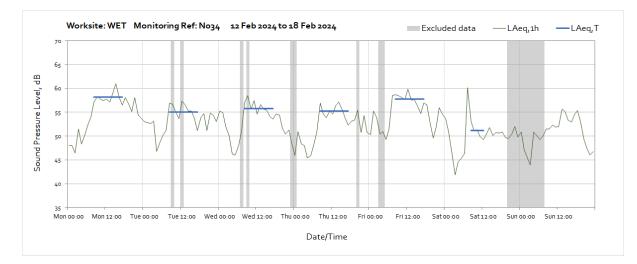


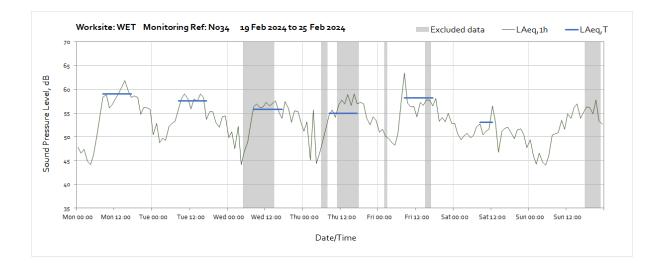


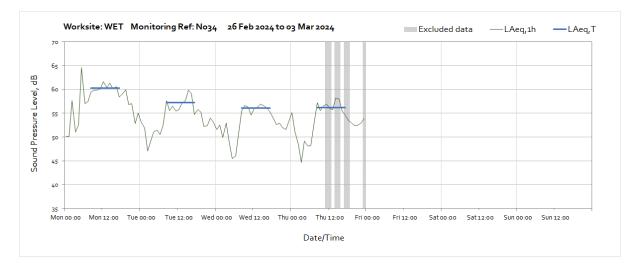





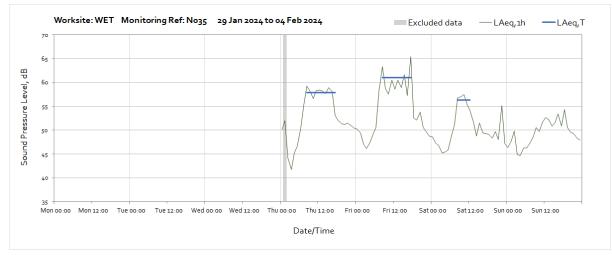

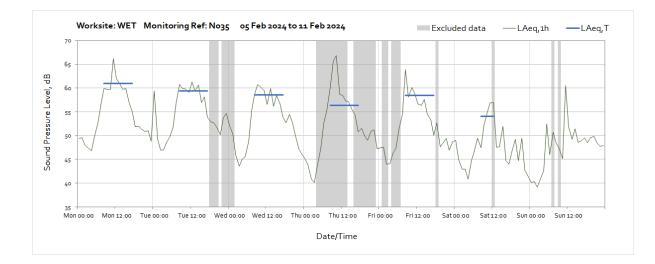


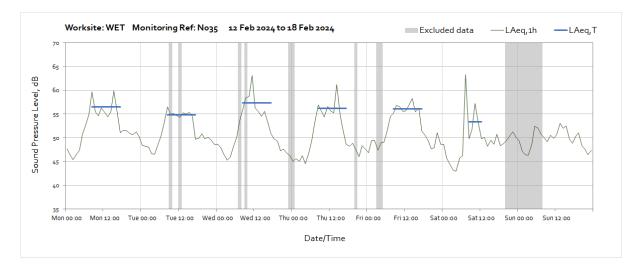


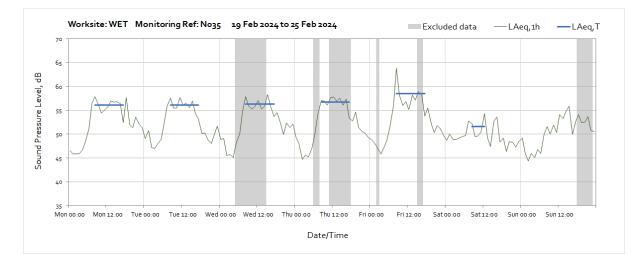


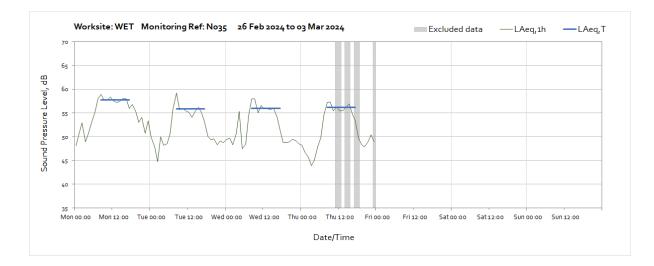



# Worksite: WET – Monitoring Ref: N041

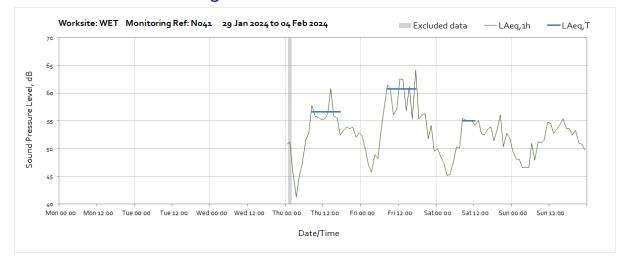


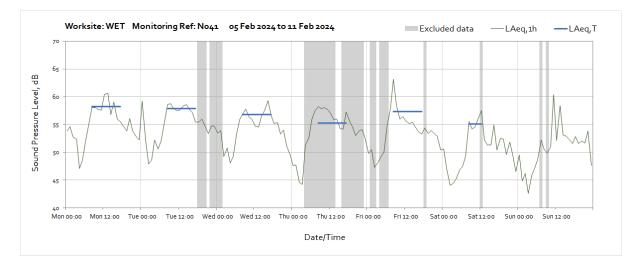

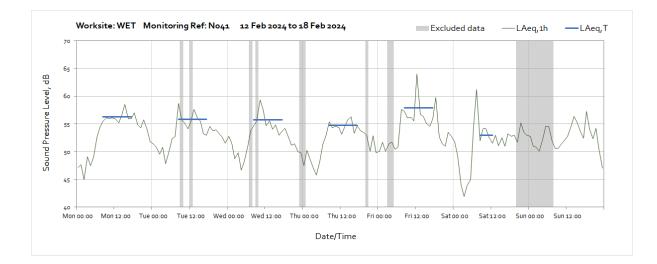


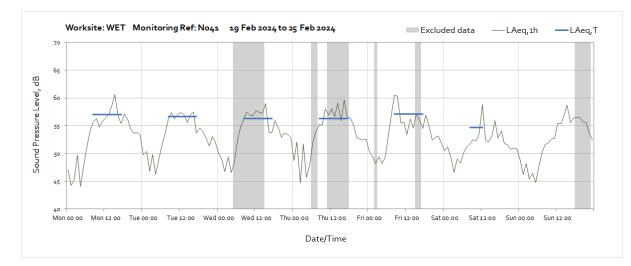


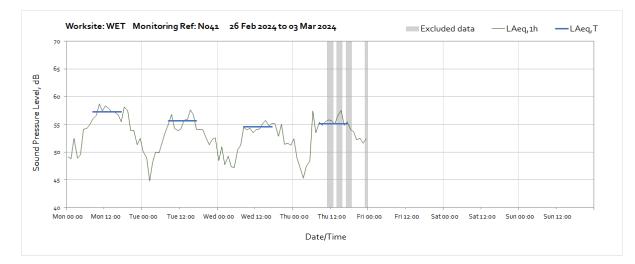


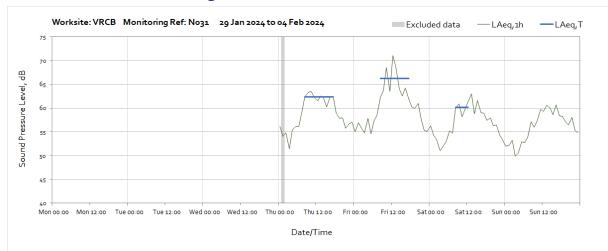


#### Worksite: VRCB - Monitoring Ref: N031

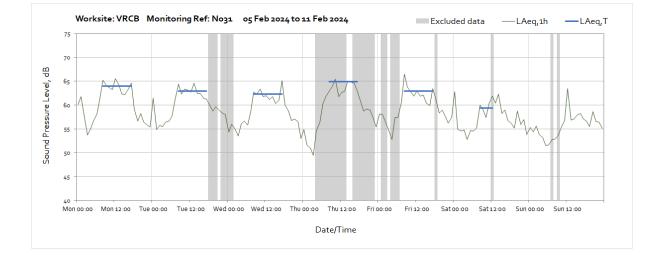


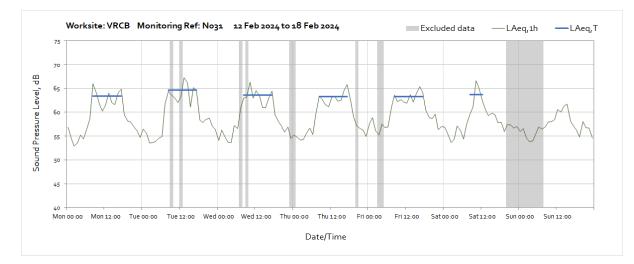


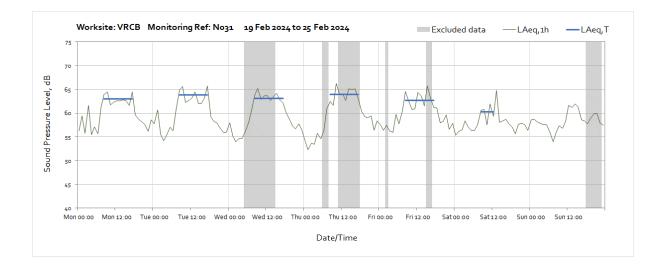


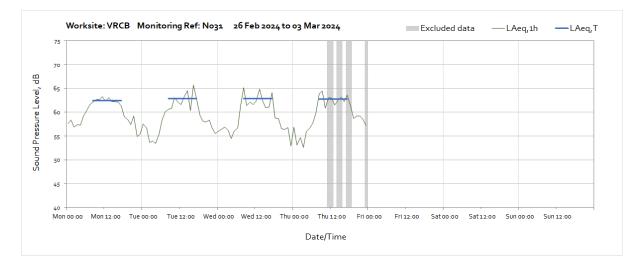


#### Worksite: VRCB – Monitoring Ref: N050

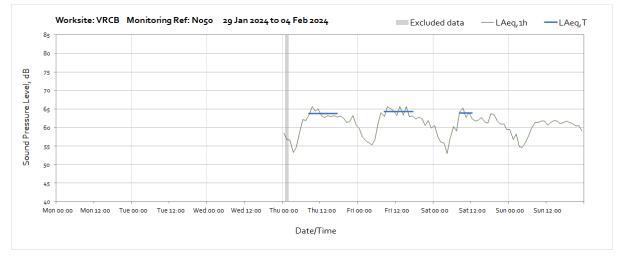

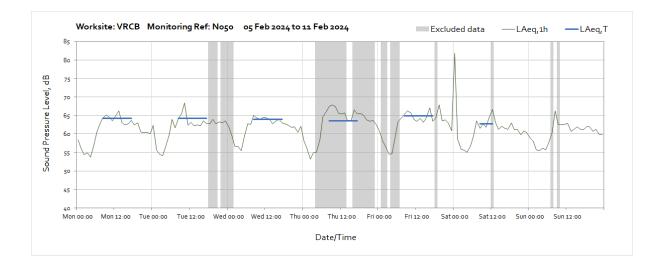


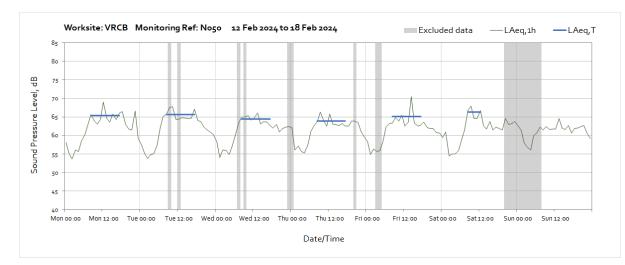


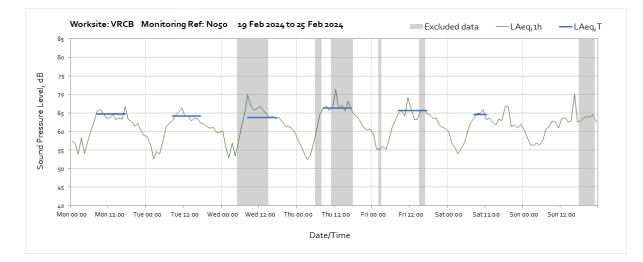






# Worksite: FIC – Monitoring Ref: N029

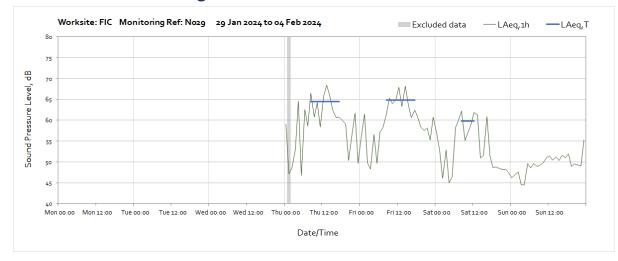


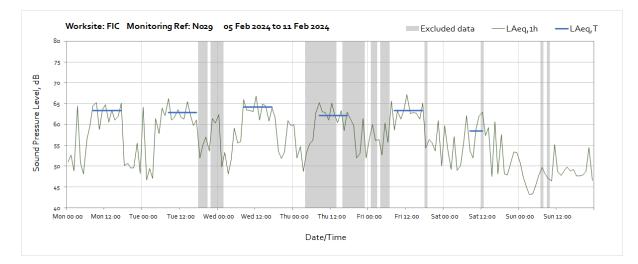

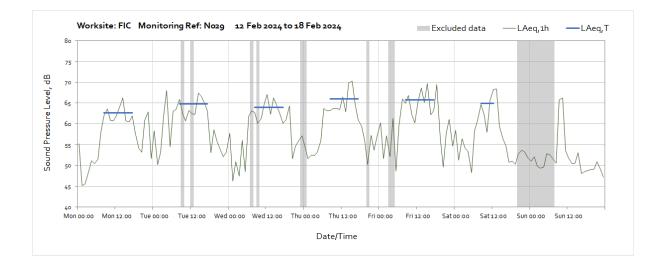


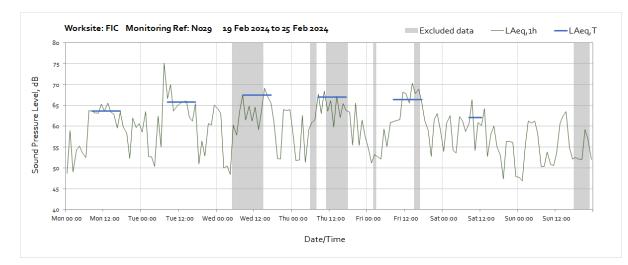


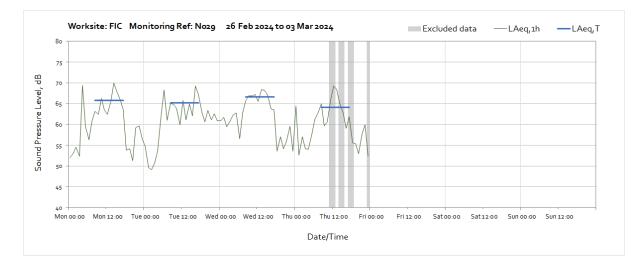


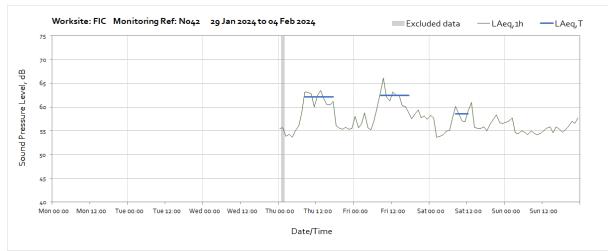


# Worksite: FIC – Monitoring Ref: N042

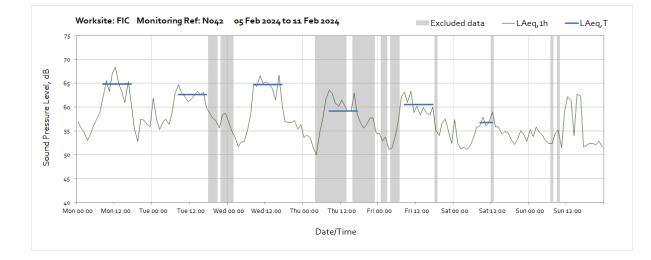


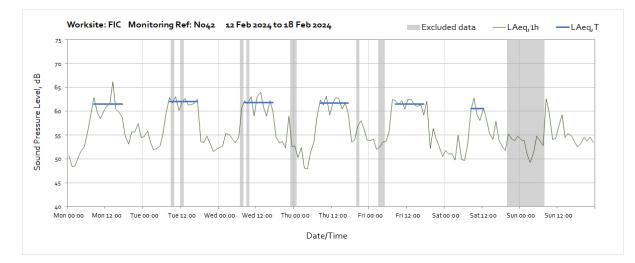


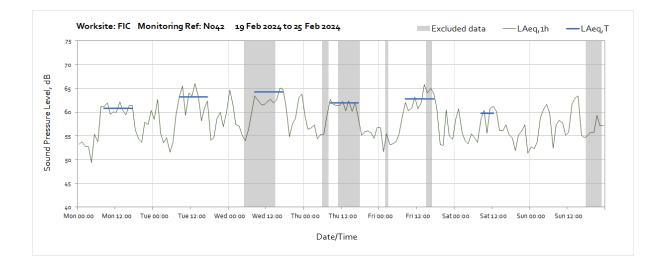


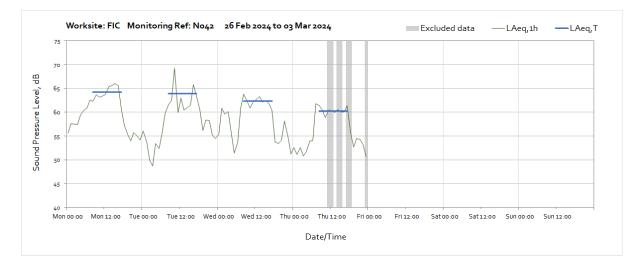





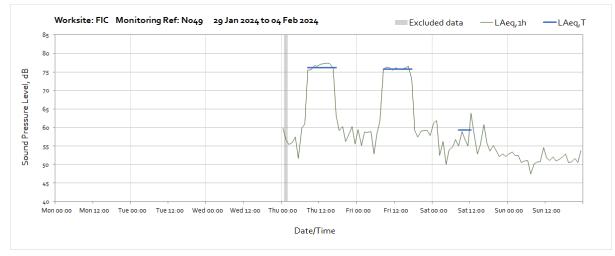

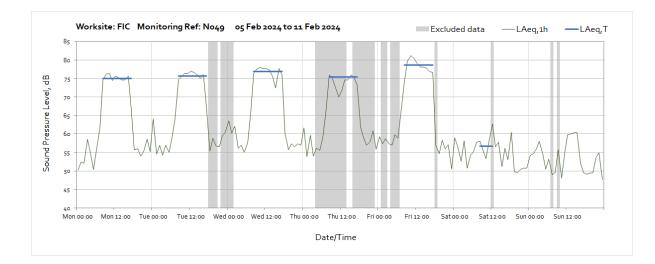


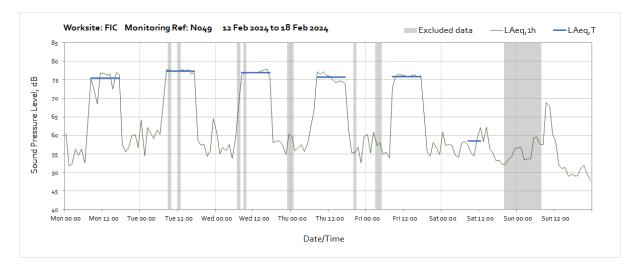


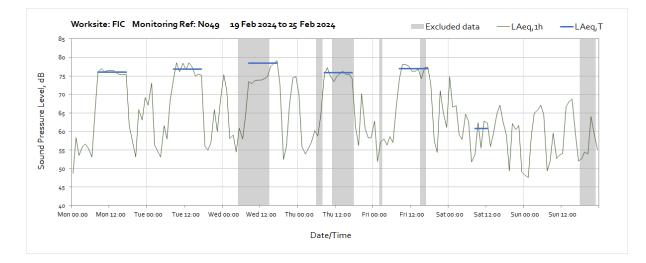

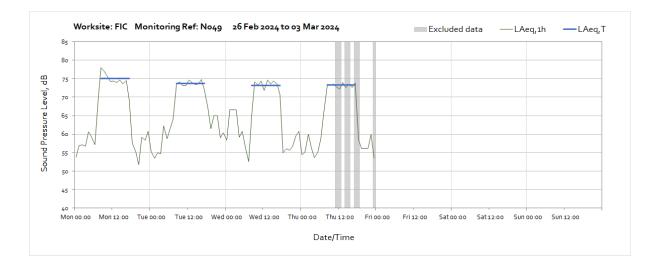



#### Worksite: OOC – Monitoring Ref: OOC-N01

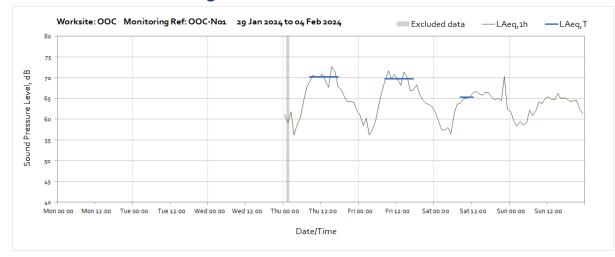


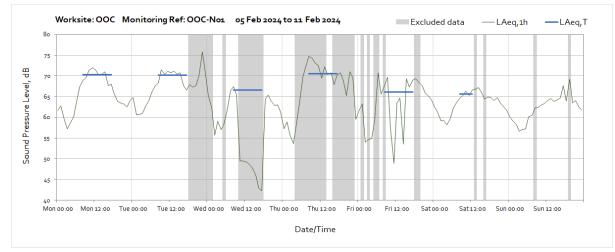


Note: Data between 10:00 and 17:00 on Wednesday 07<sup>th</sup> of February has been excluded as potentially invalid and is currently under investigation.

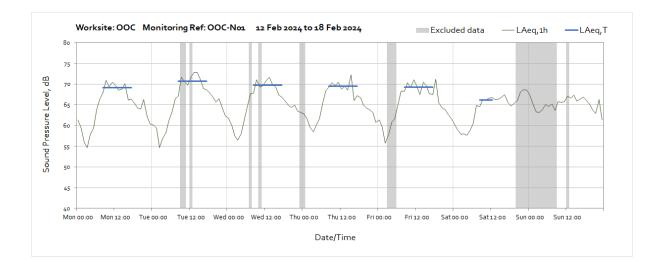


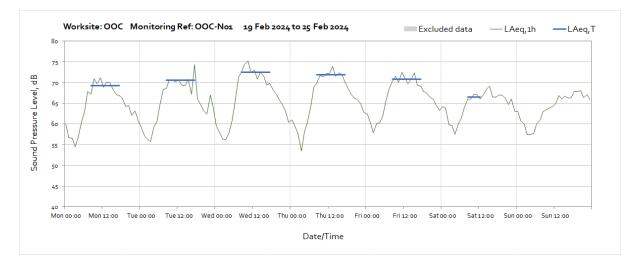

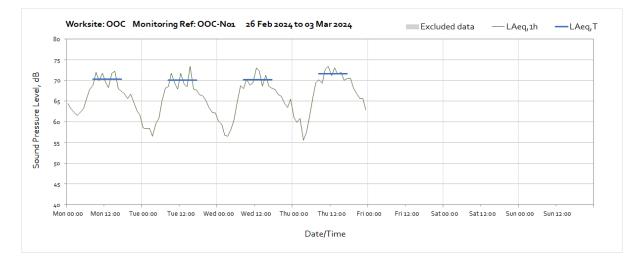


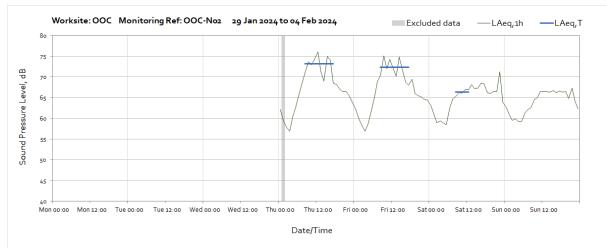



# Worksite: OOC – Monitoring Ref: OOC-N02

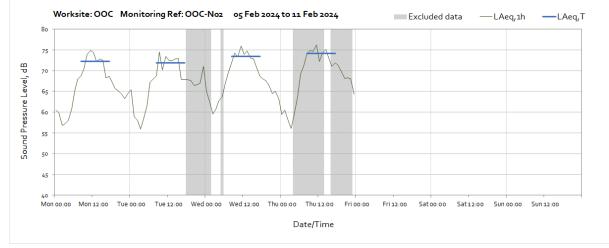


Note: Missing data between 00:00 on Friday 9<sup>th</sup> February and 23:00 on Sunday 11<sup>th</sup> February was due to a data logging error at the monitoring station.

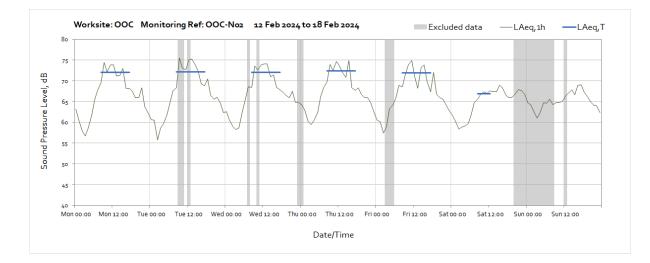

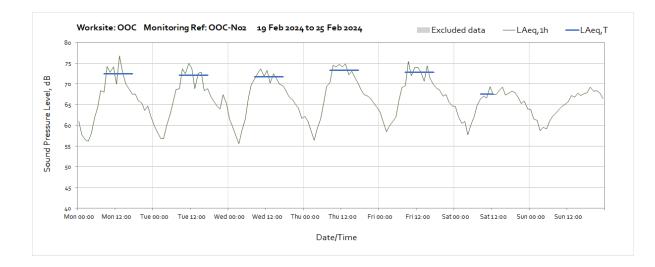


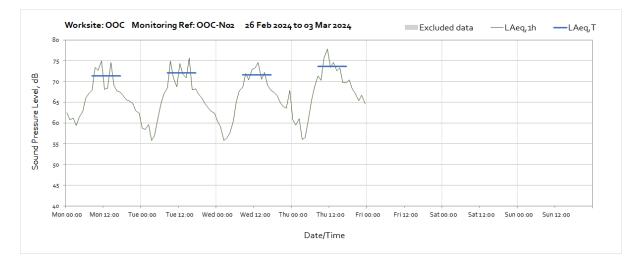


#### Worksite: OOC - Monitoring Ref: OOC-N03

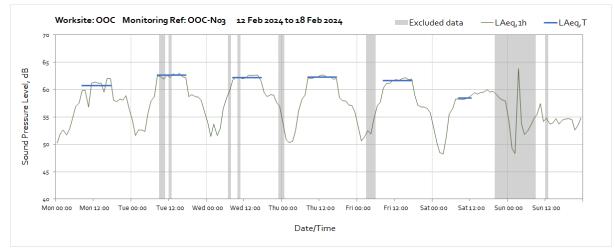


Note: Missing data between the beginning of the month and 00:00 on Monday 12<sup>th</sup> February was due to a data logging error at the monitoring station.

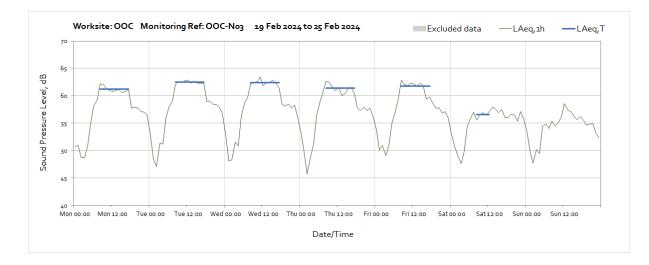

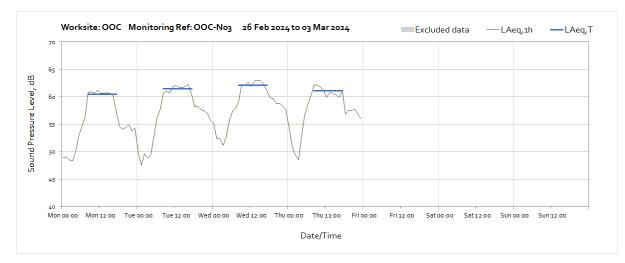



# Vibration


The following graphs show the hourly measured peak particle velocity PPV recorded during the monitoring period. The graphs show the highest PPV of the three orthogonal axis x, y and z. Periods where PPV values have been affected by local interference with the vibration monitor or only measured for part of the period, which are not representative of HS2 construction works, have been greyed out and excluded when calculating values in Table 4 of the main report.

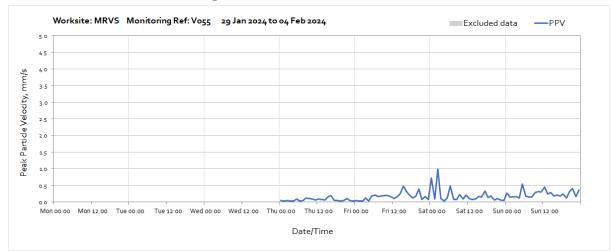


# Worksite: MRVS – Monitoring Ref: V055

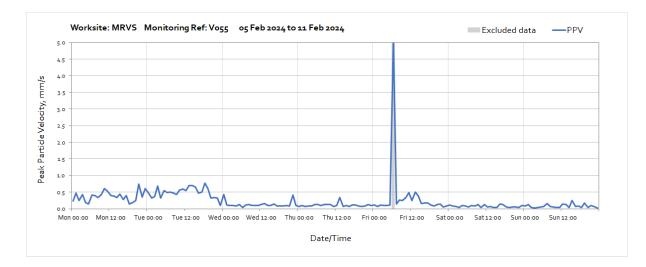


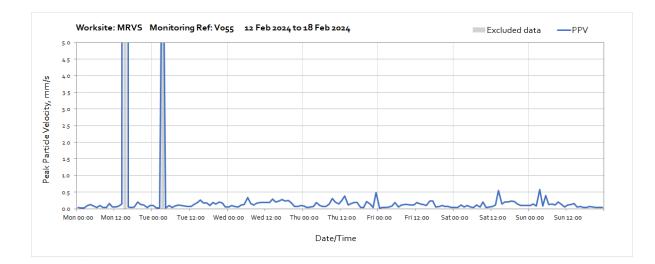


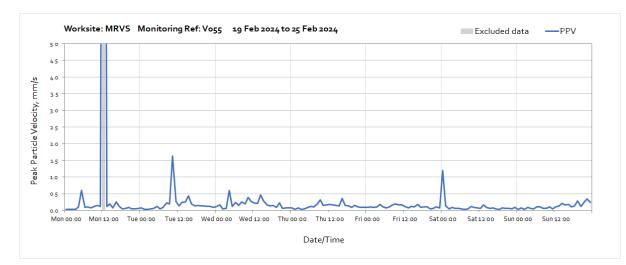


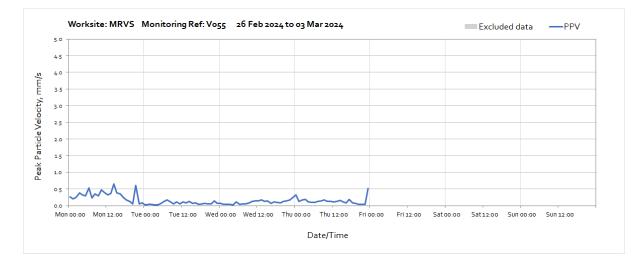





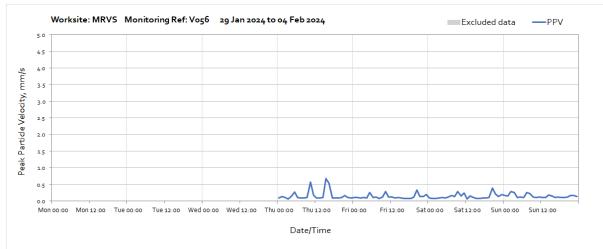

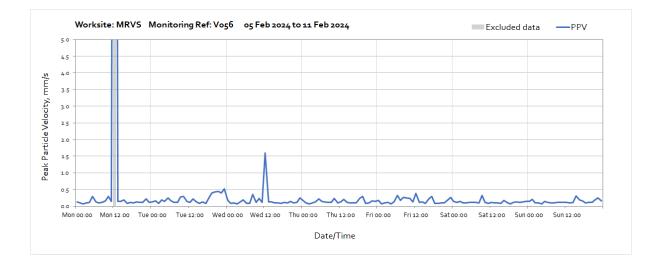


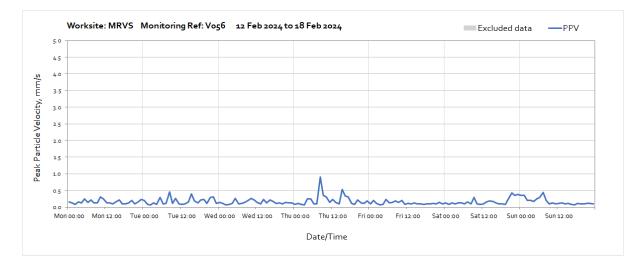


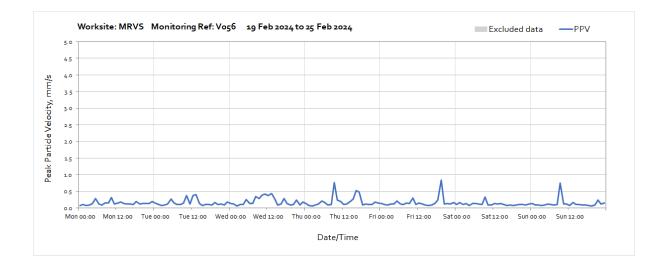


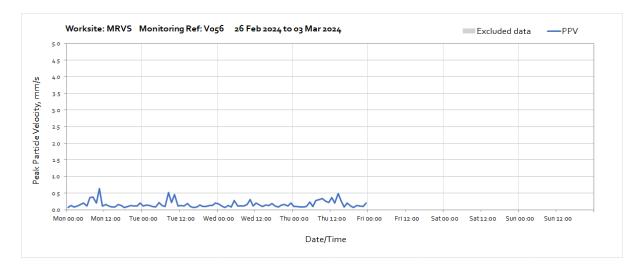



#### Worksite: GPWVS - Monitoring Ref: V053

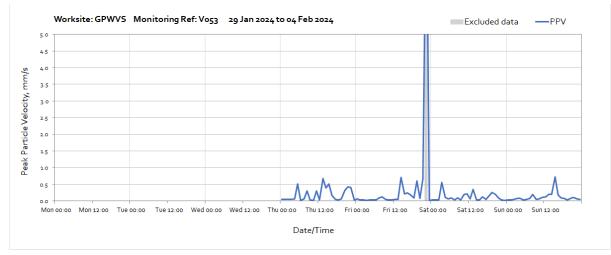

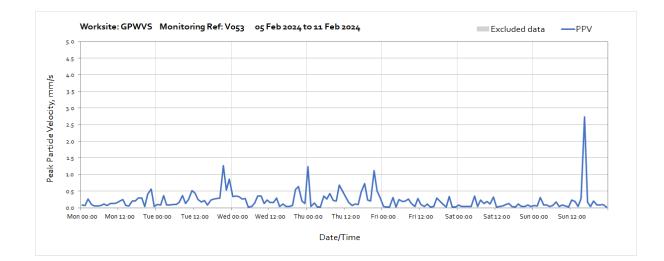


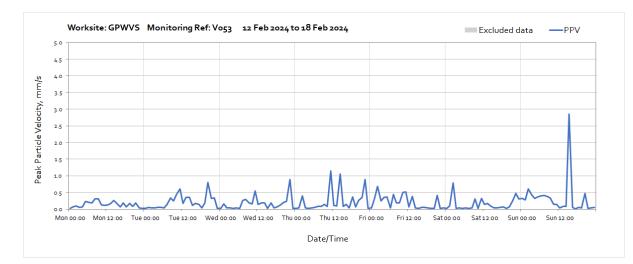


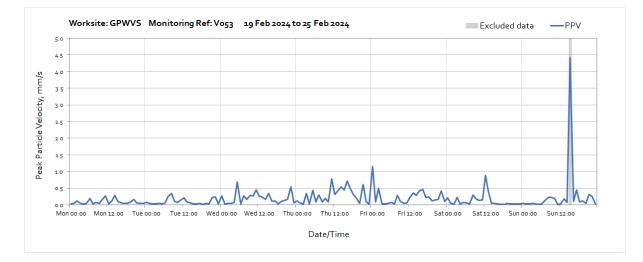


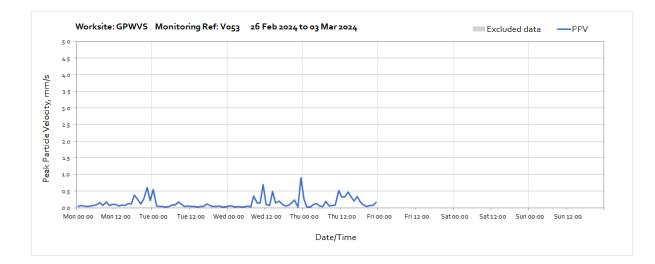



# Worksite: GPWVS - Monitoring Ref: V054

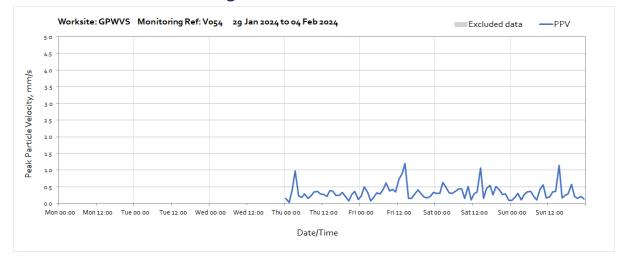


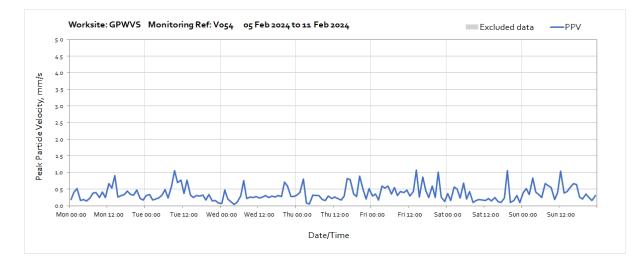

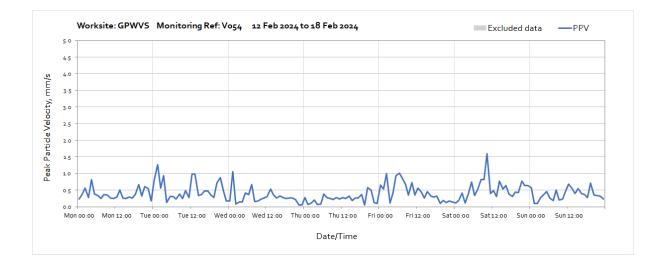


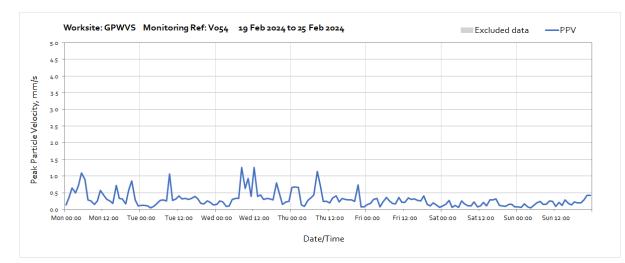


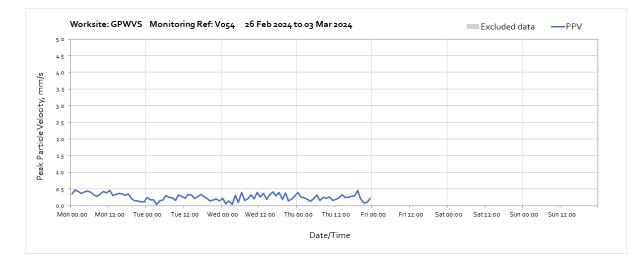


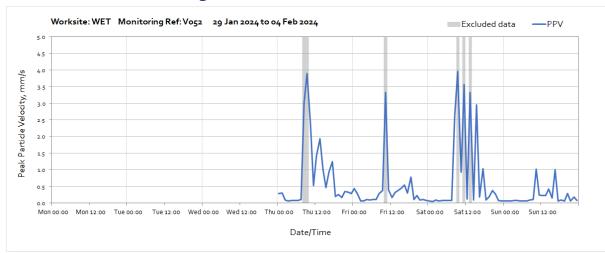


# Worksite: WET – Monitoring Ref: V052

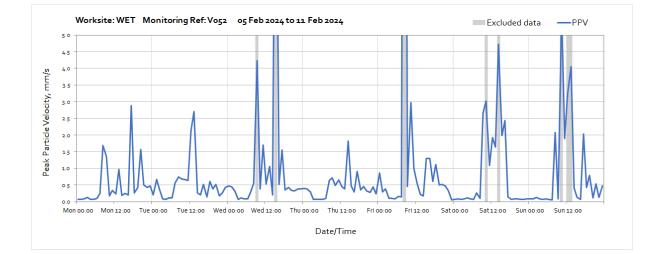


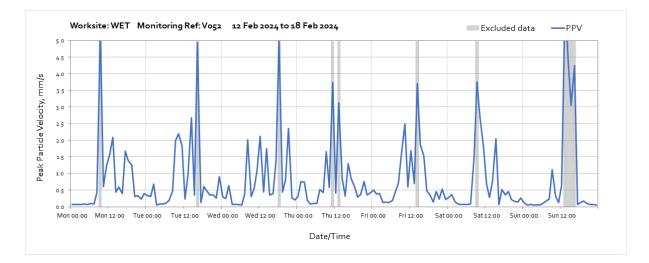


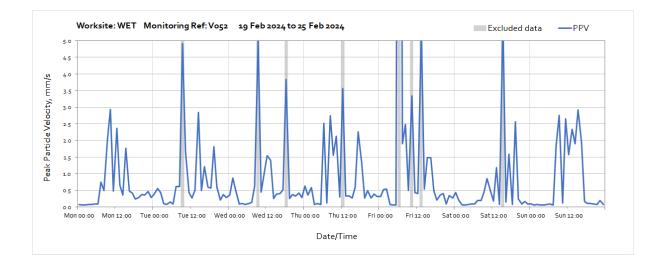


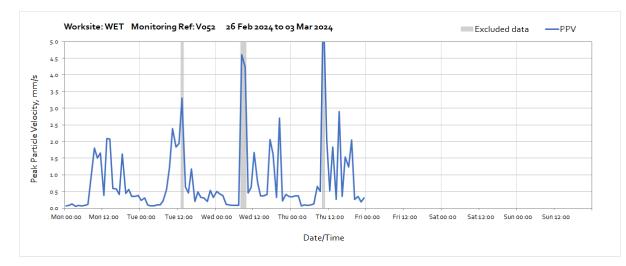



# Worksite: WET – Monitoring Ref: V057

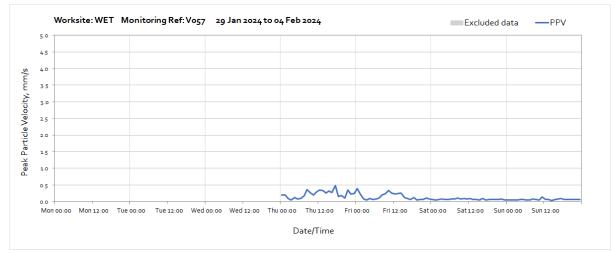

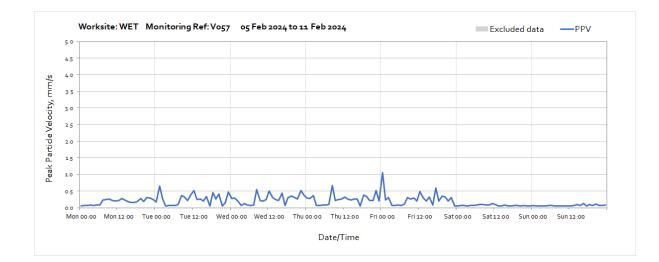

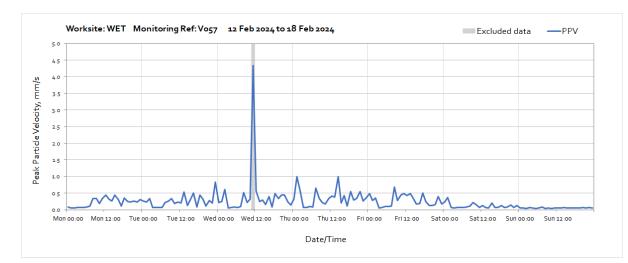

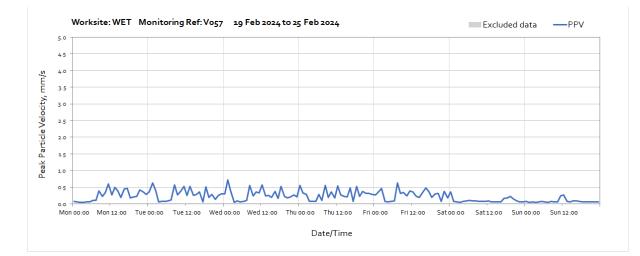

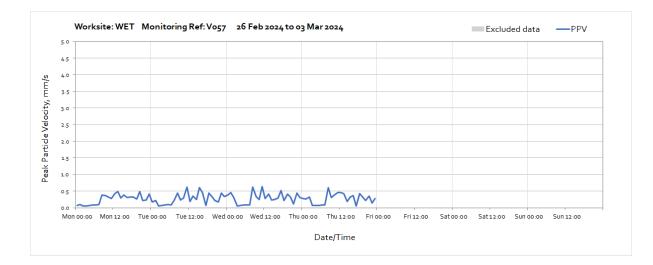

#### Worksite: OOC – Monitoring Ref: OOC-V02

