June 2024



# Air Quality and Dust Monitoring Monthly Report - June 2024

London Borough of Hillingdon



High Speed Two (HS2) Limited has been tasked by the Department for Transport (DfT) with managing the delivery of a new national high speed rail network. It is a non-departmental public body wholly owned by the DfT.

High Speed Two (HS2) Limited, Two Snowhill Snow Hill Queensway Birmingham B4 6GA

Telephone: 08081 434 434

General email enquiries: HS2enquiries@hs2.org.uk

Website: www.gov.uk/hs2

A report prepared by EWCs and MWCCs on behalf of HS2 Ltd.

High Speed Two (HS2) Limited has actively considered the needs of blind and partially sighted people in accessing this document. The text will be made available in full on the HS2 website. The text may be freely downloaded and translated by individuals or organisations for conversion into other accessible formats. If you have other needs in this regard please contact High Speed Two (HS2) Limited.

© High Speed Two (HS2) Limited, 2024, except where otherwise stated. Copyright in the typographical arrangement rests with High Speed Two (HS2) Limited.

This information is licensed under the Open Government Licence v2.0. To view this licence, visit www.nationalarchives.gov.uk/doc/open-governmentlicence/ version/2 or write to the Information Policy Team, The National Archives, Kew, London TW9 4DU, or e-mail: psi@nationalarchives.gsi.gov.uk. Where we have identified any third-party copyright information you will need to obtain permission from the copyright holders concerned.



### **Monthly Summary**

- 1.1.1 This Summary Report is published in fulfilment of commitments detailed in the High Speed Rail (London-West Midlands) Environmental Minimum Requirements, Annex 1: Code of Construction Practice, for the nominated undertaker to present the results of air quality and dust monitoring undertaken in the London Borough of Hillingdon (LBH) during May 2024 and June 2024 respectively.
- 1.1.2 Figure 1 to Figure 4 in Appendix A present the current worksites together with air quality monitoring locations.
- 1.1.3 This summary should be read in conjunction with the overview monitoring report available from <a href="www.gov.uk/government/collections/monitoring-the-environmental-effects-of-hs2">www.gov.uk/government/collections/monitoring-the-environmental-effects-of-hs2</a>, which highlights: the applicable standards and guidance, as well as the air quality and dust monitoring methodologies to be implemented by nominated undertakers throughout construction.
- 1.1.4 The current worksites, as presented in Appendix A, Figure 1 to Figure 4, include:
  - Gatemead and West Ruislip Embankment, Breakspear Road South and River Pinn
     Underbridge piling operations, concreting, groundworks and materials management;
  - Harvil Road realignment groundworks, materials management, concreting and shuttering works at Copthall North;
  - West Ruislip Portal materials management (tunnel boring machine arisings);
  - South Ruislip vent shaft construction, ground works, concrete works and materials management;
  - Northern Sustainable Placement Area (NSPA) limited materials management and groundworks;
  - Southern Sustainable Placement Area (SSPA) spoil treatment area operation, materials movements and groundworks.

#### **CVV Dews Lane**

- HOAC Compound: operation;
- Haul Road and Jetty Maintenance: operation and maintenance;
- Ground Investigation works
- Pier Construction: arch from deck for FRC works for pile cap and pier, standard piers FRC works for pile cap and pier, post-tensioning of AFD legs and tower crane mob / demob;
- ATFS: site preparation, bulk earthworks fill, permanent drainage, soiling and seeding, ATFS access road construction;
- Pumping Water Management: pumping water management ch 25.900 to 29.500;
- Satellite Welfares;
- Generator Farms;
- South Abutment: earthworks, CFA piling, pile trimming and pile hat installation, FRC early works on SE and drainage works, South Abutment construction stage 2 –

earthworks, yard supporting activities, piling platform construction (Harvil Road) and load transfer platform construction (7-8), soiling and seeding works, embankment FRC works:

- Environmental Maintenance;
- Stockpiling Activity HOAC: a stockpile of material coming from other sites;
- River Colne Crossing: Emergency removal of obstruction to RC crossing;
- Launching Girder and Deck Works: span segmental erection with launching gantry, shoring steel structure erection and dismantling, external PT, internal PT stressing & grouting and crane assembly/disassembly;
- Deck Finishes Logistics: preparation and operation of storage yards and installation of below deck access provision, traffic management on the deck surface, installation of parapets, noise barriers, troughs, pipes, steel works and other minor material to the storage yards and deck, installation of access at the top of the deck (HAKI stairs) and finishes support plan;
- Deck Finishes On-deck Construction: construction of robust kerbs, installation of parapets, construction of concrete stitch, filling of voids and top openings, verge deck waterproofing, trough installation and noise barrier installation;
- Deck Finishes In-deck Construction: diaphragm walls, concrete works within the deck, drainage works within the deck and steel works within the deck;
- Landscaping: advanced works including removal of cofferdam, early earthworks including ground profiling and cut, initial ground drainage including manhole chamber, early soil placement, hardstanding removal and tree removal & vegetation clearance;
- RC Footbridge installation; and
- Jetty Removal and associated earthworks: Earthworks excavation, backfill, and landscaping, jetty removal, cutting piles and steelworks.

#### **CVV Moorhall Road**

- North and South Moorhall Road: compound operation;
- Haul Road and Jetty Maintenance: operation and maintenance;
- Pier Construction: arch from deck and standard piers FRC works for pile cap and pier, post tensioning of AFD legs and tower crane mob / demob;
- ATFS: site preparation, bulk earthworks fill, permanent drainage, soiling and seeding, ATFS access road construction;
- Pumping Water Management: Pumping water management ch 25.900 to 29.500;
- Satellite Welfares;
- Generator Farms;
- South Abutment: earthworks, CFA piling, pile trimming and pile hat installation, FRC early works on SE and drainage works, South Abutment construction stage 2, South Abutment construction stage 2 earthworks, yard supporting activities, piling platform construction (Harvil Road) and load transfer platform construction (7-8), soiling and seeding works, embankment FRC works;
- Environmental Maintenance;
- Stockpiling Activity HOAC: Stockpile of material coming from other sites;

- River Colne Crossing: Emergency removal of obstruction to RC crossing;
- Launching Girder and Deck Works: Span segmental erection with launching gantry, shoring steel structure erection and dismantling, external PT, internal PT stressing & grouting and crane assembly/disassembly;
- Deck Finishes Logistics: Preparation and operation of storage yards and installation of below deck access provision, traffic management on the deck surface, installation of parapets, noise barriers, troughs, pipes, steel works and other minor material to the storage yards and deck, installation of access at the top of the deck (HAKI stairs) and finishes support plan;
- Deck Finishes On-deck Construction: construction of robust kerbs, installation of parapets, construction of concrete stitch, filling of voids and top openings, verge deck waterproofing, trough installation and noise barrier installation;
- Deck Finishes In-deck Construction: diaphragm walls, concrete works within the deck, drainage works within the deck and steel works within the deck;
- Landscaping: Advanced works including removal of cofferdam, early earthworks including ground profiling and cut, initial ground drainage including manhole chamber, early soil placement, hardstanding removal and tree removal & vegetation clearance;
- RC Footbridge installation; and
- Jetty Removal and associated earthworks: Earthworks excavation, backfill, and landscaping, jetty removal, cutting piles and steelworks.
- 1.1.5 Fifteen (15) dust monitors are installed around these worksites, where works are underway. These sites returned a low to high dust risk rating.
- 1.1.6 Dust monitoring locations and results are presented in Appendix B, Table 2, together with line charts of monthly data from each dust monitor in Figure 5. All continuous dust monitoring is undertaken using indicative monitors. Despite being Environment Agency (MCERTS) certified, indicative monitors carry a higher level of uncertainty than reference monitors, and therefore cannot be strictly compared with Air Quality Standards for human health and the environment. The purpose of the monitoring undertaken is to ensure the effectiveness of the on-site mitigation.
- 1.1.7 The trigger level for  $PM_{10}$  concentrations of  $190\mu g/m^3$ , over a 1-hour period, in accordance with the updated guidance document 'Guidance on Monitoring in the Vicinity of Demolition and Construction Sites (October 2018)' has been applied.
- 1.1.8 No (0) dust trigger alerts were recorded during the monitoring period (June 2024).
- 1.1.9 Data capture was below 90% for multiple monitors due to CVV-AQMP6 was disconnected from mains power during the demobilisation procedures and hence was fully reliant on its solar panel. AQ034 and AQ048 were below 90% due to the monitors being powered by hydrogen generators and needing replenishing/exchange of hydrogen cylinders.


- 1.1.10 Diffusion tube monitoring of Nitrogen Dioxide (NO<sub>2</sub>) is undertaken at eleven (11) locations around highways within the LBH as part of the management of air quality where significant effects may occur as a result of the scheme.
- 1.1.11 Diffusion tube monitoring results are as provided from the laboratory analysis, and therefore still require various analysis and adjustments to be undertaken. Final corrected results will be presented and described in the annual report. However, based on results to date, no unexpected values were recorded during the monitoring period.
- 1.1.12 NO<sub>2</sub> monitoring locations and results are presented in Appendix C, Table 3, together with the 2024 running mean.
- 1.1.13 Table 1 provides a summary of the complaint information relating to dust and air quality received during the reporting period, together with the findings of any related investigations.


Table 1: Summary of complaints received during June 2024


Complaint Reference No.	Worksite Reference	Description of complaint	Results of investigation
HS2-24-45481-C	N/A	Increased levels of dust in area.	Water cannon and water bowsers in use, along with wheel and undercarriage wash and lance sprays washing down lorries. Marshals ensure that no lorry leaves the site without its dust netting in place over the top of the vehicle. Road sweepers employed along local roads also, along with 5 monitors in the vicinity, none of which have shown an exceedance. Explanation of this provided to resident.


## **Appendix A – Worksites and Monitoring Locations**

Figure 1 to Figure 4: Current monitoring locations within the LBH

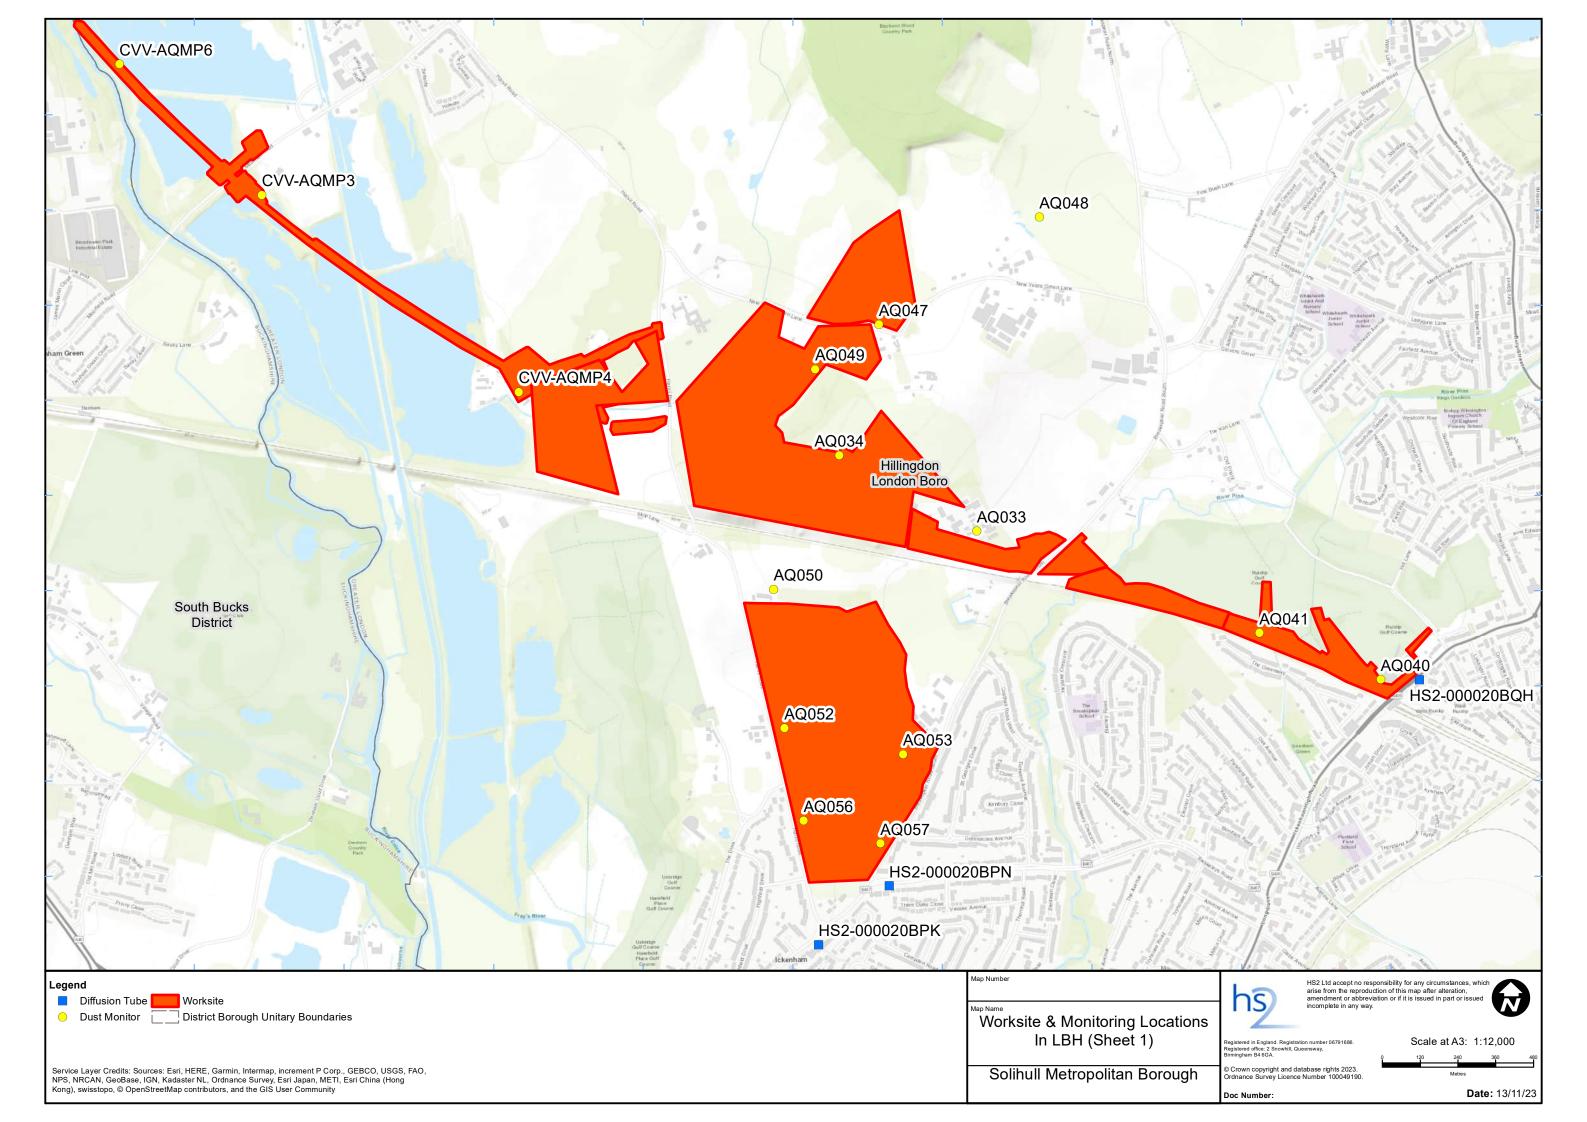

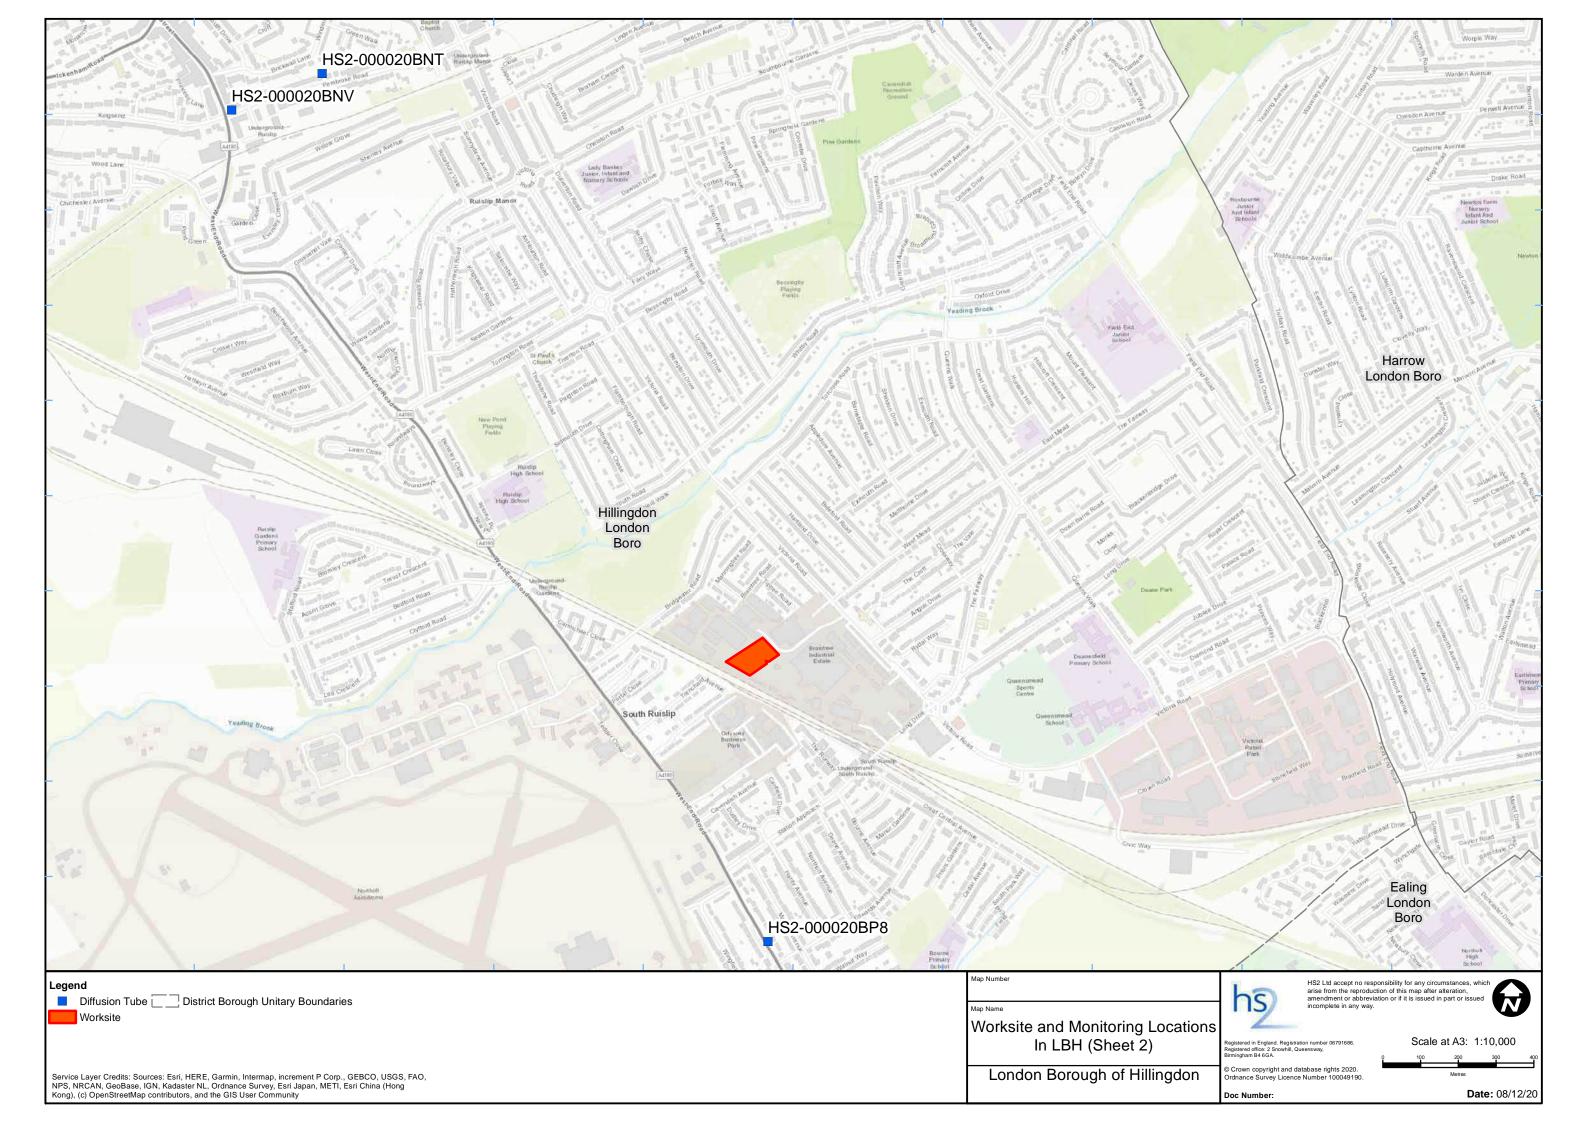

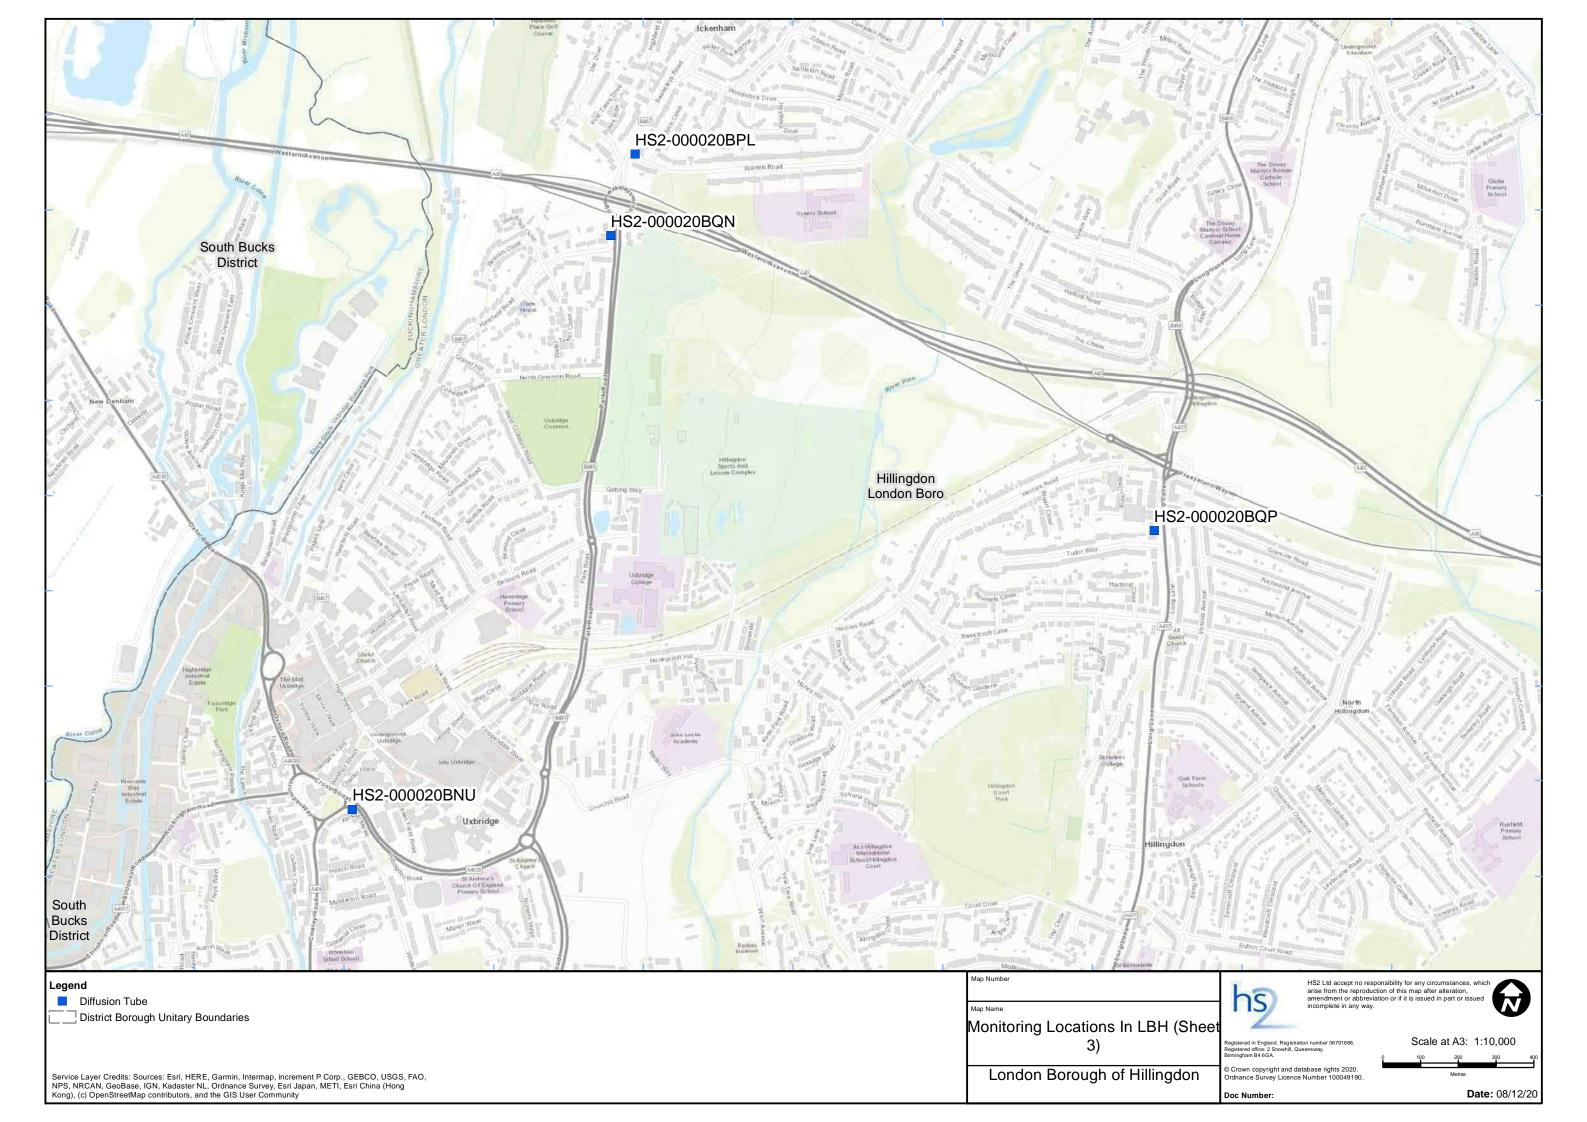

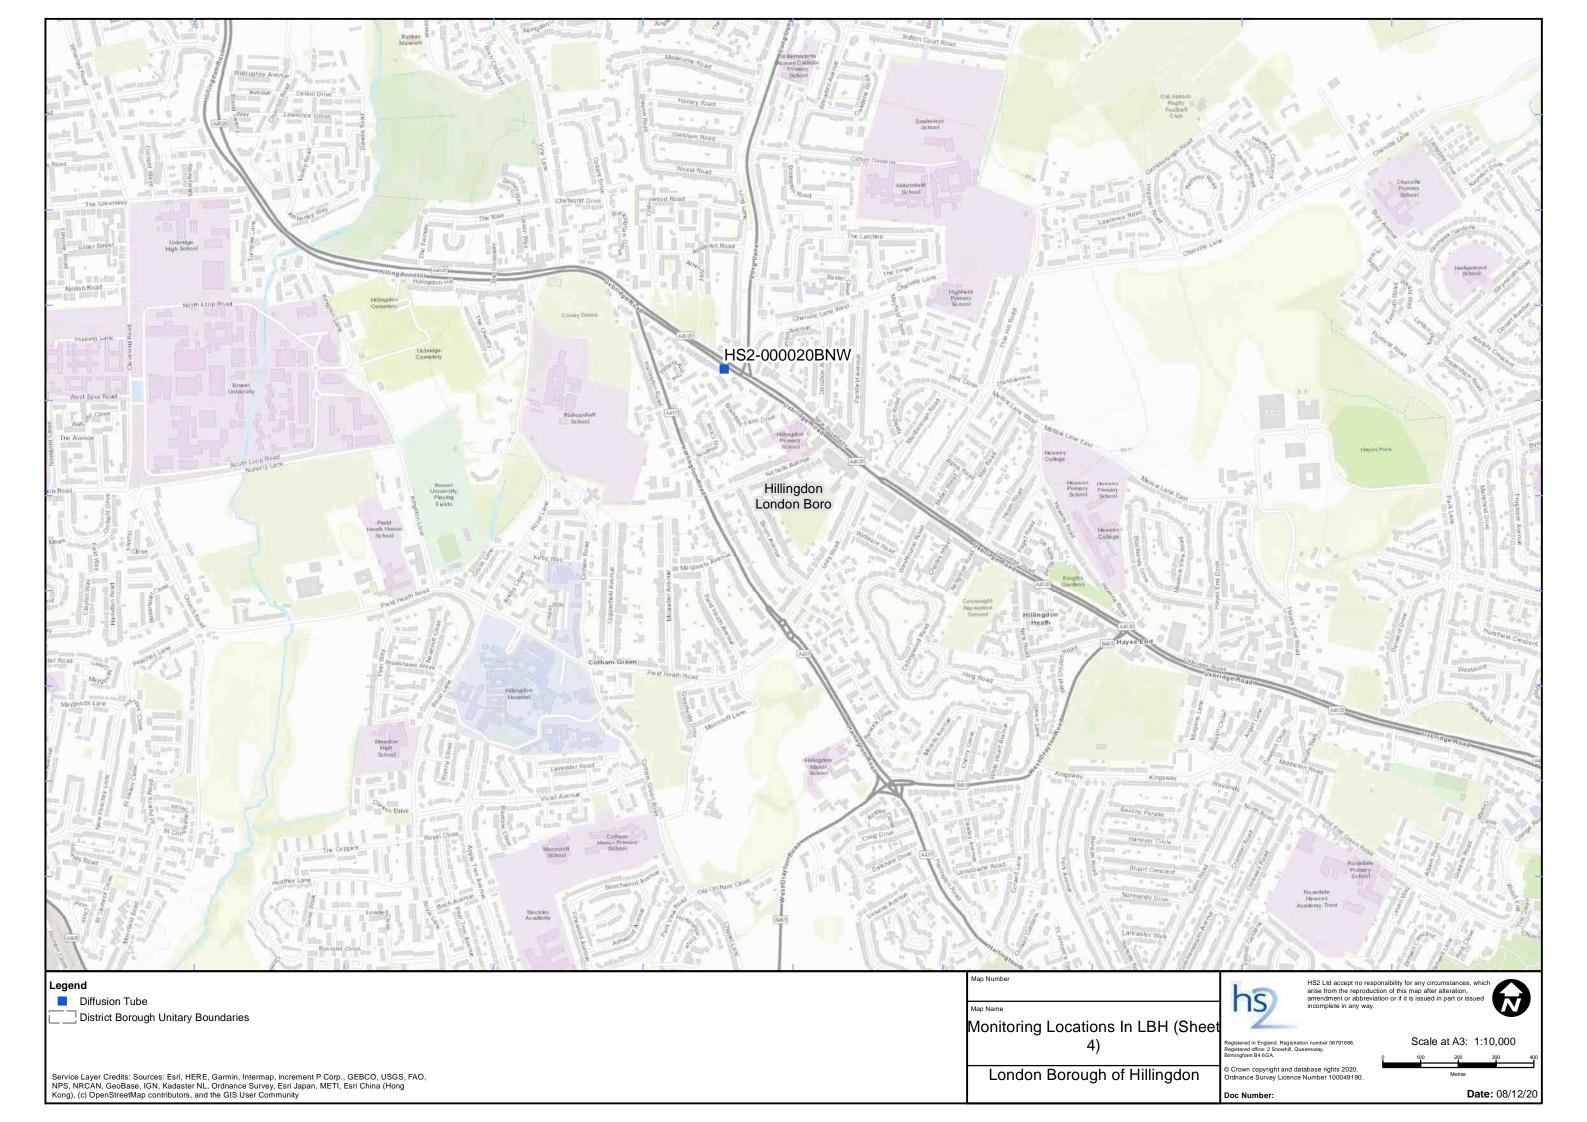


## **Appendix B - Dust Monitoring Results**


Table 2: Dust Monitoring Locations and Results


Monitoring site ID	Coordinate s (X,Y)	Location description	Dust risk rating for site	Monitoring site active during period	Change to site since previous period report	Mean 1-hour PM <sub>10</sub> concentration (μg/m³)	Minimum 1- hour PM <sub>10</sub> concentration (µg/m³)	Maximum 1- hour PM <sub>10</sub> concentration (μg/m³)	Number of 1- hour periods exceeding trigger level of 190 µg/m³	Data capture (%)
AQ033	507045, 187352	Breakspear Road South	М	Yes	N	15.3	1.4	116.7	0	92.8
AQ034	506608, 187592	Copthall Cutting	L	Yes N 17.6 1.6 145.7		0	84.7			
AQ040	508328, 186880	West Ruislip Golf Course	М	Yes	N	13.1	1.7	75.1	0	92.2
AQ041	507942, 187028	West Ruislip Portal	М	Yes	N	9.8	1.0	84.5	0	92.2
AQ047	507942, 188007	West Ruislip Portal	М	Yes	N	8.9	1.0	53.5	0	97.4
AQ048	507243, 188349	Northern Sustainable Placement Area	М	Yes	N	8.2	1.2	95.0	0	69.0
AQ049	506531, 187865	Copthall North, Ancient Woodland	М	Yes	N	11.7	1.2	110.9	0	95.6
AQ050	506399, 187166	Copthall South Compound	Н	Yes	N	7.6	1.3	56.8	0	100.0
AQ052	506433, 186725	Southern Sustainable Placement Area	Н	Yes	N	12.9	3.0	3.0 38.0		100.0
AQ053	506811, 186643	Southern Sustainable	Н	Yes	N	8.9	1.1	33.3	0	93.2


Monitoring site ID	Coordinate s (X,Y)	Location description	Dust risk rating for site	Monitoring site active during period	Change to site since previous period report	Mean 1-hour PM <sub>10</sub> concentration (μg/m³)	Minimum 1- hour PM <sub>10</sub> concentration (μg/m³)	Maximum 1- hour PM <sub>10</sub> concentration (μg/m³)	Number of 1- hour periods exceeding trigger level of 190 µg/m³	Data capture (%)
		Placement Area								
AQ056	506494, 186432	Southern Sustainable Placement Area	М	Yes	N	14.2	3.0	40.0	0	100.0
AQ057	506739, 186359	Southern Sustainable Placement Area	М	Yes	N	14.8	3.0	69.0	0	100.0
CVV-AQMP3	504773, 188419	On the eastern boundary along south side of Moorhall Road	М	Yes	Y	2.6	1.0	18.0	0	75.7
CVV-AQMP4	505589, 187793	On the western boundary of HOAC at Dews Lane	М	Yes	Y	5.5	1.0 28.0		0	99.0
CVV-AQMP6	504321, 188835	Korda Lake Compound, along haul route north of Moorhall road.	М	Yes	Υ	4.8	1.0	12.0	0	36.4

Figure 5: Construction dust 1-hour mean indicative PM<sub>10</sub> concentration for all dust monitors

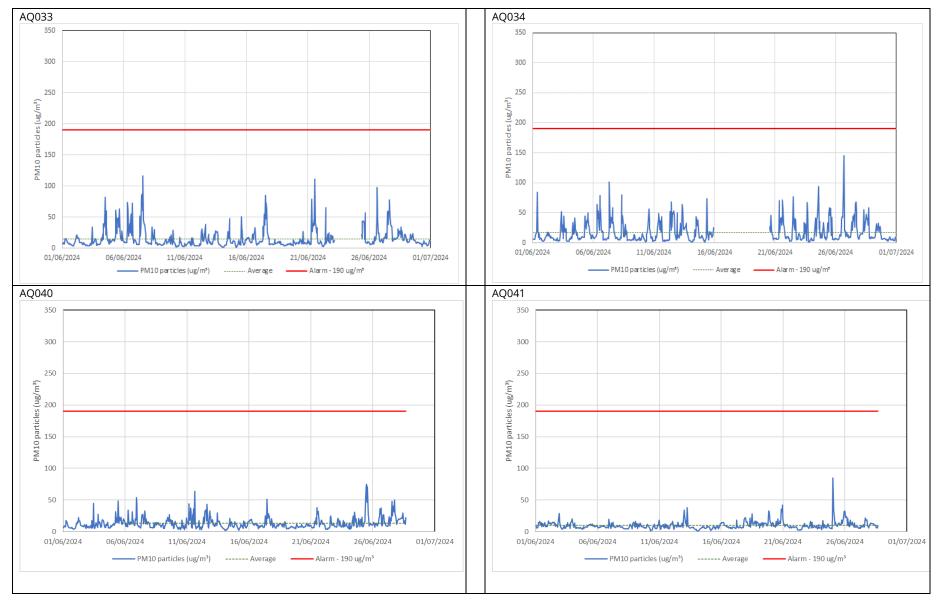

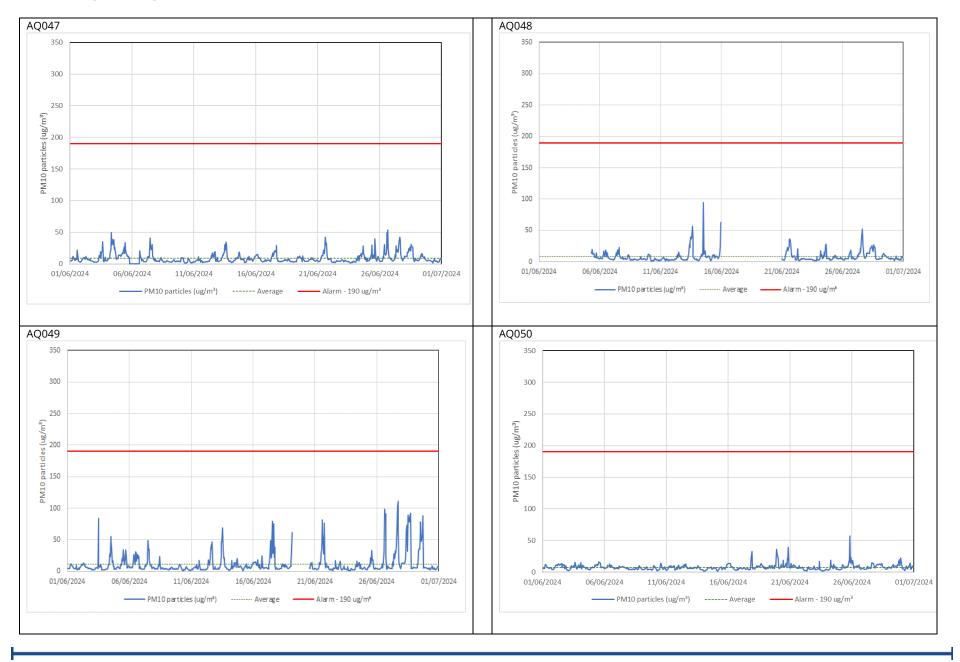

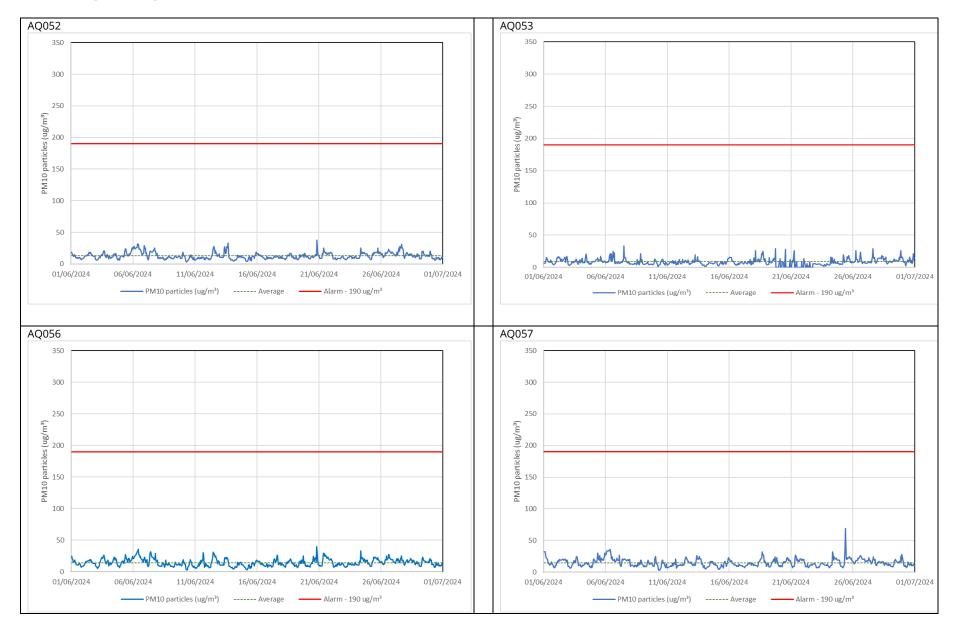

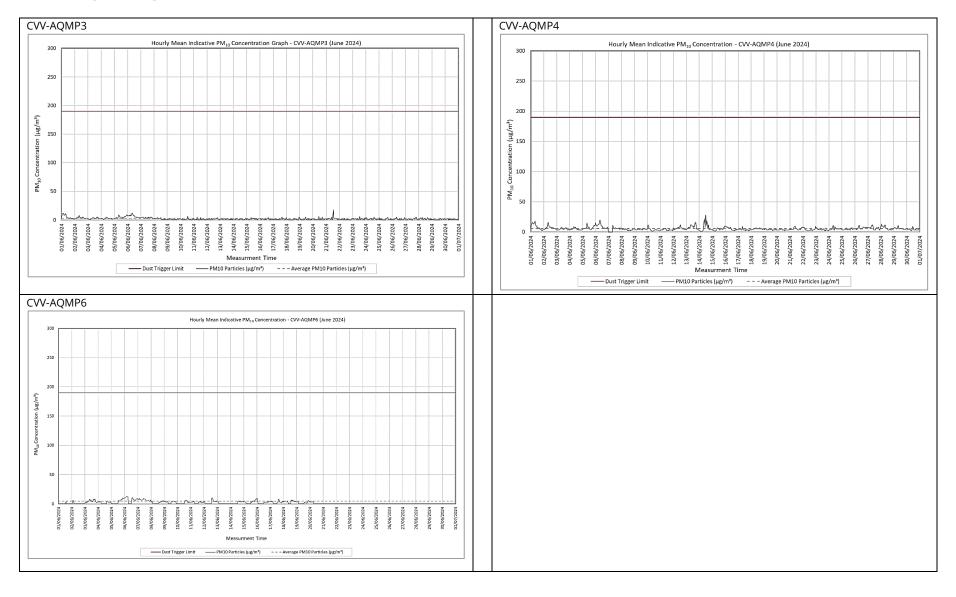

## **Appendix C - Air Quality Monitoring Results**

Table 3: NO₂ monitoring locations around highways, NO₂ concentrations and monthly monitoring results with running mean for 2024 (µg/m³)

Monitoring Site	Location description	Coordinates (X, Y)	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Mean <sup>12</sup>
HS2-000020BNT	Lamp post on Pembroke Road	509678, 187214	22	22	21	14	16								19
HS2-000020BNU	Cowley Road sign post at junction with Hillingdon Road	505492, 183926	44	36	39	33	Tube Missing								38
HS2-000020BNV	High Street sign post at junction with Pembroke Road	509439, 187117	32	37	31	27	31								32
HS2-000020BNW	Signpost on A4020 Uxbridge Road at junction with Long Lane	507365, 182687	37	Tube Missing	27	27	34								31
HS2-000020BPK	Lamp post in crescent off Swakeleys Road	506542, 186037	26	Tube Missing	Tube Missing	24	Tube Missing								25

<sup>&</sup>lt;sup>1</sup> Note: to aid interpretation and conform with best practice, the monthly measurements in this table are reported rounded to the nearest whole number. The annual mean presented here is calculated based on laboratory data to 4 significant figures, rounded to a whole number, and therefore may differ slightly to a mean derived from averaging the rounded monthly measurements in the table.

<sup>&</sup>lt;sup>2</sup> The annual mean for diffusion tubes presented in the table above still require various analysis and adjustments to be undertaken before comparison to the Air Quality Objectives. The final corrected annual mean will be presented in the HS2 Annual Air Quality Report.

Monitoring Site	Location description	Coordinates (X, Y)	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Mean <sup>12</sup>
HS2-000020BPL	Warren Road sign post on corner of Swakeleys Road and Warren Road	506240, 185660	35	34	28	25	28								30
HS2-000020BPN	Lamp post on B467	506767, 186224	33	35	29	24	28								30
HS2-000020BQH	Lamp post on High Road Ickenham	508451, 186879	42	35	Tube Missing	30	34								35
HS2-000020BQN	Lamp post on Park Road	506176, 185444	Tube Missing	39	31	29	44								36
HS2-000020BQP	Sign post on Long Lane	507614, 184663	37	29	33	26	Tube Missing								31
HS2-000020BP8	Triplicate site at South Ruislip roadside automatic monitoring station	510858, 184916	31	29	25	22	23								26